

RIVERTON ELEMENTARY SCHOOL REMODEL

PROJECT MANUAL


PROJECT NAME: Riverton Elementary School Remodel
PROJECT ADDRESS: 13150 S. 1830 W., Riverton, Utah 84065
PROJECT NUMBER 2023.043.00
DATE: January 11, 2024

GSBS CONTACT:
375 WEST 200 SOUTH
SALT LAKE CITY, UT 84101
P 801.521.8660

JORDAN SCHOOL DISTRICT

GSBS ARCHITECTS


STATE OF UTAH
VALERIE
W. NAGASAWA
261112-0301
01/22/2024
LICENSED ARCHITECT


LICENSED PROFESSIONAL ENGINEER
#334524-2202
JAMES
AUSTIN
BERRETT
1/22/2024
UTAH


REGISTERED PROFESSIONAL ENGINEER
No.
5047489
OLIVER
DALLIN
BURT
STATE OF UTAH

01/22/2024


PROFESSIONAL ENGINEER
BRIAN
HICKS
No. 7709037-2202
1/19/2024
STATE OF UTAH

TABLE OF CONTENTS

Division	Section Title	Pages
SPECIFICATIONS GROUP		
General Requirements Subgroup		
DIVISION 00 - PROCUREMENT AND CONTRACTING REQUIREMENTS		
AIA A701	2018 INSTRUCTIONS TO BIDDERS	8
AIA A310	2010 BID BOND	2
004113	BID FORM – STIPULATED SUM (SINGLE-PRIME CONTRACT)	3
004321	ALLOWANCE FORM	1
004322	UNIT PRICES FORM	2
004323	ALTERNATES FORM	2
AIA A101	2017 STANDARD FORM OF AGREEMENT BETWEEN OWNER AND CONTRACTOR (STIPULATED SUM)	8
AIA A101	2017 EXHIBIT A – INSURANCE AND BONDS	7
AIA A201	2017 GENERAL CONDITIONS OF THE CONTRACT FOR CONSTRUCTION	42
AIA A312	2010 PAYMENT BOND	4
AIA A312	2010 PERFORMANCE BOND	4
DIVISION 01 - GENERAL REQUIREMENTS		
011000	SUMMARY	6
012100	ALLOWANCES	4
012200	UNIT PRICES	2
012300	ALTERNATES	3
012500	SUBSTITUTION PROCEDURES	4
012600	CONTRACT MODIFICATION PROCEDURES	3
012900	PAYMENT PROCEDURES	5
013100	PROJECT MANAGEMENT AND COORDINATION	11
013200	CONSTRUCTION PROGRESS DOCUMENTATION	5
013300	SUBMITTAL PROCEDURES	10
013300.1	SUBMITTAL FLOW CHART	1
013300.2	SUBMITTAL STAMP SHEET	1
014000	QUALITY REQUIREMENTS	7
014200	REFERENCES	8
015000	TEMPORARY FACILITIES AND CONTROLS	5
016000	PRODUCT REQUIREMENTS	5
017300	EXECUTION	10
017700	CLOSEOUT PROCEDURES	6
017823	OPERATION AND MAINTENANCE DATA	9
017839	PROJECT RECORD DOCUMENTS	3
017900	DEMONSTRATION AND TRAINING	6
Facility Construction Subgroup		
DIVISION 02 - EXISTING CONDITIONS		
024119	SELECTIVE DEMOLITION	7

DIVISION 03 - CONCRETE
033000 CAST-IN-PLACE CONCRETE 21

DIVISION 05 - METALS
051200 STRUCTURAL STEEL FRAMING 11
053100 STEEL DECKING 6
054000 COLD-FORMED METAL FRAMING 10
055000 METAL FABRICATIONS 11

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES
061000 ROUGH CARPENTRY 9
061600 SHEATHING 6
064023 INTERIOR ARCHITECTURAL WOODWORK 7
064113 WOOD-VENEER-FACED ARCHITECTURAL CABINETS 8
064116 PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS 11

DIVISION 07 - THERMAL AND MOISTURE PROTECTION
072100 THERMAL INSULATION 5
072119 FOAMED-IN-PLACE INSULATION 3
072726 FLUID-APPLIED MEMEBRANE AIR BARRIERS 8
074213.23 METAL COMPOSITE MATERIAL WALL PANELS 11
074293 SOFFIT PANELS 9
075419 POLY-VINYL CHLORIDE (PVC) ROOFING 14
076200 SHEET METAL FLASHING AND TRIM 9
078413 PENETRATION FIRESTOPPING 7
079200 JOINT SEALANTS 8

DIVISION 08 - OPENINGS
081213 HOLLOW METAL DOORS AND FRAMES 7
081416 FLUSH WOOD DOORS 6
081433 STILE AND RAIL WOOD DOORS 7
084313 ALUMINUM-FACED STOREFRONTS 12
084523 FIBERGLASS-SANDWHICH-PANEL ASSEMBLIES 10
087100 DOOR HARDWARE 34
088000 GLAZING 13
088300 MIRRORS 5

DIVISION 09 - FINISHES
092216 NON-STRUCTURAL METAL FRAMING 7
092900 GYPSUM BOARD 8
093013 CERAMIC TILING 11
095113 ACOUSTICAL PANEL CEILINGS 9
096513 RESILIENT BASE AND ACCESSORIES 5
096519 RESILIENT TILE FLOORING 6
099123 INTERIOR PAINTING 6

DIVISION 10 - SPECIALTIES
101100 VISUAL DISPLAY UNITS 7
101423 PANEL SIGNAGE 8
102113.17 PHENOLIC-CORE TOILET COMPARTMENTS 6

102239	FOLDING PANEL PARTITIONS	10
102600	WALL AND DOOR PROTECTION	5
102800	TOILET, BATH AND LAUNDRY ACCESSORIES	5

DIVISION 11 – EQUIPMENT

113013	RESIDENTIAL APPLIANCES	5

DIVISION 12 - FURNISHINGS

122413	ROLLER WINDOW SHADES	6
123623.13	PLASTIC-LAMINATE-CLAD COUNTERTOPS	5
123661.16	SOLID SURFACING COUNTERROPS	5
123661.19	QUARTZ AGGLOMERATE COUNTERTOPS	5

Facility Services Subgroup

DIVISION 21 - FIRE SUPPRESSION

210000	FIRE PROTECTION	7

DIVISION 22 - PLUMBING

220000	PLUMBING	10
220700	INSULATION	4

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

230100	GENERAL PROVISIONS	11
230501	TESTING	2
230593	BALANCING	5
230900	BASIC MATERIALS AND METHODS	25
233300	AIR DISTRIBUTION	21

DIVISION 25 – HVAC CONTROLS

251000	AUTOMATIC TEMPERATURE CONTROLS	12

DIVISION 26 - ELECTRICAL

260500	ELECTRICAL GENERAL PROVISIONS	15
260503	ELECTRICAL SUBMITTALS AND SPARE PARTS	18
260507	ELECTRICAL CONNECTIONS FOR EQUIPMENT	2
260519	CONDUCTORS AND CABLES (600V AND BELOW)	6
260526	GROUNDING	5
260529	SUPPORTING DEVICES	3
260532	CONDUIT RACEWAY	6
260533	ELECTRICAL BOXES AND FITTINGS	4
260553	ELECTRICAL IDENTIFICATION	9
260923	OCCUPANCY SENSORS	7
260943	LIGHTING CONTROLS EQUIPMENT	15
262416	PANELBOARDS	3
262726	WIRING DEVICES	6
264119	DEMOLITION	2
265100	INTERIOR AND EXTERIOR BUILDING LIGHTING	4

DIVISION 27 - ELECTRONIC TELEPHONE AND COMMUNICATIONS

271500 TELEPHONE/DATA SYSTEMS 17
274100 AUDIOVISUAL SYSTEM 14
275123 INTERCOMMUNICATION SYSTEMS 23

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY
282200 ACCESS CONTROL SYSTEM 4
283111 FIRE ALARM AND DETECTION SYSTEM 14

Site and Infrastructure Subgroup

DIVISION 32 - EXTERIOR IMPROVEMENTS
321313 CONCRETE PAVING 12
321373 CONCRETE PAVING JOINT SEALANTS 5
323300 SITE FURNISHINGS 4

END OF TABLE OF CONTENTS

AIA® Document A701® – 2018

Instructions to Bidders

for the following Project:
(Name, location, and detailed description)

Riverton Elementary School Remodel
13150 South 1830 West
Riverton, Utah 84065

THE OWNER:
(Name, legal status, address, and other information)

Jordan School District
7905 South Redwood Road
West Jordan, Utah 84088

THE ARCHITECT:
(Name, legal status, address, and other information)

GSBS Architects
375 West 200 South, Suite 100
Salt Lake City, Utah 84101

TABLE OF ARTICLES

1 DEFINITIONS

2 BIDDER'S REPRESENTATIONS

3 BIDDING DOCUMENTS

4 BIDDING PROCEDURES

5 CONSIDERATION OF BIDS

6 POST-BID INFORMATION

7 PERFORMANCE BOND AND PAYMENT BOND

8 ENUMERATION OF THE PROPOSED CONTRACT DOCUMENTS

ADDITIONS AND DELETIONS:
The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

FEDERAL, STATE, AND LOCAL LAWS MAY IMPOSE REQUIREMENTS ON PUBLIC PROCUREMENT CONTRACTS. CONSULT LOCAL AUTHORITIES OR AN ATTORNEY TO VERIFY REQUIREMENTS APPLICABLE TO THIS PROCUREMENT BEFORE COMPLETING THIS FORM.

It is intended that AIA Document G612™–2017, Owner's Instructions to the Architect, Parts A and B will be completed prior to using this document.

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced by AIA software at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA3C)

ARTICLE 1 DEFINITIONS

§ 1.1 Bidding Documents include the Bidding Requirements and the Proposed Contract Documents. The Bidding Requirements consist of the advertisement or invitation to bid, Instructions to Bidders, supplementary instructions to bidders, the bid form, and any other bidding forms. The Proposed Contract Documents consist of the unexecuted form of Agreement between the Owner and Contractor and that Agreement's Exhibits, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, all Addenda, and all other documents enumerated in Article 8 of these Instructions.

§ 1.2 Definitions set forth in the General Conditions of the Contract for Construction, or in other Proposed Contract Documents apply to the Bidding Documents.

§ 1.3 Addenda are written or graphic instruments issued by the Architect, which, by additions, deletions, clarifications, or corrections, modify or interpret the Bidding Documents.

§ 1.4 A Bid is a complete and properly executed proposal to do the Work for the sums stipulated therein, submitted in accordance with the Bidding Documents.

§ 1.5 The Base Bid is the sum stated in the Bid for which the Bidder offers to perform the Work described in the Bidding Documents, to which Work may be added or deleted by sums stated in Alternate Bids.

§ 1.6 An Alternate Bid (or Alternate) is an amount stated in the Bid to be added to or deducted from, or that does not change, the Base Bid if the corresponding change in the Work, as described in the Bidding Documents, is accepted.

§ 1.7 A Unit Price is an amount stated in the Bid as a price per unit of measurement for materials, equipment, or services, or a portion of the Work, as described in the Bidding Documents.

§ 1.8 A Bidder is a person or entity who submits a Bid and who meets the requirements set forth in the Bidding Documents.

§ 1.9 A Sub-bidder is a person or entity who submits a bid to a Bidder for materials, equipment, or labor for a portion of the Work.

ARTICLE 2 BIDDER'S REPRESENTATIONS

§ 2.1 By submitting a Bid, the Bidder represents that:

- **.1** the Bidder has read and understands the Bidding Documents;
- **.2** the Bidder understands how the Bidding Documents relate to other portions of the Project, if any, being bid concurrently or presently under construction;
- **.3** the Bid complies with the Bidding Documents;
- **.4** the Bidder has visited the site, become familiar with local conditions under which the Work is to be performed, and has correlated the Bidder's observations with the requirements of the Proposed Contract Documents;
- **.5** the Bid is based upon the materials, equipment, and systems required by the Bidding Documents without exception; and
- **.6** the Bidder has read and understands the provisions for liquidated damages, if any, set forth in the form of Agreement between the Owner and Contractor.

ARTICLE 3 BIDDING DOCUMENTS

§ 3.1 Distribution

§ 3.1.1 Bidders shall obtain complete Bidding Documents, as indicated below, from the issuing office designated in the advertisement or invitation to bid, for the deposit sum, if any, stated therein.
(Indicate how, such as by email, website, host site/platform, paper copy, or other method Bidders shall obtain Bidding Documents.)

Host site/platform

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA3C)

§ 3.1.2 Any required deposit shall be refunded to Bidders who submit a bona fide Bid and return the paper Bidding Documents in good condition within ten days after receipt of Bids. The cost to replace missing or damaged paper documents will be deducted from the deposit. A Bidder receiving a Contract award may retain the paper Bidding Documents, and the Bidder's deposit will be refunded.

§ 3.1.3 Bidding Documents will not be issued directly to Sub-bidders unless specifically offered in the advertisement or invitation to bid, or in supplementary instructions to bidders.

§ 3.1.4 Bidders shall use complete Bidding Documents in preparing Bids. Neither the Owner nor Architect assumes responsibility for errors or misinterpretations resulting from the use of incomplete Bidding Documents.

§ 3.1.5 The Bidding Documents will be available for the sole purpose of obtaining Bids on the Work. No license or grant of use is conferred by distribution of the Bidding Documents.

§ 3.2 Modification or Interpretation of Bidding Documents

§ 3.2.1 The Bidder shall carefully study the Bidding Documents, shall examine the site and local conditions, and shall notify the Architect of errors, inconsistencies, or ambiguities discovered and request clarification or interpretation pursuant to Section 3.2.2.

§ 3.2.2 Requests for clarification or interpretation of the Bidding Documents shall be submitted by the Bidder in writing and shall be received by the Architect at least seven days prior to the date for receipt of Bids.
(Indicate how, such as by email, website, host site/platform, paper copy, or other method Bidders shall submit requests for clarification and interpretation.)

Host site/platform

§ 3.2.3 Modifications and interpretations of the Bidding Documents shall be made by Addendum. Modifications and interpretations of the Bidding Documents made in any other manner shall not be binding, and Bidders shall not rely upon them.

§ 3.2.4 The drawings and specifications that comprise the Bidding Documents are complementary and what is required by one shall be as binding as if required by all. Should a discrepancy be discovered in the Bidding Documents beyond the date indicated in Section 3.2.2, the Bidder shall provide a price for the more restrictive of the requirements.

§ 3.3 Substitutions

§ 3.3.1 The materials, products, and equipment described in the Bidding Documents establish a standard of required function, dimension, appearance, and quality to be met by any proposed substitution.

§ 3.3.2 Substitution Process

§ 3.3.2.1 Written requests for substitutions shall be received by the Architect at least ten days prior to the date for receipt of Bids. Requests shall be submitted in the same manner as that established for submitting clarifications and interpretations in Section 3.2.2.

§ 3.3.2.2 Bidders shall submit substitution requests on a Substitution Request Form if one is provided in the Bidding Documents.

§ 3.3.2.3 If a Substitution Request Form is not provided, requests shall include (1) the name of the material or equipment specified in the Bidding Documents; (2) the reason for the requested substitution; (3) a complete description of the proposed substitution including the name of the material or equipment proposed as the substitute, performance and test data, and relevant drawings; and (4) any other information necessary for an evaluation. The request shall include a statement setting forth changes in other materials, equipment, or other portions of the Work, including changes in the work of other contracts or the impact on any Project Certifications (such as LEED), that will result from incorporation of the proposed substitution.

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA3C)

§ 3.3.3 The burden of proof of the merit of the proposed substitution is upon the proposer. The Architect's decision of approval or disapproval of a proposed substitution shall be final.

§ 3.3.4 If the Architect approves a proposed substitution prior to receipt of Bids, such approval shall be set forth in an Addendum. Approvals made in any other manner shall not be binding, and Bidders shall not rely upon them.

§ 3.3.5 No substitutions will be considered after the Contract award unless specifically provided for in the Contract Documents.

§ 3.4 Addenda

§ 3.4.1 Addenda will be transmitted to Bidders known by the issuing office to have received complete Bidding Documents.

(Indicate how, such as by email, website, host site/platform, paper copy, or other method Addenda will be transmitted.)

Host site/platform

§ 3.4.2 Addenda will be available where Bidding Documents are on file.

§ 3.4.3 Addenda will be issued no later than four days prior to the date for receipt of Bids, except an Addendum withdrawing the request for Bids or one which includes postponement of the date for receipt of Bids.

§ 3.4.4 Prior to submitting a Bid, each Bidder shall ascertain that the Bidder has received all Addenda issued, and the Bidder shall acknowledge their receipt in the Bid.

ARTICLE 4 BIDDING PROCEDURES

§ 4.1 Preparation of Bids

§ 4.1.1 Bids shall be submitted on the forms included with or identified in the Bidding Documents.

§ 4.1.2 All blanks on the bid form shall be legibly executed. Paper bid forms shall be executed in a non-erasable medium.

§ 4.1.3 Sums shall be expressed in both words and numbers, unless noted otherwise on the bid form. In case of discrepancy, the amount entered in words shall govern.

§ 4.1.4 Edits to entries made on paper bid forms must be initialed by the signer of the Bid.

§ 4.1.5 All requested Alternates shall be bid. If no change in the Base Bid is required, enter "No Change" or as required by the bid form.

§ 4.1.6 Where two or more Bids for designated portions of the Work have been requested, the Bidder may, without forfeiture of the bid security, state the Bidder's refusal to accept award of less than the combination of Bids stipulated by the Bidder. The Bidder shall neither make additional stipulations on the bid form nor qualify the Bid in any other manner.

§ 4.1.7 Each copy of the Bid shall state the legal name and legal status of the Bidder. As part of the documentation submitted with the Bid, the Bidder shall provide evidence of its legal authority to perform the Work in the jurisdiction where the Project is located. Each copy of the Bid shall be signed by the person or persons legally authorized to bind the Bidder to a contract. A Bid by a corporation shall further name the state of incorporation and have the corporate seal affixed. A Bid submitted by an agent shall have a current power of attorney attached, certifying the agent's authority to bind the Bidder.

§ 4.1.8 A Bidder shall incur all costs associated with the preparation of its Bid.

§ 4.2 Bid Security

§ 4.2.1 Each Bid shall be accompanied by the following bid security:

(Insert the form and amount of bid security.)

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA3C)

Surety bond in an amount equal to 5% of the bid amount

§ 4.2.2 The Bidder pledges to enter into a Contract with the Owner on the terms stated in the Bid and shall, if required, furnish bonds covering the faithful performance of the Contract and payment of all obligations arising thereunder. Should the Bidder refuse to enter into such Contract or fail to furnish such bonds if required, the amount of the bid security shall be forfeited to the Owner as liquidated damages, not as a penalty. In the event the Owner fails to comply with Section 6.2, the amount of the bid security shall not be forfeited to the Owner.

§ 4.2.3 If a surety bond is required as bid security, it shall be written on AIA Document A310™, Bid Bond, unless otherwise provided in the Bidding Documents. The attorney-in-fact who executes the bond on behalf of the surety shall affix to the bond a certified and current copy of an acceptable power of attorney. The Bidder shall provide surety bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

§ 4.2.4 The Owner will have the right to retain the bid security of Bidders to whom an award is being considered until (a) the Contract has been executed and bonds, if required, have been furnished; (b) the specified time has elapsed so that Bids may be withdrawn; or (c) all Bids have been rejected. However, if no Contract has been awarded or a Bidder has not been notified of the acceptance of its Bid, a Bidder may, beginning days after the opening of Bids, withdraw its Bid and request the return of its bid security.

§ 4.3 Submission of Bids

§ 4.3.1 A Bidder shall submit its Bid as indicated below:
(Indicate how, such as by website, host site/platform, paper copy, or other method Bidders shall submit their Bid.)

Host site/platform

§ 4.3.2 Paper copies of the Bid, the bid security, and any other documents required to be submitted with the Bid shall be enclosed in a sealed opaque envelope. The envelope shall be addressed to the party receiving the Bids and shall be identified with the Project name, the Bidder's name and address, and, if applicable, the designated portion of the Work for which the Bid is submitted. If the Bid is sent by mail, the sealed envelope shall be enclosed in a separate mailing envelope with the notation "SEALED BID ENCLOSED" on the face thereof.

§ 4.3.3 Bids shall be submitted by the date and time and at the place indicated in the invitation to bid. Bids submitted after the date and time for receipt of Bids, or at an incorrect place, will not be accepted.

§ 4.3.4 The Bidder shall assume full responsibility for timely delivery at the location designated for receipt of Bids.

§ 4.3.5 A Bid submitted by any method other than as provided in this Section 4.3 will not be accepted.

§ 4.4 Modification or Withdrawal of Bid

§ 4.4.1 Prior to the date and time designated for receipt of Bids, a Bidder may submit a new Bid to replace a Bid previously submitted, or withdraw its Bid entirely, by notice to the party designated to receive the Bids. Such notice shall be received and duly recorded by the receiving party on or before the date and time set for receipt of Bids. The receiving party shall verify that replaced or withdrawn Bids are removed from the other submitted Bids and not considered. Notice of submission of a replacement Bid or withdrawal of a Bid shall be worded so as not to reveal the amount of the original Bid.

§ 4.4.2 Withdrawn Bids may be resubmitted up to the date and time designated for the receipt of Bids in the same format as that established in Section 4.3, provided they fully conform with these Instructions to Bidders. Bid security shall be in an amount sufficient for the Bid as resubmitted.

§ 4.4.3 After the date and time designated for receipt of Bids, a Bidder who discovers that it made a clerical error in its Bid shall notify the Architect of such error within two days, or pursuant to a timeframe specified by the law of the jurisdiction where the Project is located, requesting withdrawal of its Bid. Upon providing evidence of such error to the reasonable satisfaction of the Architect, the Bid shall be withdrawn and not resubmitted. If a Bid is withdrawn pursuant to this Section 4.4.3, the bid security will be attended to as follows:

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA3C)

(State the terms and conditions, such as Bid rank, for returning or retaining the bid security.)

If the Bidder is the apparent or second-low bid for the Project, the Owner reserves the right to retain the bid security. For other Bidders, the bid security will be returned.

ARTICLE 5 CONSIDERATION OF BIDS

§ 5.1 Opening of Bids

If stipulated in an advertisement or invitation to bid, or when otherwise required by law, Bids properly identified and received within the specified time limits will be publicly opened and read aloud. A summary of the Bids may be made available to Bidders.

§ 5.2 Rejection of Bids

Unless otherwise prohibited by law, the Owner shall have the right to reject any or all Bids.

§ 5.3 Acceptance of Bid (Award)

§ 5.3.1 It is the intent of the Owner to award a Contract to the lowest responsive and responsible Bidder, provided the Bid has been submitted in accordance with the requirements of the Bidding Documents. Unless otherwise prohibited by law, the Owner shall have the right to waive informalities and irregularities in a Bid received and to accept the Bid which, in the Owner's judgment, is in the Owner's best interests.

§ 5.3.2 Unless otherwise prohibited by law, the Owner shall have the right to accept Alternates in any order or combination, unless otherwise specifically provided in the Bidding Documents, and to determine the lowest responsive and responsible Bidder on the basis of the sum of the Base Bid and Alternates accepted.

ARTICLE 6 POST-BID INFORMATION

§ 6.1 Contractor's Qualification Statement

Bidders to whom award of a Contract is under consideration shall submit to the Architect, upon request and within the timeframe specified by the Architect, a properly executed AIA Document A305™, Contractor's Qualification Statement, unless such a Statement has been previously required and submitted for this Bid.

§ 6.2 Owner's Financial Capability

A Bidder to whom award of a Contract is under consideration may request in writing, fourteen days prior to the expiration of the time for withdrawal of Bids, that the Owner furnish to the Bidder reasonable evidence that financial arrangements have been made to fulfill the Owner's obligations under the Contract. The Owner shall then furnish such reasonable evidence to the Bidder no later than seven days prior to the expiration of the time for withdrawal of Bids. Unless such reasonable evidence is furnished within the allotted time, the Bidder will not be required to execute the Agreement between the Owner and Contractor.

§ 6.3 Submittals

§ 6.3.1 After notification of selection for the award of the Contract, the Bidder shall, as soon as practicable or as stipulated in the Bidding Documents, submit in writing to the Owner through the Architect:

.1 a designation of the Work to be performed with the Bidder's own forces;

.2 names of the principal products and systems proposed for the Work and the manufacturers and suppliers of each; and

.3 names of persons or entities (including those who are to furnish materials or equipment fabricated to a special design) proposed for the principal portions of the Work.

§ 6.3.2 The Bidder will be required to establish to the satisfaction of the Architect and Owner the reliability and responsibility of the persons or entities proposed to furnish and perform the Work described in the Bidding Documents.

§ 6.3.3 Prior to the execution of the Contract, the Architect will notify the Bidder if either the Owner or Architect, after due investigation, has reasonable objection to a person or entity proposed by the Bidder. If the Owner or Architect has reasonable objection to a proposed person or entity, the Bidder may, at the Bidder's option, withdraw the Bid or submit an acceptable substitute person or entity. The Bidder may also submit any required adjustment in the Base Bid or Alternate Bid to account for the difference in cost occasioned by such substitution. The Owner may

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA3C)

accept the adjusted bid price or disqualify the Bidder. In the event of either withdrawal or disqualification, bid security will not be forfeited.

§ 6.3.4 Persons and entities proposed by the Bidder and to whom the Owner and Architect have made no reasonable objection must be used on the Work for which they were proposed and shall not be changed except with the written consent of the Owner and Architect.

ARTICLE 7 PERFORMANCE BOND AND PAYMENT BOND

§ 7.1 Bond Requirements

§ 7.1.1 If stipulated in the Bidding Documents, the Bidder shall furnish bonds covering the faithful performance of the Contract and payment of all obligations arising thereunder.

§ 7.1.2 If the furnishing of such bonds is stipulated in the Bidding Documents, the cost shall be included in the Bid. If the furnishing of such bonds is required after receipt of bids and before execution of the Contract, the cost of such bonds shall be added to the Bid in determining the Contract Sum.

§ 7.1.3 The Bidder shall provide surety bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

§ 7.1.4 Unless otherwise indicated below, the Penal Sum of the Payment and Performance Bonds shall be the amount of the Contract Sum.
(If Payment or Performance Bonds are to be in an amount other than 100% of the Contract Sum, indicate the dollar amount or percentage of the Contract Sum.)

§ 7.2 Time of Delivery and Form of Bonds

§ 7.2.1 The Bidder shall deliver the required bonds to the Owner not later than three days following the date of execution of the Contract. If the Work is to commence sooner in response to a letter of intent, the Bidder shall, prior to commencement of the Work, submit evidence satisfactory to the Owner that such bonds will be furnished and delivered in accordance with this Section 7.2.1.

§ 7.2.2 Unless otherwise provided, the bonds shall be written on AIA Document A312, Performance Bond and Payment Bond.

§ 7.2.3 The bonds shall be dated on or after the date of the Contract.

§ 7.2.4 The Bidder shall require the attorney-in-fact who executes the required bonds on behalf of the surety to affix to the bond a certified and current copy of the power of attorney.

ARTICLE 8 ENUMERATION OF THE PROPOSED CONTRACT DOCUMENTS

§ 8.1 Copies of the proposed Contract Documents have been made available to the Bidder and consist of the following documents:

.1 AIA Document A101™–2017, Standard Form of Agreement Between Owner and Contractor, unless otherwise stated below.
(Insert the complete AIA Document number, including year, and Document title.)

.2 AIA Document A101™–2017, Exhibit A, Insurance and Bonds, unless otherwise stated below.
(Insert the complete AIA Document number, including year, and Document title.)

.3 AIA Document A201™–2017, General Conditions of the Contract for Construction, unless otherwise stated below.
(Insert the complete AIA Document number, including year, and Document title.)

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA3C)

(Paragraphs Deleted)

.5 Drawings

Number	Title	Date
105 Sheets	Riverton Elementary School Remodel Construction Documents	January 22, 2024

.6 Specifications

Section	Title	Date	Pages
See Index	Riverton Elementary School Remodel Project Manual	January 22, 2024	950 Pages

.7 Addenda:

Number	Date	Pages

.8 Other Exhibits:
(Check all boxes that apply and include appropriate information identifying the exhibit where required.)

[ ] AIA Document E204™–2017, Sustainable Projects Exhibit, dated as indicated below:
(Insert the date of the E204-2017.)

[ ] The Sustainability Plan:

Title	Date	Pages

[ ] Supplementary and other Conditions of the Contract:

Document	Title	Date	Pages

.9 Other documents listed below:
(List here any additional documents that are intended to form part of the Proposed Contract Documents.)

AIA Document A701 – 2018. Copyright © 1970, 1974, 1978, 1987, 1997 and 2018. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 15:51:07 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA3C)

AIA® Document A310™ – 2010

Bid Bond

CONTRACTOR:
(Name, legal status and address)

SURETY:
(Name, legal status and principal place of business)

OWNER:
(Name, legal status and address)
Jordan School District
7905 South Redwood Road
West Jordan, Utah 84088

BOND AMOUNT: $

PROJECT:
(Name, location or address, and Project number, if any)
Riverton Elementary School Remodel
13150 South 1830 West
Riverton, Utah 84065

The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.

If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

ADDITIONS AND DELETIONS:
The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

Init.
/
AIA Document A310 – 2010. Copyright © 1963, 1970 and 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 18:19:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (1919578225)

Signed and sealed this day of ,

(Contractor as Principal)	*(Seal)*
(Witness)	*(Title)*
(Surety)	*(Seal)*
(Witness)	*(Title)*

Init.
/

AIA Document A310 – 2010. Copyright © 1963, 1970 and 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 18:19:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(1919578225)

DOCUMENT 004113 - BID FORM - STIPULATED SUM (SINGLE-PRIME CONTRACT)

1.1 BID INFORMATION

A. Bidder: _____.

B. Project Name: Riverton Elementary School Remodel.

C. Project Location: 13150 South 1830 West, Riverton, Utah 84065.

D. Owner: Jordan School District.

E. Owner Project Number: 24KP15.

F. Architect: GSBS Architects.

G. Architect Project Number: 2023.043.00.

1.2 CERTIFICATIONS AND BASE BID

A. Base Bid, Single-Prime (All Trades) Contract: The undersigned Bidder, having carefully examined the Procurement and Contracting Requirements, Conditions of the Contract, Drawings, Specifications, and all subsequent Addenda, as prepared by GSBS Architects and Architect's consultants, having visited the site, and being familiar with all conditions and requirements of the Work, hereby agrees to furnish all material, labor, equipment and services, including all scheduled allowances, necessary to complete the construction of the above-named project, according to the requirements of the Procurement and Contracting Documents, for the stipulated sum of:

1. _____ Dollars ($_____).
2. The above amount may be modified by amounts indicated by the Bidder on the attached Document 004322 "Unit Prices Form" and Document 004323 "Alternates Form."

1.3 BID GUARANTEE

A. The undersigned Bidder agrees to execute a contract for this Work in the above amount and to furnish surety as specified within 10 days after a written Notice of Award, if offered within 60 days after receipt of bids, and on failure to do so agrees to forfeit to Owner the attached cash, cashier's check, certified check, U.S. money order, or bid bond, as liquidated damages for such failure, in the following amount constituting five percent (5%) of the Base Bid amount above:

1. _____ Dollars ($_____).

B. In the event Owner does not offer Notice of Award within the time limits stated above, Owner will return to the undersigned the cash, cashier's check, certified check, U.S. money order, or bid bond.

1.4 SUBCONTRACTORS AND SUPPLIERS

A. The following companies shall execute subcontracts for the portions of the Work indicated:

1. Demolition Work: _____.
2. Concrete Work: _____.
3. Steel Work: _____.
4. Architectural Cabinetry Work: _____.
5. Thermal and Moisture Protection Work: _____.
6. Window and Door Work: _____.
7. Finish Work: _____.
8. Plumbing Work: _____.
9. HVAC Work: _____.
10. Electrical Work: _____.

1.5 TIME OF COMPLETION

A. The undersigned Bidder proposes and agrees hereby to commence the Work of the Contract Documents no later than June 3, 2024 and shall fully complete the Work by August 13, 2024.

1.6 ACKNOWLEDGEMENT OF ADDENDA

A. The undersigned Bidder acknowledges receipt of and use of the following Addenda in the preparation of this Bid:

1. Addendum No. 1, dated _____.
2. Addendum No. 2, dated _____.
3. Addendum No. 3, dated _____.
4. Addendum No. 4, dated _____.

1.7 BID SUPPLEMENTS

A. The following supplements are a part of this Bid Form and are attached hereto.

1. Bid Form Supplement - Alternates.
2. Bid Form Supplement - Unit Prices.
3. Bid Form Supplement - Allowances.
4. Bid Form Supplement - Bid Bond Form (AIA Document A310-2010).

1.8 CONTRACTOR'S LICENSE

A. The undersigned further states that it is a duly licensed contractor, for the type of work proposed, in Riverton, Utah, and that all fees, permits, etc., pursuant to submitting this proposal have been paid in full.

1.9 SUBMISSION OF BID

A. Respectfully submitted this ____ day of _____, 2024.

B. Submitted By:_____(Name of bidding firm or corporation).

C. Authorized Signature:_____(Handwritten signature).

D. Signed By:_____(Type or print name).

E. Title:_____(Owner/Partner/President/Vice President).

F. Witnessed By:_____(Handwritten signature).

G. Attest:_____(Handwritten signature).

H. By:_____(Type or print name).

I. Title:_____(Corporate Secretary or Assistant Secretary).

J. Street Address:_____.

K. City, State, Zip:_____.

L. Phone:_____.

M. License No.:_____.

N. Federal ID No.:_____(Affix Corporate Seal Here).

END OF DOCUMENT 004113

DOCUMENT 004321 - ALLOWANCE FORM

1.1 BID INFORMATION

A. Bidder: _____.

B. Project Name: Riverton Elementary School Remodel.

C. Project Location: 13150 South 1830 West, Riverton, Utah 84065.

D. Owner: Jordan School District.

E. Owner Project Number: 24KP15.

F. Architect: GSBS Architects.

G. Architect Project Number: 2023.043.00.

1.2 BID FORM SUPPLEMENT

A. This form is required to be attached to the Bid Form.

B. The undersigned Bidder certifies that Base Bid submission to which this Bid Supplement is attached includes those allowances described in the Contract Documents and scheduled in Section 012100 "Allowances."

1.3 SUBMISSION OF BID SUPPLEMENT

A. Respectfully submitted this ____ day of _____, 2024.

B. Submitted By:_____(Insert name of bidding firm or corporation).

C. Authorized Signature:_____(Handwritten signature).

D. Signed By:_____(Type or print name).

E. Title:_____(Owner/Partner/President/Vice President).

END OF DOCUMENT 004321

DOCUMENT 004322 - UNIT PRICES FORM

1.1 BID INFORMATION

A. Bidder: _____.

B. Project Name: Riverton Elementary School Remodel.

C. Project Location: 13150 South 1830 West, Riverton, Utah 84065.

D. Owner: Jordan School District.

E. Owner Project Number: 24KP15.

F. Architect: GSBS Architects.

G. Architect Project Number: 2023.043.00.

1.2 BID FORM SUPPLEMENT

A. This form is required to be attached to the Bid Form.

B. The undersigned Bidder proposes the amounts below be added to or deducted from the Contract Sum on performance and measurement of the individual items of Work and for adjustment of the quantity given in the Unit-Price Allowance for the actual measurement of individual items of the Work.

C. If the unit price does not affect the Work of this Contract, the Bidder shall indicate "NOT APPLICABLE."

1.3 UNIT PRICES

A. Unit-Price No. 1: Cutting and patching of concrete slabs-on-grade.

1. _____ dollars ($_____) per unit.

B. Unit-Price No. 2: Access Doors.

1. _____ dollars ($_____) per unit.

C. Unit Price No. 3: Steel bracing for new operable (folding) panel partition described in Alternate No. 1.

1. _____ dollars ($_____) per unit.

1.4 SUBMISSION OF BID SUPPLEMENT

A. Respectfully submitted this ____ day of _____, 2022.

B. Submitted By:_____(Insert name of bidding firm or corporation).

C. Authorized Signature:_____(Handwritten signature).

D. Signed By:_____(Type or print name).

E. Title:_____(Owner/Partner/President/Vice President).

END OF DOCUMENT 004322

DOCUMENT 004323 - ALTERNATES FORM

1.1 BID INFORMATION

A. Bidder: _____.

B. Project Name: Riverton Elementary School Remodel.

C. Project Location: 13150 South 1830 West, Bluffdale, Utah 84065.

D. Owner: Jordan School District.

E. Owner Project Number: 24KP15.

F. Architect: GSBS Architects.

G. Architect Project Number: 2023.043.00.

1.2 BID FORM SUPPLEMENT

A. This form is required to be attached to the Bid Form.

1.3 DESCRIPTION

A. The undersigned Bidder proposes the amount below be added to or deducted from the Base Bid if particular alternates are accepted by Owner. Amounts listed for each alternate include costs of related coordination, modification, or adjustment.

B. If the alternate does not affect the Contract Sum, the Bidder shall indicate "NO CHANGE."

C. If the alternate does not affect the Work of this Contract, the Bidder shall indicate "NOT APPLICABLE."

D. The Bidder shall be responsible for determining from the Contract Documents the affects of each alternate on the Contract Time and the Contract Sum.

E. Owner reserves the right to accept or reject any alternate, in any order, and to award or amend the Contract accordingly within 60 days of the Notice of Award unless otherwise indicated in the Contract Documents.

F. Acceptance or non-acceptance of any alternates by the Owner shall have no affect on the Contract Time unless the "Schedule of Alternates" Article below provides a formatted space for the adjustment of the Contract Time.

1.4 SCHEDULE OF ALTERNATES

A. Alternate No. 1: Replace Operable (Folding) Partition in Multi-Purpose Room 112.

1. ADD____ DEDUCT____ NO CHANGE____ NOT APPLICABLE____.
2. _____ Dollars ($_____).
3. ADD____ DEDUCT____ calendar days to adjust the Contract Time for this alternate.

B. Alternate No. 2: Upgrade Make-up Air System at Kitchen 124.

1. ADD____ DEDUCT____ NO CHANGE____ NOT APPLICABLE____.
2. _____ Dollars ($_____).
3. ADD____ DEDUCT____ calendar days to adjust the Contract Time for this alternate.

C. Alternate No. 3: Upgrade Automatic Temperature Control (ATC) System.

1. ADD____ DEDUCT____ NO CHANGE____ NOT APPLICABLE____.
2. _____ Dollars ($_____).
3. ADD____ DEDUCT____ calendar days to adjust the Contract Time for this alternate.

D. Alternate No. 4: Replace Partitions, Counters, Mirrors, Sinks, and Sink Fixtures at Girls and Boys (Student) Restrooms.

1. ADD____ DEDUCT____ NO CHANGE____ NOT APPLICABLE____.
2. _____ Dollars ($_____).
3. ADD____ DEDUCT____ calendar days to adjust the Contract Time for this alternate.

E. Alternate No. 5: Replace Skylights Throughout Building.

1. ADD____ DEDUCT____ NO CHANGE____ NOT APPLICABLE____.
2. _____ Dollars ($_____).
3. ADD____ DEDUCT____ calendar days to adjust the Contract Time for this alternate.

1.5 SUBMISSION OF BID SUPPLEMENT

A. Respectfully submitted this ____ day of _____, 2024.

B. Submitted By:_____(Insert name of bidding firm or corporation).

C. Authorized Signature:_____(Handwritten signature).

D. Signed By:_____(Type or print name).

E. Title:_____(Owner/Partner/President/Vice President).

END OF DOCUMENT 004323

AIA® Document A101® – 2017

Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum

AGREEMENT made as of the day of in the year
(In words, indicate day, month and year.)

BETWEEN the Owner:
(Name, legal status, address and other information)

Jordan School District
7905 South Redwood Road
West Jordan, Utah 84088

and the Contractor:
(Name, legal status, address and other information)

for the following Project:
(Name, location and detailed description)

Riverton Elementary School Remodel
13150 South 1830 West
Riverton, Utah 84065

The Architect:
(Name, legal status, address and other information)

GSBS Architects
375 West 200 South, Suite 100
Salt Lake City, Utah 84101

The Owner and Contractor agree as follows.

ADDITIONS AND DELETIONS:
The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

The parties should complete A101®–2017, Exhibit A, Insurance and Bonds, contemporaneously with this Agreement. AIA Document A201®–2017, General Conditions of the Contract for Construction, is adopted in this document by reference. Do not use with other general conditions unless this document is modified.

Init.
/

AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced by AIA software at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA38)

TABLE OF ARTICLES

1 THE CONTRACT DOCUMENTS

2 THE WORK OF THIS CONTRACT

3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

4 CONTRACT SUM

5 PAYMENTS

6 DISPUTE RESOLUTION

7 TERMINATION OR SUSPENSION

8 MISCELLANEOUS PROVISIONS

9 ENUMERATION OF CONTRACT DOCUMENTS

EXHIBIT A INSURANCE AND BONDS

ARTICLE 1 THE CONTRACT DOCUMENTS

The Contract Documents consist of this Agreement, Conditions of the Contract (General, Supplementary, and other Conditions), Drawings, Specifications, Addenda issued prior to execution of this Agreement, other documents listed in this Agreement, and Modifications issued after execution of this Agreement, all of which form the Contract, and are as fully a part of the Contract as if attached to this Agreement or repeated herein. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. An enumeration of the Contract Documents, other than a Modification, appears in Article 9.

ARTICLE 2 THE WORK OF THIS CONTRACT

The Contractor shall fully execute the Work described in the Contract Documents, except as specifically indicated in the Contract Documents to be the responsibility of others.

ARTICLE 3 DATE OF COMMENCEMENT AND SUBSTANTIAL COMPLETION

§ 3.1 The date of commencement of the Work shall be:
(Check one of the following boxes.)

[ ] The date of this Agreement.

[ ] A date set forth in a notice to proceed issued by the Owner.

[ ] Established as follows:
(Insert a date or a means to determine the date of commencement of the Work.)

If a date of commencement of the Work is not selected, then the date of commencement shall be the date of this Agreement.

§ 3.2 The Contract Time shall be measured from the date of commencement of the Work.

§ 3.3 Substantial Completion

§ 3.3.1 Subject to adjustments of the Contract Time as provided in the Contract Documents, the Contractor shall achieve Substantial Completion of the entire Work:

Init. /

AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA38)

(Check one of the following boxes and complete the necessary information.)

[ ] Not later than ( ) calendar days from the date of commencement of the Work.

[ ] By the following date:

§ 3.3.2 Subject to adjustments of the Contract Time as provided in the Contract Documents, if portions of the Work are to be completed prior to Substantial Completion of the entire Work, the Contractor shall achieve Substantial Completion of such portions by the following dates:

Portion of Work	Substantial Completion Date

§ 3.3.3 If the Contractor fails to achieve Substantial Completion as provided in this Section 3.3, liquidated damages, if any, shall be assessed as set forth in Section 4.5.

ARTICLE 4 CONTRACT SUM

§ 4.1 The Owner shall pay the Contractor the Contract Sum in current funds for the Contractor's performance of the Contract. The Contract Sum shall be ($), subject to additions and deductions as provided in the Contract Documents.

§ 4.2 Alternates

§ 4.2.1 Alternates, if any, included in the Contract Sum:

Item	Price

§ 4.2.2 Subject to the conditions noted below, the following alternates may be accepted by the Owner following execution of this Agreement. Upon acceptance, the Owner shall issue a Modification to this Agreement.
(Insert below each alternate and the conditions that must be met for the Owner to accept the alternate.)

Item	Price	Conditions for Acceptance

§ 4.3 Allowances, if any, included in the Contract Sum:
(Identify each allowance.)

Item	Price

§ 4.4 Unit prices, if any:
(Identify the item and state the unit price and quantity limitations, if any, to which the unit price will be applicable.)

Item	Units and Limitations	Price per Unit ($0.00)

§ 4.5 Liquidated damages, if any:
(Insert terms and conditions for liquidated damages, if any.)

§ 4.6 Other:
(Insert provisions for bonus or other incentives, if any, that might result in a change to the Contract Sum.)

AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA38)

ARTICLE 5 PAYMENTS

§ 5.1 Progress Payments

§ 5.1.1 Based upon Applications for Payment submitted to the Architect by the Contractor and Certificates for Payment issued by the Architect, the Owner shall make progress payments on account of the Contract Sum to the Contractor as provided below and elsewhere in the Contract Documents.

§ 5.1.2 The period covered by each Application for Payment shall be one calendar month ending on the last day of the month, or as follows:

§ 5.1.3 Provided that an Application for Payment is received by the Architect not later than the First day of a month, the Owner shall make payment of the amount certified to the Contractor not later than the Thirtieth day of the same month. If an Application for Payment is received by the Architect after the application date fixed above, payment of the amount certified shall be made by the Owner not later than Thirty (30) days after the Architect receives the Application for Payment.
(Federal, state or local laws may require payment within a certain period of time.)

§ 5.1.4 Each Application for Payment shall be based on the most recent schedule of values submitted by the Contractor in accordance with the Contract Documents. The schedule of values shall allocate the entire Contract Sum among the various portions of the Work. The schedule of values shall be prepared in such form, and supported by such data to substantiate its accuracy, as the Architect may require. This schedule of values shall be used as a basis for reviewing the Contractor's Applications for Payment.

§ 5.1.5 Applications for Payment shall show the percentage of completion of each portion of the Work as of the end of the period covered by the Application for Payment.

§ 5.1.6 In accordance with AIA Document A201™–2017, General Conditions of the Contract for Construction, and subject to other provisions of the Contract Documents, the amount of each progress payment shall be computed as follows:

§ 5.1.6.1 The amount of each progress payment shall first include:

.1 That portion of the Contract Sum properly allocable to completed Work;

.2 That portion of the Contract Sum properly allocable to materials and equipment delivered and suitably stored at the site for subsequent incorporation in the completed construction, or, if approved in advance by the Owner, suitably stored off the site at a location agreed upon in writing; and

.3 That portion of Construction Change Directives that the Architect determines, in the Architect's professional judgment, to be reasonably justified.

§ 5.1.6.2 The amount of each progress payment shall then be reduced by:

.1 The aggregate of any amounts previously paid by the Owner;

.2 The amount, if any, for Work that remains uncorrected and for which the Architect has previously withheld a Certificate for Payment as provided in Article 9 of AIA Document A201–2017;

.3 Any amount for which the Contractor does not intend to pay a Subcontractor or material supplier, unless the Work has been performed by others the Contractor intends to pay;

.4 For Work performed or defects discovered since the last payment application, any amount for which the Architect may withhold payment, or nullify a Certificate of Payment in whole or in part, as provided in Article 9 of AIA Document A201–2017; and

.5 Retainage withheld pursuant to Section 5.1.7.

§ 5.1.7 Retainage

§ 5.1.7.1 For each progress payment made prior to Substantial Completion of the Work, the Owner may withhold the following amount, as retainage, from the payment otherwise due:
(Insert a percentage or amount to be withheld as retainage from each Application for Payment. The amount of retainage may be limited by governing law.)

Init.
/
AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA38)

The Owner shall retain 5% of each progress payment until Substantial Completion. The amount, together with interest at the variable rate determined by the State Fiduciary account shall be released to the Contractor as a part of the Final Payment.

§ 5.1.7.1.1 The following items are not subject to retainage:
(Insert any items not subject to the withholding of retainage, such as general conditions, insurance, etc.)

None

§ 5.1.7.2 Reduction or limitation of retainage, if any, shall be as follows:
(If the retainage established in Section 5.1.7.1 is to be modified prior to Substantial Completion of the entire Work, including modifications for Substantial Completion of portions of the Work as provided in Section 3.3.2, insert provisions for such modifications.)

None

§ 5.1.7.3 Except as set forth in this Section 5.1.7.3, upon Substantial Completion of the Work, the Contractor may submit an Application for Payment that includes the retainage withheld from prior Applications for Payment pursuant to this Section 5.1.7. The Application for Payment submitted at Substantial Completion shall not include retainage as follows:
(Insert any other conditions for release of retainage upon Substantial Completion.)

None

§ 5.1.8 If final completion of the Work is materially delayed through no fault of the Contractor, the Owner shall pay the Contractor any additional amounts in accordance with Article 9 of AIA Document A201–2017.

§ 5.1.9 Except with the Owner's prior approval, the Contractor shall not make advance payments to suppliers for materials or equipment which have not been delivered and stored at the site.

§ 5.2 Final Payment

§ 5.2.1 Final payment, constituting the entire unpaid balance of the Contract Sum, shall be made by the Owner to the Contractor when

.1 the Contractor has fully performed the Contract except for the Contractor's responsibility to correct Work as provided in Article 12 of AIA Document A201–2017, and to satisfy other requirements, if any, which extend beyond final payment; and

.2 a final Certificate for Payment has been issued by the Architect.

§ 5.2.2 The Owner's final payment to the Contractor shall be made no later than 30 days after the issuance of the Architect's final Certificate for Payment, or as follows:

§ 5.3 Interest

Payments due and unpaid under the Contract shall bear interest from the date payment is due at the rate stated below, or in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.
(Insert rate of interest agreed upon, if any.)

%

ARTICLE 6 DISPUTE RESOLUTION

§ 6.1 Initial Decision Maker

The Architect will serve as the Initial Decision Maker pursuant to Article 15 of AIA Document A201–2017, unless the parties appoint below another individual, not a party to this Agreement, to serve as the Initial Decision Maker.
(If the parties mutually agree, insert the name, address and other contact information of the Initial Decision Maker, if other than the Architect.)

Init.
/
AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA38)

§ 6.2 Binding Dispute Resolution
For any Claim subject to, but not resolved by, mediation pursuant to Article 15 of AIA Document A201–2017, the method of binding dispute resolution shall be as follows:
(Check the appropriate box.)

[ ] Arbitration pursuant to Section 15.4 of AIA Document A201–2017

[X] Litigation in a court of competent jurisdiction

[ ] Other *(Specify)*

If the Owner and Contractor do not select a method of binding dispute resolution, or do not subsequently agree in writing to a binding dispute resolution method other than litigation, Claims will be resolved by litigation in a court of competent jurisdiction.

ARTICLE 7 TERMINATION OR SUSPENSION
§ 7.1 The Contract may be terminated by the Owner or the Contractor as provided in Article 14 of AIA Document A201–2017.

(Paragraphs Deleted)

§ 7.2 The Work may be suspended by the Owner as provided in Article 14 of AIA Document A201–2017.

ARTICLE 8 MISCELLANEOUS PROVISIONS
§ 8.1 Where reference is made in this Agreement to a provision of AIA Document A201–2017 or another Contract Document, the reference refers to that provision as amended or supplemented by other provisions of the Contract Documents.

§ 8.2 The Owner's representative:
(Name, address, email address, and other information)

§ 8.3 The Contractor's representative:
(Name, address, email address, and other information)

AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA38)

§ 8.4 Neither the Owner's nor the Contractor's representative shall be changed without ten days' prior notice to the other party.

§ 8.5 Insurance and Bonds

§ 8.5.1 The Owner and the Contractor shall purchase and maintain insurance as set forth in AIA Document A101™–2017, Standard Form of Agreement Between Owner and Contractor where the basis of payment is a Stipulated Sum, Exhibit A, Insurance and Bonds, and elsewhere in the Contract Documents.

§ 8.5.2 The Contractor shall provide bonds as set forth in AIA Document A101™–2017 Exhibit A, and elsewhere in the Contract Documents.

§ 8.6 Notice in electronic format, pursuant to Article 1 of AIA Document A201–2017, may be given in accordance with AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, if completed, or as otherwise set forth below:
(If other than in accordance with AIA Document E203–2013, insert requirements for delivering notice in electronic format such as name, title, and email address of the recipient and whether and how the system will be required to generate a read receipt for the transmission.)

§ 8.7 Other provisions:

ARTICLE 9 ENUMERATION OF CONTRACT DOCUMENTS

§ 9.1 This Agreement is comprised of the following documents:

.1 AIA Document A101™–2017, Standard Form of Agreement Between Owner and Contractor
.2 AIA Document A101™–2017, Exhibit A, Insurance and Bonds
.3 AIA Document A201™–2017, General Conditions of the Contract for Construction
.4 AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, dated as indicated below:
(Insert the date of the E203-2013 incorporated into this Agreement.)

.5 Drawings

Number	Title	Date

.6 Specifications

Section	Title	Date	Pages

.7 Addenda, if any:

Number	Date	Pages

Portions of Addenda relating to bidding or proposal requirements are not part of the Contract Documents unless the bidding or proposal requirements are also enumerated in this Article 9.

.8 Other Exhibits:
(Check all boxes that apply and include appropriate information identifying the exhibit where required.)

AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA38)

[ ] AIA Document E204™–2017, Sustainable Projects Exhibit, dated as indicated below:
(Insert the date of the E204-2017 incorporated into this Agreement.)

[ ] The Sustainability Plan:

Title	Date	Pages

[ ] Supplementary and other Conditions of the Contract:

Document	Title	Date	Pages

.9 Other documents, if any, listed below:
(List here any additional documents that are intended to form part of the Contract Documents. AIA Document A201™–2017 provides that the advertisement or invitation to bid, Instructions to Bidders, sample forms, the Contractor's bid or proposal, portions of Addenda relating to bidding or proposal requirements, and other information furnished by the Owner in anticipation of receiving bids or proposals, are not part of the Contract Documents unless enumerated in this Agreement. Any such documents should be listed here only if intended to be part of the Contract Documents.)

This Agreement entered into as of the day and year first written above.

OWNER *(Signature)*	**CONTRACTOR** *(Signature)*
(Printed name and title)	*(Printed name and title)*

Init.
/
AIA Document A101 – 2017. Copyright © 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1967, 1974, 1977, 1987, 1991, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:09:42 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA38)

AIA® Document A101® – 2017 Exhibit A

Insurance and Bonds

This Insurance and Bonds Exhibit is part of the Agreement, between the Owner and the Contractor, dated the day of in the year
(In words, indicate day, month and year.)

for the following **PROJECT**:
(Name and location or address)

Riverton Elementary School Remodel
13150 South 1830 West
Riverton, Utah 84065

THE OWNER:
(Name, legal status and address)

Jordan School District
7905 South Redwood Road
West Jordan, Utah 84088

THE CONTRACTOR:
(Name, legal status and address)

ADDITIONS AND DELETIONS:
The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

This document is intended to be used in conjunction with AIA Document A201®–2017, General Conditions of the Contract for Construction. Article 11 of A201®–2017 contains additional insurance provisions.

TABLE OF ARTICLES

A.1 GENERAL

A.2 OWNER'S INSURANCE

A.3 CONTRACTOR'S INSURANCE AND BONDS

A.4 SPECIAL TERMS AND CONDITIONS

ARTICLE A.1 GENERAL

The Owner and Contractor shall purchase and maintain insurance, and provide bonds, as set forth in this Exhibit. As used in this Exhibit, the term General Conditions refers to AIA Document A201™–2017, General Conditions of the Contract for Construction.

ARTICLE A.2 OWNER'S INSURANCE

§ A.2.1 General

Prior to commencement of the Work, the Owner shall secure the insurance, and provide evidence of the coverage, required under this Article A.2 and, upon the Contractor's request, provide a copy of the property insurance policy or policies required by Section A.2.3. The copy of the policy or policies provided shall contain all applicable conditions, definitions, exclusions, and endorsements.

§ A.2.2 Liability Insurance

The Owner shall general liability insurance available to it from the State of Utah Division of Risk Management.

AIA Document A101 – 2017 Exhibit A. Copyright © 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced by AIA software at 16:08:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA32)

§ A.2.3 Required Property Insurance

§ A.2.3.1 Unless this obligation is placed on the Contractor pursuant to Section A.3.3.2.1, the Owner shall provide property insurance available to it from the State of Utah Division of Risk Management sufficient to cover the total value of the entire Project on a replacement cost basis. The Owner's property insurance coverage shall be no less than the amount of the initial Contract Sum, plus the value of subsequent Modifications and labor performed and materials or equipment supplied by others. The property insurance shall be maintained until Substantial Completion and thereafter as provided in Section A.2.3.1.3, unless otherwise provided in the Contract Documents or otherwise agreed in writing by the parties to this Agreement. This insurance shall include the interests of the Owner, Contractor, Subcontractors, and Sub-subcontractors in the Project as insureds. This insurance shall include the interests of mortgagees as loss payees. The Owner's property insurance coverage shall not cover the Contractor's owned or rented machinery, tools or equipment such items which shall be insured by the Contractor in accordance with Section A.3.2.2.

§ A.2.3.1.1 Causes of Loss. The insurance required by this Section A.2.3.1 shall provide coverage for direct physical loss or damage, and shall not exclude the risks of fire, explosion, theft, vandalism, malicious mischief, collapse, earthquake, flood, or windstorm. The insurance shall also provide coverage for ensuing loss or resulting damage from error, omission, or deficiency in construction methods, design, specifications, workmanship, or materials. Sub-limits, if any, are as follows:
(Indicate below the cause of loss and any applicable sub-limit.)

Causes of Loss	Sub-Limit

§ A.2.3.1.2 Specific Required Coverages. The insurance required by this Section A.2.3.1 shall provide coverage for loss or damage to falsework and other temporary structures, and to building systems from testing and startup. The insurance shall also cover debris removal, including demolition occasioned by enforcement of any applicable legal requirements, and reasonable compensation for the Architect's and Contractor's services and expenses required as a result of such insured loss, including claim preparation expenses. Sub-limits, if any, are as follows:
(Indicate below type of coverage and any applicable sub-limit for specific required coverages.)

Coverage	Sub-Limit

§ A.2.3.1.3 Unless the parties agree otherwise, upon Substantial Completion, the Owner shall continue the insurance required by Section A.2.3.1 or, if necessary, replace the insurance policy required under Section A.2.3.1 with property insurance written for the total value of the Project that shall remain in effect until expiration of the period for correction of the Work set forth in Section 12.2.2 of the General Conditions.

§ A.2.3.1.4 Deductibles and Self-Insured Retentions. The Contractor shall be responsible for all loss not covered because of such deductibles or retentions.

The deductible for the insurance provided by the Owner under Section A.2.3 is $5,000 per occurrence.

§ A.2.3.2 *Deleted.*

§ A.2.3.3 Insurance for Existing Structures

If the Work involves remodeling an existing structure or constructing an addition to an existing structure, the Owner shall purchase and maintain, until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, "all-risks" property insurance, on a replacement cost basis, protecting the existing structure against direct physical loss or damage from the causes of loss identified in Section A.2.3.1, notwithstanding the undertaking of the Work. The Owner shall be responsible for all co-insurance penalties.

§ A.2.4 Optional Extended Property Insurance.

The Owner shall purchase and maintain the insurance selected and described below.
(Select the types of insurance the Owner is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance. For each type of insurance selected, indicate applicable limits of coverage

AIA Document A101 – 2017 Exhibit A. Copyright © 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:08:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA32)

or other conditions in the fill point below the selected item.)

[ ] § A.2.4.1 **Loss of Use, Business Interruption, and Delay in Completion Insurance,** to reimburse the Owner for loss of use of the Owner's property, or the inability to conduct normal operations due to a covered cause of loss.

Not provided

[ ] § A.2.4.2 **Ordinance or Law Insurance,** for the reasonable and necessary costs to satisfy the minimum requirements of the enforcement of any law or ordinance regulating the demolition, construction, repair, replacement or use of the Project.

Not provided

[ ] § A.2.4.3 **Expediting Cost Insurance,** for the reasonable and necessary costs for the temporary repair of damage to insured property, and to expedite the permanent repair or replacement of the damaged property.

Not provided

[ ] § A.2.4.4 **Extra Expense Insurance,** to provide reimbursement of the reasonable and necessary excess costs incurred during the period of restoration or repair of the damaged property that are over and above the total costs that would normally have been incurred during the same period of time had no loss or damage occurred.

Not provided

[ ] § A.2.4.5 **Civil Authority Insurance,** for losses or costs arising from an order of a civil authority prohibiting access to the Project, provided such order is the direct result of physical damage covered under the required property insurance.

Not provided

[ ] § A.2.4.6 **Ingress/Egress Insurance,** for loss due to the necessary interruption of the insured's business due to physical prevention of ingress to, or egress from, the Project as a direct result of physical damage.

Not provided

[ ] § A.2.4.7 **Soft Costs Insurance,** to reimburse the Owner for costs due to the delay of completion of the Work, arising out of physical loss or damage covered by the required property insurance; including construction loan fees; leasing and marketing expenses; additional fees, including those of architects, engineers, consultants, attorneys and accountants, needed for the completion of the construction, repairs, or reconstruction; and carrying costs such as property taxes, building permits, additional interest on loans, realty taxes, and insurance premiums over and above normal expenses.

Not provided

§ A.2.5 Other Optional Insurance.

The Owner shall purchase and maintain the insurance selected below.

(Select the types of insurance the Owner is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance.)

[ ] § A.2.5.1 **Cyber Security Insurance** for loss to the Owner due to data security and privacy breach, including costs of investigating a potential or actual breach of confidential or private information. *(Indicate applicable limits of coverage or other conditions in the fill point below.)*

AIA Document A101 – 2017 Exhibit A. Copyright © 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:08:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:

Not provided

[ ] **§ A.2.5.2 Other Insurance**

(List below any other insurance coverage to be provided by the Owner and any applicable limits.)

Coverage	Limits
None	

ARTICLE A.3 CONTRACTOR'S INSURANCE AND BONDS

§ A.3.1 General

§ A.3.1.1 Certificates of Insurance. The Contractor shall provide certificates of insurance acceptable to the Owner evidencing compliance with the requirements in this Article A.3 at the following times: (1) prior to commencement of the Work; (2) upon renewal or replacement of each required policy of insurance; and (3) upon the Owner's written request. An additional certificate evidencing continuation of commercial liability coverage, including coverage for completed operations, shall be submitted with the final Application for Payment and thereafter upon renewal or replacement of such coverage until the expiration of the periods required by Section A.3.2.1 and Section A.3.3.1. The certificates will show the Owner as an additional insured on the Contractor's Commercial General Liability and excess or umbrella liability policy or policies.

§ A.3.1.2 Deductibles and Self-Insured Retentions. The Contractor shall disclose to the Owner any deductible or self-insured retentions applicable to any insurance required to be provided by the Contractor.

§ A.3.1.3 Additional Insured Obligations. To the fullest extent permitted by law, the Contractor shall cause the commercial general liability coverage to include (1) the Owner, the Architect, and the Architect's consultants as additional insureds for claims caused in whole or in part by the Contractor's negligent acts or omissions during the Contractor's operations; and (2) the Owner as an additional insured for claims caused in whole or in part by the Contractor's negligent acts or omissions for which loss occurs during completed operations. The additional insured coverage shall be primary and non-contributory to any of the Owner's general liability insurance policies and shall apply to both ongoing and completed operations. To the extent commercially available, the additional insured coverage shall be no less than that provided by Insurance Services Office, Inc. (ISO) forms CG 20 10 07 04, CG 20 37 07 04, and, with respect to the Architect and the Architect's consultants, CG 20 32 07 04.

§ A.3.2 Contractor's Required Insurance Coverage

§ A.3.2.1 The Contractor shall purchase and maintain the following types and limits of insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:
(If the Contractor is required to maintain insurance for a duration other than the expiration of the period for correction of Work, state the duration.)

The required products-completed operations hazard insurance shall be maintained for a minimum of ONE (1) year after the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions.

§ A.3.2.2 Commercial General Liability

§ A.3.2.2.1 Commercial General Liability insurance for the Project written on an occurrence form with policy limits of not less than One Million Dollars and Zero Cents ($ 1000000.00) each occurrence, Three Million Dollars and Zero Cents ($ 3000000.00) general aggregate, and One Million Dollars and Zero Cents ($ 1000000.00) aggregate for products-completed operations hazard, providing coverage for claims including

.1 damages because of bodily injury, sickness or disease, including occupational sickness or disease, and death of any person;
.2 personal injury and advertising injury;
.3 damages because of physical damage to or destruction of tangible property, including the loss of use of such property;
.4 bodily injury or property damage arising out of completed operations; and
.5 the Contractor's indemnity obligations under Section 3.18 of the General Conditions.

AIA Document A101 – 2017 Exhibit A. Copyright © 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:08:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:

§ A.3.2.2.2 The Contractor's Commercial General Liability policy under this Section A.3.2.2 shall not contain an exclusion or restriction of coverage for the following:

.1 Claims by one insured against another insured, if the exclusion or restriction is based solely on the fact that the claimant is an insured, and there would otherwise be coverage for the claim.

.2 Claims for property damage to the Contractor's Work arising out of the products-completed operations hazard where the damaged Work or the Work out of which the damage arises was performed by a Subcontractor.

.3 Claims for bodily injury other than to employees of the insured.

.4 Claims for indemnity under Section 3.18 of the General Conditions arising out of injury to employees of the insured.

.5 Claims or loss excluded under a prior work endorsement or other similar exclusionary language.

.6 Claims or loss due to physical damage under a prior injury endorsement or similar exclusionary language.

.7 Claims related to residential, multi-family, or other habitational projects, if the Work is to be performed on such a project.

.8 Claims related to roofing, if the Work involves roofing.

.9 Claims related to exterior insulation finish systems (EIFS), synthetic stucco or similar exterior coatings or surfaces, if the Work involves such coatings or surfaces.

.10 Claims related to earth subsidence or movement, where the Work involves such hazards.

.11 Claims related to explosion, collapse and underground hazards, where the Work involves such hazards.

§ A.3.2.3 The Contractor's Commercial General Liability policy under this Section A.3.2.2 shall be endorsed to have the General Aggregate apply to the Project only.

§ A.3.2.4 Automobile Liability covering vehicles owned, and non-owned vehicles used, by the Contractor, with policy limits of not less than One Million Dollars and Zero Cents ($ 1000000.00) per accident, for bodily injury, death of any person, and property damage arising out of the ownership, maintenance and use of those motor vehicles along with any other statutorily required automobile coverage.

§ A.3.2.4 The Contractor may achieve the required limits and coverage for Commercial General Liability and Automobile Liability through a combination of primary and excess or umbrella liability insurance, provided such primary and excess or umbrella insurance policies result in the same or greater coverage as the coverages required under Section A.3.2.2 and A.3.2.3, and in no event shall any excess or umbrella liability insurance provide narrower coverage than the primary policy. The excess policy shall not require the exhaustion of the underlying limits only through the actual payment by the underlying insurers.

§ A.3.2.5 Workers' Compensation at statutory limits. Private entities performing Work at the site that are otherwise exempt from the requirements on account of the number of employees or occupation shall purchase and maintain voluntary Workers' Compensation coverage at the same limit and duration specified herein.

§ A.3.2.6 Employers' Liability with policy limits not less than One Million Dollars and Zero Cents ($ 1000000.00) each accident, One Million Dollars and Zero Cents ($ 1000000.00) each employee, and One Million Dollars and Zero Cents ($ 1000000.00) policy limit.

§ A.3.2.7 Jones Act, and the Longshore & Harbor Workers' Compensation Act, as required, if the Work involves hazards arising from work on or near navigable waterways, including vessels and docks

§ A.3.2.8 If the Contractor is required to furnish professional services as part of the Work, the Contractor shall procure Professional Liability insurance covering performance of the professional services, with policy limits of not less than ($) per claim and ($) in the aggregate.

§ A.3.2.9 If the Work involves the transport, dissemination, use, or release of pollutants, the Contractor shall procure Pollution Liability insurance, with policy limits of not less than ($) per claim and ($) in the aggregate.

AIA Document A101 – 2017 Exhibit A. Copyright © 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:08:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA32)

§ A.3.2.10 Coverage under Sections A.3.2.8 and A.3.2.9 may be procured through a Combined Professional Liability and Pollution Liability insurance policy, with combined policy limits of not less than ($) per claim and ($) in the aggregate.

§ A.3.2.11 Insurance for maritime liability risks associated with the operation of a vessel, if the Work requires such activities, with policy limits of not less than ($) per claim and ($) in the aggregate.

§ A.3.2.12 Insurance for the use or operation of manned or unmanned aircraft, if the Work requires such activities, with policy limits of not less than ($) per claim and ($) in the aggregate.

§ A.3.3 Contractor's Other Insurance Coverage

§ A.3.3.1 Insurance selected and described in this Section A.3.3 shall be purchased from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Contractor shall maintain the required insurance until the expiration of the period for correction of Work as set forth in Section 12.2.2 of the General Conditions, unless a different duration is stated below:
(If the Contractor is required to maintain any of the types of insurance selected below for a duration other than the expiration of the period for correction of Work, state the duration.)

§ A.3.3.2 The Contractor shall purchase and maintain the following types and limits of insurance in accordance with Section A.3.3.1.
(Select the types of insurance the Contractor is required to purchase and maintain by placing an X in the box(es) next to the description(s) of selected insurance. Where policy limits are provided, include the policy limit in the appropriate fill point.)

[ ] **§ A.3.3.2.1** Property insurance of the same type and scope satisfying the requirements identified in Section A.2.3, which, if selected in this section A.3.3.2.1, relieves the Owner of the responsibility to purchase and maintain such insurance except insurance required by Section A.2.3.1.3 and Section A.2.3.3. The Contractor shall comply with all obligations of the Owner under Section A.2.3 except to the extent provided below. The Contractor shall disclose to the Owner the amount of any deductible, and the Owner shall be responsible for losses within the deductible. Upon request, the Contractor shall provide the Owner with a copy of the property insurance policy or policies required. The Owner shall adjust and settle the loss with the insurer and be the trustee of the proceeds of the property insurance in accordance with Article 11 of the General Conditions unless otherwise set forth below:
(Where the Contractor's obligation to provide property insurance differs from the Owner's obligations as described under Section A.2.3, indicate such differences in the space below. Additionally, if a party other than the Owner will be responsible for adjusting and settling a loss with the insurer and acting as the trustee of the proceeds of property insurance in accordance with Article 11 of the General Conditions, indicate the responsible party below.)

[ ] **§ A.3.3.2.2 Railroad Protective Liability Insurance**, with policy limits of not less than ($) per claim and ($) in the aggregate, for Work within fifty (50) feet of railroad property.

[ ] **§ A.3.3.2.3 Asbestos Abatement Liability Insurance**, with policy limits of not less than ($) per claim and ($) in the aggregate, for liability arising from the encapsulation, removal, handling, storage, transportation, and disposal of asbestos-containing materials.

[X] **§ A.3.3.2.4** Insurance for physical damage to property while it is in storage and in transit to the construction site on an "all-risks" completed value form.

[ ] **§ A.3.3.2.5** Property insurance on an "all-risks" completed value form, covering property owned by the Contractor and used on the Project, including scaffolding and other equipment.

[ ] **§ A.3.3.2.6 Other Insurance**

Init.
/
AIA Document A101 – 2017 Exhibit A. Copyright © 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:08:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA32)

(List below any other insurance coverage to be provided by the Contractor and any applicable limits.)

Coverage	Limits
Umbrella or Excess Liability Coverage	$5,000,000

§ A.3.4 Performance Bond and Payment Bond

The Contractor shall provide surety bonds, from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located, as follows:
(Specify type and penal sum of bonds.)

Type	Penal Sum ($0.00)
Payment Bond	
Performance Bond	

Payment and Performance Bonds shall be AIA Document A312™, Payment Bond and Performance Bond, or contain provisions identical to AIA Document A312™, current as of the date of this Agreement.

ARTICLE A.4 SPECIAL TERMS AND CONDITIONS

Special terms and conditions that modify this Insurance and Bonds Exhibit, if any, are as follows:

AIA Document A101 – 2017 Exhibit A. Copyright © 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:08:10 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:

AIA® Document A201® – 2017

General Conditions of the Contract for Construction

for the following PROJECT:
(Name and location or address)

Riverton Elementary School
13150 South 1830 West
Riverton, Utah 84065

THE OWNER:
(Name, legal status and address)

Jordan School District
7905 South Redwood Road
West Jordan, Utah 84088

THE ARCHITECT:
(Name, legal status and address)

GSBS Architects
375 West 200 South, Suite 100
Salt Lake City, Utah 84101

ADDITIONS AND DELETIONS:
The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

For guidance in modifying this document to include supplementary conditions, see AIA Document A503™, Guide for Supplementary Conditions.

TABLE OF ARTICLES

1 GENERAL PROVISIONS

2 OWNER

3 CONTRACTOR

4 ARCHITECT

5 SUBCONTRACTORS

6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

7 CHANGES IN THE WORK

8 TIME

9 PAYMENTS AND COMPLETION

10 PROTECTION OF PERSONS AND PROPERTY

11 INSURANCE AND BONDS

12 UNCOVERING AND CORRECTION OF WORK

13 MISCELLANEOUS PROVISIONS

14 TERMINATION OR SUSPENSION OF THE CONTRACT

Init.
/

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced by AIA software at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

15 CLAIMS AND DISPUTES

Init.
/

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

INDEX
(Topics and numbers in bold are Section headings.)

Acceptance of Nonconforming Work
9.6.6, 9.9.3, 12.3
Acceptance of Work
9.6.6, 9.8.2, 9.9.3, 9.10.1, 9.10.3, 12.3
Access to Work
3.16, 6.2.1, 12.1
Accident Prevention
10
Acts and Omissions
3.2, 3.3.2, 3.12.8, 3.18, 4.2.3, 8.3.1, 9.5.1, 10.2.5, 10.2.8, 13.3.2, 14.1, 15.1.2, 15.2
Addenda
1.1.1
Additional Costs, Claims for
3.7.4, 3.7.5, 10.3.2, 15.1.5
Additional Inspections and Testing
9.4.2, 9.8.3, 12.2.1, 13.4
Additional Time, Claims for
3.2.4, 3.7.4, 3.7.5, 3.10.2, 8.3.2, 15.1.6
Administration of the Contract
3.1.3, 4.2, 9.4, 9.5
Advertisement or Invitation to Bid
1.1.1
Aesthetic Effect
4.2.13
Allowances
3.8
Applications for Payment
4.2.5, 7.3.9, 9.2, 9.3, 9.4, 9.5.1, 9.5.4, 9.6.3, 9.7, 9.10
Approvals
2.1.1, 2.3.1, 2.5, 3.1.3, 3.10.2, 3.12.8, 3.12.9, 3.12.10.1, 4.2.7, 9.3.2, 13.4.1
Arbitration
8.3.1, 15.3.2, 15.4
ARCHITECT
4
Architect, Definition of
4.1.1
Architect, Extent of Authority
2.5, 3.12.7, 4.1.2, 4.2, 5.2, 6.3, 7.1.2, 7.3.4, 7.4, 9.2, 9.3.1, 9.4, 9.5, 9.6.3, 9.8, 9.10.1, 9.10.3, 12.1, 12.2.1, 13.4.1, 13.4.2, 14.2.2, 14.2.4, 15.1.4, 15.2.1
Architect, Limitations of Authority and Responsibility
2.1.1, 3.12.4, 3.12.8, 3.12.10, 4.1.2, 4.2.1, 4.2.2, 4.2.3, 4.2.6, 4.2.7, 4.2.10, 4.2.12, 4.2.13, 5.2.1, 7.4, 9.4.2, 9.5.4, 9.6.4, 15.1.4, 15.2
Architect's Additional Services and Expenses
2.5, 12.2.1, 13.4.2, 13.4.3, 14.2.4
Architect's Administration of the Contract
3.1.3, 3.7.4, 15.2, 9.4.1, 9.5
Architect's Approvals
2.5, 3.1.3, 3.5, 3.10.2, 4.2.7
Architect's Authority to Reject Work
3.5, 4.2.6, 12.1.2, 12.2.1
Architect's Copyright
1.1.7, 1.5
Architect's Decisions
3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 4.2.14, 6.3, 7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4.1, 9.5, 9.8.4, 9.9.1, 13.4.2, 15.2
Architect's Inspections
3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 13.4
Architect's Instructions
3.2.4, 3.3.1, 4.2.6, 4.2.7, 13.4.2
Architect's Interpretations
4.2.11, 4.2.12
Architect's Project Representative
4.2.10
Architect's Relationship with Contractor
1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5, 3.7.4, 3.7.5, 3.9.2, 3.9.3, 3.10, 3.11, 3.12, 3.16, 3.18, 4.1.2, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.3.2, 13.4, 15.2
Architect's Relationship with Subcontractors
1.1.2, 4.2.3, 4.2.4, 4.2.6, 9.6.3, 9.6.4, 11.3
Architect's Representations
9.4.2, 9.5.1, 9.10.1
Architect's Site Visits
3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4
Asbestos
10.3.1
Attorneys' Fees
3.18.1, 9.6.8, 9.10.2, 10.3.3
Award of Separate Contracts
6.1.1, 6.1.2
Award of Subcontracts and Other Contracts for Portions of the Work
5.2
Basic Definitions
1.1
Bidding Requirements
1.1.1
Binding Dispute Resolution
8.3.1, 9.7, 11.5, 13.1, 15.1.2, 15.1.3, 15.2.1, 15.2.5, 15.2.6.1, 15.3.1, 15.3.2, 15.3.3, 15.4.1
Bonds, Lien
7.3.4.4, 9.6.8, 9.10.2, 9.10.3
Bonds, Performance, and Payment
7.3.4.4, 9.6.7, 9.10.3, 11.1.2, 11.1.3, 11.5
Building Information Models Use and Reliance
1.8
Building Permit
3.7.1
Capitalization
1.3
Certificate of Substantial Completion
9.8.3, 9.8.4, 9.8.5

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

Certificates for Payment
4.2.1, 4.2.5, 4.2.9, 9.3.3, 9.4, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4, 15.1.4
Certificates of Inspection, Testing or Approval
13.4.4
Certificates of Insurance
9.10.2
Change Orders
1.1.1, 3.4.2, 3.7.4, 3.8.2.3, 3.11, 3.12.8, 4.2.8, 5.2.3, 7.1.2, 7.1.3, 7.2, 7.3.2, 7.3.7, 7.3.9, 7.3.10, 8.3.1, 9.3.1.1, 9.10.3, 10.3.2, 11.2, 11.5, 12.1.2
Change Orders, Definition of
7.2.1
CHANGES IN THE WORK
2.2.2, 3.11, 4.2.8, 7, 7.2.1, 7.3.1, 7.4, 8.3.1, 9.3.1.1, 11.5
Claims, Definition of
15.1.1
Claims, Notice of
1.6.2, 15.1.3
CLAIMS AND DISPUTES
3.2.4, 6.1.1, 6.3, 7.3.9, 9.3.3, 9.10.4, 10.3.3, 15, 15.4
Claims and Timely Assertion of Claims
15.4.1
Claims for Additional Cost
3.2.4, 3.3.1, 3.7.4, 7.3.9, 9.5.2, 10.2.5, 10.3.2, 15.1.5
Claims for Additional Time
3.2.4, 3.3.1, 3.7.4, 6.1.1, 8.3.2, 9.5.2, 10.3.2, 15.1.6
Concealed or Unknown Conditions, Claims for
3.7.4
Claims for Damages
3.2.4, 3.18, 8.3.3, 9.5.1, 9.6.7, 10.2.5, 10.3.3, 11.3, 11.3.2, 14.2.4, 15.1.7
Claims Subject to Arbitration
15.4.1
Cleaning Up
3.15, 6.3
Commencement of the Work, Conditions Relating to
2.2.1, 3.2.2, 3.4.1, 3.7.1, 3.10.1, 3.12.6, 5.2.1, 5.2.3, 6.2.2, 8.1.2, 8.2.2, 8.3.1, 11.1, 11.2, 15.1.5
Commencement of the Work, Definition of
8.1.2
Communications
3.9.1, 4.2.4
Completion, Conditions Relating to
3.4.1, 3.11, 3.15, 4.2.2, 4.2.9, 8.2, 9.4.2, 9.8, 9.9.1, 9.10, 12.2, 14.1.2, 15.1.2
COMPLETION, PAYMENTS AND
9
Completion, Substantial
3.10.1, 4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3, 12.2, 15.1.2
Compliance with Laws
2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14.1.1, 14.2.1.3, 15.2.8, 15.4.2, 15.4.3
Concealed or Unknown Conditions
3.7.4, 4.2.8, 8.3.1, 10.3
Conditions of the Contract
1.1.1, 6.1.1, 6.1.4
Consent, Written
3.4.2, 3.14.2, 4.1.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3, 13.2, 15.4.4.2
Consolidation or Joinder
15.4.4
CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS
1.1.4, 6
Construction Change Directive, Definition of
7.3.1
Construction Change Directives
1.1.1, 3.4.2, 3.11, 3.12.8, 4.2.8, 7.1.1, 7.1.2, 7.1.3, 7.3, 9.3.1.1
Construction Schedules, Contractor's
3.10, 3.11, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2
Contingent Assignment of Subcontracts
5.4, 14.2.2.2
Continuing Contract Performance
15.1.4
Contract, Definition of
1.1.2
CONTRACT, TERMINATION OR SUSPENSION OF THE
5.4.1.1, 5.4.2, 11.5, 14
Contract Administration
3.1.3, 4, 9.4, 9.5
Contract Award and Execution, Conditions Relating to
3.7.1, 3.10, 5.2, 6.1
Contract Documents, Copies Furnished and Use of
1.5.2, 2.3.6, 5.3
Contract Documents, Definition of
1.1.1
Contract Sum
2.2.2, 2.2.4, 3.7.4, 3.7.5, 3.8, 3.10.2, 5.2.3, 7.3, 7.4, 9.1, 9.2, 9.4.2, 9.5.1.4, 9.6.7, 9.7, 10.3.2, 11.5, 12.1.2, 12.3, 14.2.4, 14.3.2, 15.1.4.2, 15.1.5, 15.2.5
Contract Sum, Definition of
9.1
Contract Time
1.1.4, 2.2.1, 2.2.2, 3.7.4, 3.7.5, 3.10.2, 5.2.3, 6.1.5, 7.2.1.3, 7.3.1, 7.3.5, 7.3.6, 7, 7, 7.3.10, 7.4, 8.1.1, 8.2.1, 8.2.3, 8.3.1, 9.5.1, 9.7, 10.3.2, 12.1.1, 12.1.2, 14.3.2, 15.1.4.2, 15.1.6.1, 15.2.5
Contract Time, Definition of
8.1.1
CONTRACTOR
3
Contractor, Definition of
3.1, 6.1.2
Contractor's Construction and Submittal Schedules
3.10, 3.12.1, 3.12.2, 4.2.3, 6.1.3, 15.1.6.2
Contractor's Employees

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

2.2.4, 3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3, 11.3, 14.1, 14.2.1.1
Contractor's Liability Insurance
11.1
Contractor's Relationship with Separate Contractors and Owner's Forces
3.12.5, 3.14.2, 4.2.4, 6, 11.3, 12.2.4
Contractor's Relationship with Subcontractors
1.2.2, 2.2.4, 3.3.2, 3.18.1, 3.18.2, 4.2.4, 5, 9.6.2, 9.6.7, 9.10.2, 11.2, 11.3, 11.4
Contractor's Relationship with the Architect
1.1.2, 1.5, 2.3.3, 3.1.3, 3.2.2, 3.2.3, 3.2.4, 3.3.1, 3.4.2, 3.5.1, 3.7.4, 3.10, 3.11, 3.12, 3.16, 3.18, 4.2, 5.2, 6.2.2, 7, 8.3.1, 9.2, 9.3, 9.4, 9.5, 9.7, 9.8, 9.9, 10.2.6, 10.3, 11.3, 12, 13.4, 15.1.3, 15.2.1
Contractor's Representations
3.2.1, 3.2.2, 3.5, 3.12.6, 6.2.2, 8.2.1, 9.3.3, 9.8.2
Contractor's Responsibility for Those Performing the Work
3.3.2, 3.18, 5.3, 6.1.3, 6.2, 9.5.1, 10.2.8
Contractor's Review of Contract Documents
3.2
Contractor's Right to Stop the Work
2.2.2, 9.7
Contractor's Right to Terminate the Contract
14.1
Contractor's Submittals
3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 9.2, 9.3, 9.8.2, 9.8.3, 9.9.1, 9.10.2, 9.10.3
Contractor's Superintendent
3.9, 10.2.6
Contractor's Supervision and Construction Procedures
1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 7.3.6, 8.2, 10, 12, 14, 15.1.4
Coordination and Correlation
1.2, 3.2.1, 3.3.1, 3.10, 3.12.6, 6.1.3, 6.2.1
Copies Furnished of Drawings and Specifications
1.5, 2.3.6, 3.11
Copyrights
1.5, 3.17
Correction of Work
2.5, 3.7.3, 9.4.2, 9.8.2, 9.8.3, 9.9.1, 12.1.2, 12.2, 12.3, 15.1.3.1, 15.1.3.2, 15.2.1
Correlation and Intent of the Contract Documents
1.2
Cost, Definition of
7.3.4
Costs
2.5, 3.2.4, 3.7.3, 3.8.2, 3.15.2, 5.4.2, 6.1.1, 6.2.3, 7.3.3.3, 7.3.4, 7.3.8, 7.3.9, 9.10.2, 10.3.2, 10.3.6, 11.2, 12.1.2, 12.2.1, 12.2.4, 13.4, 14
Cutting and Patching
3.14, 6.2.5
Damage to Construction of Owner or Separate Contractors
3.14.2, 6.2.4, 10.2.1.2, 10.2.5, 10.4, 12.2.4
Damage to the Work
3.14.2, 9.9.1, 10.2.1.2, 10.2.5, 10.4, 12.2.4
Damages, Claims for
3.2.4, 3.18, 6.1.1, 8.3.3, 9.5.1, 9.6.7, 10.3.3, 11.3.2, 11.3, 14.2.4, 15.1.7
Damages for Delay
6.2.3, 8.3.3, 9.5.1.6, 9.7, 10.3.2, 14.3.2
Date of Commencement of the Work, Definition of
8.1.2
Date of Substantial Completion, Definition of
8.1.3
Day, Definition of
8.1.4
Decisions of the Architect
3.7.4, 4.2.6, 4.2.7, 4.2.11, 4.2.12, 4.2.13, 6.3, 7.3.4, 7.3.9, 8.1.3, 8.3.1, 9.2, 9.4, 9.5.1, 9.8.4, 9.9.1, 13.4.2, 14.2.2, 14.2.4, 15.1, 15.2
Decisions to Withhold Certification
9.4.1, 9.5, 9.7, 14.1.1.3
Defective or Nonconforming Work, Acceptance, Rejection and Correction of
2.5, 3.5, 4.2.6, 6.2.3, 9.5.1, 9.5.3, 9.6.6, 9.8.2, 9.9.3, 9.10.4, 12.2.1
Definitions
1.1, 2.1.1, 3.1.1, 3.5, 3.12.1, 3.12.2, 3.12.3, 4.1.1, 5.1, 6.1.2, 7.2.1, 7.3.1, 8.1, 9.1, 9.8.1, 15.1.1
Delays and Extensions of Time
3.2, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4, 8.3, 9.5.1, 9.7, 10.3.2, 10.4, 14.3.2, 15.1.6, 15.2.5
Digital Data Use and Transmission
1.7
Disputes
6.3, 7.3.9, 15.1, 15.2
Documents and Samples at the Site
3.11
Drawings, Definition of
1.1.5
Drawings and Specifications, Use and Ownership of
3.11
Effective Date of Insurance
8.2.2
Emergencies
10.4, 14.1.1.2, 15.1.5
Employees, Contractor's
3.3.2, 3.4.3, 3.8.1, 3.9, 3.18.2, 4.2.3, 4.2.6, 10.2, 10.3.3, 11.3, 14.1, 14.2.1.1
Equipment, Labor, or Materials
1.1.3, 1.1.6, 3.4, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1, 4.2.6, 4.2.7, 5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1, 10.2.4, 14.2.1.1, 14.2.1.2
Execution and Progress of the Work
1.1.3, 1.2.1, 1.2.2, 2.3.4, 2.3.6, 3.1, 3.3.1, 3.4.1, 3.7.1, 3.10.1, 3.12, 3.14, 4.2, 6.2.2, 7.1.3, 7.3.6, 8.2, 9.5.1, 9.9.1, 10.2, 10.3, 12.1, 12.2, 14.2, 14.3.1, 15.1.4
Extensions of Time
3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3, 7.4, 9.5.1, 9.7, 10.3.2, 10.4, 14.3, 15.1.6, 15.2.5

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

Failure of Payment
9.5.1.3, 9.7, 9.10.2, 13.5, 14.1.1.3, 14.2.1.2
Faulty Work
(See Defective or Nonconforming Work)
Final Completion and Final Payment
4.2.1, 4.2.9, 9.8.2, 9.10, 12.3, 14.2.4, 14.4.3
Financial Arrangements, Owner's
2.2.1, 13.2.2, 14.1.1.4
GENERAL PROVISIONS
1
Governing Law
13.1
Guarantees (See Warranty)
Hazardous Materials and Substances
10.2.4, 10.3
Identification of Subcontractors and Suppliers
5.2.1
Indemnification
3.17, 3.18, 9.6.8, 9.10.2, 10.3.3, 11.3
Information and Services Required of the Owner
2.1.2, 2.2, 2.3, 3.2.2, 3.12.10.1, 6.1.3, 6.1.4, 6.2.5,
9.6.1, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2,
14.1.1.4, 14.1.4, 15.1.4
Initial Decision
15.2
Initial Decision Maker, Definition of
1.1.8
Initial Decision Maker, Decisions
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5
Initial Decision Maker, Extent of Authority
14.2.4, 15.1.4.2, 15.2.1, 15.2.2, 15.2.3, 15.2.4, 15.2.5
Injury or Damage to Person or Property
10.2.8, 10.4
Inspections
3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3,
9.9.2, 9.10.1, 12.2.1, 13.4
Instructions to Bidders
1.1.1
Instructions to the Contractor
3.2.4, 3.3.1, 3.8.1, 5.2.1, 7, 8.2.2, 12, 13.4.2
Instruments of Service, Definition of
1.1.7
Insurance
6.1.1, 7.3.4, 8.2.2, 9.3.2, 9.8.4, 9.9.1, 9.10.2, 10.2.5,
11
Insurance, Notice of Cancellation or Expiration
11.1.4, 11.2.3
Insurance, Contractor's Liability
11.1
Insurance, Effective Date of
8.2.2, 14.4.2
Insurance, Owner's Liability
11.2
Insurance, Property
10.2.5, 11.2, 11.4, 11.5
Insurance, Stored Materials
9.3.2
INSURANCE AND BONDS
11
Insurance Companies, Consent to Partial Occupancy
9.9.1
Insured loss, Adjustment and Settlement of
11.5
Intent of the Contract Documents
1.2.1, 4.2.7, 4.2.12, 4.2.13
Interest
13.5
Interpretation
1.1.8, 1.2.3, 1.4, 4.1.1, 5.1, 6.1.2, 15.1.1
Interpretations, Written
4.2.11, 4.2.12
Judgment on Final Award
15.4.2
Labor and Materials, Equipment
1.1.3, 1.1.6, 3.4, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1,
5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2, 10.2.1,
10.2.4, 14.2.1.1, 14.2.1.2
Labor Disputes
8.3.1
Laws and Regulations
1.5, 2.3.2, 3.2.3, 3.2.4, 3.6, 3.7, 3.12.10, 3.13, 9.6.4,
9.9.1, 10.2.2, 13.1, 13.3.1, 13.4.2, 13.5, 14, 15.2.8,
15.4
Liens
2.1.2, 9.3.1, 9.3.3, 9.6.8, 9.10.2, 9.10.4, 15.2.8
Limitations, Statutes of
12.2.5, 15.1.2, 15.4.1.1
Limitations of Liability
3.2.2, 3.5, 3.12.10, 3.12.10.1, 3.17, 3.18.1, 4.2.6,
4.2.7, 6.2.2, 9.4.2, 9.6.4, 9.6.7, 9.6.8, 10.2.5, 10.3.3,
11.3, 12.2.5, 13.3.1
Limitations of Time
2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2.7,
5.2, 5.3, 5.4.1, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3,
9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15,
15.1.2, 15.1.3, 15.1.5
Materials, Hazardous
10.2.4, 10.3
Materials, Labor, Equipment and
1.1.3, 1.1.6, 3.4.1, 3.5, 3.8.2, 3.8.3, 3.12, 3.13, 3.15.1,
5.2.1, 6.2.1, 7.3.4, 9.3.2, 9.3.3, 9.5.1.3, 9.10.2,
10.2.1.2, 10.2.4, 14.2.1.1, 14.2.1.2
Means, Methods, Techniques, Sequences and
Procedures of Construction
3.3.1, 3.12.10, 4.2.2, 4.2.7, 9.4.2
Mechanic's Lien
2.1.2, 9.3.1, 9.3.3, 9.6.8, 9.10.2, 9.10.4, 15.2.8
Mediation
8.3.1, 15.1.3.2, 15.2.1, 15.2.5, 15.2.6, 15.3, 15.4.1,
15.4.1.1
Minor Changes in the Work
1.1.1, 3.4.2, 3.12.8, 4.2.8, 7.1, 7.4
MISCELLANEOUS PROVISIONS
13

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

Modifications, Definition of
1.1.1
Modifications to the Contract
1.1.1, 1.1.2, 2.5, 3.11, 4.1.2, 4.2.1, 5.2.3, 7, 8.3.1, 9.7, 10.3.2
Mutual Responsibility
6.2
Nonconforming Work, Acceptance of
9.6.6, 9.9.3, 12.3
Nonconforming Work, Rejection and Correction of
2.4, 2.5, 3.5, 4.2.6, 6.2.4, 9.5.1, 9.8.2, 9.9.3, 9.10.4, 12.2
Notice
1.6, 1.6.1, 1.6.2, 2.1.2, 2.2.2., 2.2.3, 2.2.4, 2.5, 3.2.4, 3.3.1, 3.7.4, 3.7.5, 3.9.2, 3.12.9, 3.12.10, 5.2.1, 7.4, 8.2.2 9.6.8, 9.7, 9.10.1, 10.2.8, 10.3.2, 11.5, 12.2.2.1, 13.4.1, 13.4.2, 14.1, 14.2.2, 14.4.2, 15.1.3, 15.1.5, 15.1.6, 15.4.1
Notice of Cancellation or Expiration of Insurance
11.1.4, 11.2.3
Notice of Claims
1.6.2, 2.1.2, 3.7.4, 9.6.8, 10.2.8, 15.1.3, 15.1.5, 15.1.6, 15.2.8, 15.3.2, 15.4.1
Notice of Testing and Inspections
13.4.1, 13.4.2
Observations, Contractor's
3.2, 3.7.4
Occupancy
2.3.1, 9.6.6, 9.8
Orders, Written
1.1.1, 2.4, 3.9.2, 7, 8.2.2, 11.5, 12.1, 12.2.2.1, 13.4.2, 14.3.1
OWNER
2
Owner, Definition of
2.1.1
Owner, Evidence of Financial Arrangements
2.2, 13.2.2, 14.1.1.4
Owner, Information and Services Required of the
2.1.2, 2.2, 2.3, 3.2.2, 3.12.10, 6.1.3, 6.1.4, 6.2.5, 9.3.2, 9.6.1, 9.6.4, 9.9.2, 9.10.3, 10.3.3, 11.2, 13.4.1, 13.4.2, 14.1.1.4, 14.1.4, 15.1.4
Owner's Authority
1.5, 2.1.1, 2.3.32.4, 2.5, 3.4.2, 3.8.1, 3.12.10, 3.14.2, 4.1.2, 4.2.4, 4.2.9, 5.2.1, 5.2.4, 5.4.1, 6.1, 6.3, 7.2.1, 7.3.1, 8.2.2, 8.3.1, 9.3.2, 9.5.1, 9.6.4, 9.9.1, 9.10.2, 10.3.2, 11.4, 11.5, 12.2.2, 12.3, 13.2.2, 14.3, 14.4, 15.2.7
Owner's Insurance
11.2
Owner's Relationship with Subcontractors
1.1.2, 5.2, 5.3, 5.4, 9.6.4, 9.10.2, 14.2.2
Owner's Right to Carry Out the Work
2.5, 14.2.2
Owner's Right to Clean Up
6.3
Owner's Right to Perform Construction and to Award Separate Contracts
6.1
Owner's Right to Stop the Work
2.4
Owner's Right to Suspend the Work
14.3
Owner's Right to Terminate the Contract
14.2, 14.4
Ownership and Use of Drawings, Specifications and Other Instruments of Service
1.1.1, 1.1.6, 1.1.7, 1.5, 2.3.6, 3.2.2, 3.11, 3.17, 4.2.12, 5.3
Partial Occupancy or Use
9.6.6, 9.9
Patching, Cutting and
3.14, 6.2.5
Patents
3.17
Payment, Applications for
4.2.5, 7.3.9, 9.2, 9.3, 9.4, 9.5, 9.6.3, 9.7, 9.8.5, 9.10.1, 14.2.3, 14.2.4, 14.4.3
Payment, Certificates for
4.2.5, 4.2.9, 9.3.3, 9.4, 9.5, 9.6.1, 9.6.6, 9.7, 9.10.1, 9.10.3, 14.1.1.3, 14.2.4
Payment, Failure of
9.5.1.3, 9.7, 9.10.2, 13.5, 14.1.1.3, 14.2.1.2
Payment, Final
4.2.1, 4.2.9, 9.10, 12.3, 14.2.4, 14.4.3
Payment Bond, Performance Bond and
7.3.4.4, 9.6.7, 9.10.3, 11.1.2
Payments, Progress
9.3, 9.6, 9.8.5, 9.10.3, 14.2.3, 15.1.4
PAYMENTS AND COMPLETION
9
Payments to Subcontractors
5.4.2, 9.5.1.3, 9.6.2, 9.6.3, 9.6.4, 9.6.7, 14.2.1.2
PCB
10.3.1
Performance Bond and Payment Bond
7.3.4.4, 9.6.7, 9.10.3, 11.1.2
Permits, Fees, Notices and Compliance with Laws
2.3.1, 3.7, 3.13, 7.3.4.4, 10.2.2
PERSONS AND PROPERTY, PROTECTION OF
10
Polychlorinated Biphenyl
10.3.1
Product Data, Definition of
3.12.2
Product Data and Samples, Shop Drawings
3.11, 3.12, 4.2.7
Progress and Completion
4.2.2, 8.2, 9.8, 9.9.1, 14.1.4, 15.1.4
Progress Payments
9.3, 9.6, 9.8.5, 9.10.3, 14.2.3, 15.1.4
Project, Definition of
1.1.4
Project Representatives

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

4.2.10
Property Insurance
10.2.5, 11.2
Proposal Requirements
1.1.1
PROTECTION OF PERSONS AND PROPERTY
10
Regulations and Laws
1.5, 2.3.2, 3.2.3, 3.6, 3.7, 3.12.10, 3.13, 9.6.4, 9.9.1, 10.2.2, 13.1, 13.3, 13.4.1, 13.4.2, 13.5, 14, 15.2.8, 15.4
Rejection of Work
4.2.6, 12.2.1
Releases and Waivers of Liens
9.3.1, 9.10.2
Representations
3.2.1, 3.5, 3.12.6, 8.2.1, 9.3.3, 9.4.2, 9.5.1, 9.10.1
Representatives
2.1.1, 3.1.1, 3.9, 4.1.1, 4.2.10, 13.2.1
Responsibility for Those Performing the Work
3.3.2, 3.18, 4.2.2, 4.2.3, 5.3, 6.1.3, 6.2, 6.3, 9.5.1, 10
Retainage
9.3.1, 9.6.2, 9.8.5, 9.9.1, 9.10.2, 9.10.3
Review of Contract Documents and Field Conditions by Contractor
3.2, 3.12.7, 6.1.3
Review of Contractor's Submittals by Owner and Architect
3.10.1, 3.10.2, 3.11, 3.12, 4.2, 5.2, 6.1.3, 9.2, 9.8.2
Review of Shop Drawings, Product Data and Samples by Contractor
3.12
Rights and Remedies
1.1.2, 2.4, 2.5, 3.5, 3.7.4, 3.15.2, 4.2.6, 5.3, 5.4, 6.1, 6.3, 7.3.1, 8.3, 9.5.1, 9.7, 10.2.5, 10.3, 12.2.1, 12.2.2, 12.2.4, 13.3, 14, 15.4
Royalties, Patents and Copyrights
3.17
Rules and Notices for Arbitration
15.4.1
Safety of Persons and Property
10.2, 10.4
Safety Precautions and Programs
3.3.1, 4.2.2, 4.2.7, 5.3, 10.1, 10.2, 10.4
Samples, Definition of
3.12.3
Samples, Shop Drawings, Product Data and
3.11, 3.12, 4.2.7
Samples at the Site, Documents and
3.11
Schedule of Values
9.2, 9.3.1
Schedules, Construction
3.10, 3.12.1, 3.12.2, 6.1.3, 15.1.6.2
Separate Contracts and Contractors
1.1.4, 3.12.5, 3.14.2, 4.2.4, 4.2.7, 6, 8.3.1, 12.1.2
Separate Contractors, Definition of
6.1.1
Shop Drawings, Definition of
3.12.1
Shop Drawings, Product Data and Samples
3.11, 3.12, 4.2.7
Site, Use of
3.13, 6.1.1, 6.2.1
Site Inspections
3.2.2, 3.3.3, 3.7.1, 3.7.4, 4.2, 9.9.2, 9.4.2, 9.10.1, 13.4
Site Visits, Architect's
3.7.4, 4.2.2, 4.2.9, 9.4.2, 9.5.1, 9.9.2, 9.10.1, 13.4
Special Inspections and Testing
4.2.6, 12.2.1, 13.4
Specifications, Definition of
1.1.6
Specifications
1.1.1, 1.1.6, 1.2.2, 1.5, 3.12.10, 3.17, 4.2.14
Statute of Limitations
15.1.2, 15.4.1.1
Stopping the Work
2.2.2, 2.4, 9.7, 10.3, 14.1
Stored Materials
6.2.1, 9.3.2, 10.2.1.2, 10.2.4
Subcontractor, Definition of
5.1.1
SUBCONTRACTORS
5
Subcontractors, Work by
1.2.2, 3.3.2, 3.12.1, 3.18, 4.2.3, 5.2.3, 5.3, 5.4, 9.3.1.2, 9.6.7
Subcontractual Relations
5.3, 5.4, 9.3.1.2, 9.6, 9.10, 10.2.1, 14.1, 14.2.1
Submittals
3.10, 3.11, 3.12, 4.2.7, 5.2.1, 5.2.3, 7.3.4, 9.2, 9.3, 9.8, 9.9.1, 9.10.2, 9.10.3
Submittal Schedule
3.10.2, 3.12.5, 4.2.7
Subrogation, Waivers of
6.1.1, 11.3
Substances, Hazardous
10.3
Substantial Completion
4.2.9, 8.1.1, 8.1.3, 8.2.3, 9.4.2, 9.8, 9.9.1, 9.10.3, 12.2, 15.1.2
Substantial Completion, Definition of
9.8.1
Substitution of Subcontractors
5.2.3, 5.2.4
Substitution of Architect
2.3.3
Substitutions of Materials
3.4.2, 3.5, 7.3.8
Sub-subcontractor, Definition of
5.1.2
Subsurface Conditions
3.7.4
Successors and Assigns

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:

13.2
Superintendent
3.9, 10.2.6
Supervision and Construction Procedures
1.2.2, 3.3, 3.4, 3.12.10, 4.2.2, 4.2.7, 6.1.3, 6.2.4, 7.1.3, 7.3.4, 8.2, 8.3.1, 9.4.2, 10, 12, 14, 15.1.4
Suppliers
1.5, 3.12.1, 4.2.4, 4.2.6, 5.2.1, 9.3, 9.4.2, 9.5.4, 9.6, 9.10.5, 14.2.1
Surety
5.4.1.2, 9.6.8, 9.8.5, 9.10.2, 9.10.3, 11.1.2, 14.2.2, 15.2.7
Surety, Consent of
9.8.5, 9.10.2, 9.10.3
Surveys
1.1.7, 2.3.4
Suspension by the Owner for Convenience
14.3
Suspension of the Work
3.7.5, 5.4.2, 14.3
Suspension or Termination of the Contract
5.4.1.1, 14
Taxes
3.6, 3.8.2.1, 7.3.4.4
Termination by the Contractor
14.1, 15.1.7
Termination by the Owner for Cause
5.4.1.1, 14.2, 15.1.7
Termination by the Owner for Convenience
14.4
Termination of the Architect
2.3.3
Termination of the Contractor Employment
14.2.2

TERMINATION OR SUSPENSION OF THE CONTRACT
14
Tests and Inspections
3.1.3, 3.3.3, 3.7.1, 4.2.2, 4.2.6, 4.2.9, 9.4.2, 9.8.3, 9.9.2, 9.10.1, 10.3.2, 12.2.1, 13.4
TIME
8
Time, Delays and Extensions of
3.2.4, 3.7.4, 5.2.3, 7.2.1, 7.3.1, 7.4, 8.3, 9.5.1, 9.7, 10.3.2, 10.4, 14.3.2, 15.1.6, 15.2.5
Time Limits
2.1.2, 2.2, 2.5, 3.2.2, 3.10, 3.11, 3.12.5, 3.15.1, 4.2, 5.2, 5.3, 5.4, 6.2.4, 7.3, 7.4, 8.2, 9.2, 9.3.1, 9.3.3, 9.4.1, 9.5, 9.6, 9.7, 9.8, 9.9, 9.10, 12.2, 13.4, 14, 15.1.2, 15.1.3, 15.4
Time Limits on Claims
3.7.4, 10.2.8, 15.1.2, 15.1.3
Title to Work
9.3.2, 9.3.3
UNCOVERING AND CORRECTION OF WORK
12
Uncovering of Work
12.1
Unforeseen Conditions, Concealed or Unknown
3.7.4, 8.3.1, 10.3
Unit Prices
7.3.3.2, 9.1.2
Use of Documents
1.1.1, 1.5, 2.3.6, 3.12.6, 5.3
Use of Site
3.13, 6.1.1, 6.2.1
Values, Schedule of
9.2, 9.3.1
Waiver of Claims by the Architect
13.3.2
Waiver of Claims by the Contractor
9.10.5, 13.3.2, 15.1.7
Waiver of Claims by the Owner
9.9.3, 9.10.3, 9.10.4, 12.2.2.1, 13.3.2, 14.2.4, 15.1.7
Waiver of Consequential Damages
14.2.4, 15.1.7
Waiver of Liens
9.3, 9.10.2, 9.10.4
Waivers of Subrogation
6.1.1, 11.3
Warranty
3.5, 4.2.9, 9.3.3, 9.8.4, 9.9.1, 9.10.2, 9.10.4, 12.2.2, 15.1.2
Weather Delays
8.3, 15.1.6.2
Work, Definition of
1.1.3
Written Consent
1.5.2, 3.4.2, 3.7.4, 3.12.8, 3.14.2, 4.1.2, 9.3.2, 9.10.3, 13.2, 13.3.2, 15.4.4.2
Written Interpretations
4.2.11, 4.2.12
Written Orders
1.1.1, 2.4, 3.9, 7, 8.2.2, 12.1, 12.2, 13.4.2, 14.3.1

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

ARTICLE 1 GENERAL PROVISIONS

§ 1.1 Basic Definitions

§ 1.1.1 The Contract Documents

The Contract Documents are enumerated in the Agreement between the Owner and Contractor (hereinafter the Agreement) and consist of the Agreement, Conditions of the Contract (General, Supplementary and other Conditions), Drawings, Specifications, Addenda issued prior to execution of the Contract, other documents listed in the Agreement, and Modifications issued after execution of the Contract. A Modification is (1) a written amendment to the Contract signed by both parties, (2) a Change Order, (3) a Construction Change Directive, or (4) a written order for a minor change in the Work issued by the Architect. Unless specifically enumerated in the Agreement, the Contract Documents do not include the advertisement or invitation to bid, Instructions to Bidders, sample forms, other information furnished by the Owner in anticipation of receiving bids or proposals, the Contractor's bid or proposal, or portions of Addenda relating to bidding or proposal requirements.

§ 1.1.2 The Contract

The Contract Documents form the Contract for Construction. The Contract represents the entire and integrated agreement between the parties hereto and supersedes prior negotiations, representations, or agreements, either written or oral. The Contract may be amended or modified only by a Modification. The Contract Documents shall not be construed to create a contractual relationship of any kind (1) between the Contractor and the Architect or the Architect's consultants, (2) between the Owner and a Subcontractor or a Sub-subcontractor, (3) between the Owner and the Architect or the Architect's consultants, or (4) between any persons or entities other than the Owner and the Contractor. The Architect shall, however, be entitled to performance and enforcement of obligations under the Contract intended to facilitate performance of the Architect's duties.

§ 1.1.3 The Work

The term "Work" means the construction and services required by the Contract Documents, whether completed or partially completed, and includes all other labor, materials, equipment, and services provided or to be provided by the Contractor to fulfill the Contractor's obligations. The Work may constitute the whole or a part of the Project.

§ 1.1.4 The Project

The Project is the total construction of which the Work performed under the Contract Documents may be the whole or a part and which may include construction by the Owner and by Separate Contractors.

§ 1.1.5 The Drawings

The Drawings are the graphic and pictorial portions of the Contract Documents showing the design, location and dimensions of the Work, generally including plans, elevations, sections, details, schedules, and diagrams.

§ 1.1.6 The Specifications

The Specifications are that portion of the Contract Documents consisting of the written requirements for materials, equipment, systems, standards and workmanship for the Work, and performance of related services.

§ 1.1.7 Instruments of Service

Instruments of Service are representations, in any medium of expression now known or later developed, of the tangible and intangible creative work performed by the Architect and the Architect's consultants under their respective professional services agreements. Instruments of Service may include, without limitation, studies, surveys, models, sketches, drawings, specifications, and other similar materials.

§ 1.1.8 Initial Decision Maker

The Initial Decision Maker is the person identified in the Agreement to render initial decisions on Claims in accordance with Section 15.2. The Initial Decision Maker shall not show partiality to the Owner or Contractor and shall not be liable for results of interpretations or decisions rendered in good faith.

§ 1.2 Correlation and Intent of the Contract Documents

§ 1.2.1 The intent of the Contract Documents is to include all items necessary for the proper execution and completion of the Work by the Contractor. The Contract Documents are complementary, and what is required by one shall be as binding as if required by all; performance by the Contractor shall be required only to the extent

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

consistent with the Contract Documents and reasonably inferable from them as being necessary to produce the indicated results.

§ 1.2.1.1 The invalidity of any provision of the Contract Documents shall not invalidate the Contract or its remaining provisions. If it is determined that any provision of the Contract Documents violates any law, or is otherwise invalid or unenforceable, then that provision shall be revised to the extent necessary to make that provision legal and enforceable. In such case the Contract Documents shall be construed, to the fullest extent permitted by law, to give effect to the parties' intentions and purposes in executing the Contract.

§ 1.2.1.2 In the event of conflicts or discrepancies among the Contract Documents, interpretations will be based on the following priorities:

.1 Modifications.
.2 The Agreement.
.3 Addenda, with those of later date having precedence over those of earlier date.
.4 The General Conditions of the Contract for Construction.
.5 Division 1 of the Specifications.
.6 Drawings and Divisions 2-49 of the Specifications.
.7 Other documents specifically enumerated in the Agreement as part of the Contract Documents.

In the case of conflicts or discrepancies between Drawings and Divisions 2-49 of the Specifications, or within or among the Contract Documents and not clarified by Addendum, the Architect will determine which takes precedence in accordance with Sections 4.2.11, 4.2.12, and 4.2.13.

§ 1.2.2 Organization of the Specifications into divisions, sections and articles, and arrangement of Drawings shall not control the Contractor in dividing the Work among Subcontractors or in establishing the extent of Work to be performed by any trade.

§ 1.2.3 Unless otherwise stated in the Contract Documents, words that have well-known technical or construction industry meanings are used in the Contract Documents in accordance with such recognized meanings.

§ 1.2.4 Notes and other call-outs are considered to be typical unless noted otherwise. A note or call-out made in one location shall apply to all similar conditions of the Work.

§ 1.3 Capitalization

Terms capitalized in these General Conditions include those that are (1) specifically defined, (2) the titles of numbered articles, or (3) the titles of other documents published by the American Institute of Architects.

§ 1.4 Interpretation

In the interest of brevity the Contract Documents frequently omit modifying words such as "all" and "any" and articles such as "the" and "an," but the fact that a modifier or an article is absent from one statement and appears in another is not intended to affect the interpretation of either statement.

§ 1.5 Ownership and Use of Drawings, Specifications, and Other Instruments of Service

§ 1.5.1 The Architect and the Architect's consultants shall be deemed the authors and owners of their respective Instruments of Service, including the Drawings and Specifications, and retain all common law, statutory, and other reserved rights in their Instruments of Service, including copyrights. The Contractor, Subcontractors, Sub-subcontractors, and suppliers shall not own or claim a copyright in the Instruments of Service. Submittal or distribution to meet official regulatory requirements or for other purposes in connection with the Project is not to be construed as publication in derogation of the Architect's or Architect's consultants' reserved rights.

§ 1.5.2 The Contractor, Subcontractors, Sub-subcontractors, and suppliers are authorized to use and reproduce the Instruments of Service provided to them, subject to any protocols established pursuant to Sections 1.7 and 1.8, solely and exclusively for execution of the Work. All copies made under this authorization shall bear the copyright notice, if any, shown on the Instruments of Service. The Contractor, Subcontractors, Sub-subcontractors, and suppliers may not use the Instruments of Service on other projects or for additions to the Project outside the scope of the Work without the specific written consent of the Owner, Architect, and the Architect's consultants.

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 1.6 Notice

§ 1.6.1 Except as otherwise provided in Section 1.6.2, where the Contract Documents require one party to notify or give notice to the other party, such notice shall be provided in writing to the designated representative of the party to whom the notice is addressed and shall be deemed to have been duly served if delivered in person, by mail, by courier, or by electronic transmission if a method for electronic transmission is set forth in the Agreement.

§ 1.6.2 Notice of Claims as provided in Section 15.1.3 shall be provided in writing and shall be deemed to have been duly served only if delivered to the designated representative of the party to whom the notice is addressed by certified or registered mail, or by courier providing proof of delivery.

§ 1.7 Digital Data Use and Transmission

The parties shall agree upon protocols governing the transmission and use of Instruments of Service or any other information or documentation in digital form. The parties will use AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, to establish the protocols for the development, use, transmission, and exchange of digital data.

§ 1.8 Building Information Models Use and Reliance

Any use of, or reliance on, all or a portion of a building information model without agreement to protocols governing the use of, and reliance on, the information contained in the model and without having those protocols set forth in AIA Document E203™–2013, Building Information Modeling and Digital Data Exhibit, and the requisite AIA Document G202™–2013, Project Building Information Modeling Protocol Form, shall be at the using or relying party's sole risk and without liability to the other party and its contractors or consultants, the authors of, or contributors to, the building information model, and each of their agents and employees.

ARTICLE 2 OWNER

§ 2.1 General

§ 2.1.1 The Owner is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Owner shall designate in writing a representative who shall have express authority to bind the Owner with respect to all matters requiring the Owner's approval or authorization. Except as otherwise provided in Section 4.2.1, the Architect does not have such authority. The term "Owner" means the Owner or the Owner's authorized representative.

(Paragraph Deleted)

§ 2.2 Evidence of the Owner's Financial Arrangements

(Paragraphs Deleted)

§ 2.3 Information and Services Required of the Owner

§ 2.3.1 Except for permits and fees that are the responsibility of the Contractor under the Contract Documents, including those required under Section 3.7.1, the Owner shall secure and pay for necessary approvals, easements, assessments and charges required for construction, use or occupancy of permanent structures or for permanent changes in existing facilities.

§ 2.3.2 The Owner shall retain an architect lawfully licensed to practice architecture, or an entity lawfully practicing architecture, in the jurisdiction where the Project is located. That person or entity is identified as the Architect in the Agreement and is referred to throughout the Contract Documents as if singular in number.

§ 2.3.3 If the employment of the Architect terminates, the Owner shall employ a successor to whom the Contractor has no reasonable objection and whose status under the Contract Documents shall be that of the Architect.

§ 2.3.4 The Owner shall furnish surveys describing physical characteristics, legal limitations and utility locations for the site of the Project, and a legal description of the site. The Contractor shall be entitled to rely on the accuracy of information furnished by the Owner but shall exercise proper precautions relating to the safe performance of the Work.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 2.3.5 The Owner shall furnish information or services required of the Owner by the Contract Documents with reasonable promptness. The Owner shall also furnish any other information or services under the Owner's control and relevant to the Contractor's performance of the Work with reasonable promptness after receiving the Contractor's written request for such information or services.

§ 2.3.6 Unless otherwise provided in the Contract Documents, the Owner shall furnish to the Contractor one copy of the Contract Documents for purposes of making reproductions pursuant to Section 1.5.2.

§ 2.4 Owner's Right to Stop the Work

If the Contractor fails to correct Work that is not in accordance with the requirements of the Contract Documents as required by Section 12.2 or repeatedly fails to carry out Work in accordance with the Contract Documents, the Owner may issue a written order to the Contractor to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, the right of the Owner to stop the Work shall not give rise to a duty on the part of the Owner to exercise this right for the benefit of the Contractor or any other person or entity, except to the extent required by Section 6.1.3.

§ 2.5 Owner's Right to Carry Out the Work

If the Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents and fails within a ten-day period after receipt of notice from the Owner to commence and continue correction of such default or neglect with diligence and promptness, the Owner may, without prejudice to other remedies the Owner may have, correct such default or neglect. Such action by the Owner and amounts charged to the Contractor may, pursuant to Section 9.5.1, be withheld or nullify a Certificate for Payment in whole or in part, to the extent reasonably necessary to reimburse the Owner for the reasonable cost of correcting such deficiencies, including Owner's expenses and compensation for the Architect's additional services made necessary by such default, neglect, or failure. If current and future payments are not sufficient to cover such amounts, the Contractor shall pay the difference to the Owner. If the Contractor disagrees with the actions of the Owner or the Architect, or the amounts claimed as costs to the Owner, the Contractor may file a Claim pursuant to Article 15.

ARTICLE 3 CONTRACTOR

§ 3.1 General

§ 3.1.1 The Contractor is the person or entity identified as such in the Agreement and is referred to throughout the Contract Documents as if singular in number. The Contractor shall be lawfully licensed, if required in the jurisdiction where the Project is located. The Contractor shall designate in writing a representative who shall have express authority to bind the Contractor with respect to all matters under this Contract. The term "Contractor" means the Contractor or the Contractor's authorized representative.

§ 3.1.2 The Contractor shall perform the Work in accordance with the Contract Documents.

§ 3.1.3 The Contractor shall not be relieved of its obligations to perform the Work in accordance with the Contract Documents either by activities or duties of the Architect in the Architect's administration of the Contract, or by tests, inspections or approvals required or performed by persons or entities other than the Contractor.

§ 3.2 Review of Contract Documents and Field Conditions by Contractor

§ 3.2.1 Execution of the Contract by the Contractor is a representation that the Contractor has visited the site, become generally familiar with local conditions under which the Work is to be performed, and correlated personal observations with requirements of the Contract Documents.

§ 3.2.2 Because the Contract Documents are complementary, the Contractor shall, before starting each portion of the Work, carefully study and compare the various Contract Documents relative to that portion of the Work, as well as the information furnished by the Owner pursuant to Section 2.3.4, shall take field measurements of any existing conditions related to that portion of the Work, and shall observe any conditions at the site affecting it. These obligations are for the purpose of facilitating coordination and construction by the Contractor and are not for the purpose of discovering errors, omissions, or inconsistencies in the Contract Documents; however, the Contractor shall promptly report to the Architect any errors, inconsistencies or omissions discovered by or made known to the Contractor as a request for information in such form as the Architect may require. It is recognized that the Contractor's review is made in the Contractor's capacity as a contractor and not as a licensed design professional, unless otherwise specifically provided in the Contract Documents.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 3.2.3 The Contractor is not required to ascertain that the Contract Documents are in accordance with applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, but the Contractor shall promptly report to the Architect any nonconformity discovered by or made known to the Contractor as a request for information in such form as the Architect may require.

§ 3.2.4 If the Contractor believes that additional cost or time is involved because of clarifications or instructions the Architect issues in response to the Contractor's notices or requests for information pursuant to Sections 3.2.2 or 3.2.3, the Contractor shall submit Claims as provided in Article 15. If the Contractor fails to perform the obligations of Sections 3.2.2 or 3.2.3, the Contractor shall pay such costs and damages to the Owner, subject to Section 15.1.7, as would have been avoided if the Contractor had performed such obligations. If the Contractor performs those obligations, the Contractor shall not be liable to the Owner or Architect for damages resulting from errors, inconsistencies or omissions in the Contract Documents, for differences between field measurements or conditions and the Contract Documents, or for nonconformities of the Contract Documents to applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities.

§ 3.2.5 The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect to evaluate and respond to the contractor's requests for information that are not prepared in accordance with the Contract Documents or where the requested information is available to the Contractor from a careful study and comparison of the Contract Documents, field conditions, other Owner-provided information, Contractor-prepared coordination drawings of prior Project correspondence or documentation.

§ 3.3 Supervision and Construction Procedures

§ 3.3.1 The Contractor shall supervise and direct the Work, using the Contractor's best skill and attention. The Contractor shall be solely responsible for, and have control over, construction means, methods, techniques, sequences, and procedures, and for coordinating all portions of the Work under the Contract. If the Contract Documents give specific instructions concerning construction means, methods, techniques, sequences, or procedures, the Contractor shall evaluate the jobsite safety thereof and shall be solely responsible for the jobsite safety of such means, methods, techniques, sequences, or procedures. If the Contractor determines that such means, methods, techniques, sequences or procedures may not be safe, the Contractor shall give timely notice to the Owner and Architect, and shall propose alternative means, methods, techniques, sequences, or procedures. The Architect shall evaluate the proposed alternative solely for conformance with the design intent for the completed construction. Unless the Architect objects to the Contractor's proposed alternative, the Contractor shall perform the Work using its alternative means, methods, techniques, sequences, or procedures.

§ 3.3.2 The Contractor shall be responsible to the Owner for acts and omissions of the Contractor's employees, Subcontractors and their agents and employees, and other persons or entities performing portions of the Work for, or on behalf of, the Contractor or any of its Subcontractors.

§ 3.3.3 The Contractor shall be responsible for inspection of portions of Work already performed to determine that such portions meet the requirements of Sections 3.1.2, 3.7.2 and 3.7.3 and are in proper condition to receive subsequent Work.

§ 3.4 Labor and Materials

§ 3.4.1 Unless otherwise provided in the Contract Documents, the Contractor shall provide and pay for labor, materials, equipment, tools, construction equipment and machinery, water, heat, utilities, transportation, and other facilities and services necessary for proper execution and completion of the Work, whether temporary or permanent and whether or not incorporated or to be incorporated in the Work.

§ 3.4.2 Except in the case of minor changes in the Work approved by the Architect in accordance with Section 3.12.8 or ordered by the Architect in accordance with Section 7.4, the Contractor may make substitutions only with the consent of the Owner, after evaluation by the Architect and in accordance with a Change Order or Construction Change Directive.

§ 3.4.2.1 After the Contract has been executed, the Owner and Architect may consider requests for the substitution of products in place of those specified. The Owner and Architect may, but are not obligated to, consider only those

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

substitution requests that are in full conformance with the conditions set forth in the General Requirements (Division 1 of the Specifications). By making requests for substitution, the Contractor:

.1 represents that it has personally investigated the proposed substitute product and determined that it is equal of superior in all respects to the product specified;

.2 represents that it will provide the same warranty for the substitution as it would have provided for the product specified;

.3 certifies that the cost data presented is complete and includes all related costs for the substituted product and for the Architect's redesign costs, and waives all claims for additional costs related to the substitution that subsequently become apparent;

.4 agrees that it shall, if the substitution is approved, coordinate the installation of the accepted substitute, making such changes as may be required for the Work to be complete in all respects.

§ 3.4.2.2 The Owner shall be entitled to reimbursement from the Contractor for amounts paid to the Architect to review the Contractor's proposed substitutions and making agreed-upon changes in the Drawings and Specifications resulting from such substitutions.

§ 3.4.3 The Contractor shall enforce strict discipline and good order among the Contractor's employees and other persons carrying out the Work. The Contractor shall not permit employment of unfit persons or persons not properly skilled in tasks assigned to them.

§ 3.5 Warranty

§ 3.5.1 The Contractor warrants to the Owner and Architect that materials and equipment furnished under the Contract will be of good quality and new unless the Contract Documents require or permit otherwise. The Contractor further warrants that the Work will conform to the requirements of the Contract Documents and will be free from defects, except for those inherent in the quality of the Work the Contract Documents require or permit. Work, materials, or equipment not conforming to these requirements may be considered defective. The Contractor's warranty excludes remedy for damage or defect caused by abuse, alterations to the Work not executed by the Contractor, improper or insufficient maintenance, improper operation, or normal wear and tear and normal usage. If required by the Architect, the Contractor shall furnish satisfactory evidence as to the kind and quality of materials and equipment.

§ 3.5.2 All material, equipment, or other special warranties required by the Contract Documents shall be issued in the name of the Owner, or shall be transferable to the Owner, and shall commence in accordance with Section 9.8.4.

§ 3.6 Taxes

The Contractor shall pay sales, consumer, use and similar taxes for the Work provided by the Contractor that are legally enacted when bids are received or negotiations concluded, whether or not yet effective or merely scheduled to go into effect.

§ 3.6.1 Construction materials purchased by the Contractor are not subject to Utah State Sales Tax. The Owner will provide Form TC-721 and the Contractor, its sub-contractors and suppliers shall use said form when purchasing such construction materials for the Project.

§ 3.7 Permits, Fees, Notices and Compliance with Laws

§ 3.7.1 Unless otherwise notified in writing, the Contractor shall not be required to obtain building permits or other permits from governmental authorities. The Owner shall provide its own inspectors to comply with inspection requirements of applicable building codes. Such inspection does not release the Contractor from the obligations of Sections 3.1.2, 3.3.3, 3.7.2 and 3.7.3.

§ 3.7.1.1 Impact fees and permit fees required for off-site improvements or roadway construction required for the Project, if any, shall be paid by the Contractor.

§ 3.7.1.2 In the event that portions of the Work subject to this Section 3.7 fail more than two inspections, the contractor shall be charged five-hundred dollars ($500.00) for each additional inspection required to obtain approval for that portion of the Work.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

§ 3.7.2 The Contractor shall comply with and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities applicable to performance of the Work.

§ 3.7.3 If the Contractor performs Work knowing it to be contrary to applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of public authorities, the Contractor shall assume appropriate responsibility for such Work and shall bear the costs attributable to correction.

§ 3.7.4 Concealed or Unknown Conditions

If the Contractor encounters conditions at the site that are (1) subsurface or otherwise concealed physical conditions that differ materially from those indicated in the Contract Documents or (2) unknown physical conditions of an unusual nature that differ materially from those ordinarily found to exist and generally recognized as inherent in construction activities of the character provided for in the Contract Documents, the Contractor shall promptly provide notice to the Owner and the Architect before conditions are disturbed and in no event later than 14 days after first observance of the conditions. The Architect will promptly investigate such conditions and, if the Architect determines that they differ materially and cause an increase or decrease in the Contractor's cost of, or time required for, performance of any part of the Work, will recommend that an equitable adjustment be made in the Contract Sum or Contract Time, or both. If the Architect determines that the conditions at the site are not materially different from those indicated in the Contract Documents and that no change in the terms of the Contract is justified, the Architect shall promptly notify the Owner and Contractor, stating the reasons. If either party disputes the Architect's determination or recommendation, that party may submit a Claim as provided in Article 15.

§ 3.7.5 If, in the course of the Work, the Contractor encounters human remains or recognizes the existence of burial markers, archaeological sites or wetlands not indicated in the Contract Documents, the Contractor shall immediately suspend any operations that would affect them and shall notify the Owner and Architect. Upon receipt of such notice, the Owner shall promptly take any action necessary to obtain governmental authorization required to resume the operations. The Contractor shall continue to suspend such operations until otherwise instructed by the Owner but shall continue with all other operations that do not affect those remains or features. Requests for adjustments in the Contract Sum and Contract Time arising from the existence of such remains or features may be made as provided in Article 15.

§ 3.8 Allowances

§ 3.8.1 The Contractor shall include in the Contract Sum all allowances stated in the Contract Documents. Items covered by allowances shall be supplied for such amounts and by such persons or entities as the Owner may direct, but the Contractor shall not be required to employ persons or entities to whom the Contractor has reasonable objection.

§ 3.8.2 Unless otherwise provided in the Contract Documents,

.1 allowances shall cover the cost to the Contractor of materials and equipment delivered at the site and all required taxes, less applicable trade discounts;

.2 Contractor's costs for unloading and handling at the site, labor, installation costs, overhead, profit, and other expenses contemplated for stated allowance amounts shall be included in the Contract Sum but not in the allowances; and

.3 whenever costs are more than or less than allowances, the Contract Sum shall be adjusted accordingly by Change Order. The amount of the Change Order shall reflect (1) the difference between actual costs and the allowances under Section 3.8.2.1 and (2) changes in Contractor's costs under Section 3.8.2.2.

§ 3.8.3 Materials and equipment under an allowance shall be selected by the Owner with reasonable promptness.

§ 3.9 Project Management Personnel and Superintendent

§ 3.9.1 The Contractor shall employ competent project management personnel, a superintendent and necessary assistants who shall be in attendance at the Project site during performance of the Work. The project management personnel and superintendent shall represent the Contractor, and communications given to the project management personnel or superintendent shall be as binding as if given to the Contractor.

§ 3.9.2 The Contractor, as soon as practicable after award of the Contract, shall notify the Owner and Architect of the names and qualifications of the proposed project management personnel and superintendent. Within 14 days of

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:06:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

receipt of the information, the Architect may notify the Contractor, stating whether the Owner or the Architect (1) has reasonable objection to the proposed individuals or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 3.9.3 The Contractor shall not employ proposed project management personnel or a superintendent to whom the Owner or Architect has made reasonable and timely objection in accordance with Section 3.9.2. The Contractor shall not change the project management personnel or superintendent without the Owner's consent, which shall not unreasonably be withheld or delayed.

§ 3.10 Contractor's Construction and Submittal Schedules

§ 3.10.1 The Contractor, promptly after being awarded the Contract, shall submit for the Owner's and Architect's information a Contractor's construction schedule for the Work. The schedule shall contain detail appropriate for the Project, including (1) the date of commencement of the Work, interim schedule milestone dates, and the date of Substantial Completion; (2) an apportionment of the Work by construction activity; and (3) the time required for completion of each portion of the Work. The schedule shall provide for the orderly progression of the Work to completion and shall not exceed time limits current under the Contract Documents. The schedule shall be revised at appropriate intervals as required by the conditions of the Work and Project.

§ 3.10.2 The Contractor, promptly after being awarded the Contract and thereafter as necessary to maintain a current submittal schedule, shall submit a submittal schedule for the Architect's approval. The Architect's approval shall not be unreasonably delayed or withheld. The submittal schedule shall (1) be coordinated with the Contractor's construction schedule, and (2) allow the Architect reasonable time to review submittals. If the Contractor fails to submit a submittal schedule, or fails to provide submittals in accordance with the approved submittal schedule, the Contractor shall not be entitled to any increase in Contract Sum or extension of Contract Time based on the time required for review of submittals.

§ 3.10.3 The Contractor shall perform the Work in general accordance with the most recent schedules submitted to the Owner and Architect.

§ 3.11 Documents and Samples at the Site

The Contractor shall make available, at the Project site, the Contract Documents, including Change Orders, Construction Change Directives, and other Modifications, in good order and marked currently to indicate field changes and selections made during construction, and the approved Shop Drawings, Product Data, Samples, and similar required submittals. These shall be in electronic form or paper copy, available to the Architect and Owner, and delivered to the Architect for submittal to the Owner upon completion of the Work as a record of the Work as constructed.

§ 3.12 Shop Drawings, Product Data and Samples

§ 3.12.1 Shop Drawings are drawings, diagrams, schedules, and other data specially prepared for the Work by the Contractor or a Subcontractor, Sub-subcontractor, manufacturer, supplier, or distributor to illustrate some portion of the Work.

§ 3.12.2 Product Data are illustrations, standard schedules, performance charts, instructions, brochures, diagrams, and other information furnished by the Contractor to illustrate materials or equipment for some portion of the Work.

§ 3.12.3 Samples are physical examples that illustrate materials, equipment, or workmanship, and establish standards by which the Work will be judged.

§ 3.12.4 Shop Drawings, Product Data, Samples, and similar submittals are not Contract Documents. Their purpose is to demonstrate how the Contractor proposes to conform to the information given and the design concept expressed in the Contract Documents for those portions of the Work for which the Contract Documents require submittals. Review by the Architect is subject to the limitations of Section 4.2.7. Informational submittals upon which the Architect is not expected to take responsive action may be so identified in the Contract Documents. Submittals that are not required by the Contract Documents may be returned by the Architect without action.

§ 3.12.5 The Contractor shall review for compliance with the Contract Documents, approve, and submit to the Architect, Shop Drawings, Product Data, Samples, and similar submittals required by the Contract Documents, in

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

accordance with the submittal schedule approved by the Architect or, in the absence of an approved submittal schedule, with reasonable promptness and in such sequence as to cause no delay in the Work or in the activities of the Owner or of Separate Contractors. Submittals that do not indicate the Contractor's review for compliance may be returned by the Architect without action.

§ 3.12.6 By submitting Shop Drawings, Product Data, Samples, and similar submittals, the Contractor represents to the Owner and Architect that the Contractor has (1) reviewed and approved them, (2) determined and verified materials, field measurements and field construction criteria related thereto, or will do so, and (3) checked and coordinated the information contained within such submittals with the requirements of the Work and of the Contract Documents.

§ 3.12.7 The Contractor shall perform no portion of the Work for which the Contract Documents require submittal and review of Shop Drawings, Product Data, Samples, or similar submittals, until the respective submittal has been approved by the Architect.

§ 3.12.8 The Work shall be in accordance with approved submittals except that the Contractor shall not be relieved of responsibility for deviations from the requirements of the Contract Documents by the Architect's approval of Shop Drawings, Product Data, Samples, or similar submittals, unless the Contractor has specifically notified the Architect of such deviation at the time of submittal and (1) the Architect has given written approval to the specific deviation as a minor change in the Work, or (2) a Change Order or Construction Change Directive has been issued authorizing the deviation. The Contractor shall not be relieved of responsibility for errors or omissions in Shop Drawings, Product Data, Samples, or similar submittals, by the Architect's approval thereof.

§ 3.12.9 The Contractor shall direct specific attention, in writing or on resubmitted Shop Drawings, Product Data, Samples, or similar submittals, to revisions other than those requested by the Architect on previous submittals. In the absence of such notice, the Architect's approval of a resubmission shall not apply to such revisions.

§ 3.12.10 The Contractor shall not be required to provide professional services that constitute the practice of architecture or engineering unless such services are specifically required by the Contract Documents for a portion of the Work or unless the Contractor needs to provide such services in order to carry out the Contractor's responsibilities for construction means, methods, techniques, sequences, and procedures. The Contractor shall not be required to provide professional services in violation of applicable law.

§ 3.12.10.1 If professional design services or certifications by a design professional related to systems, materials, or equipment are specifically required of the Contractor by the Contract Documents, the Owner and the Architect will specify all performance and design criteria that such services must satisfy. The Contractor shall be entitled to rely upon the adequacy and accuracy of the performance and design criteria provided in the Contract Documents. The Contractor shall cause such services or certifications to be provided by an appropriately licensed design professional, whose signature and seal shall appear on all drawings, calculations, specifications, certifications, Shop Drawings, and other submittals prepared by such professional. Shop Drawings, and other submittals related to the Work, designed or certified by such professional, if prepared by others, shall bear such professional's written approval when submitted to the Architect. The Owner and the Architect shall be entitled to rely upon the adequacy and accuracy of the services, certifications, and approvals performed or provided by such design professionals, provided the Owner and Architect have specified to the Contractor the performance and design criteria that such services must satisfy. Pursuant to this Section 3.12.10, the Architect will review and approve or take other appropriate action on submittals only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents.

§ 3.12.10.2 If the Contract Documents require the Contractor's design professional to certify that the Work has been performed in accordance with the design criteria, the Contractor shall furnish such certifications to the Architect at the time and in the form specified by the Architect.

§ 3.12.11 The Architect's review of Contractor's submittals will be limited to examination of an initial submittal and one (1) resubmittal. The Contractor shall reimburse the Owner for amounts paid to the Architect for evaluation of additional resubmittals.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 3.13 Use of Site

The Contractor shall confine operations at the site to areas permitted by applicable laws, statutes, ordinances, codes, rules and regulations, lawful orders of public authorities, and the Contract Documents and shall not unreasonably encumber the site with materials or equipment.

§ 3.14 Cutting and Patching

§ 3.14.1 The Contractor shall be responsible for cutting, fitting, or patching required to complete the Work or to make its parts fit together properly. All areas requiring cutting, fitting, or patching shall be restored to the condition existing prior to the cutting, fitting, or patching, unless otherwise required by the Contract Documents.

§ 3.14.2 The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or Separate Contractors by cutting, patching, or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter construction by the Owner or a Separate Contractor except with written consent of the Owner and of the Separate Contractor. Consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold, from the Owner or a Separate Contractor, its consent to cutting or otherwise altering the Work.

§ 3.15 Cleaning Up

§ 3.15.1 The Contractor shall keep the premises and surrounding area free from accumulation of waste materials and rubbish caused by operations under the Contract. At completion of the Work, the Contractor shall remove waste materials, rubbish, the Contractor's tools, construction equipment, machinery, and surplus materials from and about the Project.

§ 3.15.2 If the Contractor fails to clean up as provided in the Contract Documents, the Owner may do so and the Owner shall be entitled to reimbursement from the Contractor.

§ 3.16 Access to Work

The Contractor shall provide the Owner and Architect with access to the Work in preparation and progress wherever located.

§ 3.17 Royalties, Patents and Copyrights

The Contractor shall pay all royalties and license fees. The Contractor shall defend suits or claims for infringement of copyrights and patent rights and shall hold the Owner and Architect harmless from loss on account thereof, but shall not be responsible for defense or loss when a particular design, process, or product of a particular manufacturer or manufacturers is required by the Contract Documents, or where the copyright violations are contained in Drawings, Specifications, or other documents prepared by the Owner or Architect. However, if an infringement of a copyright or patent is discovered by, or made known to, the Contractor, the Contractor shall be responsible for the loss unless the information is promptly furnished to the Architect.

§ 3.18 Indemnification

§ 3.18.1 To the fullest extent permitted by law, the Contractor shall indemnify and hold harmless the Owner, Architect, Architect's consultants, and agents and employees of any of them from and against claims, damages, losses, and expenses, including but not limited to attorneys' fees, arising out of or resulting from performance of the Work, provided that such claim, damage, loss, or expense is attributable to bodily injury, sickness, disease or death, or to injury to or destruction of tangible property (other than the Work itself), but only to the extent caused by the negligent acts or omissions of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, regardless of whether or not such claim, damage, loss, or expense is caused in part by a party indemnified hereunder. Such obligation shall not be construed to negate, abridge, or reduce other rights or obligations of indemnity that would otherwise exist as to a party or person described in this Section 3.18.

§ 3.18.2 In claims against any person or entity indemnified under this Section 3.18 by an employee of the Contractor, a Subcontractor, anyone directly or indirectly employed by them, or anyone for whose acts they may be liable, the indemnification obligation under Section 3.18.1 shall not be limited by a limitation on amount or type of damages, compensation, or benefits payable by or for the Contractor or a Subcontractor under workers' compensation acts, disability benefit acts, or other employee benefit acts.

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

ARTICLE 4 ARCHITECT

§ 4.1 General

§ 4.1.1 The Architect is the person or entity retained by the Owner pursuant to Section 2.3.2 and identified as such in the Agreement.

§ 4.1.2 Duties, responsibilities, and limitations of authority of the Architect as set forth in the Contract Documents shall not be restricted, modified, or extended without written consent of the Owner, Contractor, and Architect. Consent shall not be unreasonably withheld.

§ 4.2 Administration of the Contract

§ 4.2.1 The Architect will provide administration of the Contract as described in the Contract Documents and will be an Owner's representative during construction until the date the Architect issues the final Certificate for Payment. The Architect will have authority to act on behalf of the Owner only to the extent provided in the Contract Documents.

§ 4.2.2 The Architect will visit the site at intervals appropriate to the stage of construction, or as otherwise agreed with the Owner, to become generally familiar with the progress and quality of the portion of the Work completed, and to determine in general if the Work observed is being performed in a manner indicating that the Work, when fully completed, will be in accordance with the Contract Documents. However, the Architect will not be required to make exhaustive or continuous on-site inspections to check the quality or quantity of the Work. The Architect will not have control over, charge of, or responsibility for the construction means, methods, techniques, sequences or procedures, or for the safety precautions and programs in connection with the Work, since these are solely the Contractor's rights and responsibilities under the Contract Documents.

§ 4.2.2.1 The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for site visits made necessary by the fault of the Contractor or by defects and deficiencies in the Work.

§ 4.2.3 On the basis of the site visits, the Architect will keep the Owner reasonably informed about the progress and quality of the portion of the Work completed, and promptly report to the Owner (1) known deviations from the Contract Documents, (2) known deviations from the most recent construction schedule submitted by the Contractor, and (3) defects and deficiencies observed in the Work. The Architect will not be responsible for the Contractor's failure to perform the Work in accordance with the requirements of the Contract Documents. The Architect will not have control over or charge of, and will not be responsible for acts or omissions of, the Contractor, Subcontractors, or their agents or employees, or any other persons or entities performing portions of the Work.

§ 4.2.4 Communications

The Owner and Contractor shall include the Architect in all communications that relate to or affect the Architect's services or professional responsibilities. The Owner shall promptly notify the Architect of the substance of any direct communications between the Owner and the Contractor otherwise relating to the Project. Communications by and with the Architect's consultants shall be through the Architect. Communications by and with Subcontractors and suppliers shall be through the Contractor. Communications by and with Separate Contractors shall be through the Owner. The Contract Documents may specify other communication protocols.

§ 4.2.5 Based on the Architect's evaluations of the Contractor's Applications for Payment, the Architect will review and certify the amounts due the Contractor and will issue Certificates for Payment in such amounts.

§ 4.2.6 The Architect has authority to reject Work that does not conform to the Contract Documents. Whenever the Architect considers it necessary or advisable, the Architect will have authority to require inspection or testing of the Work in accordance with Sections 13.4.2 and 13.4.3, whether or not the Work is fabricated, installed or completed. However, neither this authority of the Architect nor a decision made in good faith either to exercise or not to exercise such authority shall give rise to a duty or responsibility of the Architect to the Contractor, Subcontractors, suppliers, their agents or employees, or other persons or entities performing portions of the Work.

§ 4.2.7 The Architect will review and approve, or take other appropriate action upon, the Contractor's submittals such as Shop Drawings, Product Data, and Samples, but only for the limited purpose of checking for conformance with information given and the design concept expressed in the Contract Documents. The Architect's action will be taken in accordance with the submittal schedule approved by the Architect or, in the absence of an approved

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

submittal schedule, with reasonable promptness while allowing sufficient time in the Architect's professional judgment to permit adequate review. Review of such submittals is not conducted for the purpose of determining the accuracy and completeness of other details such as dimensions and quantities, or for substantiating instructions for installation or performance of equipment or systems, all of which remain the responsibility of the Contractor as required by the Contract Documents. The Architect's review of the Contractor's submittals shall not relieve the Contractor of the obligations under Sections 3.3, 3.5, and 3.12. The Architect's review shall not constitute approval of safety precautions or of any construction means, methods, techniques, sequences, or procedures. The Architect's approval of a specific item shall not indicate approval of an assembly of which the item is a component.

§ 4.2.8 The Architect will prepare Change Orders and Construction Change Directives, and may order minor changes in the Work as provided in Section 7.4. The Architect will investigate and make determinations and recommendations regarding concealed and unknown conditions as provided in Section 3.7.4.

§ 4.2.9 The Architect will conduct inspections to determine the date or dates of Substantial Completion and the date of final completion; issue Certificates of Substantial Completion pursuant to Section 9.8; receive and forward to the Owner, for the Owner's review and records, written warranties and related documents required by the Contract and assembled by the Contractor pursuant to Section 9.10; and issue a final Certificate for Payment pursuant to Section 9.10.

§ 4.2.10 If the Owner and Architect agree, the Architect will provide one or more Project representatives to assist in carrying out the Architect's responsibilities at the site. The Owner shall notify the Contractor of any change in the duties, responsibilities and limitations of authority of the Project representatives.

§ 4.2.11 The Architect will interpret and decide matters concerning performance under, and requirements of, the Contract Documents on written request of either the Owner or Contractor. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness.

§ 4.2.12 Interpretations and decisions of the Architect will be consistent with the intent of, and reasonably inferable from, the Contract Documents and will be in writing or in the form of drawings. When making such interpretations and decisions, the Architect will endeavor to secure faithful performance by both Owner and Contractor, will not show partiality to either, and will not be liable for results of interpretations or decisions rendered in good faith.

§ 4.2.13 The Architect's decisions on matters relating to aesthetic effect will be final if consistent with the intent expressed in the Contract Documents.

§ 4.2.14 The Architect will review and respond to requests for information about the Contract Documents. The Architect's response to such requests will be made in writing within any time limits agreed upon or otherwise with reasonable promptness. If appropriate, the Architect will prepare and issue supplemental Drawings and Specifications in response to the requests for information.

§ 4.2.14.1 The Architect will return, without action, requests for information that do not conform to requirements of the Contract Documents.

ARTICLE 5 SUBCONTRACTORS

§ 5.1 Definitions

§ 5.1.1 A Subcontractor is a person or entity who has a direct contract with the Contractor to perform a portion of the Work at the site. The term "Subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Subcontractor or an authorized representative of the Subcontractor. The term "Subcontractor" does not include a Separate Contractor or the subcontractors of a Separate Contractor.

§ 5.1.2 A Sub-subcontractor is a person or entity who has a direct or indirect contract with a Subcontractor to perform a portion of the Work at the site. The term "Sub-subcontractor" is referred to throughout the Contract Documents as if singular in number and means a Sub-subcontractor or an authorized representative of the Sub-subcontractor.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@alacontracts.com.
User Notes: (3B9ADA34)

§ 5.2 Award of Subcontracts and Other Contracts for Portions of the Work

§ 5.2.1 Unless otherwise stated in the Contract Documents, the Contractor, not later than two days following the notice of award of the contract, shall notify the Owner and Architect of the persons or entities proposed for each principal portion of the Work, including those who are to furnish materials or equipment fabricated to a special design. Within 14 days of receipt of the information, the Architect may notify the Contractor whether the Owner or the Architect (1) has reasonable objection to any such proposed person or entity or (2) requires additional time for review. Failure of the Architect to provide notice within the 14-day period shall constitute notice of no reasonable objection.

§ 5.2.2 The Contractor shall not contract with a proposed person or entity to whom the Owner or Architect has made reasonable and timely objection. The Contractor shall not be required to contract with anyone to whom the Contractor has made reasonable objection.

§ 5.2.3 If the Owner or Architect has reasonable objection to a person or entity proposed by the Contractor, the Contractor shall propose another to whom the Owner or Architect has no reasonable objection. If the proposed but rejected Subcontractor was reasonably capable of performing the Work, the Contract Sum and Contract Time shall be increased or decreased by the difference, if any, occasioned by such change, and an appropriate Change Order shall be issued before commencement of the substitute Subcontractor's Work. However, no increase in the Contract Sum or Contract Time shall be allowed for such change unless the Contractor has acted promptly and responsively in submitting names as required.

§ 5.2.4 The Contractor shall not substitute a Subcontractor, person, or entity for one previously selected if the Owner or Architect makes reasonable objection to such substitution.

§ 5.3 Subcontractual Relations

By appropriate written agreement, the Contractor shall require each Subcontractor, to the extent of the Work to be performed by the Subcontractor, to be bound to the Contractor by terms of the Contract Documents, and to assume toward the Contractor all the obligations and responsibilities, including the responsibility for safety of the Subcontractor's Work that the Contractor, by these Contract Documents, assumes toward the Owner and Architect. Each subcontract agreement shall preserve and protect the rights of the Owner and Architect under the Contract Documents with respect to the Work to be performed by the Subcontractor so that subcontracting thereof will not prejudice such rights, and shall allow to the Subcontractor, unless specifically provided otherwise in the subcontract agreement, the benefit of all rights, remedies, and redress against the Contractor that the Contractor, by the Contract Documents, has against the Owner. Where appropriate, the Contractor shall require each Subcontractor to enter into similar agreements with Sub-subcontractors. The Contractor shall make available to each proposed Subcontractor, prior to the execution of the subcontract agreement, copies of the Contract Documents to which the Subcontractor will be bound, and, upon written request of the Subcontractor, identify to the Subcontractor terms and conditions of the proposed subcontract agreement that may be at variance with the Contract Documents. Subcontractors will similarly make copies of applicable portions of such documents available to their respective proposed Sub-subcontractors.

§ 5.4 Contingent Assignment of Subcontracts

§ 5.4.1 Each subcontract agreement for a portion of the Work is assigned by the Contractor to the Owner, provided that

.1 assignment is effective only after termination of the Contract by the Owner for cause pursuant to Section 14.2 and only for those subcontract agreements that the Owner accepts by notifying the Subcontractor and Contractor; and

.2 assignment is subject to the prior rights of the surety, if any, obligated under bond relating to the Contract.

When the Owner accepts the assignment of a subcontract agreement, the Owner assumes the Contractor's rights and obligations under the subcontract.

§ 5.4.2 Upon such assignment, if the Work has been suspended for more than 30 days, the Subcontractor's compensation shall be equitably adjusted for increases in cost resulting from the suspension.

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 5.4.3 Upon assignment to the Owner under this Section 5.4, the Owner may further assign the subcontract to a successor contractor or other entity. If the Owner assigns the subcontract to a successor contractor or other entity, the Owner shall nevertheless remain legally responsible for all of the successor contractor's obligations under the subcontract.

ARTICLE 6 CONSTRUCTION BY OWNER OR BY SEPARATE CONTRACTORS

§ 6.1 Owner's Right to Perform Construction and to Award Separate Contracts

§ 6.1.1 The term "Separate Contractor(s)" shall mean other contractors retained by the Owner under separate agreements. The Owner reserves the right to perform construction or operations related to the Project with the Owner's own forces, and with Separate Contractors retained under Conditions of the Contract substantially similar to those of this Contract

§ 6.1.2 When separate contracts are awarded for different portions of the Project or other construction or operations on the site, the term "Contractor" in the Contract Documents in each case shall mean the Contractor who executes each separate Owner-Contractor Agreement.

§ 6.1.3 The Owner shall provide for coordination of the activities of the Owner's own forces and of each Separate Contractor with the Work of the Contractor, who shall cooperate with them. The Contractor shall participate with any Separate Contractors and the Owner in reviewing their construction schedules. The Contractor shall make any revisions to its construction schedule deemed necessary after a joint review and mutual agreement. The construction schedules shall then constitute the schedules to be used by the Contractor, Separate Contractors, and the Owner until subsequently revised.

§ 6.1.4 Unless otherwise provided in the Contract Documents, when the Owner performs construction or operations related to the Project with the Owner's own forces or with Separate Contractors, the Owner or its Separate Contractors shall have the same obligations and rights that the Contractor has under the Conditions of the Contract, including, without excluding others, those stated in Article 3, this Article 6, and Articles 10, 11, and 12.

§ 6.2 Mutual Responsibility

§ 6.2.1 The Contractor shall afford the Owner and Separate Contractors reasonable opportunity for introduction and storage of their materials and equipment and performance of their activities, and shall connect and coordinate the Contractor's construction and operations with theirs as required by the Contract Documents.

§ 6.2.2 If part of the Contractor's Work depends for proper execution or results upon construction or operations by the Owner or a Separate Contractor, the Contractor shall, prior to proceeding with that portion of the Work, promptly notify the Architect of apparent discrepancies or defects in the construction or operations by the Owner or Separate Contractor that would render it unsuitable for proper execution and results of the Contractor's Work. Failure of the Contractor to notify the Architect of apparent discrepancies or defects prior to proceeding with the Work shall constitute an acknowledgment that the Owner's or Separate Contractor's completed or partially completed construction is fit and proper to receive the Contractor's Work. The Contractor shall not be responsible for discrepancies or defects in the construction or operations by the Owner or Separate Contractor that are not apparent.

§ 6.2.3 The Contractor shall reimburse the Owner for costs the Owner incurs that are payable to a Separate Contractor because of the Contractor's delays, improperly timed activities or defective construction.

§ 6.2.4 The Contractor shall promptly remedy damage that the Contractor wrongfully causes to completed or partially completed construction or to property of the Owner or Separate Contractor as provided in Section 10.2.5.

§ 6.2.5 The Owner and each Separate Contractor shall have the same responsibilities for cutting and patching as are described for the Contractor in Section 3.14.

§ 6.3 Owner's Right to Clean Up

If a dispute arises among the Contractor, Separate Contractors, and the Owner as to the responsibility under their respective contracts for maintaining the premises and surrounding area free from waste materials and rubbish, the Owner may clean up and the Architect will allocate the cost among those responsible.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

ARTICLE 7 CHANGES IN THE WORK

§ 7.1 General

§ 7.1.1 Changes in the Work may be accomplished after execution of the Contract, and without invalidating the Contract, by Change Order, Construction Change Directive or order for a minor change in the Work, subject to the limitations stated in this Article 7 and elsewhere in the Contract Documents.

§ 7.1.2 A Change Order shall be based upon agreement among the Owner, Contractor, and Architect. A Construction Change Directive requires agreement by the Owner and Architect and may or may not be agreed to by the Contractor. An order for a minor change in the Work may be issued by the Architect alone.

§ 7.1.3 Changes in the Work shall be performed under applicable provisions of the Contract Documents. The Contractor shall proceed promptly with changes in the Work, unless otherwise provided in the Change Order, Construction Change Directive, or order for a minor change in the Work.

§ 7.1.4 The combined overhead and profit included in the total cost to the Owner for a change in the Work shall be based on the following schedule:

.1 For the Contractor, for Work performed by the Contractor's own forces, ten percent (10%) of the cost.

.2 For the Contractor, for Work performed by the Contractor's Subcontractors, five percent (5%) of the amount due the Subcontractors.

.3 For each Subcontractor involved, for Work performed by the Subcontractor's own forces, ten percent (10%) of the cost.

.4 For each Subcontractor involved, for Work performed by the Subcontractor's Sub-subcontractors, five percent (5%) of the amount due the Sub-subcontractor.

.5 Cost to which overhead and profit is to be applied shall be determined in accordance with Section 7.3.4.

§ 7.1.5 In order to facilitate checking of proposals from increases or decreases to the contract sum, all proposals, except those so minor that their propriety can be seen by inspection, shall be accompanied by a complete itemization of costs including labor, materials and Subcontracts. Labor and materials shall be itemized in the manner prescribed above. Where major cost items are Subcontracts, they shall be itemized also. In no case will a change involving over $500 be approved without such itemization.

§ 7.2 Change Orders

§ 7.2.1 A Change Order is a written instrument prepared by the Architect and signed by the Owner, Contractor, and Architect stating their agreement upon all of the following:

.1 The change in the Work;

.2 The amount of the adjustment, if any, in the Contract Sum; and

.3 The extent of the adjustment, if any, in the Contract Time.

§ 7.3 Construction Change Directives

§ 7.3.1 A Construction Change Directive is a written order prepared by the Architect and signed by the Owner and Architect, directing a change in the Work prior to agreement on adjustment, if any, in the Contract Sum or Contract Time, or both. The Owner may by Construction Change Directive, without invalidating the Contract, order changes in the Work within the general scope of the Contract consisting of additions, deletions, or other revisions, the Contract Sum and Contract Time being adjusted accordingly.

§ 7.3.2 A Construction Change Directive shall be used in the absence of total agreement on the terms of a Change Order.

§ 7.3.3 If the Construction Change Directive provides for an adjustment to the Contract Sum, the adjustment shall be based on one of the following methods:

.1 Mutual acceptance of a lump sum properly itemized and supported by sufficient substantiating data to permit evaluation;

.2 Unit prices stated in the Contract Documents or subsequently agreed upon;

.3 Cost to be determined in a manner agreed upon by the parties and a mutually acceptable fixed or percentage fee; or

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

.4 As provided in Section 7.3.4.

§ 7.3.4 If the Contractor does not respond promptly or disagrees with the method for adjustment in the Contract Sum, the Architect shall determine the adjustment on the basis of reasonable expenditures and savings of those performing the Work attributable to the change, including, in case of an increase in the Contract Sum, an amount for overhead and profit as set forth in the Agreement, or if no such amount is set forth in the Agreement, a reasonable amount. In such case, and also under Section 7.3.3.3, the Contractor shall keep and present, in such form as the Architect may prescribe, an itemized accounting together with appropriate supporting data. Unless otherwise provided in the Contract Documents, costs for the purposes of this Section 7.3.4 shall be limited to the following:

.1 Costs of labor, including applicable payroll taxes, fringe benefits required by agreement or custom, workers' compensation insurance, and other employee costs approved by the Architect;

.2 Costs of materials, supplies, and equipment, including cost of transportation, whether incorporated or consumed;

.3 Rental costs of machinery and equipment, exclusive of hand tools, whether rented from the Contractor or others;

.4 Costs of premiums for all bonds and insurance, permit fees, and sales, use, or similar taxes, directly related to the change; and

.5 Costs of supervision and field office personnel directly attributable to the change.

§ 7.3.5 If the Contractor disagrees with the adjustment in the Contract Time, the Contractor may make a Claim in accordance with applicable provisions of Article 15.

§ 7.3.6 Upon receipt of a Construction Change Directive, the Contractor shall promptly proceed with the change in the Work involved and advise the Architect of the Contractor's agreement or disagreement with the method, if any, provided in the Construction Change Directive for determining the proposed adjustment in the Contract Sum or Contract Time.

§ 7.3.7 A Construction Change Directive signed by the Contractor indicates the Contractor's agreement therewith, including adjustment in Contract Sum and Contract Time or the method for determining them. Such agreement shall be effective immediately and shall be recorded as a Change Order.

§ 7.3.8 The amount of credit to be allowed by the Contractor to the Owner for a deletion or change that results in a net decrease in the Contract Sum shall be actual net cost as confirmed by the Architect. When both additions and credits covering related Work or substitutions are involved in a change, the allowance for overhead and profit shall be figured on the basis of net increase, if any, with respect to that change.

§ 7.3.9 Pending final determination of the total cost of a Construction Change Directive to the Owner, the Contractor may request payment for Work completed under the Construction Change Directive in Applications for Payment. The Architect will make an interim determination for purposes of monthly certification for payment for those costs and certify for payment the amount that the Architect determines, in the Architect's professional judgment, to be reasonably justified. The Architect's interim determination of cost shall adjust the Contract Sum on the same basis as a Change Order, subject to the right of either party to disagree and assert a Claim in accordance with Article 15.

§ 7.3.10 When the Owner and Contractor agree with a determination made by the Architect concerning the adjustments in the Contract Sum and Contract Time, or otherwise reach agreement upon the adjustments, such agreement shall be effective immediately and the Architect will prepare a Change Order. Change Orders may be issued for all or any part of a Construction Change Directive.

§ 7.4 Minor Changes in the Work

The Architect may order minor changes in the Work that are consistent with the intent of the Contract Documents and do not involve an adjustment in the Contract Sum or an extension of the Contract Time. The Architect's order for minor changes shall be in writing. If the Contractor believes that the proposed minor change in the Work will affect the Contract Sum or Contract Time, the Contractor shall notify the Architect and shall not proceed to implement the change in the Work. If the Contractor performs the Work set forth in the Architect's order for a minor change without prior notice to the Architect that such change will affect the Contract Sum or Contract Time, the Contractor waives any adjustment to the Contract Sum or extension of the Contract Time.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

ARTICLE 8 TIME

§ 8.1 Definitions

§ 8.1.1 Unless otherwise provided, Contract Time is the period of time, including authorized adjustments, allotted in the Contract Documents for Substantial Completion of the Work.

§ 8.1.2 The date of commencement of the Work is the date established in the Agreement.

§ 8.1.3 The date of Substantial Completion is the date certified by the Architect in accordance with Section 9.8.

§ 8.1.4 The term "day" as used in the Contract Documents shall mean calendar day unless otherwise specifically defined.

§ 8.2 Progress and Completion

§ 8.2.1 Time limits stated in the Contract Documents are of the essence of the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

§ 8.2.2 The Contractor shall not knowingly, except by agreement or instruction of the Owner in writing, commence the Work prior to the effective date of insurance required to be furnished by the Contractor and Owner.

§ 8.2.3 The Contractor shall proceed expeditiously with adequate forces and shall achieve Substantial Completion within the Contract Time.

§ 8.3 Delays and Extensions of Time

§ 8.3.1 If the Contractor is delayed at any time in the commencement or progress of the Work by (1) an act or neglect of the Owner or Architect, of an employee of either, or of a Separate Contractor; (2) by changes ordered in the Work; (3) by labor disputes, fire, unusual delay in deliveries, unavoidable casualties, adverse weather conditions documented in accordance with Section 15.1.6.2, or other causes beyond the Contractor's control; (4) by delay authorized by the Owner pending mediation and binding dispute resolution; or (5) by other causes that the Contractor asserts, and the Architect determines, justify delay, then the Contract Time shall be extended for such reasonable time as the Architect may determine.

§ 8.3.2 Claims relating to time shall be made in accordance with applicable provisions of Article 15.

§ 8.3.3 This Section 8.3 does not preclude recovery of damages for delay by either party under other provisions of the Contract Documents.

ARTICLE 9 PAYMENTS AND COMPLETION

§ 9.1 Contract Sum

§ 9.1.1 The Contract Sum is stated in the Agreement and, including authorized adjustments, is the total amount payable by the Owner to the Contractor for performance of the Work under the Contract Documents.

§ 9.1.2 If unit prices are stated in the Contract Documents or subsequently agreed upon, and if quantities originally contemplated are materially changed so that application of such unit prices to the actual quantities causes substantial inequity to the Owner or Contractor, the applicable unit prices shall be equitably adjusted.

§ 9.2 Schedule of Values

Where the Contract is based on a stipulated sum or Guaranteed Maximum Price, the Contractor shall submit a schedule of values to the Architect before the first Application for Payment, allocating the entire Contract Sum to the various portions of the Work. The schedule of values shall be prepared in the form, and supported by the data to substantiate its accuracy, required by the Architect. This schedule, unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's Applications for Payment. Any changes to the schedule of values shall be submitted to the Architect and supported by such data to substantiate its accuracy as the Architect may require, and unless objected to by the Architect, shall be used as a basis for reviewing the Contractor's subsequent Applications for Payment.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 9.3 Applications for Payment

§ 9.3.1 At least ten days before the date established for each progress payment, the Contractor shall submit to the Architect an itemized Application for Payment prepared in accordance with the schedule of values, if required under Section 9.2, for completed portions of the Work. The application shall be notarized, if required, and supported by all data substantiating the Contractor's right to payment that the Owner or Architect require, such as copies of requisitions, and releases from Subcontractors and suppliers, and shall reflect retainage if provided for in the Contract Documents.

§ 9.3.1.1 As provided in Section 7.3.9, such applications may include requests for payment on account of changes in the Work that have been properly authorized by Construction Change Directives, or by interim determinations of the Architect, but not yet included in Change Orders.

§ 9.3.1.2 Applications for Payment shall not include requests for payment for portions of the Work for which the Contractor does not intend to pay a Subcontractor or supplier, unless such Work has been performed by others whom the Contractor intends to pay.

§ 9.3.2 Unless otherwise provided in the Contract Documents, payments shall be made on account of materials and equipment delivered and suitably stored at the site for subsequent incorporation in the Work. If approved in advance by the Owner, payment may similarly be made for materials and equipment suitably stored off the site at a location agreed upon in writing. Payment for materials and equipment stored on or off the site shall be conditioned upon compliance by the Contractor with procedures satisfactory to the Owner to establish the Owner's title to such materials and equipment or otherwise protect the Owner's interest, and shall include the costs of applicable insurance, storage, and transportation to the site, for such materials and equipment stored off the site.

§ 9.3.3 The Contractor warrants that title to all Work covered by an Application for Payment will pass to the Owner no later than the time of payment. The Contractor further warrants that upon submittal of an Application for Payment all Work for which Certificates for Payment have been previously issued and payments received from the Owner shall, to the best of the Contractor's knowledge, information, and belief, be free and clear of claims, security interests, or encumbrances, in favor of the Contractor, Subcontractors, suppliers, or other persons or entities that provided labor, materials, and equipment relating to the Work.

§ 9.4 Certificates for Payment

§ 9.4.1 The Architect will, within seven days after receipt of the Contractor's Application for Payment, either (1) issue to the Owner a Certificate for Payment in the full amount of the Application for Payment, with a copy to the Contractor; or (2) issue to the Owner a Certificate for Payment for such amount as the Architect determines is properly due, and notify the Contractor and Owner of the Architect's reasons for withholding certification in part as provided in Section 9.5.1; or (3) withhold certification of the entire Application for Payment, and notify the Contractor and Owner of the Architect's reason for withholding certification in whole as provided in Section 9.5.1.

§ 9.4.2 The issuance of a Certificate for Payment will constitute a representation by the Architect to the Owner, based on the Architect's evaluation of the Work and the data in the Application for Payment, that, to the best of the Architect's knowledge, information, and belief, the Work has progressed to the point indicated, the quality of the Work is in accordance with the Contract Documents, and that the Contractor is entitled to payment in the amount certified. The foregoing representations are subject to an evaluation of the Work for conformance with the Contract Documents upon Substantial Completion, to results of subsequent tests and inspections, to correction of minor deviations from the Contract Documents prior to completion, and to specific qualifications expressed by the Architect. However, the issuance of a Certificate for Payment will not be a representation that the Architect has (1) made exhaustive or continuous on-site inspections to check the quality or quantity of the Work; (2) reviewed construction means, methods, techniques, sequences, or procedures; (3) reviewed copies of requisitions received from Subcontractors and suppliers and other data requested by the Owner to substantiate the Contractor's right to payment; or (4) made examination to ascertain how or for what purpose the Contractor has used money previously paid on account of the Contract Sum.

§ 9.5 Decisions to Withhold Certification

§ 9.5.1 The Architect may withhold a Certificate for Payment in whole or in part, to the extent reasonably necessary to protect the Owner, if in the Architect's opinion the representations to the Owner required by Section 9.4.2 cannot be made. If the Architect is unable to certify payment in the amount of the Application, the Architect will notify the

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

Contractor and Owner as provided in Section 9.4.1. If the Contractor and Architect cannot agree on a revised amount, the Architect will promptly issue a Certificate for Payment for the amount for which the Architect is able to make such representations to the Owner. The Architect may also withhold a Certificate for Payment or, because of subsequently discovered evidence, may nullify the whole or a part of a Certificate for Payment previously issued, to such extent as may be necessary in the Architect's opinion to protect the Owner from loss for which the Contractor is responsible, including loss resulting from acts and omissions described in Section 3.3.2, because of

.1 defective Work not remedied;
.2 third party claims filed or reasonable evidence indicating probable filing of such claims, unless security acceptable to the Owner is provided by the Contractor;
.3 failure of the Contractor to make payments properly to Subcontractors or suppliers for labor, materials or equipment;
.4 reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Sum;
.5 damage to the Owner or a Separate Contractor;
.6 reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay; or
.7 repeated failure to carry out the Work in accordance with the Contract Documents.

§ 9.5.2 When either party disputes the Architect's decision regarding a Certificate for Payment under Section 9.5.1, in whole or in part, that party may submit a Claim in accordance with Article 15.

§ 9.5.3 When the reasons for withholding certification are removed, certification will be made for amounts previously withheld.

§ 9.5.4 If the Architect withholds certification for payment under Section 9.5.1.3, the Owner may, at its sole option, issue joint checks to the Contractor and to any Subcontractor or supplier to whom the Contractor failed to make payment for Work properly performed or material or equipment suitably delivered. If the Owner makes payments by joint check, the Owner shall notify the Architect and the Contractor shall reflect such payment on its next Application for Payment.

§ 9.6 Progress Payments

§ 9.6.1 After the Architect has issued a Certificate for Payment, the Owner shall make payment in the manner and within the time provided in the Contract Documents, and shall so notify the Architect.

§ 9.6.2 The Contractor shall pay each Subcontractor, no later than seven days after receipt of payment from the Owner, the amount to which the Subcontractor is entitled, reflecting percentages actually retained from payments to the Contractor on account of the Subcontractor's portion of the Work. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to Sub-subcontractors in a similar manner.

§ 9.6.3 The Architect will, on request, furnish to a Subcontractor, if practicable, information regarding percentages of completion or amounts applied for by the Contractor and action taken thereon by the Architect and Owner on account of portions of the Work done by such Subcontractor.

§ 9.6.4 The Owner has the right to request written evidence from the Contractor that the Contractor has properly paid Subcontractors and suppliers amounts paid by the Owner to the Contractor for subcontracted Work. If the Contractor fails to furnish such evidence within seven days, the Owner shall have the right to contact Subcontractors and suppliers to ascertain whether they have been properly paid. Neither the Owner nor Architect shall have an obligation to pay, or to see to the payment of money to, a Subcontractor or supplier, except as may otherwise be required by law.

§ 9.6.5 The Contractor's payments to suppliers shall be treated in a manner similar to that provided in Sections 9.6.2, 9.6.3 and 9.6.4.

§ 9.6.6 A Certificate for Payment, a progress payment, or partial or entire use or occupancy of the Project by the Owner shall not constitute acceptance of Work not in accordance with the Contract Documents.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

§ 9.6.7 Unless the Contractor provides the Owner with a payment bond in the full penal sum of the Contract Sum, payments received by the Contractor for Work properly performed by Subcontractors or provided by suppliers shall be held by the Contractor for those Subcontractors or suppliers who performed Work or furnished materials, or both, under contract with the Contractor for which payment was made by the Owner. Nothing contained herein shall require money to be placed in a separate account and not commingled with money of the Contractor, create any fiduciary liability or tort liability on the part of the Contractor for breach of trust, or entitle any person or entity to an award of punitive damages against the Contractor for breach of the requirements of this provision.

§ 9.6.8 Provided the Owner has fulfilled its payment obligations under the Contract Documents, the Contractor shall defend and indemnify the Owner from all loss, liability, damage or expense, including reasonable attorney's fees and litigation expenses, arising out of any claim for payment by any Subcontractor or supplier of any tier. Upon receipt of notice of a claim for payment, the Owner shall notify the Contractor. If approved by the applicable court, when required, the Contractor may substitute a surety bond for the property against which the claim for payment has been asserted.

§ 9.7 Failure of Payment

If the Architect does not issue a Certificate for Payment, through no fault of the Contractor, within fifteen days after receipt of the Contractor's Application for Payment, or if the Owner does not pay the Contractor within fifteen days after the date established in the Contract Documents, the amount certified by the Architect or awarded by binding dispute resolution, then the Contractor may, upon fifteen additional days' notice to the Owner and Architect, stop the Work until payment of the amount owing has been received. The Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable costs of shutdown, delay and start-up, plus interest as provided for in the Contract Documents.

§ 9.8 Substantial Completion

§ 9.8.1 Substantial Completion is the stage in the progress of the Work when the Work or designated portion thereof is sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work for its intended use. Consideration that the Work has achieved Substantial Completion may be contingent upon, but is not limited by or to, the completion in accordance with Section 3.1.2 of the following:

- **.1** doors and door hardware;
- **.2** roofing and associated appurtenances;
- **.3** windows, storefronts, curtainwall and glazing systems;
- **.4** access and door control systems;
- **.5** audio/visual, data and telephone systems;
- **.6** interior lighting and lighting control systems;
- **.7** exterior lighting;
- **.8** fire and smoke alarm systems;
- **.9** automatic fire sprinkling systems;
- **.10** mechanical systems and controls, including testing and balance reports and web-based access to control systems;
- **.11** interior and exterior plumbing fixtures;
- **.12** exterior improvements including pedestrian and vehicular paving, protective surfacing and drainage;
- **.13** planting, landscaping and planting irrigation;
- **.14** site furnishings including playground and sports equipment, and fences and gates.

§ 9.8.2 When the Contractor considers that the Work, or a portion thereof which the Owner agrees to accept separately, is substantially complete, the Contractor shall prepare and submit to the Architect a comprehensive list of items to be completed or corrected prior to final payment. Failure to include an item on such list does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

§ 9.8.3 Upon receipt of the Contractor's list, the Architect will make an inspection to determine whether the Work or designated portion thereof is substantially complete. If the Architect's inspection discloses any item, whether or not included on the Contractor's list, which is not sufficiently complete in accordance with the Contract Documents so that the Owner can occupy or utilize the Work or designated portion thereof for its intended use, the Contractor shall, before issuance of the Certificate of Substantial Completion, complete or correct such item upon notification by the Architect. In such case, the Contractor shall then submit a request for another inspection by the Architect to determine Substantial Completion.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 9.8.3.1 The Architect will perform no more than two (2) inspections to determine whether the work or a designated portion thereof has attained Substantial Completion in accordance with the Contract Documents. The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for additional inspections.

§ 9.8.4 When the Work or designated portion thereof is substantially complete, the Architect will prepare a Certificate of Substantial Completion that shall establish the date of Substantial Completion; establish responsibilities of the Owner and Contractor for security, maintenance, heat, utilities, damage to the Work and insurance; and fix the time within which the Contractor shall finish all items on the list accompanying the Certificate. Warranties required by the Contract Documents shall commence on the date of Substantial Completion of the Work or designated portion thereof unless otherwise provided in the Certificate of Substantial Completion.

§ 9.8.5 The Certificate of Substantial Completion shall be submitted to the Owner and Contractor for their written acceptance of responsibilities assigned to them in the Certificate. Upon such acceptance, and consent of surety if any, the Owner shall make payment of retainage applying to the Work or designated portion thereof. Such payment shall be adjusted for Work that is incomplete or not in accordance with the requirements of the Contract Documents.

§ 9.8.5.1 Retainage shall be released in accordance with applicable state law.

§ 9.8.6 Written acceptance of the Certificate of Substantial Completion by the Contractor shall constitute a warrant to the Owner that the Work has been completed in accordance with Section 3.5.1.

§ 9.9 Partial Occupancy or Use

§ 9.9.1 The Owner may occupy or use any completed or partially completed portion of the Work at any stage when such portion is designated by separate agreement with the Contractor, provided such occupancy or use is consented to by the inspectors identified in Section 3.7. Such partial occupancy or use may commence whether or not the portion is substantially complete, provided the Owner and Contractor have accepted in writing the responsibilities assigned to each of them for payments, retainage, if any, security, maintenance, heat, utilities, damage to the Work and insurance, and have agreed in writing concerning the period for correction of the Work and commencement of warranties required by the Contract Documents. When the Contractor considers a portion substantially complete, the Contractor shall prepare and submit a list to the Architect as provided under Section 9.8.2. Consent of the Contractor to partial occupancy or use shall not be unreasonably withheld. The stage of the progress of the Work shall be determined by written agreement between the Owner and Contractor or, if no agreement is reached, by decision of the Architect.

§ 9.9.2 Immediately prior to such partial occupancy or use, the Owner, Contractor, and Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

§ 9.9.3 Unless otherwise agreed upon, partial occupancy or use of a portion or portions of the Work shall not constitute acceptance of Work not complying with the requirements of the Contract Documents.

§ 9.10 Final Completion and Final Payment

§ 9.10.1 Upon receipt of the Contractor's notice that the Work is ready for final inspection and acceptance and upon receipt of a final Application for Payment, the Architect will promptly make such inspection. When the Architect finds the Work acceptable under the Contract Documents and the Contract fully performed, the Architect will promptly issue a final Certificate for Payment stating that to the best of the Architect's knowledge, information and belief, and on the basis of the Architect's on-site visits and inspections, the Work has been completed in accordance with the Contract Documents and that the entire balance found to be due the Contractor and noted in the final Certificate is due and payable. The Architect's final Certificate for Payment will constitute a further representation that conditions listed in Section 9.10.2 as precedent to the Contractor's being entitled to final payment have been fulfilled.

§ 9.10.1.1 The Architect will perform no more than two (2) inspections to determine whether the Work or a designated portion thereof has attained Final Completion in accordance with the Contract Documents. The Owner is entitled to reimbursement from the Contractor for amounts paid to the Architect for any additional inspections.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 9.10.2 Neither final payment nor any remaining retained percentage shall become due until the Contractor submits to the Architect (1) an affidavit that payrolls, bills for materials and equipment, and other indebtedness connected with the Work for which the Owner or the Owner's property might be responsible or encumbered (less amounts withheld by Owner) have been paid or otherwise satisfied, (2) a certificate evidencing that insurance required by the Contract Documents to remain in force after final payment is currently in effect, (3) a written statement that the Contractor knows of no reason that the insurance will not be renewable to cover the period required by the Contract Documents, (4) consent of surety, if any, to final payment, (5) documentation of any special warranties, such as manufacturers' warranties or specific Subcontractor warranties, and (6) if required by the Owner, other data establishing payment or satisfaction of obligations, such as receipts and releases and waivers of claims, security interests, or encumbrances arising out of the Contract, to the extent and in such form as may be designated by the Owner. If a Subcontractor refuses to furnish a release or waiver required by the Owner, the Contractor may furnish a bond satisfactory to the Owner to indemnify the Owner against such claim, security interest, or encumbrance. If a claim, security interest, or encumbrance remains unsatisfied after payments are made, the Contractor shall refund to the Owner all money that the Owner may be compelled to pay in discharging the claim, security interest, or encumbrance, including all costs and reasonable attorneys' fees.

§ 9.10.3 If, after Substantial Completion of the Work, final completion thereof is materially delayed through no fault of the Contractor or by issuance of Change Orders affecting final completion, and the Architect so confirms, the Owner shall, upon application by the Contractor and certification by the Architect, and without terminating the Contract, make payment of the balance due for that portion of the Work fully completed, corrected, and accepted. If the remaining balance for Work not fully completed or corrected is less than retainage stipulated in the Contract Documents, and if bonds have been furnished, the written consent of the surety to payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by the Contractor to the Architect prior to certification of such payment. Such payment shall be made under terms and conditions governing final payment, except that it shall not constitute a waiver of Claims.

§ 9.10.4 The making of final payment shall constitute a waiver of Claims by the Owner except those arising from

- **.1** Claims, security interests, or encumbrances arising out of the Contract and unsettled;
- **.2** failure of the Work to comply with the requirements of the Contract Documents;
- **.3** terms of special warranties required by the Contract Documents;.4 any liquidated damages resulting from failure to complete the Work within the Contract Time;
- **.5** any claim for fraud or fraudulent concealment;
- **.6** any liability arising from defects or dangers known to the Contractor but not disclosed to the Owner in writing, or
- **.7** audits performed by the Owner, if permitted by the Contract Documents, after final payment.

§ 9.10.5 Acceptance of final payment by the Contractor, a Subcontractor, or a supplier, shall constitute a waiver of claims by that payee except those previously made in writing and identified by that payee as unsettled at the time of final Application for Payment.

ARTICLE 10 PROTECTION OF PERSONS AND PROPERTY

§ 10.1 Safety Precautions and Programs

The Contractor shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the performance of the Contract.

§ 10.2 Safety of Persons and Property

§ 10.2.1 The Contractor shall take reasonable precautions for safety of, and shall provide reasonable protection to prevent damage, injury, or loss to

- **.1** employees on the Work and other persons who may be affected thereby, including third-parties who are invited by the Owner, Architect or Contractor onto the site, or who may otherwise reasonably be expected to access the site;
- **.2** the Work and materials and equipment to be incorporated therein, whether in storage on or off the site, under care, custody, or control of the Contractor, a Subcontractor, or a Sub-subcontractor; and
- **.3** other property at the site or adjacent thereto, such as trees, shrubs, lawns, walks, pavements, roadways, structures, and utilities not designated for removal, relocation, or replacement in the course of construction.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 10.2.2 The Contractor shall comply with, and give notices required by applicable laws, statutes, ordinances, codes, rules and regulations, and lawful orders of public authorities, bearing on safety of persons or property or their protection from damage, injury, or loss.

§ 10.2.2.1 Nothing herein shall be construed to subject the Owner to the jurisdiction of local or state authorities except to the extent required by law.

§ 10.2.3 The Contractor shall implement, erect, and maintain, as required by existing conditions and performance of the Contract, reasonable safeguards for safety and protection, including posting danger signs and other warnings against hazards; promulgating safety regulations; and notifying the owners and users of adjacent sites and utilities of the safeguards.

§ 10.2.4 When use or storage of explosives or other hazardous materials or equipment, or unusual methods are necessary for execution of the Work, the Contractor shall exercise utmost care and carry on such activities under supervision of properly qualified personnel.

§ 10.2.5 The Contractor shall promptly remedy damage and loss (other than damage or loss insured under property insurance required by the Contract Documents) to property referred to in Sections 10.2.1.2 and 10.2.1.3 caused in whole or in part by the Contractor, a Subcontractor, a Sub-subcontractor, or anyone directly or indirectly employed by any of them, or by anyone for whose acts they may be liable and for which the Contractor is responsible under Sections 10.2.1.2 and 10.2.1.3. The Contractor may make a Claim for the cost to remedy the damage or loss to the extent such damage or loss is attributable to acts or omissions of the Owner or Architect or anyone directly or indirectly employed by either of them, or by anyone for whose acts either of them may be liable, and not attributable to the fault or negligence of the Contractor. The foregoing obligations of the Contractor are in addition to the Contractor's obligations under Section 3.18.

§ 10.2.6 The Contractor shall designate a responsible member of the Contractor's organization at the site whose duty shall be the prevention of accidents. This person shall be the Contractor's superintendent unless otherwise designated by the Contractor in writing to the Owner and Architect.

§ 10.2.7 The Contractor shall not permit any part of the construction or site to be loaded so as to cause damage or create an unsafe condition.

§ 10.2.8 Injury or Damage to Person or Property

If either party suffers injury or damage to person or property because of an act or omission of the other party, or of others for whose acts such party is legally responsible, notice of the injury or damage, whether or not insured, shall be given to the other party within a reasonable time not exceeding 21 days after discovery. The notice shall provide sufficient detail to enable the other party to investigate the matter.

§ 10.3 Hazardous Materials and Substances

§ 10.3.1 The Contractor is responsible for compliance with any requirements included in the Contract Documents regarding hazardous materials or substances. If the Contractor encounters a hazardous material or substance not addressed in the Contract Documents and if reasonable precautions will be inadequate to prevent foreseeable bodily injury or death to persons resulting from a material or substance, including but not limited to asbestos or polychlorinated biphenyl (PCB), encountered on the site by the Contractor, the Contractor shall, upon recognizing the condition, immediately stop Work in the affected area and notify the Owner and Architect of the condition.

§ 10.3.2 Upon receipt of the Contractor's notice, the Owner shall obtain the services of a licensed laboratory to verify the presence or absence of the material or substance reported by the Contractor and, in the event such material or substance is found to be present, to cause it to be rendered harmless. Unless otherwise required by the Contract Documents, the Owner shall furnish in writing to the Contractor and Architect the names and qualifications of persons or entities who are to perform tests verifying the presence or absence of the material or substance or who are to perform the task of removal or safe containment of the material or substance. The Contractor and the Architect will promptly reply to the Owner in writing stating whether or not either has reasonable objection to the persons or entities proposed by the Owner. If either the Contractor or Architect has an objection to a person or entity proposed by the Owner, the Owner shall propose another to whom the Contractor and the Architect have no reasonable objection. When the material or substance has been rendered harmless, Work in the affected area shall resume upon

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

written agreement of the Owner and Contractor. By Change Order, the Contract Time shall be extended appropriately and the Contract Sum shall be increased by the amount of the Contractor's reasonable additional costs of shutdown, delay, and start-up.

§ 10.3.3 *Paragraph Deleted.*

§ 10.3.4 The Owner shall not be responsible under this Section 10.3 for hazardous materials or substances the Contractor brings to the site unless such materials or substances are required by the Contract Documents. The Owner shall be responsible for hazardous materials or substances required by the Contract Documents, except to the extent of the Contractor's fault or negligence in the use and handling of such materials or substances.

§ 10.3.5 The Contractor shall reimburse the Owner for the cost and expense the Owner incurs (1) for remediation of hazardous materials or substances the Contractor brings to the site and negligently handles, or (2) where the Contractor fails to perform its obligations under Section 10.3.1, except to the extent that the cost and expense are due to the Owner's fault or negligence.

§ 10.3.6 If, without negligence on the part of the Contractor, the Contractor is held liable by a government agency for the cost of remediation of a hazardous material or substance solely by reason of performing Work as required by the Contract Documents, the Owner shall reimburse the Contractor for all cost and expense thereby incurred.

§ 10.4 Emergencies

In an emergency affecting safety of persons or property, the Contractor shall act, at the Contractor's discretion, to prevent threatened damage, injury, or loss. Additional compensation or extension of time claimed by the Contractor on account of an emergency shall be determined as provided in Article 15 and Article 7.

ARTICLE 11 INSURANCE AND BONDS

§ 11.1 Contractor's Insurance and Bonds

§ 11.1.1 The Contractor shall purchase and maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Contractor shall purchase and maintain the required insurance from an insurance company or insurance companies lawfully authorized to issue insurance in the jurisdiction where the Project is located. The Owner, Architect, and Architect's consultants shall be named as additional insureds under the Contractor's commercial general liability policy or as otherwise described in the Contract Documents.

§ 11.1.2 The Contractor shall provide surety bonds of the types, for such penal sums, and subject to such terms and conditions as required by the Contract Documents. The Contractor shall purchase and maintain the required bonds from a company or companies lawfully authorized to issue surety bonds in the jurisdiction where the Project is located.

§ 11.1.3 Upon the request of any person or entity appearing to be a potential beneficiary of bonds covering payment of obligations arising under the Contract, the Contractor shall promptly furnish a copy of the bonds or shall authorize a copy to be furnished.

§ 11.1.4 Notice of Cancellation or Expiration of Contractor's Required Insurance. Within three (3) business days of the date the Contractor becomes aware of an impending or actual cancellation or expiration of any insurance required by the Contract Documents, the Contractor shall provide notice to the Owner of such impending or actual cancellation or expiration. Upon receipt of notice from the Contractor, the Owner shall, unless the lapse in coverage arises from an act or omission of the Owner, have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by the Contractor. The furnishing of notice by the Contractor shall not relieve the Contractor of any contractual obligation to provide any required coverage.

§ 11.2 Owner's Insurance

§ 11.2.1 The Owner shall maintain insurance of the types and limits of liability, containing the endorsements, and subject to the terms and conditions, as described in the Agreement or elsewhere in the Contract Documents. The Owner's required insurance shall be provided through the State of Utah Division of Risk Management.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:

§ 11.2.2 Failure to Purchase Required Property Insurance. If the Owner fails to maintain the required property insurance, with all of the coverages and in the amounts described in the Agreement or elsewhere in the Contract Documents, the Owner shall inform the Contractor in writing prior to commencement of the Work. Upon receipt of notice from the Owner, the Contractor may delay commencement of the Work and may obtain insurance that will protect the interests of the Contractor, Subcontractors, and Sub-Subcontractors in the Work. When the failure to provide coverage has been cured or resolved, the Contract Sum and Contract Time shall be equitably adjusted. In the event the Owner fails to procure coverage, the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent the loss to the Owner would have been covered by the insurance to have been procured by the Owner. The cost of the insurance shall be charged to the Owner by a Change Order. If the Owner does not provide written notice, and the Contractor is damaged by the failure or neglect of the Owner to purchase or maintain the required insurance, the Owner shall reimburse the Contractor for all reasonable costs and damages attributable thereto.

§ 11.2.3 Notice of Cancellation or Expiration of Owner's Required Property Insurance. Within three (3) business days of the date the Owner becomes aware of an impending or actual cancellation or expiration of any property insurance required by the Contract Documents, the Owner shall provide notice to the Contractor of such impending or actual cancellation or expiration. Unless the lapse in coverage arises from an act or omission of the Contractor: (1) the Contractor, upon receipt of notice from the Owner, shall have the right to stop the Work until the lapse in coverage has been cured by the procurement of replacement coverage by either the Owner or the Contractor; (2) the Contract Time and Contract Sum shall be equitably adjusted; and (3) the Owner waives all rights against the Contractor, Subcontractors, and Sub-subcontractors to the extent any loss to the Owner would have been covered by the insurance had it not expired or been cancelled. If the Contractor purchases replacement coverage, the cost of the insurance shall be charged to the Owner by an appropriate Change Order. The furnishing of notice by the Owner shall not relieve the Owner of any contractual obligation to provide required insurance.

§ 11.3 Waivers of Subrogation

§ 11.3.1 The Owner and Contractor waive all rights against (1) each other and any of their subcontractors, sub-subcontractors, agents, and employees, each of the other; (2) the Architect and Architect's consultants; and (3) Separate Contractors, if any, and any of their subcontractors, sub-subcontractors, agents, and employees, for damages caused by fire, or other causes of loss, to the extent those losses are covered by property insurance required by the Agreement or other property insurance applicable to the Project, except such rights as they have to proceeds of such insurance. The Owner or Contractor, as appropriate, shall require similar written waivers in favor of the individuals and entities identified above from the Architect, Architect's consultants, Separate Contractors, subcontractors, and sub-subcontractors. The policies of insurance purchased and maintained by each person or entity agreeing to waive claims pursuant to this section 11.3.1 shall not prohibit this waiver of subrogation. This waiver of subrogation shall be effective as to a person or entity (1) even though that person or entity would otherwise have a duty of indemnification, contractual or otherwise, (2) even though that person or entity did not pay the insurance premium directly or indirectly, or (3) whether or not the person or entity had an insurable interest in the damaged property.

§ 11.3.2 If during the Project construction period the Owner insures properties, real or personal or both, at or adjacent to the site by property insurance under policies separate from those insuring the Project, or if after final payment property insurance is to be provided on the completed Project through a policy or policies other than those insuring the Project during the construction period, to the extent permissible by such policies, the Owner waives all rights in accordance with the terms of Section 11.3.1 for damages caused by fire or other causes of loss covered by this separate property insurance.

§ 11.4 Loss of Use, Business Interruption, and Delay in Completion Insurance

The Owner, at the Owner's option, may purchase and maintain insurance that will protect the Owner against loss of use of the Owner's property, or the inability to conduct normal operations, due to fire or other causes of loss. The Owner waives all rights of action against the Contractor and Architect for loss of use of the Owner's property, due to fire or other hazards however caused.

§11.5 Adjustment and Settlement of Insured Loss

§ 11.5.1 A loss insured under the property insurance required by the Agreement shall be adjusted by the Owner as fiduciary and made payable to the Owner as fiduciary for the insureds, as their interests may appear, subject to requirements of any applicable mortgagee clause and of Section 11.5.2. The Owner shall pay the Architect and

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

Contractor their just shares of insurance proceeds received by the Owner, and by appropriate agreements the Architect and Contractor shall make payments to their consultants and Subcontractors in similar manner.

§ 11.5.2 Prior to settlement of an insured loss, the Owner shall notify the Contractor of the terms of the proposed settlement as well as the proposed allocation of the insurance proceeds. The Contractor shall have 14 days from receipt of notice to object to the proposed settlement or allocation of the proceeds. If the Contractor does not object, the Owner shall settle the loss and the Contractor shall be bound by the settlement and allocation. Upon receipt, the Owner shall deposit the insurance proceeds in a separate account and make the appropriate distributions. Thereafter, if no other agreement is made or the Owner does not terminate the Contract for convenience, the Owner and Contractor shall execute a Change Order for reconstruction of the damaged or destroyed Work in the amount allocated for that purpose. If the Contractor timely objects to either the terms of the proposed settlement or the allocation of the proceeds, the Owner may proceed to settle the insured loss, and any dispute between the Owner and Contractor arising out of the settlement or allocation of the proceeds shall be resolved pursuant to Article 15. Pending resolution of any dispute, the Owner may issue a Construction Change Directive for the reconstruction of the damaged or destroyed Work.

ARTICLE 12 UNCOVERING AND CORRECTION OF WORK

§ 12.1 Uncovering of Work

§ 12.1.1 If a portion of the Work is covered contrary to the Architect's request or to requirements specifically expressed in the Contract Documents, it must, if requested in writing by the Architect, be uncovered for the Architect's examination and be replaced at the Contractor's expense without change in the Contract Time.

§ 12.1.2 If a portion of the Work has been covered that the Architect has not specifically requested to examine prior to its being covered, the Architect may request to see such Work and it shall be uncovered by the Contractor. If such Work is in accordance with the Contract Documents, the Contractor shall be entitled to an equitable adjustment to the Contract Sum and Contract Time as may be appropriate. If such Work is not in accordance with the Contract Documents, the costs of uncovering the Work, and the cost of correction, shall be at the Contractor's expense.

§ 12.2 Correction of Work

§ 12.2.1 Before Substantial Completion

The Contractor shall promptly correct Work rejected by the Architect or failing to conform to the requirements of the Contract Documents, discovered before Substantial Completion and whether or not fabricated, installed or completed. Costs of correcting such rejected Work, including additional testing and inspections, the cost of uncovering and replacement, and compensation for the Architect's services and expenses made necessary thereby, shall be at the Contractor's expense.

§ 12.2.2 After Substantial Completion

§ 12.2.2.1 In addition to the Contractor's obligations under Section 3.5, if, within one year after the date of Substantial Completion of the Work or designated portion thereof or after the date for commencement of warranties established under Section 9.9.1, or by terms of any applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of notice from the Owner to do so, unless the Owner has previously given the Contractor a written acceptance of such condition. The Owner shall give such notice promptly after discovery of the condition. During the one-year period for correction of Work, if the Owner fails to notify the Contractor and give the Contractor an opportunity to make the correction, the Owner waives the rights to require correction by the Contractor and to make a claim for breach of warranty. If the Contractor fails to correct nonconforming Work within a reasonable time during that period after receipt of notice from the Owner or Architect, the Owner may correct it in accordance with Section 2.5.

§ 12.2.2.2 The one-year period for correction of Work shall be extended with respect to portions of Work first performed after Substantial Completion by the period of time between Substantial Completion and the actual completion of that portion of the Work.

§ 12.2.2.3 The one-year period for correction of Work shall not be extended by corrective Work performed by the Contractor pursuant to this Section 12.2.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 12.2.2.4 Upon request by the Owner and prior to the expiration of one year from the date of Substantial Completion, the Architect will conduct, and the Contractor shall attend, a meeting with the Owner to review the facility operations and performance.

§ 12.2.3 The Contractor shall remove from the site portions of the Work that are not in accordance with the requirements of the Contract Documents and are neither corrected by the Contractor nor accepted by the Owner.

§ 12.2.4 The Contractor shall bear the cost of correcting destroyed or damaged construction of the Owner or Separate Contractors, whether completed or partially completed, caused by the Contractor's correction or removal of Work that is not in accordance with the requirements of the Contract Documents.

§ 12.2.5 Nothing contained in this Section 12.2 shall be construed to establish a period of limitation with respect to other obligations the Contractor has under the Contract Documents. Establishment of the one-year period for correction of Work as described in Section 12.2.2 relates only to the specific obligation of the Contractor to correct the Work, and has no relationship to the time within which the obligation to comply with the Contract Documents may be sought to be enforced, nor to the time within which proceedings may be commenced to establish the Contractor's liability with respect to the Contractor's obligations other than specifically to correct the Work.

§ 12.3 Acceptance of Nonconforming Work

If the Owner prefers to accept Work that is not in accordance with the requirements of the Contract Documents, the Owner may do so instead of requiring its removal and correction, in which case the Contract Sum will be reduced as appropriate and equitable. Such adjustment shall be effected whether or not final payment has been made.

ARTICLE 13 MISCELLANEOUS PROVISIONS

§ 13.1 Governing Law

The Contract shall be governed by the law of the place where the Project is located, excluding that jurisdiction's choice of law rules. If the parties have selected arbitration as the method of binding dispute resolution, the Federal Arbitration Act shall govern Section 15.4.

§ 13.2 Successors and Assigns

§ 13.2.1 The Owner and Contractor respectively bind themselves, their partners, successors, assigns, and legal representatives to covenants, agreements, and obligations contained in the Contract Documents. Except as provided in Section 13.2.2, neither party to the Contract shall assign the Contract as a whole without written consent of the other. If either party attempts to make an assignment without such consent, that party shall nevertheless remain legally responsible for all obligations under the Contract.

(Paragraph Deleted)

§ 13.3 Rights and Remedies

§ 13.3.1 Duties and obligations imposed by the Contract Documents and rights and remedies available thereunder shall be in addition to and not a limitation of duties, obligations, rights, and remedies otherwise imposed or available by law.

§ 13.3.2 No action or failure to act by the Owner, Architect, or Contractor shall constitute a waiver of a right or duty afforded them under the Contract, nor shall such action or failure to act constitute approval of or acquiescence in a breach thereunder, except as may be specifically agreed upon in writing.

§ 13.4 Tests and Inspections

§ 13.4.1 Tests, inspections, and approvals of portions of the Work shall be made as required by the Contract Documents and by applicable laws, statutes, ordinances, codes, rules, and regulations or lawful orders of public authorities. Unless otherwise provided, the Contractor shall make arrangements for such tests, inspections, and approvals with an independent testing laboratory or entity acceptable to the Owner, or with the appropriate public authority, and shall bear all related costs of tests, inspections, and approvals. The Contractor shall give the Architect timely notice of when and where tests and inspections are to be made so that the Architect may be present for such procedures. The Owner shall bear costs of tests, inspections, or approvals that do not become requirements until after bids are received or negotiations concluded. The Owner shall directly arrange and pay for tests, inspections, or approvals where building codes or applicable laws or regulations so require.

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

§ 13.4.2 If the Architect, Owner, or public authorities having jurisdiction determine that portions of the Work require additional testing, inspection, or approval not included under Section 13.4.1, the Architect will, upon written authorization from the Owner, instruct the Contractor to make arrangements for such additional testing, inspection, or approval, by an entity acceptable to the Owner, and the Contractor shall give timely notice to the Architect of when and where tests and inspections are to be made so that the Architect may be present for such procedures. Such costs, except as provided in Section 13.4.3, shall be at the Owner's expense.

§ 13.4.3 If procedures for testing, inspection, or approval under Sections 13.4.1 and 13.4.2 reveal failure of the portions of the Work to comply with requirements established by the Contract Documents, all costs made necessary by such failure, including those of repeated procedures and compensation for the Architect's services and expenses, shall be at the Contractor's expense.

§ 13.4.4 Required certificates of testing, inspection, or approval shall, unless otherwise required by the Contract Documents, be secured by the Contractor and promptly delivered to the Architect.

§ 13.4.5 If the Architect is to observe tests, inspections, or approvals required by the Contract Documents, the Architect will do so promptly and, where practicable, at the normal place of testing.

§ 13.4.6 Tests or inspections conducted pursuant to the Contract Documents shall be made promptly to avoid unreasonable delay in the Work.

§ 13.5 Interest

Payments due and unpaid under the Contract Documents shall bear interest from the date payment is due at the rate the parties agree upon in writing or, in the absence thereof, at the legal rate prevailing from time to time at the place where the Project is located.

§ 13.6 Employment Practices

§ 13.6.1 Equal Opportunity

§ 13.6.1.1 The Contractor and Contractor's Subcontractors shall not discriminate against any employee or applicant for employment because of race, religion, color, sex or national origin. The Contractor shall take affirmative action to insure that applicants are employed, and that employees are treated during employment without regard to their race, religion, color, sex or national origin. Such action shall include, but is not limited to the following: employment, upgrading, demotion or transfer, recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The Contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices setting forth the policies of non-discrimination.

§ 13.6.1.2 The Contractor and Contractor's Subcontractors shall, in all solicitations or advertisement for employees placed by them of on their behalf, state that all qualified applicants will receive consideration from employment without regard to race, religion, color, sex or national origin.

§ 13.6.2 Illegal Immigration. The Contractor shall comply with all applicable immigration laws, including, but not limited to the E-Verify Status Verification System requirements contained in UCA 63G-12-302. The contractor certifies to the Owner that (1) the Contractor has registered and is participating in the Status Verification System to verify work eligibility status of the Contractor's new employees, and (2) the Contractor shall include the following provision in each subcontract at every tier: "The Subcontractor shall certify to the Contractor by affidavit that the Subcontractor has verified through the Status Verification System the employment status of each new employee of the respective Subcontractor, all in accordance with UCA Section 63G-11-103 and to comply with all applicable employee status verification laws. Such affidavit must be provided prior to the notice to proceed for the subcontractor to perform the Work."

§ 13.6.2.1 Employment Records Audits. T The Owner reserves the right to conduct random employment audits throughout the duration of the Project. In the event of such an audit, the Contractor shall (1) cause any employee of the Contractor, its Sub-contractors or Suppliers performing portions of the Work to identify their name and the name of the entity for which they are performing their portion of the Work; and (2). provide payroll records for its own employees and any Sub-contractors or Suppliers performing portions of the Work as the Owner may require to

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

perform the audit. The Owner will verify legal employment based upon such payroll records submitted by the Contractor.

Failure by the Contractor to supply the required payroll records or to comply with the verification of legal employment requirements for the Contractor's employees or the Contractor's Sub-contractors or Suppliers will result in the following:

.1 first failure to comply with the requirements, a written warning from the Owner;

.2 second failure to comply with the requirements, suspension of the Contractor to bid future projects of the Owner; and

.3 third failure to comply with the requirements, suspension and/or disbarment for a minimum of one (1) year and a maximum of three (3) years to bid on future projects of, or to contract with, the Owner.

The length of suspension and/or debarment will follow all applicable procurement codes and rules (Utah Procurement Code 63G-6a-904) and is at the sole discretion of the Owner.

§ 13.6.3 Drug and Alcohol Testing. The Contractor shall comply with the requirements of Utah State Code 63G-6-604 and State Purchasing and General Services Rule R33-10 Drug and Alcohol Testing including the provision of a drug and alcohol testing program during the period of the performance of the Work. The Contractor certifies to the Owner that (1) shall have and maintain a compliant drug and alcohol testing program including the posting and random testing requirements during the period of the Contract; and (2) the Contractor shall include the requirements of this Section 13.6.3 in all subcontracts at any tier.

ARTICLE 14 TERMINATION OR SUSPENSION OF THE CONTRACT

§ 14.1 Termination by the Contractor

§ 14.1.1 The Contractor may terminate the Contract if the Work is stopped for a period of 30 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, for any of the following reasons:

.1 Issuance of an order of a court or other public authority having jurisdiction that requires all Work to be stopped;

.2 An act of government, such as a declaration of national emergency, that requires all Work to be stopped;

.3 Because the Architect has not issued a Certificate for Payment and has not notified the Contractor of the reason for withholding certification as provided in Section 9.4.1, or because the Owner has not made payment on a Certificate for Payment within the time stated in the Contract Documents; or

.4 The Owner has failed to furnish to the Contractor reasonable evidence as required by Section 2.2.

§ 14.1.2 The Contractor may terminate the Contract if, through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, their agents or employees, or any other persons or entities performing portions of the Work, repeated suspensions, delays, or interruptions of the entire Work by the Owner as described in Section 14.3, constitute in the aggregate more than 100 percent of the total number of days scheduled for completion, or 120 days in any 365-day period, whichever is less.

§ 14.1.3 If one of the reasons described in Section 14.1.1 or 14.1.2 exists, the Contractor may, upon seven days' notice to the Owner and Architect, terminate the Contract and recover from the Owner payment for Work executed.

§ 14.1.4 If the Work is stopped for a period of 60 consecutive days through no act or fault of the Contractor, a Subcontractor, a Sub-subcontractor, or their agents or employees or any other persons or entities performing portions of the Work because the Owner has repeatedly failed to fulfill the Owner's obligations under the Contract Documents with respect to matters important to the progress of the Work, the Contractor may, upon seven additional days' notice to the Owner and the Architect, terminate the Contract and recover from the Owner as provided in Section 14.1.3.

§ 14.2 Termination by the Owner for Cause

§ 14.2.1 The Owner may terminate the Contract if the Contractor

.1 repeatedly refuses or fails to supply enough properly skilled workers or proper materials;

.2 fails to make payment to Subcontractors or suppliers in accordance with the respective agreements between the Contractor and the Subcontractors or suppliers;

Init.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.

User Notes: (3B9ADA34)

.3 repeatedly disregards applicable laws, statutes, ordinances, codes, rules and regulations, or lawful orders of a public authority; or

.4 otherwise is guilty of substantial breach of a provision of the Contract Documents.

§ 14.2.2 When any of the reasons described in Section 14.2.1 exist, and upon certification by the Architect that sufficient cause exists to justify such action, the Owner may, without prejudice to any other rights or remedies of the Owner and after giving the Contractor and the Contractor's surety, if any, seven days' notice, terminate employment of the Contractor and may, subject to any prior rights of the surety:

.1 Exclude the Contractor from the site and take possession of all materials, equipment, tools, and construction equipment and machinery thereon owned by the Contractor;

.2 Accept assignment of subcontracts pursuant to Section 5.4; and

.3 Finish the Work by whatever reasonable method the Owner may deem expedient. Upon written request of the Contractor, the Owner shall furnish to the Contractor a detailed accounting of the costs incurred by the Owner in finishing the Work.

§ 14.2.3 When the Owner terminates the Contract for one of the reasons stated in Section 14.2.1, the Contractor shall not be entitled to receive further payment until the Work is finished.

§ 14.2.4 If the unpaid balance of the Contract Sum exceeds costs of finishing the Work, including compensation for the Architect's services and expenses made necessary thereby, and other damages incurred by the Owner and not expressly waived, such excess shall be paid to the Contractor. If such costs and damages exceed the unpaid balance, the Contractor shall pay the difference to the Owner. The amount to be paid to the Contractor or Owner, as the case may be, shall be certified by the Initial Decision Maker, upon application, and this obligation for payment shall survive termination of the Contract.

§ 14.3 Suspension by the Owner for Convenience

§ 14.3.1 The Owner may, without cause, order the Contractor in writing to suspend, delay or interrupt the Work, in whole or in part for such period of time as the Owner may determine.

§ 14.3.2 The Contract Sum and Contract Time shall be adjusted for increases in the cost and time caused by suspension, delay, or interruption under Section 14.3.1. Adjustment of the Contract Sum shall include profit. No adjustment shall be made to the extent

.1 that performance is, was, or would have been, so suspended, delayed, or interrupted, by another cause for which the Contractor is responsible; or

.2 that an equitable adjustment is made or denied under another provision of the Contract.

§ 14.4 Termination by the Owner for Convenience

§ 14.4.1 The Owner may, at any time, terminate the Contract for the Owner's convenience and without cause.

§ 14.4.2 Upon receipt of notice from the Owner of such termination for the Owner's convenience, the Contractor shall

.1 cease operations as directed by the Owner in the notice;

.2 take actions necessary, or that the Owner may direct, for the protection and preservation of the Work; and

.3 except for Work directed to be performed prior to the effective date of termination stated in the notice, terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.

§ 14.4.3 In case of such termination for the Owner's convenience, the Owner shall pay the Contractor for Work properly executed; costs incurred by reason of the termination, including costs attributable to termination of Subcontracts; and the termination fee, if any, set forth in the Agreement.

§ 14.5 Nothing herein shall be construed to subject the Owner to the jurisdiction of local or state authorities except to the extent required by law.

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

ARTICLE 15 CLAIMS AND DISPUTES

§ 15.1 Claims

§ 15.1.1 Definition

A Claim is a demand or assertion by one of the parties seeking, as a matter of right, payment of money, a change in the Contract Time, or other relief with respect to the terms of the Contract. The term "Claim" also includes other disputes and matters in question between the Owner and Contractor arising out of or relating to the Contract. The responsibility to substantiate Claims shall rest with the party making the Claim. This Section 15.1.1 does not require the Owner to file a Claim in order to impose liquidated damages in accordance with the Contract Documents.

§ 15.1.2 Time Limits on Claims

The Owner and Contractor shall commence all Claims and causes of action against the other and arising out of or related to the Contract, whether in contract, tort, breach of warranty or otherwise, in accordance with the requirements of the binding dispute resolution method selected in the Agreement and within the period specified by applicable law, but in any case not more than 10 years after the date of Substantial Completion of the Work. The Owner and Contractor waive all Claims and causes of action not commenced in accordance with this Section 15.1.2.

§ 15.1.3 Notice of Claims

§ 15.1.3.1 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered prior to expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party and to the Initial Decision Maker with a copy sent to the Architect, if the Architect is not serving as the Initial Decision Maker. Claims by either party under this Section 15.1.3.1 shall be initiated within 21 days after occurrence of the event giving rise to such Claim or within 21 days after the claimant first recognizes the condition giving rise to the Claim, whichever is later.

§ 15.1.3.2 Claims by either the Owner or Contractor, where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2, shall be initiated by notice to the other party. In such event, no decision by the Initial Decision Maker is required.

§ 15.1.4 Continuing Contract Performance

§ 15.1.4.1 Pending final resolution of a Claim, except as otherwise agreed in writing or as provided in Section 9.7 and Article 14, the Contractor shall proceed diligently with performance of the Contract and the Owner shall continue to make payments in accordance with the Contract Documents.

§ 15.1.4.2 The Contract Sum and Contract Time shall be adjusted in accordance with the Initial Decision Maker's decision, subject to the right of either party to proceed in accordance with this Article 15. The Architect will issue Certificates for Payment in accordance with the decision of the Initial Decision Maker.

§ 15.1.5 Claims for Additional Cost

If the Contractor wishes to make a Claim for an increase in the Contract Sum, notice as provided in Section 15.1.3 shall be given before proceeding to execute the portion of the Work that is the subject of the Claim. However, an adjustment to the Contract Sum or Contract Time shall be permitted only in the event of a material addition not contemplated by the Contract Documents. Prior notice is not required for Claims relating to an emergency endangering life or property arising under Section 10.4.

§ 15.1.6 Claims for Additional Time

§ 15.1.6.1 If the Contractor wishes to make a Claim for an increase in the Contract Time, notice as provided in Section 15.1.3 shall be given. The Contractor's Claim shall include an estimate of cost and of probable effect of delay on progress of the Work. In the case of a continuing delay, only one Claim is necessary.

§ 15.1.6.2 If adverse weather conditions are the basis for a Claim for additional time, such Claim shall be documented by data substantiating that weather conditions were abnormal for the period of time, could not have been reasonably anticipated, and had an adverse effect on the scheduled construction.

§ 15.1.6.3 Claims for increases in Contract time shall set forth in detail the circumstances that form the basis for the Claim, the date upon which each cause of delay began to affect the progress of the Work, and the number of days' increase in the Contract Time claimed as a consequence of each such cause of delay. The contractor shall provide

Init.
/
AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (3B9ADA34)

such supporting documentation as the Owner may require including, where appropriate, a revised construction schedule indicating all the activities affected by the circumstances forming the basis of the Claim.

§ 15.1.6.4 The Contractor shall not be entitled to a separate increase in the Contract time for each one of the number of causes of delay which may have concurrent or interrelated effects on the progress of the Work, or for concurrent delays due to the fault of the Contractor.

§ 15.1.7 Waiver of Claims for Consequential Damages

§ 15.1.7.1 The Contractor and Owner waive Claims against each other for consequential damages arising out of or relating to this Contract. This mutual waiver includes

.1 damages incurred by the Owner for rental expenses, for losses of use, income, profit, financing, business and reputation, and for loss of management or employee productivity or of the services of such persons; and

.2 damages incurred by the Contractor for principal office expenses including the compensation of personnel stationed there, for losses of financing, business and reputation, and for loss of profit.

This mutual waiver is applicable, without limitation, to all consequential damages due to either party's termination in accordance with Article 14. Nothing contained in this Section 15.1.7 shall be deemed to preclude assessment of liquidated damages, when applicable, in accordance with the requirements of the Contract Documents.

§ 15.1.7.2 If, before expiration of 30 days from the date of execution of this Agreement, the Owner obtains by separate agreement and furnishes to the Contractor a similar waiver of all claims from the architect against the Contractor for consequential damages which the Architect may incur as a result of any act or omission of the Contractor, then the waiver of consequential damages contained in this Section 15.1.7 shall be applicable to claims by the Contractor against the Architect.

§ 15.2 Initial Decision

§ 15.2.1 Claims, excluding those where the condition giving rise to the Claim is first discovered after expiration of the period for correction of the Work set forth in Section 12.2.2 or arising under Sections 10.3, 10.4, and 11.5, shall be referred to the Initial Decision Maker for initial decision. The Architect will serve as the Initial Decision Maker, unless otherwise indicated in the Agreement. Except for those Claims excluded by this Section 15.2.1, an initial decision shall be required as a condition precedent to mediation of any Claim. If an initial decision has not been rendered within 30 days after the Claim has been referred to the Initial Decision Maker, the party asserting the Claim may demand mediation and binding dispute resolution without a decision having been rendered. Unless the Initial Decision Maker and all affected parties agree, the Initial Decision Maker will not decide disputes between the Contractor and persons or entities other than the Owner.

§ 15.2.2 The Initial Decision Maker will review Claims and within ten days of the receipt of a Claim take one or more of the following actions: (1) request additional supporting data from the claimant or a response with supporting data from the other party, (2) reject the Claim in whole or in part, (3) approve the Claim, (4) suggest a compromise, or (5) advise the parties that the Initial Decision Maker is unable to resolve the Claim if the Initial Decision Maker lacks sufficient information to evaluate the merits of the Claim or if the Initial Decision Maker concludes that, in the Initial Decision Maker's sole discretion, it would be inappropriate for the Initial Decision Maker to resolve the Claim.

§ 15.2.3 In evaluating Claims, the Initial Decision Maker may, but shall not be obligated to, consult with or seek information from either party or from persons with special knowledge or expertise who may assist the Initial Decision Maker in rendering a decision. The Initial Decision Maker may request the Owner to authorize retention of such persons at the Owner's expense.

§ 15.2.4 If the Initial Decision Maker requests a party to provide a response to a Claim or to furnish additional supporting data, such party shall respond, within ten days after receipt of the request, and shall either (1) provide a response on the requested supporting data, (2) advise the Initial Decision Maker when the response or supporting data will be furnished, or (3) advise the Initial Decision Maker that no supporting data will be furnished. Upon receipt of the response or supporting data, if any, the Initial Decision Maker will either reject or approve the Claim in whole or in part.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(3B9ADA34)

§ 15.2.5 The Initial Decision Maker will render an initial decision approving or rejecting the Claim, or indicating that the Initial Decision Maker is unable to resolve the Claim. This initial decision shall (1) be in writing; (2) state the reasons therefor; and (3) notify the parties and the Architect, if the Architect is not serving as the Initial Decision Maker, of any change in the Contract Sum or Contract Time or both. The initial decision shall be final and binding on the parties but subject to the rights of the parties to assert their claims in a court of law or by mediation.

§ 15.2.6 Either party may file for mediation of an initial decision at any time, subject to the terms of Section 15.2.6.1.

§ 15.2.6.1 Either party may, within 30 days from the date of receipt of an initial decision, demand in writing that the other party file for mediation. If such a demand is made and the party receiving the demand fails to file for mediation within 30 days after receipt thereof, then both parties waive their rights to mediate or pursue binding dispute resolution proceedings with respect to the initial decision.

§ 15.2.7 In the event of a Claim against the Contractor, the Owner may, but is not obligated to, notify the surety, if any, of the nature and amount of the Claim. If the Claim relates to a possibility of a Contractor's default, the Owner may, but is not obligated to, notify the surety and request the surety's assistance in resolving the controversy.

(Paragraph Deleted)

§ 15.3 Mediation

§ 15.3.1 Claims, disputes, or other matters in controversy arising out of or related to the Contract, except those waived as provided for in Sections 9.10.4, 9.10.5, and 15.1.7, may be subject to mediation as a condition precedent to binding dispute resolution.

§ 15.3.2 The parties may endeavor to resolve their Claims by mediation which, unless the parties mutually agree otherwise, shall be administered by the American Arbitration Association in accordance with its Construction Industry Mediation Procedures in effect on the date of the Agreement. A request for mediation shall be made in writing, delivered to the other party to the Contract, and filed with the person or entity administering the mediation. The request may be made concurrently with the filing of binding dispute resolution proceedings but, in such event, mediation may proceed in advance of binding dispute resolution proceedings, which may be stayed pending mediation for a period of 60 days from the date of filing, unless stayed for a longer period by agreement of the parties or court order. If an arbitration is stayed pursuant to this Section 15.3.2, the parties may nonetheless proceed to the selection of the arbitrator(s) and agree upon a schedule for later proceedings.

§ 15.3.3 Either party may, within 30 days from the date that mediation has been concluded without resolution of the dispute or 60 days after mediation has been demanded without resolution of the dispute, demand in writing that the other party file for binding dispute resolution. If such a demand is made and the party receiving the demand fails to file for binding dispute resolution within 60 days after receipt thereof, then both parties waive their rights to binding dispute resolution proceedings with respect to the initial decision.

§ 15.3.4 The parties shall share the mediator's fee and any filing fees equally. The mediation shall be held in the place where the Project is located, unless another location is mutually agreed upon. Agreements reached in mediation shall be enforceable as settlement agreements in any court having jurisdiction thereof.

(Paragraph Deleted)

(Paragraph Deleted)

Init.

AIA Document A201 – 2017. Copyright © 1911, 1915, 1918, 1925, 1937, 1951, 1958, 1961, 1963, 1966, 1970, 1976, 1987, 1997, 2007 and 2017. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 16:05:50 ET on 01/04/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:

(3B9ADA34)

AIA® Document A312® – 2010

Payment Bond

CONTRACTOR:
(Name, legal status and address)

SURETY:
(Name, legal status and principal place of business)

OWNER:
(Name, legal status and address)
Jordan School District
7905 South Redwood Road
West Jordan, Utah 84088

CONSTRUCTION CONTRACT
Date:
Amount: $
Description:
(Name and location)

BOND
Date:
(Not earlier than Construction Contract Date)

Amount: $
Modifications to this Bond: ☐ None ☐ See Section 18

CONTRACTOR AS PRINCIPAL		**SURETY**	
Company:	*(Corporate Seal)*	Company:	*(Corporate Seal)*
Signature:		Signature:	
Name and Title:		Name and Title:	

(Any additional signatures appear on the last page of this Payment Bond.)

(FOR INFORMATION ONLY — Name, address and telephone)

AGENT or **BROKER:**

OWNER'S REPRESENTATIVE:
(Architect, Engineer or other party:)

ADDITIONS AND DELETIONS:
The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

Init.
/
AIA Document A312 – 2010 Payment Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:46:38 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(1483238469)

§ 1 The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to the Owner to pay for labor, materials and equipment furnished for use in the performance of the Construction Contract, which is incorporated herein by reference, subject to the following terms.

§ 2 If the Contractor promptly makes payment of all sums due to Claimants, and defends, indemnifies and holds harmless the Owner from claims, demands, liens or suits by any person or entity seeking payment for labor, materials or equipment furnished for use in the performance of the Construction Contract, then the Surety and the Contractor shall have no obligation under this Bond.

§ 3 If there is no Owner Default under the Construction Contract, the Surety's obligation to the Owner under this Bond shall arise after the Owner has promptly notified the Contractor and the Surety (at the address described in Section 13) of claims, demands, liens or suits against the Owner or the Owner's property by any person or entity seeking payment for labor, materials or equipment furnished for use in the performance of the Construction Contract and tendered defense of such claims, demands, liens or suits to the Contractor and the Surety.

§ 4 When the Owner has satisfied the conditions in Section 3, the Surety shall promptly and at the Surety's expense defend, indemnify and hold harmless the Owner against a duly tendered claim, demand, lien or suit.

§ 5 The Surety's obligations to a Claimant under this Bond shall arise after the following:

§ 5.1 Claimants, who do not have a direct contract with the Contractor,

.1 have furnished a written notice of non-payment to the Contractor, stating with substantial accuracy the amount claimed and the name of the party to whom the materials were, or equipment was, furnished or supplied or for whom the labor was done or performed, within ninety (90) days after having last performed labor or last furnished materials or equipment included in the Claim; and

.2 have sent a Claim to the Surety (at the address described in Section 13).

§ 5.2 Claimants, who are employed by or have a direct contract with the Contractor, have sent a Claim to the Surety (at the address described in Section 13).

§ 6 If a notice of non-payment required by Section 5.1.1 is given by the Owner to the Contractor, that is sufficient to satisfy a Claimant's obligation to furnish a written notice of non-payment under Section 5.1.1.

§ 7 When a Claimant has satisfied the conditions of Sections 5.1 or 5.2, whichever is applicable, the Surety shall promptly and at the Surety's expense take the following actions:

§ 7.1 Send an answer to the Claimant, with a copy to the Owner, within sixty (60) days after receipt of the Claim, stating the amounts that are undisputed and the basis for challenging any amounts that are disputed; and

§ 7.2 Pay or arrange for payment of any undisputed amounts.

§ 7.3 The Surety's failure to discharge its obligations under Section 7.1 or Section 7.2 shall not be deemed to constitute a waiver of defenses the Surety or Contractor may have or acquire as to a Claim, except as to undisputed amounts for which the Surety and Claimant have reached agreement. If, however, the Surety fails to discharge its obligations under Section 7.1 or Section 7.2, the Surety shall indemnify the Claimant for the reasonable attorney's fees the Claimant incurs thereafter to recover any sums found to be due and owing to the Claimant.

§ 8 The Surety's total obligation shall not exceed the amount of this Bond, plus the amount of reasonable attorney's fees provided under Section 7.3, and the amount of this Bond shall be credited for any payments made in good faith by the Surety.

§ 9 Amounts owed by the Owner to the Contractor under the Construction Contract shall be used for the performance of the Construction Contract and to satisfy claims, if any, under any construction performance bond. By the Contractor furnishing and the Owner accepting this Bond, they agree that all funds earned by the Contractor in the performance of the Construction Contract are dedicated to satisfy obligations of the Contractor and Surety under this Bond, subject to the Owner's priority to use the funds for the completion of the work.

AIA Document A312 – 2010 Payment Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:46:38 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (1483238469)

§ 10 The Surety shall not be liable to the Owner, Claimants or others for obligations of the Contractor that are unrelated to the Construction Contract. The Owner shall not be liable for the payment of any costs or expenses of any Claimant under this Bond, and shall have under this Bond no obligation to make payments to, or give notice on behalf of, Claimants or otherwise have any obligations to Claimants under this Bond.

§ 11 The Surety hereby waives notice of any change, including changes of time, to the Construction Contract or to related subcontracts, purchase orders and other obligations.

§ 12 No suit or action shall be commenced by a Claimant under this Bond other than in a court of competent jurisdiction in the state in which the project that is the subject of the Construction Contract is located or after the expiration of one year from the date (1) on which the Claimant sent a Claim to the Surety pursuant to Section 5.1.2 or 5.2, or (2) on which the last labor or service was performed by anyone or the last materials or equipment were furnished by anyone under the Construction Contract, whichever of (1) or (2) first occurs. If the provisions of this Paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall be applicable.

§ 13 Notice and Claims to the Surety, the Owner or the Contractor shall be mailed or delivered to the address shown on the page on which their signature appears. Actual receipt of notice or Claims, however accomplished, shall be sufficient compliance as of the date received.

§ 14 When this Bond has been furnished to comply with a statutory or other legal requirement in the location where the construction was to be performed, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

§ 15 Upon request by any person or entity appearing to be a potential beneficiary of this Bond, the Contractor and Owner shall promptly furnish a copy of this Bond or shall permit a copy to be made.

§ 16 Definitions

§ 16.1 Claim. A written statement by the Claimant including at a minimum:

.1 the name of the Claimant;
.2 the name of the person for whom the labor was done, or materials or equipment furnished;
.3 a copy of the agreement or purchase order pursuant to which labor, materials or equipment was furnished for use in the performance of the Construction Contract;
.4 a brief description of the labor, materials or equipment furnished;
.5 the date on which the Claimant last performed labor or last furnished materials or equipment for use in the performance of the Construction Contract;
.6 the total amount earned by the Claimant for labor, materials or equipment furnished as of the date of the Claim;
.7 the total amount of previous payments received by the Claimant; and
.8 the total amount due and unpaid to the Claimant for labor, materials or equipment furnished as of the date of the Claim.

§ 16.2 Claimant. An individual or entity having a direct contract with the Contractor or with a subcontractor of the Contractor to furnish labor, materials or equipment for use in the performance of the Construction Contract. The term Claimant also includes any individual or entity that has rightfully asserted a claim under an applicable mechanic's lien or similar statute against the real property upon which the Project is located. The intent of this Bond shall be to include without limitation in the terms "labor, materials or equipment" that part of water, gas, power, light, heat, oil, gasoline, telephone service or rental equipment used in the Construction Contract, architectural and engineering services required for performance of the work of the Contractor and the Contractor's subcontractors, and all other items for which a mechanic's lien may be asserted in the jurisdiction where the labor, materials or equipment were furnished.

§ 16.3 Construction Contract. The agreement between the Owner and Contractor identified on the cover page, including all Contract Documents and all changes made to the agreement and the Contract Documents.

Init.
/
AIA Document A312 – 2010 Payment Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:46:38 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes: (1483238469)

§ 16.4 Owner Default. Failure of the Owner, which has not been remedied or waived, to pay the Contractor as required under the Construction Contract or to perform and complete or comply with the other material terms of the Construction Contract.

§ 16.5 Contract Documents. All the documents that comprise the agreement between the Owner and Contractor.

§ 17 If this Bond is issued for an agreement between a Contractor and subcontractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

§ 18 Modifications to this bond are as follows:

(Space is provided below for additional signatures of added parties, other than those appearing on the cover page.)

CONTRACTOR AS PRINCIPAL		**SURETY**	
Company:	*(Corporate Seal)*	Company:	*(Corporate Seal)*
Signature:		Signature:	
Name and Title:		Name and Title:	
Address:		Address:	

Init.
/
AIA Document A312 – 2010 Payment Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:46:38 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(1483238469)

AIA® Document A312® – 2010

Performance Bond

CONTRACTOR:
(Name, legal status and address)

SURETY:
(Name, legal status and principal place of business)

OWNER:
(Name, legal status and address)
Jordan School District
7905 South Redwood Road
West Jordan, Utah 84088

CONSTRUCTION CONTRACT
Date:
Amount: $
Description:
(Name and location)

BOND
Date:
(Not earlier than Construction Contract Date)

Amount: $
Modifications to this Bond: ☐ None ☐ See Section 16

CONTRACTOR AS PRINCIPAL	**SURETY**
Company: *(Corporate Seal)*	Company: *(Corporate Seal)*
Signature: _____	Signature: _____
Name and Title:	Name and Title:

(Any additional signatures appear on the last page of this Performance Bond.)

(FOR INFORMATION ONLY — Name, address and telephone)
AGENT or **BROKER:**

OWNER'S REPRESENTATIVE:
(Architect, Engineer or other party:)

ADDITIONS AND DELETIONS:
The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

Init.
/
AIA Document A312 – 2010 Performance Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:43:11 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(1248014155)

§ 1 The Contractor and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to the Owner for the performance of the Construction Contract, which is incorporated herein by reference.

§ 2 If the Contractor performs the Construction Contract, the Surety and the Contractor shall have no obligation under this Bond, except when applicable to participate in a conference as provided in Section 3.

§ 3 If there is no Owner Default under the Construction Contract, the Surety's obligation under this Bond shall arise after

.1 the Owner first provides notice to the Contractor and the Surety that the Owner is considering declaring a Contractor Default. Such notice shall indicate whether the Owner is requesting a conference among the Owner, Contractor and Surety to discuss the Contractor's performance. If the Owner does not request a conference, the Surety may, within five (5) business days after receipt of the Owner's notice, request such a conference. If the Surety timely requests a conference, the Owner shall attend. Unless the Owner agrees otherwise, any conference requested under this Section 3.1 shall be held within ten (10) business days of the Surety's receipt of the Owner's notice. If the Owner, the Contractor and the Surety agree, the Contractor shall be allowed a reasonable time to perform the Construction Contract, but such an agreement shall not waive the Owner's right, if any, subsequently to declare a Contractor Default;

.2 the Owner declares a Contractor Default, terminates the Construction Contract and notifies the Surety; and

.3 the Owner has agreed to pay the Balance of the Contract Price in accordance with the terms of the Construction Contract to the Surety or to a contractor selected to perform the Construction Contract.

§ 4 Failure on the part of the Owner to comply with the notice requirement in Section 3.1 shall not constitute a failure to comply with a condition precedent to the Surety's obligations, or release the Surety from its obligations, except to the extent the Surety demonstrates actual prejudice.

§ 5 When the Owner has satisfied the conditions of Section 3, the Surety shall promptly and at the Surety's expense take one of the following actions:

§ 5.1 Arrange for the Contractor, with the consent of the Owner, to perform and complete the Construction Contract;

§ 5.2 Undertake to perform and complete the Construction Contract itself, through its agents or independent contractors;

§ 5.3 Obtain bids or negotiated proposals from qualified contractors acceptable to the Owner for a contract for performance and completion of the Construction Contract, arrange for a contract to be prepared for execution by the Owner and a contractor selected with the Owner's concurrence, to be secured with performance and payment bonds executed by a qualified surety equivalent to the bonds issued on the Construction Contract, and pay to the Owner the amount of damages as described in Section 7 in excess of the Balance of the Contract Price incurred by the Owner as a result of the Contractor Default; or

§ 5.4 Waive its right to perform and complete, arrange for completion, or obtain a new contractor and with reasonable promptness under the circumstances:

.1 After investigation, determine the amount for which it may be liable to the Owner and, as soon as practicable after the amount is determined, make payment to the Owner; or

.2 Deny liability in whole or in part and notify the Owner, citing the reasons for denial.

§ 6 If the Surety does not proceed as provided in Section 5 with reasonable promptness, the Surety shall be deemed to be in default on this Bond seven days after receipt of an additional written notice from the Owner to the Surety demanding that the Surety perform its obligations under this Bond, and the Owner shall be entitled to enforce any remedy available to the Owner. If the Surety proceeds as provided in Section 5.4, and the Owner refuses the payment or the Surety has denied liability, in whole or in part, without further notice the Owner shall be entitled to enforce any remedy available to the Owner.

Init.
/
AIA Document A312 – 2010 Performance Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:43:11 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(1248014155)

§ 7 If the Surety elects to act under Section 5.1, 5.2 or 5.3, then the responsibilities of the Surety to the Owner shall not be greater than those of the Contractor under the Construction Contract, and the responsibilities of the Owner to the Surety shall not be greater than those of the Owner under the Construction Contract. Subject to the commitment by the Owner to pay the Balance of the Contract Price, the Surety is obligated, without duplication, for

.1 the responsibilities of the Contractor for correction of defective work and completion of the Construction Contract;

.2 additional legal, design professional and delay costs resulting from the Contractor's Default, and resulting from the actions or failure to act of the Surety under Section 5; and

.3 liquidated damages, or if no liquidated damages are specified in the Construction Contract, actual damages caused by delayed performance or non-performance of the Contractor.

§ 8 If the Surety elects to act under Section 5.1, 5.3 or 5.4, the Surety's liability is limited to the amount of this Bond.

§ 9 The Surety shall not be liable to the Owner or others for obligations of the Contractor that are unrelated to the Construction Contract, and the Balance of the Contract Price shall not be reduced or set off on account of any such unrelated obligations. No right of action shall accrue on this Bond to any person or entity other than the Owner or its heirs, executors, administrators, successors and assigns.

§ 10 The Surety hereby waives notice of any change, including changes of time, to the Construction Contract or to related subcontracts, purchase orders and other obligations.

§ 11 Any proceeding, legal or equitable, under this Bond may be instituted in any court of competent jurisdiction in the location in which the work or part of the work is located and shall be instituted within two years after a declaration of Contractor Default or within two years after the Contractor ceased working or within two years after the Surety refuses or fails to perform its obligations under this Bond, whichever occurs first. If the provisions of this Paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall be applicable.

§ 12 Notice to the Surety, the Owner or the Contractor shall be mailed or delivered to the address shown on the page on which their signature appears.

§ 13 When this Bond has been furnished to comply with a statutory or other legal requirement in the location where the construction was to be performed, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

§ 14 Definitions

§ 14.1 Balance of the Contract Price. The total amount payable by the Owner to the Contractor under the Construction Contract after all proper adjustments have been made, including allowance to the Contractor of any amounts received or to be received by the Owner in settlement of insurance or other claims for damages to which the Contractor is entitled, reduced by all valid and proper payments made to or on behalf of the Contractor under the Construction Contract.

§ 14.2 Construction Contract. The agreement between the Owner and Contractor identified on the cover page, including all Contract Documents and changes made to the agreement and the Contract Documents.

§ 14.3 Contractor Default. Failure of the Contractor, which has not been remedied or waived, to perform or otherwise to comply with a material term of the Construction Contract.

§ 14.4 Owner Default. Failure of the Owner, which has not been remedied or waived, to pay the Contractor as required under the Construction Contract or to perform and complete or comply with the other material terms of the Construction Contract.

§ 14.5 Contract Documents. All the documents that comprise the agreement between the Owner and Contractor.

AIA Document A312 – 2010 Performance Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:43:11 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(1248014155)

§ 15 If this Bond is issued for an agreement between a Contractor and subcontractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

§ 16 Modifications to this bond are as follows:

(Space is provided below for additional signatures of added parties, other than those appearing on the cover page.)

CONTRACTOR AS PRINCIPAL		**SURETY**	
Company:	*(Corporate Seal)*	Company:	*(Corporate Seal)*
Signature:		Signature:	
Name and Title:		Name and Title:	
Address:		Address:	

Init.
/

AIA Document A312 – 2010 Performance Bond. Copyright © 2010. All rights reserved. "The American Institute of Architects," "American Institute of Architects," "AIA," the AIA Logo, and "AIA Contract Documents" are trademarks of The American Institute of Architects. This document was produced at 17:43:11 ET on 01/10/2024 under Order No.4104246335 which expires on 10/23/2024, is not for resale, is licensed for one-time use only, and may only be used in accordance with the AIA Contract Documents® Terms of Service. To report copyright violations, e-mail docinfo@aiacontracts.com.
User Notes:
(1248014155)

SECTION 011000 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Project information.
2. Work covered by Contract Documents.
3. Owner-furnished/Contractor-installed (OFCI) products.
4. Owner-furnished/Owner-installed (OFOI) products.
5. Contractor's use of site and premises.
6. Coordination with occupants.
7. Work restrictions.
8. Specification and Drawing conventions.
9. Miscellaneous provisions.

B. Related Requirements:

1. Section 015000 "Temporary Facilities and Controls" for limitations and procedures governing temporary use of Owner's facilities.
2. Section 017300 "Execution" for coordination of Owner-installed products.

1.3 PROJECT INFORMATION

A. Project Identification: Riverton Elementary School Remodel.

1. Project Location: 13150 South 1830 West Riverton, Utah 84065.

B. Owner: Jordan School District, 7905 South Redwood Road, West Jordan, Utah 84088.

1. Owner's Representative: Ian Roberts.

C. Architect: GSBS Architects.

1. Architect's Representative: Clio Rayner.

D. Architect's Consultants: Architect has retained the following design professionals, who have prepared designated portions of the Contract Documents:

1. Structural Engineering: Reaveley Engineers and Associates.

    a. Structural Engineer’s Representative: Oliver Burt.

2. Mechanical Engineer: Olsen & Peterson Consulting.

    a. Representative: Mitch Tervort.

3. Electrical Engineer: BNA Consulting.

    a. Representative: Jerry Burnside.

E. Web-Based Project Software: Project software will be used for purposes of managing communication and documents during the construction stage.

1. See Section 013100 "Project Management and Coordination." for requirements for using web-based Project software.

1.4 WORK COVERED BY CONTRACT DOCUMENTS

A. The Work of Project is defined by the Contract Documents and includes, but is not limited to, the following:

1. The project is a remodel to a single-story elementary school built in 1994. It includes exterior and interior lighting replacement, ceiling replacement throughout, office relocation/remodel and addition, limited remodel to other rooms within the school, new horn strobes and exit signs throughout, new fire alarm devices, A/V upgrades, mechanical upgrades and miscellaneous other Work indicated in the Contract Documents. The building is an E occupancy. The existing building structure includes steel and wood framing with masonry walls.

B. Type of Contract:

1. Project will be constructed under a single prime contract.

1.5 OWNER-FURNISHED/CONTRACTOR-INSTALLED (OFCI) PRODUCTS

A. Owner's Responsibilities: Owner will furnish products indicated and perform the following, as applicable:

1. Provide to Contractor Owner-reviewed Product Data, Shop Drawings, and Samples.
2. Provide for delivery of Owner-furnished products to Project site.
3. Upon delivery, inspect, with Contractor present, delivered items.

    a. If Owner-furnished products are damaged, defective, or missing, arrange for replacement.

4. Obtain manufacturer's inspections, service, and warranties.

5. Inform Contractor of earliest available delivery date for Owner-furnished products.

B. Contractor's Responsibilities: The Work includes the following, as applicable:

1. Designate delivery dates of Owner-furnished products in Contractor's construction schedule, utilizing Owner-furnished earliest available delivery dates.
2. Review Owner-reviewed Product Data, Shop Drawings, and Samples, noting discrepancies and other issues in providing for Owner-furnished products in the Work.
3. Receive, unload, handle, store, protect, and install Owner-furnished products.
4. Make building services connections for Owner-furnished products.
5. Protect Owner-furnished products from damage during storage, handling, and installation and prior to Substantial Completion.
6. Repair or replace Owner-furnished products damaged following receipt.

C. Owner-Furnished/Contractor-Installed (OFCI) Products:

1. Toilet Room Accessories described in Division 9 Section “Toilet Bath and Laundry Accessories” as OFCI.

1.6 OWNER-FURNISHED/OWNER-INSTALLED (OFOI) PRODUCTS

A. The Owner will furnish and install products indicated.

B. Owner-Furnished/Owner-Installed (OFOI) Products:

1. Carpet, walk-off carpet, and carpet base where indicated on Drawings.

1.7 CONTRACTOR'S USE OF SITE AND PREMISES

A. Restricted Use of Site: Contractor shall have limited use of Project site for construction operations as indicated on Drawings by the Contract limits and as indicated by requirements of this Section.

B. Limits on Use of Site: Limit use of Project site to areas within the Contract limits indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.

1. Driveways, Walkways and Entrances: Keep driveways loading areas, and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or for storage of materials.

a. Schedule deliveries to minimize use of driveways and entrances by construction operations.
b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.

C. Condition of Existing Building: Maintain portions of existing building affected by construction operations in a weathertight condition throughout construction period. Repair damage caused by construction operations.

D. Condition of Existing Grounds: Maintain portions of existing grounds, landscaping, and hardscaping affected by construction operations throughout construction period. Repair damage caused by construction operations.

1.8 COORDINATION WITH OCCUPANTS

A. Partial Owner Occupancy: Owner will occupy the premises during entire construction period, with the exception of areas under construction. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's operations. Maintain existing exits unless otherwise indicated.

1. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and authorities having jurisdiction.
2. Provide not less than 72 hours' notice to Owner of activities that will affect Owner's operations.

B. Owner Limited Occupancy of Completed Areas of Construction: Owner reserves the right to occupy and to place and install equipment in completed portions of the Work, prior to Substantial Completion of the Work, provided such occupancy does not interfere with completion of the Work. Such placement of equipment and limited occupancy shall not constitute acceptance of the total Work.

1. Architect will prepare a Certificate of Substantial Completion for each specific portion of the Work to be occupied prior to Owner acceptance of the completed Work.
2. Obtain a Certificate of Occupancy from authorities having jurisdiction before limited Owner occupancy.
3. Before limited Owner occupancy, mechanical and electrical systems shall be fully operational, and required tests and inspections shall be successfully completed. On occupancy, Owner will operate and maintain mechanical and electrical systems serving occupied portions of Work.
4. On occupancy, Owner will assume responsibility for maintenance and custodial service for occupied portions of Work.

1.9 WORK RESTRICTIONS

A. Comply with restrictions on construction operations.

1. Comply with limitations on use of public streets, work on public streets, rights of way, and other requirements of authorities having jurisdiction.

B. On-Site Work Hours: Limit work to between 7:00 a.m. to 7:00 p.m., Monday through Friday, unless otherwise indicated. Work hours may be modified to meet Project requirements if approved by Owner and authorities having jurisdiction.

1. Weekend Hours: Notify Owner three days prior and obtain approval on hours.

2. Early Morning Hours: Notify Owner three days prior and obtain approval on hours.
3. Hours for Utility Shutdowns: Notify Owner three days prior and obtain approval on hours.
4. Hours for Core Drilling: Notify Owner three days prior and obtain approval on hours.

C. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging for temporary utility services according to requirements indicated:

1. Notify Architect and Owner not less than three days in advance of proposed utility interruptions.
2. Obtain Owner's written permission before proceeding with utility interruptions.

D. Noise, Vibration, Dust, and Odors: Coordinate operations that may result in high levels of noise and vibration, dust, odors, or other disruption to Owner occupancy with Owner.

1. Notify Architect and Owner not less than three days in advance of proposed disruptive operations.
2. Obtain Owner's written permission before proceeding with disruptive operations.

E. Smoking and Controlled Substance Restrictions: Use of tobacco products and other controlled substances on Owner's property is not permitted.

F. Employee Identification: Provide identification tags for Contractor personnel working on Project site. Require personnel to use identification tags at all times.

G. Employee Screening: Comply with Owner's requirements for drug and background screening of Contractor personnel working on Project site.

1. Maintain list of approved screened personnel with Owner's representative.

1.10 SPECIFICATION AND DRAWING CONVENTIONS

A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:

1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
2. Text Color: Text used in the Specifications, including units of measure, manufacturer and product names, and other text may appear in multiple colors or underlined as part of a hyperlink; no emphasis is implied by text with these characteristics.
3. Hypertext: Text used in the Specifications may contain hyperlinks. Hyperlinks may allow for access to linked information that is not residing in the Specifications. Unless otherwise indicated, linked information is not part of the Contract Documents.
4. Specification requirements are to be performed by Contractor unless specifically stated otherwise.

B. Division 00 Contracting Requirements: General provisions of the Contract, including General and Supplementary Conditions, apply to all Sections of the Specifications.

C. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.

D. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:

1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.
2. Abbreviations: Materials and products are identified by abbreviations scheduled on Drawings and published as part of the U.S. National CAD Standard.
3. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 011000

SECTION 012100 - ALLOWANCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements governing allowances.

B. Types of allowances include the following:

1. Contingency allowances.

C. Related Requirements:

1. Section 012200 "Unit Prices" for procedures for using unit prices, including adjustment of quantity allowances when applicable.
2. Section 012600 "Contract Modification Procedures" for procedures for submitting and handling Change Orders.
3. Section 014000 "Quality Requirements" for procedures governing the use of allowances for field testing by an independent testing agency.

1.3 DEFINITIONS

A. Allowance: A quantity of work or dollar amount included in the Contract, established in lieu of additional requirements, used to defer selection of actual materials and equipment to a later date when direction will be provided to Contractor. If necessary, additional requirements will be issued by Change Order.

1.4 SELECTION AND PURCHASE

A. At the earliest practical date after award of the Contract, advise Architect of the date when final selection, or purchase and delivery, of each product or system described by an allowance must be completed by the Owner to avoid delaying the Work.

B. At Architect's request, obtain proposals for each allowance for use in making final selections. Include recommendations that are relevant to performing the Work.

C. Purchase products and systems selected by Architect from the designated supplier.

1.5 ACTION SUBMITTALS

A. Submit proposals for purchase of products or systems included in allowances in the form specified for Change Orders.

1.6 INFORMATIONAL SUBMITTALS

A. Submit invoices or delivery slips to show actual quantities of materials delivered to the site for use in fulfillment of each allowance.

B. Submit time sheets and other documentation to show labor time and cost for installation of allowance items that include installation as part of the allowance.

C. Coordinate and process submittals for allowance items in same manner as for other portions of the Work.

1.7 CONTINGENCY ALLOWANCES

A. Use the contingency allowance only as directed by Architect for Owner's purposes and only by Change Orders that indicate amounts to be charged to the allowance.

B. Contractor's overhead, profit, and related costs for products and equipment ordered by Owner under the contingency allowance are included in the allowance and are not part of the Contract Sum. These costs include delivery, installation, taxes, insurance, equipment rental, and similar costs.

C. Change Orders authorizing use of funds from the contingency allowance will include Contractor's related costs and reasonable overhead and profit.

D. At Project closeout, credit unused amounts remaining in the contingency allowance to Owner by Change Order.

1.8 TESTING AND INSPECTING ALLOWANCES

A. Testing and inspecting allowances include the cost of engaging testing agencies, actual tests and inspections, and reporting results.

B. The allowance does not include incidental labor required to assist the testing agency or costs for retesting if previous tests and inspections result in failure. The cost for incidental labor to assist the testing agency shall be included in the Contract Sum.

C. Costs of testing and inspection services not specifically required by the Contract Documents are Contractor responsibilities and are not included in the allowance.

D. At Project closeout, credit unused amounts remaining in the testing and inspecting allowance to Owner by Change Order.

1.9 ADJUSTMENT OF ALLOWANCES

A. Allowance Adjustment: To adjust allowance amounts, prepare a Change Order proposal based on the difference between purchase amount and the allowance, multiplied by final measurement of work-in-place where applicable. If applicable, include reasonable allowances for cutting losses, tolerances, mixing wastes, normal product imperfections, required maintenance materials, and similar margins.

1. Include installation costs in purchase amount only where indicated as part of the allowance.
2. If requested, prepare explanation and documentation to substantiate distribution of overhead costs and other markups.
3. Submit substantiation of a change in scope of Work, if any, claimed in Change Orders related to unit-cost allowances.
4. Owner reserves the right to establish the quantity of work-in-place by independent quantity survey, measure, or count.

B. Submit claims for increased costs due to a change in the scope or nature of the allowance described in the Contract Documents, whether for the purchase order amount or Contractor's handling, labor, installation, overhead, and profit.

1. Do not include Contractor's or subcontractor's indirect expense in the Change Order cost amount unless it is clearly shown that the nature or extent of Work has changed from what could have been foreseen from information in the Contract Documents.
2. No change to Contractor's indirect expense is permitted for selection of higher- or lower-priced materials or systems of the same scope and nature as originally indicated.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine products covered by an allowance promptly on delivery for damage or defects. Return damaged or defective products to manufacturer for replacement.

3.2 PREPARATION

A. Coordinate materials and their installation for each allowance with related materials and installations to ensure that each allowance item is completely integrated and interfaced with related work.

3.3 SCHEDULE OF ALLOWANCES

A. Allowance No. 1: Contingency Allowance: Include a contingency allowance of $200,000.00 for use according to Owner's written instructions.

B. Allowance No. 2: Supplemental Steel Allowance: Include an allowance of $10,000 for steel angle bracing at new operable (folding) panel partition at Multi-Purpose Room 112, identified in Alternate No. 1. Existing steel bracing is indicated on original construction documents but has not been field verified. Additional bracing may be required., as detailed on Drawings.

1. Coordinate allowance adjustment with unit-price requirements in Section 012200 "Unit Prices."

END OF SECTION 012100

SECTION 012200 - UNIT PRICES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for unit prices.

B. Related Requirements:

1. Section 012100 "Allowances" for procedures for using unit prices to adjust quantity allowances.
2. Section 012600 "Contract Modification Procedures" for procedures for submitting and handling Change Orders.
3. Section 014000 "Quality Requirements" for field testing by an independent testing agency.

1.3 DEFINITIONS

A. Unit price is an amount incorporated into the Agreement, applicable during the duration of the Work as a price per unit of measurement for materials, equipment, or services, or a portion of the Work, added to or deducted from the Contract Sum by appropriate modification, if the scope of Work or estimated quantities of Work required by the Contract Documents are increased or decreased.

1.4 PROCEDURES

A. Unit prices include all necessary material, plus cost for delivery, installation, insurance, applicable taxes, overhead, and profit.

B. Measurement and Payment: See individual Specification Sections for work that requires establishment of unit prices. Methods of measurement and payment for unit prices are specified in those Sections.

C. Owner reserves the right to reject Contractor's measurement of work-in-place that involves use of established unit prices and to have this work measured, at Owner's expense, by an independent surveyor acceptable to Contractor.

D. List of Unit Prices: A schedule of unit prices is included in Part 3. Specification Sections referenced in the Part 3 "Schedule of Unit Prices" Article contain requirements for materials described under each unit price.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF UNIT PRICES

A. Unit Price No. 1: Cutting and patching of concrete slabs-on-grade.

1. Description: Cutting of new or existing concrete slabs-on-grade up to 6 inches thick, removal and excavation as required, and subsequent backfill, compaction, and patching of concrete in accordance with Section 017300 "Execution." not otherwise indicated in the Contract Documents.
2. Unit of Measurement: Four square feet of concrete removed.

B. Unit Price No.2: Access Doors.

1. Description: Access doors located in gypsum board ceilings or walls in accordance with Section 083113 "Access Doors and Frames."
2. Unit of Measurement: One access door installed and painted to match ceiling or wall surface.
3. Quantity Allowance: Coordinate unit price with allowance adjustment requirements in Section 012100 "Allowances."

C. Unit Price No. 3: Steel bracing for new operable (folding) panel partition described in Alternate No. 1.

1. Description: Steel angle bracing, above ceiling, for support of operable panel partition, as indicated in structural drawings and specified in Section 055000 “Metal Fabrications.”
2. Unit of Measurement: Two (2) horizontal and two (2) diagonal braces as indicated on structural detail C4/SF502, fabricated, primed, and installed.

END OF SECTION 012200

SECTION 012300 - ALTERNATES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for alternates.

1.3 DEFINITIONS

A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the bidding requirements that may be added to or deducted from the base bid amount if the Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.

1. Alternates described in this Section are part of the Work only if enumerated in the Agreement.
2. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternates into the Work. No other adjustments are made to the Contract Sum.

1.4 PROCEDURES

A. Coordination: Revise or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.

1. Include, as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation, whether or not indicated as part of alternate.

B. Execute accepted alternates under the same conditions as other Work of the Contract.

C. Schedule: A Part 3 "Schedule of Alternates" Article is included at the end of this Section. Specification Sections referenced in schedule contain requirements for materials necessary to achieve the work described under each alternate.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES

A. Alternate No. 1: Replace Operable (Folding) Partition in Multi-Purpose Room 112:

1. Base Bid: No work to operable partition.
2. Alternate: Remove and replace existing operable partition in Multi-Purpose Room 112 with new operable partition as indicated on Drawing sheets A101a, A131a, A804, and E301a and as specified in Section 102239 "Folding Panel Partition." Alternate includes metal framing, gypsum board soffit and sound control, and electrical connections as indicated on Drawings noted above and in corresponding specification sections.
   a. Cost for potential new support steel, indicated on Drawing sheet SF502 and Section 055000 “Metal Fabrications”, will be handled as an allowance, see Section 012100 “Allowances.” Identify unit cost for support steel as described in Section 012200 “Unit Prices.”

B. Alternate No. 2: Upgrade Make-up Air System at Kitchen 124:

1. Base Bid: No work.
2. Alternate: Remove and replace the existing gas-fired/evaporative cooled make-up air unit and curb complete and provide new gas-fired/DX make-up air unit with factory curb and new controls, as indicated on Drawing Sheet M402 and as specified in Division 23 sections. Patch and repair existing built-up roof system, including new roof insulation where required, as indicated on Drawing Sheet A101a. Provide new roof deck infill and edge support as indicated on Drawing Sheet

C. Alternate No. 3: Upgrade Automatic Temperature Control (ATC) System:

1. Base Bid: Automatic temperature controls as required for overall project base bid scope of work.
2. Alternate: Upgrade of existing ATC system including new space temperature sensors/thermostats, new VAV controllers, and new valve or damper controllers, as indicated on Drawing M403 and as specified in Division 23 sections. Provided and installed by Utah Yamas Controls as extension of existing system (no substitutions).

D. Alternate No. 4: Replace Partitions, Counters, Mirrors, Sinks, and Sink Fixtures at Girls and Boys (Student) Restrooms (Room numbers - 14, 15, 19, 20, 63, 64, 78, 79, 83, 84, 103, 104):

1. Base Bid: Existing partitions, counters, mirrors, sinks, and sink fixtures at Girls and Boys Restrooms noted above to remain as is, as indicated on Drawings AD101a, AD101b, and AD101c.
2. Alternate: Remove and replace existing counters, mirrors, sinks and sink fixtures as indicated on Drawings AD101a, AD101b, AD101c, A101a, A101b, A101c, AE804, PD101a, PD101b, PD101c, P101a, P101b, P101c and as specified in Sections 088300

"Mirrors", 102113.17 "Phenolic-Core Toilet Compartments", 123661.16 "Solid Surface Countertops", 220000 "Plumbing."

E. Alternate No. 5: Replace Skylights Throughout Building:

1. Base Bid: No work to skylights.
2. Alternate: Remove and replace place skylights nine (9) pyramidal, (3) shed, and (2) ridge type skylights as indicated on Drawings AE141 and AE806 and Section 084523 "Fiberglass Sandwich Panel Assemblies." Patch and repair existing built-up roofing and flashing at existing curbs as required for weathertight and waterproof installation.

END OF SECTION 012300

SECTION 012500 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for substitutions.

B. Related Requirements:

1. Section 012100 "Allowances" for products selected under an allowance.
2. Section 016000 "Product Requirements" for requirements for submitting comparable product submittals for products by listed manufacturers.

1.3 DEFINITIONS

A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents and proposed by Contractor.

1. Substitutions for Cause: Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product, regulatory changes, or unavailability of required warranty terms.
2. Substitutions for Convenience: Changes proposed by Contractor or Owner that are not required in order to meet other Project requirements but may offer advantage to Contractor or Owner.

1.4 ACTION SUBMITTALS

A. Substitution Requests: Submit three copies of each request for consideration. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.

1. Substitution Request Form: Use CSI Form 13.1A.
2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:

a. Statement indicating why specified product or fabrication or installation cannot be provided, if applicable.
b. Coordination information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors, that will be necessary to accommodate proposed substitution.

c. Detailed comparison of significant qualities of proposed substitution with those of the Work specified. Include annotated copy of applicable Specification Section. Significant qualities may include attributes such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
e. Samples, where applicable or requested.
f. Certificates and qualification data, where applicable or requested.
g. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners.
h. Material test reports from a qualified testing agency indicating and interpreting test results for compliance with requirements indicated.
i. Research reports evidencing compliance with building code in effect for Project, from ICC-ES.
j. Detailed comparison of Contractor's construction schedule using proposed substitution with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
k. Cost information, including a proposal of change, if any, in the Contract Sum.
l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents except as indicated in substitution request, is compatible with related materials, and is appropriate for applications indicated.
m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.

3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within seven days of receipt of a request for substitution. Architect will notify Contractor of acceptance or rejection of proposed substitution within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.

a. Forms of Acceptance: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.
b. Use product specified if Architect does not issue a decision on use of a proposed substitution within time allocated.

1.5 QUALITY ASSURANCE

A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.

1.6 PROCEDURES

A. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

PART 2 - PRODUCTS

2.1 SUBSTITUTIONS

A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals.

1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:

a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
b. Substitution request is fully documented and properly submitted.
c. Requested substitution will not adversely affect Contractor's construction schedule.
d. Requested substitution has received necessary approvals of authorities having jurisdiction.
e. Requested substitution is compatible with other portions of the Work.
f. Requested substitution has been coordinated with other portions of the Work.
g. Requested substitution provides specified warranty.
h. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

B. Substitutions for Convenience: Not allowed unless otherwise indicated.

C. Substitutions for Convenience: Architect will consider requests for substitution if received within 5 days after commencement of the Work the Notice of Award. Requests received after that time may be considered or rejected at discretion of Architect.

1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:

a. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.

b. Requested substitution does not require extensive revisions to the Contract Documents.
c. Requested substitution is consistent with the Contract Documents and will produce indicated results.
d. Substitution request is fully documented and properly submitted.
e. Requested substitution will not adversely affect Contractor's construction schedule.
f. Requested substitution has received necessary approvals of authorities having jurisdiction.
g. Requested substitution is compatible with other portions of the Work.
h. Requested substitution has been coordinated with other portions of the Work.
i. Requested substitution provides specified warranty.
j. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

PART 3 - EXECUTION (Not Used)

END OF SECTION 012500

SECTION 012600 – CONTRACT MODIFICATION PRODEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for handling and processing Contract modifications.

B. Related Requirements:

1. Section 012500 "Substitution Procedures" for administrative procedures for handling requests for substitutions made after the Contract award.

1.3 MINOR CHANGES IN THE WORK

A. Architect will issue supplemental instructions authorizing minor changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, on AIA Document G710, "Architect's Supplemental Instructions."

1.4 PROPOSAL REQUESTS

A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.

1. Work Change Proposal Requests issued by Architect are not instructions either to stop work in progress or to execute the proposed change.
2. Within time specified in Proposal Request or 14 days, when not otherwise specified, after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.

a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
c. Include costs of labor and supervision directly attributable to the change.

d. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
e. Quotation Form: Use forms provided by Owner forms acceptable to Architect.

B. Contractor-Initiated Proposals: If latent or changed conditions require modifications to the Contract, Contractor may initiate a claim by submitting a request for a change to Architect.

1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
4. Include costs of labor and supervision directly attributable to the change.
5. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
6. Comply with requirements in Section 012500 "Substitution Procedures" if the proposed change requires substitution of one product or system for product or system specified.
7. Proposal Request Form: Use form provided by Owner form acceptable to Architect.

1.5 ADMINISTRATIVE CHANGE ORDERS

A. Allowance Adjustment: See Section 012100 "Allowances" for administrative procedures for preparation of Change Order Proposal for adjusting the Contract Sum to reflect actual costs of allowances.

1.6 CHANGE ORDER PROCEDURES

A. On Owner's approval of a Work Changes Proposal Request, Architect will issue a Change Order for signatures of Owner and Contractor on AIA Document G701.

1.7 CONSTRUCTION CHANGE DIRECTIVE

A. Construction Change Directive: Architect may issue a Construction Change Directive on AIA Document G714. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.

1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.

B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.

1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012600

SECTION 012900 - PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements necessary to prepare and process Applications for Payment.

B. Related Requirements:

1. Section 012100 "Allowances" for procedural requirements governing the handling and processing of allowances.
2. Section 012600 "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.

1.3 DEFINITIONS

A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

1.4 SCHEDULE OF VALUES

A. Coordination: Coordinate preparation of the schedule of values with preparation of Contractor's construction schedule.

1. Coordinate line items in the schedule of values with other required administrative forms and schedules, including the following:

a. Application for Payment forms with continuation sheets.
b. Submittal schedule.
c. Items required to be indicated as separate activities in Contractor's construction schedule.

2. Submit the schedule of values to Architect at earliest possible date, but no later than seven days before the date scheduled for submittal of initial Applications for Payment.

B. Format and Content: Use Project Manual table of contents as a guide to establish line items for the schedule of values. Provide at least one line item for each Specification Section.

1. Identification: Include the following Project identification on the schedule of values:

    a. Project name and location.
    b. Name of Architect.
    c. Architect's project number.
    d. Contractor's name and address.
    e. Date of submittal.

2. Arrange schedule of values consistent with format of AIA Document G703.
3. Arrange the schedule of values in tabular form with separate columns to indicate the following for each item listed:

    a. Related Specification Section or Division.
    b. Description of the Work.
    c. Name of subcontractor.
    d. Name of manufacturer or fabricator.
    e. Name of supplier.
    f. Change Orders (numbers) that affect value.
    g. Dollar value of the following, as a percentage of the Contract Sum to nearest one-hundredth percent, adjusted to total 100 percent.

        1) Labor.
        2) Materials.
        3) Equipment.

4. Provide a breakdown of the Contract Sum in enough detail to facilitate continued evaluation of Applications for Payment and progress reports. Coordinate with Project Manual table of contents. Provide multiple line items for principal subcontract amounts in excess of five percent of the Contract Sum.

    a. Include separate line items under principal subcontracts for Project closeout requirements in an amount totaling five percent of the Contract Sum and subcontract amount.

5. Round amounts to nearest whole dollar; total shall equal the Contract Sum.
6. Provide a separate line item in the schedule of values for each part of the Work where Applications for Payment may include materials or equipment purchased or fabricated and stored, but not yet installed.

    a. Differentiate between items stored on-site and items stored off-site. If required, include evidence of insurance.

7. Provide separate line items in the schedule of values for initial cost of materials, for each subsequent stage of completion, and for total installed value of that part of the Work.

8. Allowances: Provide a separate line item in the schedule of values for each allowance. Show line-item value of unit-cost allowances, as a product of the unit cost, multiplied by measured quantity. Use information indicated in the Contract Documents to determine quantities.
9. Each item in the schedule of values and Applications for Payment shall be complete. Include total cost and proportionate share of general overhead and profit for each item.

    a. Temporary facilities and other major cost items that are not direct cost of actual work-in-place may be shown either as separate line items in the schedule of values or distributed as general overhead expense, at Contractor's option.

10. Schedule Updating: Update and resubmit the schedule of values before the next Applications for Payment when Change Orders or Construction Change Directives result in a change in the Contract Sum.

1.5 APPLICATIONS FOR PAYMENT

A. Each Application for Payment following the initial Application for Payment shall be consistent with previous applications and payments as certified by Architect and paid for by Owner.

    1. Initial Application for Payment, Application for Payment at time of Substantial Completion, and final Application for Payment involve additional requirements.

B. Payment Application Times: The date for each progress payment is indicated in the Agreement between Owner and Contractor. The period of construction work covered by each Application for Payment is the period indicated in the Agreement.

    1. Submit draft copy of Application for Payment seven [7] days prior to due date for review by Architect.

C. Application for Payment Forms: Use AIA Document G702 and AIA Document G703 as form for Applications for Payment.

D. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Architect will return incomplete applications without action.

    1. Entries shall match data on the schedule of values and Contractor's construction schedule. Use updated schedules if revisions were made.
    2. Include amounts for work completed following previous Application for Payment, whether or not payment has been received. Include only amounts for work completed at time of Application for Payment.
    3. Include amounts of Change Orders and Construction Change Directives issued before last day of construction period covered by application.
    4. Indicate separate amounts for work being carried out under Owner-requested project acceleration.

E. Stored Materials: Include in Application for Payment amounts applied for materials or equipment purchased or fabricated and stored, but not yet installed. Differentiate between items stored on-site and items stored off-site.

1. Provide certificate of insurance, evidence of transfer of title to Owner, and consent of surety to payment, for stored materials.
2. Provide supporting documentation that verifies amount requested, such as paid invoices. Match amount requested with amounts indicated on documentation; do not include overhead and profit on stored materials.
3. Provide summary documentation for stored materials indicating the following:

    a. Value of materials previously stored and remaining stored as of date of previous Applications for Payment.
    b. Value of previously stored materials put in place after date of previous Application for Payment and on or before date of current Application for Payment.
    c. Value of materials stored since date of previous Application for Payment and remaining stored as of date of current Application for Payment.

F. Transmittal: Submit three signed and notarized original copies of each Application for Payment to Architect by a method ensuring receipt within 24 hours. One copy shall include waivers of lien and similar attachments if required.

1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.

G. Waivers of Mechanic's Lien: With each Application for Payment, submit waivers of mechanic's lien from entities lawfully entitled to file a mechanic's lien arising out of the Contract and related to the Work covered by the payment.

1. Submit partial waivers on each item for amount requested in previous application, after deduction for retainage, on each item.
2. When an application shows completion of an item, submit conditional final or full waivers.
3. Owner reserves the right to designate which entities involved in the Work must submit waivers.
4. Waiver Forms: Submit executed waivers of lien on forms acceptable to Owner.

H. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:

1. List of subcontractors.
2. Schedule of values.
3. Contractor's construction schedule (preliminary if not final).
4. Products list (preliminary if not final).
5. Submittal schedule (preliminary if not final).
6. List of Contractor's staff assignments.
7. List of Contractor's principal consultants.
8. Copies of authorizations and licenses from authorities having jurisdiction for performance of the Work.

9. Initial progress report.
10. Report of preconstruction conference.
11. Certificates of insurance and insurance policies.
12. Performance and payment bonds.
13. Data needed to acquire Owner's insurance.

I. Application for Payment at Substantial Completion: After Architect issues the Certificate of Substantial Completion, submit an Application for Payment showing 100 percent completion for portion of the Work claimed as substantially complete.

1. Include documentation supporting claim that the Work is substantially complete and a statement showing an accounting of changes to the Contract Sum.
2. This application shall reflect Certificate(s) of Substantial Completion issued previously for Owner occupancy of designated portions of the Work.

J. Final Payment Application: After completing Project closeout requirements, submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:

1. Evidence of completion of Project closeout requirements.
2. Insurance certificates for products and completed operations where required and proof that taxes, fees, and similar obligations were paid.
3. Updated final statement, accounting for final changes to the Contract Sum.
4. AIA Document G706, "Contractor's Affidavit of Payment of Debts and Claims."
5. AIA Document G706A, "Contractor's Affidavit of Release of Liens."
6. AIA Document G707, "Consent of Surety to Final Payment."
7. Evidence that claims have been settled.
8. Final meter readings for utilities, a measured record of stored fuel, and similar data as of date of Substantial Completion or when Owner took possession of and assumed responsibility for corresponding elements of the Work.
9. Final liquidated damages settlement statement.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012900

SECTION 013100 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative provisions for coordinating construction operations on Project including, but not limited to, the following:

1. General coordination procedures.
2. Coordination drawings.
3. Requests for Information (RFIs).
4. Project Information Exchange Site.
5. Project meetings.

B. Each contractor shall participate in coordination requirements. Certain areas of responsibility are assigned to a specific contractor.

C. Related Requirements:

1. Section 017300 "Execution" for procedures for coordinating general installation and field-engineering services, including establishment of benchmarks and control points.
2. Section 017700 "Closeout Procedures" for coordinating closeout of the Contract.

1.3 DEFINITIONS

A. RFI: Request from Owner, Architect, or Contractor seeking information required by or clarifications of the Contract Documents.

1.4 INFORMATIONAL SUBMITTALS

A. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Use CSI Form 1.5A. Include the following information in tabular form:

1. Name, address, and telephone number of entity performing subcontract or supplying products.
2. Number and title of related Specification Section(s) covered by subcontract.
3. Drawing number and detail references, as appropriate, covered by subcontract.

B. Key Personnel Names: Within 15 days of starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses and telephone numbers, including home, office, and cellular telephone numbers and e-mail addresses. Provide names, addresses, and telephone numbers of individuals assigned as alternates in the absence of individuals assigned to Project.

1. Post copies of list in project meeting room, in temporary field office, and by each temporary telephone. Keep list current at all times.

1.5 GENERAL COORDINATION PROCEDURES

A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations, included in different Sections, that depend on each other for proper installation, connection, and operation.

1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
2. Coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair.
3. Make adequate provisions to accommodate items scheduled for later installation.

B. Coordination: Each contractor shall coordinate its construction operations with those of other contractors and entities to ensure efficient and orderly installation of each part of the Work. Each contractor shall coordinate its operations with operations, included in different Sections, that depend on each other for proper installation, connection, and operation.

1. Schedule construction operations in sequence required to obtain the best results where installation of one part of the Work depends on installation of other components, before or after its own installation.
2. Coordinate installation of different components with other contractors to ensure maximum performance and accessibility for required maintenance, service, and repair.
3. Make adequate provisions to accommodate items scheduled for later installation.

C. Prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.

1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.

D. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:

1. Preparation of Contractor's construction schedule.
2. Preparation of the schedule of values.
3. Installation and removal of temporary facilities and controls.

4. Delivery and processing of submittals.
5. Progress meetings.
6. Preinstallation conferences.
7. Project closeout activities.
8. Startup and adjustment of systems.

E. Conservation: Coordinate construction activities to ensure that operations are carried out with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.

1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. See other Sections for disposition of salvaged materials that are designated as Owner's property.

1.6 COORDINATION DRAWINGS

A. Coordination Drawings, General: Prepare coordination drawings according to requirements in individual Sections, and additionally where installation is not completely shown on Shop Drawings, where limited space availability necessitates coordination, or if coordination is required to facilitate integration of products and materials fabricated or installed by more than one entity.

1. Content: Project-specific information, drawn accurately to a scale large enough to indicate and resolve conflicts. Do not base coordination drawings on standard printed data. Include the following information, as applicable:

a. Use applicable Drawings as a basis for preparation of coordination drawings. Prepare sections, elevations, and details as needed to describe relationship of various systems and components.
b. Coordinate the addition of trade-specific information to the coordination drawings by multiple contractors in a sequence that best provides for coordination of the information and resolution of conflicts between installed components before submitting for review.
c. Indicate functional and spatial relationships of components of architectural, structural, civil, mechanical, and electrical systems.
d. Indicate space requirements for routine maintenance and for anticipated replacement of components during the life of the installation.
e. Show location and size of access doors required for access to concealed dampers, valves, and other controls.
f. Indicate required installation sequences.
g. Indicate dimensions shown on the Drawings. Specifically note dimensions that appear to be in conflict with submitted equipment and minimum clearance requirements. Provide alternate sketches to Architect indicating proposed resolution of such conflicts. Minor dimension changes and difficult installations will not be considered changes to the Contract.

B. Coordination Drawing Organization: Organize coordination drawings as follows:

1. Floor Plans and Reflected Ceiling Plans: Show architectural and structural elements, and mechanical, plumbing, fire-protection, fire-alarm, and electrical Work. Show locations of visible ceiling-mounted devices relative to acoustical ceiling grid. Supplement plan drawings with section drawings where required to adequately represent the Work.
2. Plenum Space: Indicate subframing for support of ceiling and wall systems, mechanical and electrical equipment, and related Work. Locate components within ceiling plenum to accommodate layout of light fixtures indicated on Drawings. Indicate areas of conflict between light fixtures and other components.
3. Structural Penetrations: Indicate penetrations and openings required for all disciplines.
4. Mechanical and Plumbing Work: Show the following:

    a. Sizes and bottom elevations of ductwork, piping, and conduit runs, including insulation, bracing, flanges, and support systems.
    b. Dimensions of major components, such as dampers, valves, diffusers, access doors, cleanouts and electrical distribution equipment.

5. Electrical Work: Show the following:

    a. Runs of vertical and horizontal conduit 1-1/4 inches in diameter and larger.
    b. Light fixture, exit light, emergency battery pack, smoke detector, and other fire-alarm locations.
    c. Location of pull boxes and junction boxes, dimensioned from column center lines.

6. Fire-Protection System: Show the following:

    a. Locations of standpipes, mains piping, branch lines, pipe drops, and sprinkler heads.

7. Review: Architect will review coordination drawings to confirm that the Work is being coordinated, but not for the details of the coordination, which are Contractor's responsibility. If Architect determines that coordination drawings are not being prepared in sufficient scope or detail, or are otherwise deficient, Architect will so inform Contractor, who shall make changes as directed and resubmit.
8. Coordination Drawing Prints: Prepare coordination drawing prints according to requirements in Section 013300 "Submittal Procedures."

C. Coordination Digital Data Files: Prepare coordination digital data files according to the following requirements:

1. File Preparation Format: Same digital data software program, version, and operating system as original Drawings or as agreed to by Architect and Owner.
2. File Submittal Format: Submit or post coordination drawing files using Portable Data File (PDF) format.
3. Architect will furnish Contractor one set of digital data files of Drawings for use in preparing coordination digital data files.

    a. Architect makes no representations as to the accuracy or completeness of digital data files as they relate to Drawings.
    b. Digital Data Software Program: Drawings are available in Autodesk Revit.
    c. Contractor shall execute a data licensing agreement in the form of Agreement form acceptable to Owner and Architect.

1.7 REQUESTS FOR INFORMATION (RFIs)

A. General: Immediately on discovery of the need for additional information or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.

1. Architect will return RFIs submitted to Architect by other entities controlled by Contractor with no response.
2. Coordinate and submit RFIs in a prompt manner so as to avoid delays in Contractor's work or work of subcontractors.

B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:

1. Project name.
2. Project number.
3. Date.
4. Name of Contractor.
5. RFI number, numbered sequentially.
6. RFI subject.
7. Specification Section number and title and related paragraphs, as appropriate.
8. Drawing number and detail references, as appropriate.
9. Field dimensions and conditions, as appropriate.
10. Contractor's suggested resolution. If Contractor's suggested resolution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
11. Contractor's signature.
12. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.

    a. Include dimensions, thicknesses, structural grid references, and details of affected materials, assemblies, and attachments on attached sketches.

C. RFI Forms: Software-generated form with substantially the same content as indicated above, acceptable to Architect.

1. Attachments shall be electronic files in Adobe Acrobat PDF format.

D. Architect's Action: Architect will review each RFI, determine action required, and respond. Allow seven working days for Architect's response for each RFI. RFIs received by Architect after 1:00 p.m. will be considered as received the following working day.

1. The following Contractor-generated RFIs will be returned without action:

    a. Requests for approval of submittals.
    b. Requests for approval of substitutions.
    c. Requests for approval of Contractor's means and methods.
    d. Requests for coordination information already indicated in the Contract Documents.
    e. Requests for adjustments in the Contract Time or the Contract Sum.
    f. Requests for interpretation of Architect's actions on submittals.
    g. Incomplete RFIs or inaccurately prepared RFIs.

2. Architect's action may include a request for additional information, in which case Architect's time for response will date from time of receipt of additional information.
3. Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Section 012600 "Contract Modification Procedures."

    a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect in writing within 10 days of receipt of the RFI response.

E. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log weekly. Include the following:

1. Project name.
2. Name and address of Contractor.
3. Name and address of Architect.
4. RFI number including RFIs that were returned without action or withdrawn.
5. RFI description.
6. Date the RFI was submitted.
7. Date Architect's response was received.

F. On receipt of Architect's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect within seven days if Contractor disagrees with response.

1. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.
2. Identification of related Field Order, Work Change Directive, and Proposal Request, as appropriate.

1.8 PROJECT INFORMATION EXCHANGE SITE

A. Use Architect's Newforma information exchange site for purposes of hosting and managing project communication and documentation until Final Completion. Newforma information exchange site shall include the following functions:

1. Project directory.
2. Project correspondence.
3. Meeting minutes.
4. Photo documentation.
5. Submittals and logs.
6. RFI forms and logs
7. Payment application forms.

1.9 PROJECT MEETINGS

A. General: Schedule and conduct meetings and conferences at Project site unless otherwise indicated.

1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times.
2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
3. Minutes: Entity responsible for conducting meeting will record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner and Architect, within three days of the meeting.

B. Preconstruction Conference: Schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after execution of the Agreement.

1. Conduct the conference to review responsibilities and personnel assignments.
2. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
3. Agenda: Discuss items of significance that could affect progress, including the following:

a. Tentative construction schedule.
b. Critical work sequencing and long-lead items.
c. Designation of key personnel and their duties.
d. Lines of communications.
e. Procedures for processing field decisions and Change Orders.
f. Procedures for RFIs.
g. Procedures for testing and inspecting.
h. Procedures for processing Applications for Payment.
i. Distribution of the Contract Documents.
j. Submittal procedures.
k. Preparation of record documents.
l. Use of the premises and existing building.
m. Work restrictions.
n. Working hours.
o. Owner's occupancy requirements.
p. Responsibility for temporary facilities and controls.
q. Procedures for moisture and mold control.
r. Procedures for disruptions and shutdowns.
s. Construction waste management and recycling.
t. Parking availability.
u. Office, work, and storage areas.
v. Equipment deliveries and priorities.
w. First aid.
x. Security.
y. Progress cleaning.

4. Minutes: Entity responsible for conducting meeting will record and distribute meeting minutes.

C. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity that requires coordination with other construction.

1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect of scheduled meeting dates.
2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:

    a. Contract Documents.
    b. Options.
    c. Related RFIs.
    d. Related Change Orders.
    e. Purchases.
    f. Deliveries.
    g. Submittals.
    h. Possible conflicts.
    i. Compatibility requirements.
    j. Time schedules.
    k. Weather limitations.
    l. Manufacturer's written instructions.
    m. Warranty requirements.
    n. Compatibility of materials.
    o. Acceptability of substrates.
    p. Temporary facilities and controls.
    q. Space and access limitations.
    r. Regulations of authorities having jurisdiction.
    s. Testing and inspecting requirements.
    t. Installation procedures.
    u. Coordination with other work.
    v. Required performance results.
    w. Protection of adjacent work.
    x. Protection of construction and personnel.

3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.
5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.

D. Project Closeout Conference: Schedule and conduct a project closeout conference, at a time convenient to Owner and Architect, but no later than 15 days prior to the scheduled date of Substantial Completion.

1. Conduct the conference to review requirements and responsibilities related to Project closeout.
2. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the meeting. Participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
3. Agenda: Discuss items of significance that could affect or delay Project closeout, including the following:

    a. Preparation of record documents.
    b. Procedures required prior to inspection for Substantial Completion and for final inspection for acceptance.
    c. Submittal of written warranties.
    d. Requirements for completing documentation.
    e. Requirements for preparing operations and maintenance data.
    f. Requirements for delivery of material samples, attic stock, and spare parts.
    g. Requirements for demonstration and training.
    h. Preparation of Contractor's punch list.
    i. Procedures for processing Applications for Payment at Substantial Completion and for final payment.
    j. Submittal procedures.
    k. Coordination of separate contracts.
    l. Owner's partial occupancy requirements.
    m. Installation of Owner's furniture, fixtures, and equipment.
    n. Responsibility for removing temporary facilities and controls.

4. Minutes: Entity conducting meeting will record and distribute meeting minutes.

E. Progress Meetings: Conduct progress meetings at weekly intervals.

1. Coordinate dates of meetings with preparation of payment requests.
2. Attendees: In addition to representatives of Owner, and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
3. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.

    a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.

        1) Review schedule for next period.

b. Review present and future needs of each entity present, including the following:

1) Interface requirements.
2) Sequence of operations.
3) Status of submittals.
4) Deliveries.
5) Off-site fabrication.
6) Access.
7) Site utilization.
8) Temporary facilities and controls.
9) Progress cleaning.
10) Quality and work standards.
11) Status of correction of deficient items.
12) Field observations.
13) Status of RFIs.
14) Status of proposal requests.
15) Pending changes.
16) Status of Change Orders.
17) Pending claims and disputes.
18) Documentation of information for payment requests.

4. Minutes: Entity responsible for conducting the meeting will record and distribute the meeting minutes to each party present and to parties requiring information.

a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

F. Coordination Meetings: Conduct Project coordination meetings at regular intervals. Project coordination meetings are in addition to specific meetings held for other purposes, such as progress meetings and preinstallation conferences.

1. Attendees: Each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meetings shall be familiar with Project and authorized to conclude matters relating to the Work.
2. Agenda: Review and correct or approve minutes of the previous coordination meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.

a. Combined Contractor's Construction Schedule: Review progress since the last coordination meeting. Determine whether each contract is on time, ahead of schedule, or behind schedule, in relation to combined Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.

b. Schedule Updating: Revise combined Contractor's construction schedule after each coordination meeting where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with report of each meeting.

c. Review present and future needs of each contractor present, including the following:

1) Interface requirements.
2) Sequence of operations.
3) Resolution of BIM component conflicts.
4) Status of submittals.
5) Deliveries.
6) Off-site fabrication.
7) Access.
8) Site utilization.
9) Temporary facilities and controls.
10) Work hours.
11) Hazards and risks.
12) Progress cleaning.
13) Quality and work standards.
14) Change Orders.

3. Reporting: Record meeting results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

SECTION 013200 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:

1. Contractor's construction schedule.
2. Construction schedule updating reports.
3. Daily construction reports.

B. Related Requirements:

1. Section 013300 "Submittal Procedures" for submitting schedules and reports.
2. Section 014000 "Quality Requirements" for submitting a schedule of tests and inspections.

1.3 DEFINITIONS

A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction project. Activities included in a construction schedule consume time and resources.

1. Critical Activity: An activity on the critical path that must start and finish on the planned early start and finish times.
2. Predecessor Activity: An activity that precedes another activity in the network.
3. Successor Activity: An activity that follows another activity in the network.

B. Resource Loading: The allocation of manpower and equipment necessary for the completion of an activity as scheduled.

1.4 INFORMATIONAL SUBMITTALS

A. Format for Submittals: Submit required submittals in the following format:

1. Working electronic copy of schedule file, where indicated.
2. PDF electronic file.

B. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.

C. Construction Schedule Updating Reports: Submit with Applications for Payment.

D. Daily Construction Reports: Submit at monthly intervals.

1.5 COORDINATION

A. Coordinate Contractor's construction schedule with the schedule of values, submittal schedule, progress reports, payment requests, and other required schedules and reports.

1. Secure time commitments for performing critical elements of the Work from entities involved.
2. Coordinate each construction activity in the network with other activities and schedule them in proper sequence.

PART 2 - PRODUCTS

2.1 CONTRACTOR'S CONSTRUCTION SCHEDULE, GENERAL

A. Time Frame: Extend schedule from date established for commencement of the Work to date of Substantial Completion.

1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.

B. Activities: Treat each story or separate area as a separate numbered activity for each main element of the Work. Comply with the following:

1. Activity Duration: Define activities so no activity is longer than 20 days, unless specifically allowed by Architect.
2. Submittal Review Time: Include review and resubmittal times indicated in Section 013300 "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's construction schedule with submittal schedule.
3. Startup and Testing Time: Include no fewer than 15 days for startup and testing.
4. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Architect's administrative procedures necessary for certification of Substantial Completion.
5. Punch List and Final Completion: Include not more than 30 days for completion of punch list items and final completion.

C. Constraints: Include constraints and work restrictions indicated in the Contract Documents and as follows in schedule, and show how the sequence of the Work is affected.

1. Work Restrictions: Show the effect of the following items on the schedule:

    a. Coordination with existing construction.
    b. Limitations of continued occupancies.
    c. Uninterruptible services.
    d. Partial occupancy before Substantial Completion.
    e. Use of premises restrictions.
    f. Provisions for future construction.
    g. Seasonal variations.
    h. Environmental control.

D. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and final completion.

E. Cost Correlation: Superimpose a cost correlation timeline, indicating planned and actual costs. On the line, show planned and actual dollar volume of the Work performed as of planned and actual dates used for preparation of payment requests.

1. See Section 012900 "Payment Procedures" for cost reporting and payment procedures.

F. Upcoming Work Summary: Prepare summary report indicating activities scheduled to occur or commence prior to submittal of next schedule update. Summarize the following issues:

1. Unresolved issues.
2. Unanswered Requests for Information.
3. Rejected or unreturned submittals.
4. Notations on returned submittals.
5. Pending modifications affecting the Work and Contract Time.

G. Recovery Schedule: When periodic update indicates the Work is 14 or more calendar days behind the current approved schedule, submit a separate recovery schedule indicating means by which Contractor intends to regain compliance with the schedule. Indicate changes to working hours, working days, crew sizes, and equipment required to achieve compliance, and date by which recovery will be accomplished.

H. Computer Scheduling Software: Prepare schedules using current version of a program that has been developed specifically to manage construction schedules.

2.2 CONTRACTOR'S CONSTRUCTION SCHEDULE (GANTT CHART)

A. Gantt-Chart Schedule: Submit a comprehensive, fully developed, horizontal, Gantt-chart-type, Contractor's construction schedule within 30 days of date established for commencement of the Work. Base schedule on the startup construction schedule and additional information received since the start of Project.

B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line.

1. For construction activities that require three months or longer to complete, indicate an estimated completion percentage in 10 percent increments within time bar.

2.3 REPORTS

A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:

1. List of subcontractors at Project site.
2. Approximate count of personnel at Project site.
3. Equipment at Project site.
4. Material deliveries.
5. High and low temperatures and general weather conditions, including presence of rain or snow.
6. Accidents.
7. Meetings and significant decisions.
8. Unusual events (see special reports).
9. Stoppages, delays, shortages, and losses.
10. Meter readings and similar recordings.
11. Emergency procedures.
12. Orders and requests of authorities having jurisdiction.
13. Change Orders received and implemented.
14. Construction Change Directives received and implemented.
15. Services connected and disconnected.
16. Equipment or system tests and startups.
17. Partial completions and occupancies.
18. Substantial Completions authorized.

B. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.

PART 3 - EXECUTION

3.1 CONTRACTOR'S CONSTRUCTION SCHEDULE

A. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.

1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
3. As the Work progresses, indicate final completion percentage for each activity.

B. Distribution: Distribute copies of approved schedule to Architect Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.

1. Post copies in Project meeting rooms and temporary field offices.
2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

END OF SECTION 013200

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes requirements for the submittal schedule and administrative and procedural requirements for submitting Shop Drawings, Product Data, Samples, and other submittals.

B. Related Requirements:

1. Section 012900 "Payment Procedures" for submitting Applications for Payment and the schedule of values.
2. Section 017823 "Operation and Maintenance Data" for submitting operation and maintenance manuals.
3. Section 017839 "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.

1.3 DEFINITIONS

A. Action Submittals: Written and graphic information and physical samples that require Architect's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."

B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."

C. File Transfer Protocol (FTP): Communications protocol that enables transfer of files to and from another computer over a network and that serves as the basis for standard Internet protocols. An FTP site is a portion of a network located outside of network firewalls within which internal and external users are able to access files.

D. Portable Document Format (PDF): An open standard file format licensed by Adobe Systems used for representing documents in a device-independent and display resolution-independent fixed-layout document format.

1.4 ACTION SUBMITTALS

A. Submittal Schedule: Submit a schedule of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include additional time required for making corrections or revisions to submittals noted by Architect and additional time for handling and reviewing submittals required by those corrections.

1. Coordinate submittal schedule with list of subcontracts, the schedule of values, and Contractor's construction schedule.
2. Initial Submittal: Submit concurrently with startup construction schedule. Include submittals required during the first 30 days of construction. List those submittals required to maintain orderly progress of the Work and those required early because of long lead time for manufacture or fabrication.
3. Final Submittal: Submit concurrently with the first complete submittal of Contractor's construction schedule.

    a. Submit revised submittal schedule to reflect changes in current status and timing for submittals.

4. Format: Arrange the following information in a tabular format:

    a. Scheduled date for first submittal.
    b. Specification Section number and title.
    c. Submittal category: Action; informational.
    d. Name of subcontractor.
    e. Description of the Work covered.
    f. Scheduled date for Architect's final release or approval.
    g. Scheduled date of fabrication.
    h. Scheduled dates for purchasing.
    i. Scheduled dates for installation.
    j. Activity or event number.

B. Contractor to make all submittals to Architect within 30 days following notice to proceed.

1.5 SUBMITTAL ADMINISTRATIVE REQUIREMENTS

A. Architect's Digital Data Files: Electronic digital data files of the Contract Drawings will be provided by Architect for Contractor's use in preparing submittals.

1. Architect will furnish Contractor one set of digital data drawing files of the Contract Drawings for use in preparing Shop Drawings.

    a. Architect makes no representations as to the accuracy or completeness of digital data drawing files as they relate to the Contract Drawings.
    b. Digital Drawing Software Program: The Contract Drawings are available in Autodesk Revit format.

c. Contractor shall execute a data licensing agreement in the form of AIA Document C106, Digital Data Licensing Agreement.
d. The following digital data files will by furnished for each appropriate discipline:

1) Floor Plans.
2) Ceiling Plans.

B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.

1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.
4. Coordinate transmittal of different types of submittals for related parts of the Work so processing will not be delayed because of need to review submittals concurrently for coordination.

a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.

C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Architect's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.

1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
2. Intermediate Review: If intermediate submittal is necessary, process it in same manner as initial submittal.
3. Resubmittal Review: Allow 15 days for review of each resubmittal.

D. Electronic Submittals: Identify and incorporate information in each electronic submittal file as follows:

1. Assemble complete submittal package into a single indexed file incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
2. Provide means for insertion to permanently record Contractor's review and approval markings and action taken by Architect.

a. Use review stamp sheet provided by Architect at the end of this section.

3. Transmittal Form for Electronic Submittals: Use software-generated form from electronic project management software acceptable to Owner, containing the following information:

a. Project name.
b. Date.

c. Name and address of Architect.
d. Name of Contractor.
e. Name of firm or entity that prepared submittal.
f. Names of subcontractor, manufacturer, and supplier.
g. Category and type of submittal.
h. Submittal purpose and description.
i. Specification Section number and title.
j. Specification paragraph number or drawing designation and generic name for each of multiple items.
k. Drawing number and detail references, as appropriate.
l. Location(s) where product is to be installed, as appropriate.
m. Related physical samples submitted directly.
n. Indication of full or partial submittal.
o. Transmittal number, numbered consecutively.
p. Submittal and transmittal distribution record.
q. Other necessary identification.
r. Remarks.

4. Metadata: Include the following information as keywords in the electronic submittal file metadata:

a. Project name.
b. Number and title of appropriate Specification Section.
c. Subcontractor name and contact information.
d. Manufacturer name.
e. Product name.

E. Options: Identify options requiring selection by Architect.

F. Deviations and Additional Information: On an attached separate sheet, prepared on Contractor's letterhead, record relevant information, requests for data, revisions other than those requested by Architect on previous submittals, and deviations from requirements in the Contract Documents, including minor variations and limitations. Include same identification information as related submittal.

G. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.

1. Note date and content of previous submittal.
2. Note date and content of revision in label or title block and clearly indicate extent of revision.
3. Resubmit submittals until they are marked with approval notation from Architect's action stamp.

H. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.

I. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from Architect's action stamp.

PART 2 - PRODUCTS

2.1 SUBMITTAL PROCEDURES

A. General Submittal Procedure Requirements: Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.

1. Post electronic submittals as PDF electronic files directly to Architect's Info Exchange Site specifically established for Project.

a. Architect will return annotated file. Annotate and retain one copy of file as an electronic Project record document file.

2. Certificates and Certifications Submittals: Provide a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity.

a. Provide a notarized statement on original paper copy certificates and certifications where indicated.

B. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.

1. If information must be specially prepared for submittal because standard published data are not suitable for use, submit as Shop Drawings, not as Product Data.
2. Mark each copy of each submittal to show which products and options are applicable.
3. Include the following information, as applicable:

a. Manufacturer's catalog cuts.
b. Manufacturer's product specifications.
c. Standard color charts.
d. Statement of compliance with specified referenced standards.
e. Testing by recognized testing agency.
f. Application of testing agency labels and seals.
g. Notation of coordination requirements.
h. Availability and delivery time information.

4. For equipment, include the following in addition to the above, as applicable:

a. Wiring diagrams showing factory-installed wiring.
b. Printed performance curves.
c. Operational range diagrams.
d. Clearances required to other construction, if not indicated on accompanying Shop Drawings.

5. Submit Product Data before or concurrent with Samples.

6. Submit Product Data in the following format:

    a. PDF electronic file.

C. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.

1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:

    a. Identification of products.
    b. Schedules.
    c. Compliance with specified standards.
    d. Notation of coordination requirements.
    e. Notation of dimensions established by field measurement.
    f. Relationship and attachment to adjoining construction clearly indicated.
    g. Seal and signature of professional engineer if specified.

2. Sheet Size: Except for templates, patterns, and similar full-size drawings, submit Shop Drawings on sheets at least 8-1/2 by 11 inches, but no larger than 30 by 42 inches.
3. Submit Shop Drawings in the following format:

    a. PDF electronic file.

D. Samples: Submit Samples for review of kind, color, pattern, and texture for a check of these characteristics with other elements and for a comparison of these characteristics between submittal and actual component as delivered and installed.

1. Transmit Samples that contain multiple, related components such as accessories together in one submittal package.
2. Identification: Attach label on unexposed side of Samples that includes the following:

    a. Generic description of Sample.
    b. Product name and name of manufacturer.
    c. Sample source.
    d. Number and title of applicable Specification Section.
    e. Specification paragraph number and generic name of each item.

3. For projects where electronic submittals are required, provide corresponding electronic submittal of Sample transmittal, digital image file illustrating Sample characteristics, and identification information for record.
4. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.

    a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
    b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.

5. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units showing the full range of colors, textures, and patterns available.

    a. Number of Samples: Submit three full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return submittal with options selected.

6. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.

    a. Number of Samples: Submit three sets of Samples. Architect and Construction Manager/GC will retain two Sample sets; remainder will be returned.

        1) Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.
        2) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.

E. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:

1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
2. Manufacturer and product name, and model number if applicable.
3. Number and name of room or space.
4. Location within room or space.
5. Submit product schedule in the following format:

    a. PDF electronic file.

F. Contractor's Construction Schedule: Comply with requirements specified in Division 01 Section "Construction Progress Documentation."

G. Application for Payment and Schedule of Values: Comply with requirements specified in Division 01 Section "Payment Procedures."

H. Test and Inspection Reports and Schedule of Tests and Inspections Submittals: Comply with requirements specified in Division 01 Section "Quality Requirements."

I. Closeout Submittals and Maintenance Material Submittals: Comply with requirements specified in Division 01 Section "Closeout Procedures."

J. Maintenance Data: Comply with requirements specified in Division 01 Section "Operation and Maintenance Data."

K. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.

L. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of Welding Procedure Specification and Procedure Qualification Record on AWS forms. Include names of firms and personnel certified.

M. Installer Certificates: Submit written statements on manufacturer's letterhead certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.

N. Manufacturer Certificates: Submit written statements on manufacturer's letterhead certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.

O. Product Certificates: Submit written statements on manufacturer's letterhead certifying that product complies with requirements in the Contract Documents.

P. Material Certificates: Submit written statements on manufacturer's letterhead certifying that material complies with requirements in the Contract Documents.

Q. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.

R. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.

S. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:

1. Name of evaluation organization.
2. Date of evaluation.
3. Time period when report is in effect.
4. Product and manufacturers' names.
5. Description of product.
6. Test procedures and results.
7. Limitations of use.

T. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.

U. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for primers and substrate preparation needed for adhesion.

V. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.

W. Design Data: Prepare and submit written and graphic information, including, but not limited to, performance and design criteria, list of applicable codes and regulations, and calculations. Include list of assumptions and other performance and design criteria and a summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Include page numbers.

2.2 DELEGATED-DESIGN SERVICES

A. Performance and Design Criteria: Where professional design services or certifications by a design professional are specifically required of Contractor by the Contract Documents, provide products and systems complying with specific performance and design criteria indicated.

1. If criteria indicated are not sufficient to perform services or certification required, submit a written request for additional information to Architect.

B. Delegated-Design Services Certification: In addition to Shop Drawings, Product Data, and other required submittals, submit digitally signed PDF electronic file 3 paper copies of certificate, signed and sealed by the responsible design professional, for each product and system specifically assigned to Contractor to be designed or certified by a design professional.

1. Indicate that products and systems comply with performance and design criteria in the Contract Documents. Include list of codes, loads, and other factors used in performing these services.

PART 3 - EXECUTION

3.1 CONTRACTOR'S REVIEW

A. Action and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect.

B. Project Closeout and Maintenance Material Submittals: See requirements in Division 01 Section "Closeout Procedures."

C. Approval Stamp: Stamp each submittal with a uniform, approval stamp. Include Project name and location, submittal number, Specification Section title and number, name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.

3.2 ARCHITECT'S ACTION

A. Action Submittals: Architect will review each submittal, make marks to indicate corrections or revisions required, and return it. Architect will stamp each submittal with an action stamp and will mark stamp appropriately to indicate action.

B. Informational Submittals: Architect will review each submittal and will not return it, or will return it if it does not comply with requirements. Architect will forward each submittal to appropriate party.

C. Partial submittals prepared for a portion of the Work will be reviewed when use of partial submittals has received prior approval from Architect.

D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review.

E. Submittals not required by the Contract Documents may be returned by the Architect without action.

END OF SECTION 013300

Electronic Submittal Flow Chart

01.02.2023

File Flow
A1. Contractor receives submittals from subs on **Contractors FTP or Email.** A2. Rename file to reflect project naming convention. [Project Name] [Spec Section]-[Submittal #]-[Revisions #] [Description] [Date] ***(e.g. ABCD-262413-01-00 - Switchboards 07-20-18.pdf)***
B1. Contractor reviews submittal. B2. Mark-up and comment using designated color. B3. Add stamp to the 'Review Stamp' sheet. B4. Flatten and create layer with company code (CON) ***(e.g. CON)*** B5. Renames file to add company code (CON) ***(e.g. ABCD-262413-01-00 - Switchboards 07-20-18-CON.pdf)*** B6. Upload submittal via Info Exchange and sends submittal to GSBS.
C1. GSBS forwards to Consultant/Owner for review via Info Exchange.
D1. Consultant/Owner receives submittal via Info Exchange. D2. Consultant/Owner reviews submittal concurrently. D3. Mark-up and comment using designated color. D4. Add stamp to the 'Review Stamp' sheet.D5. Do not PDF. D6. Renames file to add company code (ELEC). ***(e.g. ABCD - 262413-01-00 - Switchboards 07-20-18-CON-ELEC.pdf)*** D7. Return submittal to GSBS via Info Exchange
E1. GSBS combines consultant/owner comments from concurrent review. E2. GSBS flattens and creates layers for consultant/owners. E3. Mark-up and comment using designated color. E4. Add stamp to the 'Review Stamp' sheet. E5. Flatten and create layer with company code (GSBS) E6. Renames file to add company code (GSBS). ***(e.g. ABCD-262413-01-00 - Switchboards 07-20-18-CON-ELEC-GSBS.pdf)*** E7. Return submittal to Contractor via Info Exchange
F1. Contractor downloads submittal from Info Exchange.

Reviewer	Person	Code	Color
Contractor		CON	Green (10)
GSBS Architects	Cathy Davison	GSBS	Red (12)
Electrical Engineer		ELEC	Blue (11)
Mechanical Engineer		MECH	Orange (8)
Structural Engineer		STRUC	Maroon (7)
Landscape Architect		GSBS	Red (12)
Civil Engineer		CVL	Violet (13)
Commissioning Agent		COMM	Magenta (14)
Owner		OWN	Brown (1)



REVIEW STAMPS FOR PROJECT:

Required Reviewers

- ☐ ARCHITECTURAL
- ☐ STRUCTURAL
- ☐ MECHANICAL
- ☐ ELECTRICAL
- ☐ CIVIL
- ☐ INTERIORS
- ☐ LANDSCAPE
- ☐ KITCHEN PRODUCTS
- ☐ ACOUSTICAL
- ☐ HARDWARE
- ☐ A/V
- ☐ ENVELOPE
- ☐ COMMISSIONING
- ☐ OWNER
- ☐ SIGNAGE
- ☐ SUSTAINABILITY
- ☐ AHJ
- ☐ DETENTION

GENERAL CONTRACTOR	ARCHITECT
CONSULTANT	CONSULTANT

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for quality assurance and quality control.

B. Testing and inspecting services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.

1. Specific quality-assurance and -control requirements for individual construction activities are specified in the Sections that specify those activities. Requirements in those Sections may also cover production of standard products.
2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and -control procedures that facilitate compliance with the Contract Document requirements.
3. Requirements for Contractor to provide quality-assurance and -control services required by Architect, Owner, or authorities having jurisdiction are not limited by provisions of this Section.
4. Specific test and inspection requirements are not specified in this Section.

1.3 DEFINITIONS

A. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.

B. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Services do not include contract enforcement activities performed by Architect.

C. Mockups: Full-size physical assemblies that are constructed on-site. Mockups are constructed to verify selections made under Sample submittals; to demonstrate aesthetic effects and, where indicated, qualities of materials and execution; to review coordination, testing, or operation; to show interface between dissimilar materials; and to demonstrate compliance with specified installation tolerances. Mockups are not Samples. Unless otherwise indicated, approved mockups establish the standard by which the Work will be judged.

D. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with specified criteria.

E. Product Testing: Tests and inspections that are performed by an NRTL, an NVLAP, or a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.

F. Source Quality-Control Testing: Tests and inspections that are performed at the source, e.g., plant, mill, factory, or shop.

G. Field Quality-Control Testing: Tests and inspections that are performed on-site for installation of the Work and for completed Work.

H. Testing Agency: An entity engaged to perform specific tests, inspections, or both. Testing laboratory shall mean the same as testing agency.

I. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, Subcontractor, or Sub-subcontractor, to perform a particular construction operation, including installation, erection, application, and similar operations.

1. Use of trade-specific terminology in referring to a trade or entity does not require that certain construction activities be performed by accredited or unionized individuals, or that requirements specified apply exclusively to specific trade(s).

J. Experienced: When used with an entity or individual, "experienced" means having successfully completed a minimum of five previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.

1.4 CONFLICTING REQUIREMENTS

A. Referenced Standards: If compliance with two or more standards is specified and the standards establish different or conflicting requirements for minimum quantities or quality levels, comply with the most stringent requirement. Refer conflicting requirements that are different, but apparently equal, to Architect for a decision before proceeding.

B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified shall be the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Contractor's quality-control personnel.

B. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.

C. Schedule of Tests and Inspections: Prepare in tabular form and include the following:

1. Specification Section number and title.
2. Entity responsible for performing tests and inspections.
3. Description of test and inspection.
4. Identification of applicable standards.
5. Identification of test and inspection methods.
6. Number of tests and inspections required.
7. Time schedule or time span for tests and inspections.
8. Requirements for obtaining samples.
9. Unique characteristics of each quality-control service.

1.6 REPORTS AND DOCUMENTS

A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:

1. Date of issue.
2. Project title and number.
3. Name, address, and telephone number of testing agency.
4. Dates and locations of samples and tests or inspections.
5. Names of individuals making tests and inspections.
6. Description of the Work and test and inspection method.
7. Identification of product and Specification Section.
8. Complete test or inspection data.
9. Test and inspection results and an interpretation of test results.
10. Record of temperature and weather conditions at time of sample taking and testing and inspecting.
11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
12. Name and signature of laboratory inspector.
13. Recommendations on retesting and reinspecting.

B. Manufacturer's Technical Representative's Field Reports: Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:

1. Name, address, and telephone number of technical representative making report.
2. Statement on condition of substrates and their acceptability for installation of product.
3. Statement that products at Project site comply with requirements.
4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
6. Statement whether conditions, products, and installation will affect warranty.
7. Other required items indicated in individual Specification Sections.

C. Permits, Licenses, and Certificates: For Owner's records, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents, established for compliance with standards and regulations bearing on performance of the Work.

1.7 QUALITY ASSURANCE

A. General: Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.

B. Manufacturer Qualifications: A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.

C. Fabricator Qualifications: A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.

D. Installer Qualifications: A firm or individual experienced in installing, erecting, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.

E. Testing Agency Qualifications: An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspecting indicated, as documented according to ASTM E 329; and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.

1. NRTL: A nationally recognized testing laboratory according to 29 CFR 1910.7.
2. NVLAP: A testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program.

F. Manufacturer's Technical Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.

G. Factory-Authorized Service Representative Qualifications: An authorized representative of manufacturer who is trained and approved by manufacturer to inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.

1.8 QUALITY CONTROL

A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.

1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspecting they are engaged to perform.

2. Costs for retesting and reinspecting construction that replaces or is necessitated by work that failed to comply with the Contract Documents will be charged to Contractor, and the Contract Sum will be adjusted by Change Order.

B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities required to verify that the Work complies with requirements, whether specified or not.

1. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.
2. Where services are indicated as Contractor's responsibility, engage a qualified testing agency to perform these quality-control services.

    a. Contractor shall not employ same entity engaged by Owner, unless agreed to in writing by Owner.

3. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspecting will be performed.
4. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
5. Testing and inspecting requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
6. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.

C. Manufacturer's Field Services: Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Section 013300 "Submittal Procedures."

D. Manufacturer's Technical Services: Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.

E. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.

F. Associated Services: Cooperate with agencies performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:

1. Access to the Work.
2. Incidental labor and facilities necessary to facilitate tests and inspections.
3. Adequate quantities of representative samples of materials that require testing and inspecting. Assist agency in obtaining samples.

4. Facilities for storage and field curing of test samples.
5. Delivery of samples to testing agencies.
6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
7. Security and protection for samples and for testing and inspecting equipment at Project site.

G. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and -control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting.

1. Schedule times for tests, inspections, obtaining samples, and similar activities.

H. Schedule of Tests and Inspections: Prepare a schedule of tests, inspections, and similar quality-control services required by the Contract Documents. Coordinate and submit concurrently with Contractor's construction schedule. Update as the Work progresses.

1. Distribution: Distribute schedule to Owner, Architect, testing agencies, and each party involved in performance of portions of the Work where tests and inspections are required.

1.9 SPECIAL TESTS AND INSPECTIONS

A. Special Tests and Inspections: Owner will engage a qualified testing agency to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner, and as follows:

1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures and reviews the completeness and adequacy of those procedures to perform the Work.
2. Notifying Architect and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
3. Submitting a certified written report of each test, inspection, and similar quality-control service to Architect with copy to Contractor and to authorities having jurisdiction.
4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
5. Interpreting tests and inspections and stating in each report whether tested and inspected work complies with or deviates from the Contract Documents.
6. Retesting and reinspecting corrected work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:

1. Date test or inspection was conducted.
2. Description of the Work tested or inspected.
3. Date test or inspection results were transmitted to Architect.
4. Identification of testing agency or special inspector conducting test or inspection.

B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Architect's reference during normal working hours.

3.2 REPAIR AND PROTECTION

A. General: On completion of testing, inspecting, sample taking, and similar services, repair damaged construction and restore substrates and finishes.

1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Section 017300 "Execution."

B. Protect construction exposed by or for quality-control service activities.

C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 014000

SECTION 014200 - REFERENCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 DEFINITIONS

A. General: Basic Contract definitions are included in the Conditions of the Contract.

B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.

C. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "required," and "permitted" have the same meaning as "directed."

D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."

E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.

F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.

G. "Install": Unload, temporarily store, unpack, assemble, erect, place, anchor, apply, work to dimension, finish, cure, protect, clean, and similar operations at Project site.

H. "Provide": Furnish and install, complete and ready for the intended use.

I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

1.3 INDUSTRY STANDARDS

A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.

B. Publication Dates: Comply with standards in effect as of date of the Contract Documents unless otherwise indicated.

C. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.

1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

1.4 ABBREVIATIONS AND ACRONYMS

A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities indicated in Gale's "Encyclopedia of Associations: National Organizations of the U.S." or in Columbia Books' "National Trade & Professional Associations of the United States."

B. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. AABC - Associated Air Balance Council; www.aabc.com.
2. AAMA - American Architectural Manufacturers Association; www.aamanet.org.
3. AAPFCO - Association of American Plant Food Control Officials; www.aapfco.org.
4. AASHTO - American Association of State Highway and Transportation Officials; www.transportation.org.
5. AATCC - American Association of Textile Chemists and Colorists; www.aatcc.org.
6. ABMA - American Bearing Manufacturers Association; www.americanbearings.org.
7. ACI - American Concrete Institute; (Formerly: ACI International); www.concrete.org.
8. ACPA - American Concrete Pipe Association; www.concrete-pipe.org.
9. AEIC - Association of Edison Illuminating Companies, Inc. (The); www.aeic.org.
10. AF&PA - American Forest & Paper Association; www.afandpa.org.
11. AGA - American Gas Association; www.aga.org.
12. AHAM - Association of Home Appliance Manufacturers; www.aham.org.
13. AHRI - Air-Conditioning, Heating, and Refrigeration Institute (The); www.ahrinet.org.
14. AI - Asphalt Institute; www.asphaltinstitute.org.
15. AIA - American Institute of Architects (The); www.aia.org.
16. AISC - American Institute of Steel Construction; www.aisc.org.
17. AISI - American Iron and Steel Institute; www.steel.org.
18. AITC - American Institute of Timber Construction; www.aitc-glulam.org.
19. AMCA - Air Movement and Control Association International, Inc.; www.amca.org.
20. ANSI - American National Standards Institute; www.ansi.org.
21. AOSA - Association of Official Seed Analysts, Inc.; www.aosaseed.com.
22. APA - APA - The Engineered Wood Association; www.apawood.org.
23. APA - Architectural Precast Association; www.archprecast.org.
24. API - American Petroleum Institute; www.api.org.
25. ARI - Air-Conditioning & Refrigeration Institute; (See AHRI).

26. ARI - American Refrigeration Institute; (See AHRI).
27. ARMA - Asphalt Roofing Manufacturers Association; www.asphaltroofing.org.
28. ASCE - American Society of Civil Engineers; www.asce.org.
29. ASCE/SEI - American Society of Civil Engineers/Structural Engineering Institute; (See ASCE).
30. ASHRAE - American Society of Heating, Refrigerating and Air-Conditioning Engineers; www.ashrae.org.
31. ASME - ASME International; (American Society of Mechanical Engineers); www.asme.org.
32. ASSE - American Society of Safety Engineers (The); www.asse.org.
33. ASSE - American Society of Sanitary Engineering; www.asse-plumbing.org.
34. ASTM - ASTM International; (American Society for Testing and Materials International); www.astm.org.
35. ATIS - Alliance for Telecommunications Industry Solutions; www.atis.org.
36. AWEA - American Wind Energy Association; www.awea.org.
37. AWI - Architectural Woodwork Institute; www.awinet.org.
38. AWMAC - Architectural Woodwork Manufacturers Association of Canada; www.awmac.com.
39. AWPA - American Wood Protection Association; (Formerly: American Wood-Preservers' Association); www.awpa.com.
40. AWS - American Welding Society; www.aws.org.
41. AWWA - American Water Works Association; www.awwa.org.
42. BHMA - Builders Hardware Manufacturers Association; www.buildershardware.com.
43. BIA - Brick Industry Association (The); www.gobrick.com.
44. BICSI - BICSI, Inc.; www.bicsi.org.
45. BIFMA - BIFMA International; (Business and Institutional Furniture Manufacturer's Association); www.bifma.com.
46. BISSC - Baking Industry Sanitation Standards Committee; www.bissc.org.
47. BWF - Badminton World Federation; (Formerly: International Badminton Federation); www.bwfbadminton.org.
48. CDA - Copper Development Association; www.copper.org.
49. CEA - Canadian Electricity Association; www.electricity.ca.
50. CEA - Consumer Electronics Association; www.ce.org.
51. CFFA - Chemical Fabrics & Film Association, Inc.; www.chemicalfabricsandfilm.com.
52. CFSEI - Cold-Formed Steel Engineers Institute; www.cfsei.org.
53. CGA - Compressed Gas Association; www.cganet.com.
54. CIMA - Cellulose Insulation Manufacturers Association; www.cellulose.org.
55. CISCA - Ceilings & Interior Systems Construction Association; www.cisca.org.
56. CISPI - Cast Iron Soil Pipe Institute; www.cispi.org.
57. CLFMI - Chain Link Fence Manufacturers Institute; www.chainlinkinfo.org.
58. CPA - Composite Panel Association; www.pbmdf.com.
59. CRI - Carpet and Rug Institute (The); www.carpet-rug.org.
60. CRRC - Cool Roof Rating Council; www.coolroofs.org.
61. CRSI - Concrete Reinforcing Steel Institute; www.crsi.org.
62. CSA - Canadian Standards Association; www.csa.ca.
63. CSA - CSA International; (Formerly: IAS - International Approval Services); www.csa-international.org.
64. CSI - Construction Specifications Institute (The); www.csinet.org.
65. CSSB - Cedar Shake & Shingle Bureau; www.cedarbureau.org.

66. CTI - Cooling Technology Institute; (Formerly: Cooling Tower Institute); www.cti.org.
67. CWC - Composite Wood Council; (See CPA).
68. DASMA - Door and Access Systems Manufacturers Association; www.dasma.com.
69. DHI - Door and Hardware Institute; www.dhi.org.
70. ECA - Electronic Components Association; (See ECIA).
71. ECAMA - Electronic Components Assemblies & Materials Association; (See ECIA).
72. ECIA ? Electronic Components Industry Association; www.eciaonline.org
73. EIA - Electronic Industries Alliance; (See TIA).
74. EIMA - EIFS Industry Members Association; www.eima.com.
75. EJMA - Expansion Joint Manufacturers Association, Inc.; www.ejma.org.
76. ESD - ESD Association; (Electrostatic Discharge Association); www.esda.org.
77. ESTA - Entertainment Services and Technology Association; (See PLASA).
78. EVO - Efficiency Valuation Organization; www.evo-world.org.
79. FIBA - F?d?ration Internationale de Basketball; (The International Basketball Federation); www.fiba.com.
80. FIVB - F?d?ration Internationale de Volleyball; (The International Volleyball Federation); www.fivb.org.
81. FM Approvals - FM Approvals LLC; www.fmglobal.com.
82. FM Global - FM Global; (Formerly: FMG - FM Global); www.fmglobal.com.
83. FRSA - Florida Roofing, Sheet Metal & Air Conditioning Contractors Association, Inc.; www.floridaroof.com.
84. FSA - Fluid Sealing Association; www.fluidsealing.com.
85. FSC - Forest Stewardship Council U.S.; www.fscus.org.
86. GA - Gypsum Association; www.gypsum.org.
87. GANA - Glass Association of North America; www.glasswebsite.com.
88. GS - Green Seal; www.greenseal.org.
89. HI - Hydraulic Institute; www.pumps.org.
90. HI/GAMA - Hydronics Institute/Gas Appliance Manufacturers Association; (See AHRI).
91. HMMA - Hollow Metal Manufacturers Association; (See NAAMM).
92. HPVA - Hardwood Plywood & Veneer Association; www.hpva.org.
93. HPW - H. P. White Laboratory, Inc.; www.hpwhite.com.
94. IAPSC - International Association of Professional Security Consultants; www.iapsc.org.
95. IAS - International Accreditation Service; www.iasonline.org.
96. IAS - International Approval Services; (See CSA).
97. ICBO - International Conference of Building Officials; (See ICC).
98. ICC - International Code Council; www.iccsafe.org.
99. ICEA - Insulated Cable Engineers Association, Inc.; www.icea.net.
100. ICPA - International Cast Polymer Alliance; www.icpa-hq.org.
101. ICRI - International Concrete Repair Institute, Inc.; www.icri.org.
102. IEC - International Electrotechnical Commission; www.iec.ch.
103. IEEE - Institute of Electrical and Electronics Engineers, Inc. (The); www.ieee.org.
104. IES - Illuminating Engineering Society; (Formerly: Illuminating Engineering Society of North America); www.ies.org.
105. IESNA - Illuminating Engineering Society of North America; (See IES).
106. IEST - Institute of Environmental Sciences and Technology; www.iest.org.
107. IGMA - Insulating Glass Manufacturers Alliance; www.igmaonline.org.
108. IGSHPA - International Ground Source Heat Pump Association; www.igshpa.okstate.edu.
109. ILI - Indiana Limestone Institute of America, Inc.; www.iliai.com.

110. Intertek - Intertek Group; (Formerly: ETL SEMCO; Intertek Testing Service NA); www.intertek.com.
111. ISA - International Society of Automation (The); (Formerly: Instrumentation, Systems, and Automation Society); www.isa.org.
112. ISAS - Instrumentation, Systems, and Automation Society (The); (See ISA).
113. ISFA - International Surface Fabricators Association; (Formerly: International Solid Surface Fabricators Association); www.isfanow.org.
114. ISO - International Organization for Standardization; www.iso.org.
115. ISSFA - International Solid Surface Fabricators Association; (See ISFA).
116. ITU - International Telecommunication Union; www.itu.int/home.
117. KCMA - Kitchen Cabinet Manufacturers Association; www.kcma.org.
118. LMA - Laminating Materials Association; (See CPA).
119. LPI - Lightning Protection Institute; www.lightning.org.
120. MBMA - Metal Building Manufacturers Association; www.mbma.com.
121. MCA - Metal Construction Association; www.metalconstruction.org.
122. MFMA - Maple Flooring Manufacturers Association, Inc.; www.maplefloor.org.
123. MFMA - Metal Framing Manufacturers Association, Inc.; www.metalframingmfg.org.
124. MHIA - Material Handling Industry of America; www.mhia.org.
125. MIA - Marble Institute of America; www.marble-institute.com.
126. MMPA - Moulding & Millwork Producers Association; (Formerly: Wood Moulding & Millwork Producers Association); www.wmmpa.com.
127. MPI - Master Painters Institute; www.paintinfo.com.
128. MSS - Manufacturers Standardization Society of The Valve and Fittings Industry Inc.; www.mss-hq.org.
129. NAAMM - National Association of Architectural Metal Manufacturers; www.naamm.org.
130. NACE - NACE International; (National Association of Corrosion Engineers International); www.nace.org.
131. NADCA - National Air Duct Cleaners Association; www.nadca.com.
132. NAIMA - North American Insulation Manufacturers Association; www.naima.org.
133. NBGQA - National Building Granite Quarries Association, Inc.; www.nbgqa.com.
134. NCAA - National Collegiate Athletic Association (The); www.ncaa.org.
135. NCMA - National Concrete Masonry Association; www.ncma.org.
136. NEBB - National Environmental Balancing Bureau; www.nebb.org.
137. NECA - National Electrical Contractors Association; www.necanet.org.
138. NeLMA - Northeastern Lumber Manufacturers Association; www.nelma.org.
139. NEMA - National Electrical Manufacturers Association; www.nema.org.
140. NETA - InterNational Electrical Testing Association; www.netaworld.org.
141. NFHS - National Federation of State High School Associations; www.nfhs.org.
142. NFPA - NFPA; (National Fire Protection Association); www.nfpa.org.
143. NFPA - NFPA International; (See NFPA).
144. NFRC - National Fenestration Rating Council; www.nfrc.org.
145. NHLA - National Hardwood Lumber Association; www.nhla.com.
146. NLGA - National Lumber Grades Authority; www.nlga.org.
147. NOFMA - National Oak Flooring Manufacturers Association; (See NWFA).
148. NOMMA - National Ornamental & Miscellaneous Metals Association; www.nomma.org.
149. NRCA - National Roofing Contractors Association; www.nrca.net.
150. NRMCA - National Ready Mixed Concrete Association; www.nrmca.org.
151. NSF - NSF International; (National Sanitation Foundation International); www.nsf.org.

152. NSPE - National Society of Professional Engineers; www.nspe.org.
153. NSSGA - National Stone, Sand & Gravel Association; www.nssga.org.
154. NTMA - National Terrazzo & Mosaic Association, Inc. (The); www.ntma.com.
155. NWFA - National Wood Flooring Association; www.nwfa.org.
156. PCI - Precast/Prestressed Concrete Institute; www.pci.org.
157. PDI - Plumbing & Drainage Institute; www.pdionline.org.
158. PLASA - PLASA; (Formerly: ESTA - Entertainment Services and Technology Association); www.plasa.org.
159. RCSC - Research Council on Structural Connections; www.boltcouncil.org.
160. RFCI - Resilient Floor Covering Institute; www.rfci.com.
161. RIS - Redwood Inspection Service; www.redwoodinspection.com.
162. SAE - SAE International; (Society of Automotive Engineers); www.sae.org.
163. SCTE - Society of Cable Telecommunications Engineers; www.scte.org.
164. SDI - Steel Deck Institute; www.sdi.org.
165. SDI - Steel Door Institute; www.steeldoor.org.
166. SEFA - Scientific Equipment and Furniture Association; www.sefalabs.com.
167. SEI/ASCE - Structural Engineering Institute/American Society of Civil Engineers; (See ASCE).
168. SIA - Security Industry Association; www.siaonline.org.
169. SJI - Steel Joist Institute; www.steeljoist.org.
170. SMA - Screen Manufacturers Association; www.smainfo.org.
171. SMACNA - Sheet Metal and Air Conditioning Contractors' National Association; www.smacna.org.
172. SMPTE - Society of Motion Picture and Television Engineers; www.smpte.org.
173. SPFA - Spray Polyurethane Foam Alliance; www.sprayfoam.org.
174. SPIB - Southern Pine Inspection Bureau; www.spib.org.
175. SPRI - Single Ply Roofing Industry; www.spri.org.
176. SRCC - Solar Rating and Certification Corporation; www.solar-rating.org.
177. SSINA - Specialty Steel Industry of North America; www.ssina.com.
178. SSPC - SSPC: The Society for Protective Coatings; www.sspc.org.
179. STI - Steel Tank Institute; www.steeltank.com.
180. SWI - Steel Window Institute; www.steelwindows.com.
181. SWPA - Submersible Wastewater Pump Association; www.swpa.org.
182. TCA - Tilt-Up Concrete Association; www.tilt-up.org.
183. TCNA - Tile Council of North America, Inc.; (Formerly: Tile Council of America); www.tileusa.com.
184. TEMA - Tubular Exchanger Manufacturers Association, Inc.; www.tema.org.
185. TIA - Telecommunications Industry Association; (Formerly: TIA/EIA - Telecommunications Industry Association/Electronic Industries Alliance); www.tiaonline.org.
186. TIA/EIA - Telecommunications Industry Association/Electronic Industries Alliance; (See TIA).
187. TMS - The Masonry Society; www.masonrysociety.org.
188. TPI - Truss Plate Institute; www.tpinst.org.
189. TPI - Turfgrass Producers International; www.turfgrasssod.org.
190. TRI - Tile Roofing Institute; (Formerly: National Tile Roofing Manufacturing Association); www.tileroofing.org.
191. UBC - Uniform Building Code; (See ICC).
192. UL - Underwriters Laboratories Inc.; www.ul.com.

193. UNI - Uni-Bell PVC Pipe Association; www.uni-bell.org.
194. USAV - USA Volleyball; www.usavolleyball.org.
195. USGBC - U.S. Green Building Council; www.usgbc.org.
196. USITT - United States Institute for Theatre Technology, Inc.; www.usitt.org.
197. WASTEC - Waste Equipment Technology Association; www.wastec.org.
198. WCLIB - West Coast Lumber Inspection Bureau; www.wclib.org.
199. WCMA - Window Covering Manufacturers Association; www.wcmanet.org.
200. WDMA - Window & Door Manufacturers Association; www.wdma.com.
201. WI - Woodwork Institute; (Formerly: WIC - Woodwork Institute of California); www.wicnet.org.
202. WMMPA - Wood Moulding & Millwork Producers Association; (See MMPA).
203. WSRCA - Western States Roofing Contractors Association; www.wsrca.com.
204. WPA - Western Wood Products Association; www.wwpa.org.

C. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. This information is believed to be accurate as of the date of the Contract Documents.

1. DIN - Deutsches Institut f?r Normung e.V.; www.din.de.
2. IAPMO - International Association of Plumbing and Mechanical Officials; www.iapmo.org.
3. ICC - International Code Council; www.iccsafe.org.
4. ICC-ES - ICC Evaluation Service, LLC; www.icc-es.org.

D. Federal Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. Information is subject to change and is up-to-date as of the date of the Contract Documents.

1. COE - Army Corps of Engineers; www.usace.army.mil.
2. CPSC - Consumer Product Safety Commission; www.cpsc.gov.
3. DOC - Department of Commerce; National Institute of Standards and Technology; www.nist.gov.
4. DOD - Department of Defense; http://dodssp.daps.dla.mil.
5. DOE - Department of Energy; www.energy.gov.
6. EPA - Environmental Protection Agency; www.epa.gov.
7. FAA - Federal Aviation Administration; www.faa.gov.
8. FG - Federal Government Publications; www.gpo.gov.
9. GSA - General Services Administration; www.gsa.gov.
10. HUD - Department of Housing and Urban Development; www.hud.gov.
11. LBL - Lawrence Berkeley National Laboratory; Environmental Energy Technologies Division; http://eetd.lbl.gov.
12. OSHA - Occupational Safety & Health Administration; www.osha.gov.
13. SD - Department of State; www.state.gov.
14. TRB - Transportation Research Board; National Cooperative Highway Research Program; www.trb.org.
15. USDA - Department of Agriculture; Agriculture Research Service; U.S. Salinity Laboratory; www.ars.usda.gov.
16. USDA - Department of Agriculture; Rural Utilities Service; www.usda.gov.

17. USDJ - Department of Justice; Office of Justice Programs; National Institute of Justice; www.ojp.usdoj.gov.
18. USP - U.S. Pharmacopeia; www.usp.org.
19. USPS - United States Postal Service; www.usps.com.

E. Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the standards and regulations in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.

1. CFR - Code of Federal Regulations; Available from Government Printing Office; www.gpo.gov/fdsys.
2. DOD - Department of Defense; Military Specifications and Standards; Available from Department of Defense Single Stock Point; http://dodssp.daps.dla.mil.
3. DSCC - Defense Supply Center Columbus; (See FS).
4. FED-STD - Federal Standard; (See FS).
5. FS - Federal Specification; Available from Department of Defense Single Stock Point; http://dodssp.daps.dla.mil.

    a. Available from Defense Standardization Program; www.dsp.dla.mil.
    b. Available from General Services Administration; www.gsa.gov.
    c. Available from National Institute of Building Sciences/Whole Building Design Guide; www.wbdg.org/ccb.

6. MILSPEC - Military Specification and Standards; (See DOD).
7. USAB - United States Access Board; www.access-board.gov.
8. USATBCB - U.S. Architectural & Transportation Barriers Compliance Board; (See USAB).

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 014200

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.

B. Related Requirements:

1. Section 011000 "Summary" for work restrictions and limitations on utility interruptions.

1.3 USE CHARGES

A. Water and Sewer Service from Existing System: Water from Owner's existing water system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

B. Electric Power Service from Existing System: Electric power from Owner's existing system is available for use without metering and without payment of use charges. Provide connections and extensions of services as required for construction operations.

1.4 INFORMATIONAL SUBMITTALS

A. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.

B. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.

C. Moisture-Protection Plan: Describe procedures and controls for protecting materials and construction from water absorption and damage.

1. Describe delivery, handling, and storage provisions for materials subject to water absorption or water damage.
2. Indicate procedures for discarding water-damaged materials, protocols for mitigating water intrusion into completed Work, and replacing water-damaged Work.

3. Indicate sequencing of work that requires water and describe plans for dealing with water from these operations. Show procedures for verifying that wet construction has dried sufficiently to permit installation of finish materials.

D. Dust- and HVAC-Control Plan: Submit coordination drawing and narrative that indicates the dust- and HVAC-control measures proposed for use, proposed locations, and proposed time frame for their operation. Identify further options if proposed measures are later determined to be inadequate. Include the following:

1. Locations of dust-control partitions at each phase of work.
2. HVAC system isolation schematic drawing.
3. Location of proposed air-filtration system discharge.
4. Waste handling procedures.
5. Other dust-control measures.

1.5 QUALITY ASSURANCE

A. Accessible Temporary Egress: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.

1.6 PROJECT CONDITIONS

A. Temporary Use of Permanent Facilities: Engage Installer of each permanent service to assume responsibility for operation, maintenance, and protection of each permanent service during its use as a construction facility before Owner's acceptance, regardless of previously assigned responsibilities.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Chain-Link Fencing: Minimum 2-inch, 0.148-inch- thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet high with galvanized-steel pipe posts; minimum 2-3/8-inch- OD line posts and 2-7/8-inch- OD corner and pull posts, with 1-5/8-inch- OD top rails.

B. Portable Chain-Link Fencing: Minimum 2-inch, 0.148-inch- thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet high with galvanized-steel pipe posts; minimum 2-3/8-inch- OD line posts and 2-7/8-inch- OD corner and pull posts, with 1-5/8-inch- OD top and bottom rails. Provide galvanized-steel bases for supporting posts.

C. Polyethylene Sheet: Reinforced, fire-resistive sheet, 10-mil minimum thickness, with flame-spread rating of 15 or less per ASTM E 84 and passing NFPA 701 Test Method 2.

D. Dust-Control Adhesive-Surface Walk-off Mats: Provide mats minimum 36 by 60 inches.

2.2 TEMPORARY FACILITIES

A. Field Offices, General: Owner will designate an area within the building for contractor's office use.

B. Sheds: Provide sheds sized, furnished, and equipped to accommodate materials and equipment for construction operations.

1. Store combustible materials apart from building.

C. Sanitary Facilities: Provide portable toilet and wash facilities.

2.3 EQUIPMENT

A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

B. Permanent HVAC System: If Owner authorizes use of permanent HVAC system for temporary use during construction, provide filter with MERV of 8 at each return-air grille in system and remove at end of construction and clean HVAC system as required in Section 017700 "Closeout Procedures".

C. Air-Filtration Units: Primary and secondary HEPA-filter-equipped portable units with four-stage filtration. Provide single switch for emergency shutoff. Configure to run continuously.

PART 3 - EXECUTION

3.1 SUPPORT FACILITIES INSTALLATION

A. General: Comply with the following:

1. Provide construction for sheds located within construction area or within 30 feet of building lines that is noncombustible according to ASTM E 136. Comply with NFPA 241.
2. Maintain support facilities until Architect schedules Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.

B. Traffic Controls: Comply with requirements of authorities having jurisdiction.

1. Protect existing site improvements to remain including curbs, pavement, and utilities.
2. Maintain access for fire-fighting equipment and access to fire hydrants.

C. Parking: Use designated areas of Owner's existing parking areas for construction personnel.

D. Waste Disposal Facilities: Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction. Comply with progress cleaning requirements in Section 017300 "Execution."

E. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.

1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.

F. Sanitary Facilities: Provide temporary toilets, wash facilities, safety shower and eyewash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.

1. Use of Permanent Toilets: Use of Owner's existing or new toilet facilities is not permitted.

3.2 SECURITY AND PROTECTION FACILITIES INSTALLATION

A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.

B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.

1. Comply with work restrictions specified in Section 011000 "Summary."

C. Stormwater Control: Comply with requirements of authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.

D. Pest Control: Engage pest-control service to recommend practices to minimize attraction and harboring of rodents, roaches, and other pests and to perform extermination and control procedures at regular intervals so Project will be free of pests and their residues at Substantial Completion. Perform control operations lawfully, using environmentally safe materials.

E. Security Enclosure and Lockup: Install temporary enclosure fence, with lock, around staging and storage areas on site.

F. Temporary Egress: Maintain temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction.

G. Temporary Enclosures: Provide temporary enclosures for protection of construction, in progress and completed, from exposure, foul weather, other construction operations, and similar activities. Provide temporary weathertight enclosure for building exterior.

1. Where heating or cooling is needed and permanent enclosure is incomplete, insulate temporary enclosures.

H. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.

1. Prohibit smoking in construction areas.
2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition according to requirements of authorities having jurisdiction.
3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
4. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

3.3 OPERATION, TERMINATION, AND REMOVAL

A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.

B. Maintenance: Maintain facilities in good operating condition until removal.

1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.

C. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.
2. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 017700 "Closeout Procedures."

END OF SECTION 015000

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.

B. Related Requirements:

1. Section 012100 "Allowances" for products selected under an allowance.
2. Section 012500 "Substitution Procedures" for requests for substitutions.
3. Section 014200 "References" for applicable industry standards for products specified.

1.3 DEFINITIONS

A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.

1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature, that is current as of date of the Contract Documents.
2. New Products: Items that have not previously been incorporated into another project or facility. Products salvaged or recycled from other projects are not considered new products.
3. Comparable Product: Product that is demonstrated and approved through submittal process to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.

B. Basis-of-Design Product Specification: A specification in which a specific manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation, to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics for purposes of evaluating comparable products of additional manufacturers named in the specification.

1.4 ACTION SUBMITTALS

A. Comparable Product Requests: Submit request for consideration of each comparable product. Identify product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.

1. Include data to indicate compliance with the requirements specified in "Comparable Products" Article.
2. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within one week of receipt of a comparable product request. Architect will notify Contractor of approval or rejection of proposed comparable product request within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.

    a. Form of Approval: As specified in Section 013300 "Submittal Procedures."
    b. Use product specified if Architect does not issue a decision on use of a comparable product request within time allocated.

B. Basis-of-Design Product Specification Submittal: Comply with requirements in Section 013300 "Submittal Procedures." Show compliance with requirements.

1.5 QUALITY ASSURANCE

A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.

1. Each contractor is responsible for providing products and construction methods compatible with products and construction methods of other contractors.
2. If a dispute arises between contractors over concurrently selectable but incompatible products, Architect will determine which products shall be used.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.

B. Delivery and Handling:

1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.

3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
4. Inspect products on delivery to determine compliance with the Contract Documents and to determine that products are undamaged and properly protected.

C. Storage:

1. Store products to allow for inspection and measurement of quantity or counting of units.
2. Store materials in a manner that will not endanger Project structure.
3. Store products that are subject to damage by the elements, under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation.
4. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
5. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
6. Protect stored products from damage and liquids from freezing.
7. Provide a secure location and enclosure at Project site for storage of materials and equipment by Owner's construction forces. Coordinate location with Owner.

1.7 PRODUCT WARRANTIES

A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.

1. Manufacturer's Warranty: Written warranty furnished by individual manufacturer for a particular product and specifically endorsed by manufacturer to Owner.
2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner.

B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.

1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
2. Specified Form: When specified forms are included with the Specifications, prepare a written document using indicated form properly executed.
3. See other Sections for specific content requirements and particular requirements for submitting special warranties.

C. Submittal Time: Comply with requirements in Section 017700 "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.

1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
3. Owner reserves the right to limit selection to products with warranties not in conflict with requirements of the Contract Documents.
4. Where products are accompanied by the term "as selected," Architect will make selection.
5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
6. Or Equal: For products specified by name and accompanied by the term "or equal," or "or approved equal," or "or approved," comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product.

B. Product Selection Procedures:

1. Product: Where Specifications name a single manufacturer and product, provide the named product that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
2. Manufacturer/Source: Where Specifications name a single manufacturer or source, provide a product by the named manufacturer or source that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
3. Products:

    a. Restricted List: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will be considered unless otherwise indicated.
    b. Nonrestricted List: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed, or an unnamed product, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product.

4. Manufacturers:

    a. Restricted List: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will be considered unless otherwise indicated.

b. Nonrestricted List: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed, or a product by an unnamed manufacturer, that complies with requirements. Comply with requirements in "Comparable Products" Article for consideration of an unnamed manufacturer's product.

5. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.

C. Visual Matching Specification: Where Specifications require "match Architect's sample", provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.

1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Section 012500 "Substitution Procedures" for proposal of product.

D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

A. Conditions for Consideration: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with these requirements:

1. Evidence that the proposed product does not require revisions to the Contract Documents, that it is consistent with the Contract Documents and will produce the indicated results, and that it is compatible with other portions of the Work.
2. Detailed comparison of significant qualities of proposed product with those named in the Specifications. Significant qualities include attributes such as performance, weight, size, durability, visual effect, and specific features and requirements indicated.
3. Evidence that proposed product provides specified warranty.
4. List of similar installations for completed projects with project names and addresses and names and addresses of architects and owners, if requested.
5. Samples, if requested.

PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

SECTION 017300 - EXECUTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes general administrative and procedural requirements governing execution of the Work including, but not limited to, the following:

1. Construction layout.
2. Field engineering and surveying.
3. Installation of the Work.
4. Cutting and patching.
5. Coordination of Owner-installed products.
6. Progress cleaning.
7. Starting and adjusting.
8. Protection of installed construction.

B. Related Requirements:

1. Section 011000 "Summary" for limits on use of Project site.
2. Section 013300 "Submittal Procedures" for submitting surveys.
3. Section 017700 "Closeout Procedures" for submitting final property survey with Project Record Documents, recording of Owner-accepted deviations from indicated lines and levels, and final cleaning.
4. Section 024119 "Selective Demolition" for demolition and removal of selected portions of the building.
5. Section 078413 "Penetration Firestopping" for patching penetrations in fire-rated construction.

1.3 DEFINITIONS

A. Cutting: Removal of in-place construction necessary to permit installation or performance of other work.

B. Patching: Fitting and repair work required to restore construction to original conditions after installation of other work.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For land surveyor.

B. Certificates: Submit certificate signed by land surveyor or professional engineer certifying that location and elevation of improvements comply with requirements.

C. Cutting and Patching Plan: Submit plan describing procedures at least 10 days prior to the time cutting and patching will be performed. Include the following information:

1. Extent: Describe reason for and extent of each occurrence of cutting and patching.
2. Changes to In-Place Construction: Describe anticipated results. Include changes to structural elements and operating components as well as changes in building appearance and other significant visual elements.
3. Products: List products to be used for patching and firms or entities that will perform patching work.
4. Dates: Indicate when cutting and patching will be performed.
5. Utilities and Mechanical and Electrical Systems: List services and systems that cutting and patching procedures will disturb or affect. List services and systems that will be relocated and those that will be temporarily out of service. Indicate length of time permanent services and systems will be disrupted.

    a. Include description of provisions for temporary services and systems during interruption of permanent services and systems.

D. Landfill Receipts: Submit copy of receipts issued by a landfill facility, licensed to accept hazardous materials, for hazardous waste disposal.

E. Certified Surveys: Submit two copies signed by land surveyor or professional engineer.

F. Final Property Survey: Submit 10 copies showing the Work performed and record survey data.

1.5 QUALITY ASSURANCE

A. Land Surveyor Qualifications: A professional land surveyor who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing land-surveying services of the kind indicated.

B. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.

1. Structural Elements: When cutting and patching structural elements, notify Architect of locations and details of cutting and await directions from Architect before proceeding. Shore, brace, and support structural elements during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection

2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety.

    a. Primary operational systems and equipment.
    b. Fire separation assemblies.
    c. Air or smoke barriers.
    d. Fire-suppression systems.
    e. Plumbing piping systems.
    f. Mechanical systems piping and ducts.
    g. Control systems.
    h. Communication systems.
    i. Fire-detection and -alarm systems.
    j. Conveying systems.
    k. Electrical wiring systems.
    l. Operating systems of special construction.

3. Other Construction Elements: Do not cut and patch other construction elements or components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety. Other construction elements include but are not limited to the following:

    a. Water, moisture, or vapor barriers.
    b. Membranes and flashings.
    c. Exterior curtain-wall construction.
    d. Sprayed fire-resistive material.
    e. Equipment supports.
    f. Piping, ductwork, vessels, and equipment.
    g. Noise- and vibration-control elements and systems.

4. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.

C. Cutting and Patching Conference: Before proceeding, meet at Project site with parties involved in cutting and patching, including mechanical and electrical trades. Review areas of potential interference and conflict. Coordinate procedures and resolve potential conflicts before proceeding.

D. Manufacturer's Installation Instructions: Obtain and maintain on-site manufacturer's written recommendations and instructions for installation of products and equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

A. General: Comply with requirements specified in other Sections.

B. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.

1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to Architect for the visual and functional performance of in-place materials.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.

1. Before construction, verify the location and invert elevation at points of connection of site utilities.
2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.

B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.

1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
2. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.

C. Written Report: Where a written report listing conditions detrimental to performance of the Work is required by other Sections, include the following:

1. Description of the Work.
2. List of detrimental conditions, including substrates.
3. List of unacceptable installation tolerances.
4. Recommended corrections.

D. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Existing Utility Information: Furnish information to Owner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.

B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents caused by differing field conditions outside the control of Contractor, submit a request for information to Architect according to requirements in Section 013100 "Project Management and Coordination."

3.3 CONSTRUCTION LAYOUT

A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks. If discrepancies are discovered, notify Architect promptly.

B. General: Engage a land surveyor to lay out the Work using accepted surveying practices.

1. Establish benchmarks and control points to set lines and levels at each story of construction and elsewhere as needed to locate each element of Project.
2. Establish limits on use of Project site.
3. Establish dimensions within tolerances indicated. Do not scale Drawings to obtain required dimensions.
4. Inform installers of lines and levels to which they must comply.
5. Check the location, level and plumb, of every major element as the Work progresses.
6. Notify Architect when deviations from required lines and levels exceed allowable tolerances.
7. Close site surveys with an error of closure equal to or less than the standard established by authorities having jurisdiction.

C. Site Improvements: Locate and lay out site improvements, including pavements, grading, fill and topsoil placement, utility slopes, and rim and invert elevations.

D. Building Lines and Levels: Locate and lay out control lines and levels for structures, building foundations, column grids, and floor levels, including those required for mechanical and electrical work. Transfer survey markings and elevations for use with control lines and levels. Level foundations and piers from two or more locations.

E. Record Log: Maintain a log of layout control work. Record deviations from required lines and levels. Include beginning and ending dates and times of surveys, weather conditions, name and duty of each survey party member, and types of instruments and tapes used. Make the log available for reference by Architect.

3.4 INSTALLATION

A. General: Locate the Work and components of the Work accurately, in correct alignment and elevation, as indicated.

1. Make vertical work plumb and make horizontal work level.
2. Where space is limited, install components to maximize space available for maintenance and ease of removal for replacement.
3. Conceal pipes, ducts, and wiring in finished areas unless otherwise indicated.
4. Maintain minimum headroom clearance of 96 inches in occupied spaces and 90 inches in unoccupied spaces.

B. Comply with manufacturer's written instructions and recommendations for installing products in applications indicated.

C. Install products at the time and under conditions that will ensure the best possible results. Maintain conditions required for product performance until Substantial Completion.

D. Conduct construction operations so no part of the Work is subjected to damaging operations or loading in excess of that expected during normal conditions of occupancy.

E. Sequence the Work and allow adequate clearances to accommodate movement of construction items on site and placement in permanent locations.

F. Tools and Equipment: Do not use tools or equipment that produce harmful noise levels.

G. Templates: Obtain and distribute to the parties involved templates for work specified to be factory prepared and field installed. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing products to comply with indicated requirements.

H. Attachment: Provide blocking and attachment plates and anchors and fasteners of adequate size and number to securely anchor each component in place, accurately located and aligned with other portions of the Work. Where size and type of attachments are not indicated, verify size and type required for load conditions.

1. Mounting Heights: Where mounting heights are not indicated, mount components at heights directed by Architect.
2. Allow for building movement, including thermal expansion and contraction.
3. Coordinate installation of anchorages. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

I. Joints: Make joints of uniform width. Where joint locations in exposed work are not indicated, arrange joints for the best visual effect. Fit exposed connections together to form hairline joints.

J. Hazardous Materials: Use products, cleaners, and installation materials that are not considered hazardous.

3.5 CUTTING AND PATCHING

A. Cutting and Patching, General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.

1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.

B. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during installation or cutting and patching operations, by methods and with materials so as not to void existing warranties.

C. Temporary Support: Provide temporary support of work to be cut.

D. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.

E. Adjacent Occupied Areas: Where interference with use of adjoining areas or interruption of free passage to adjoining areas is unavoidable, coordinate cutting and patching according to requirements in Section 011000 "Summary."

F. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to minimize interruption to occupied areas.

G. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.

1. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
2. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
3. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
4. Excavating and Backfilling: Comply with requirements in applicable Sections where required by cutting and patching operations.
5. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
6. Proceed with patching after construction operations requiring cutting are complete.

H. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other work. Patch with durable seams that are as invisible as practicable. Provide materials and comply with installation requirements specified in other Sections, where applicable.

1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate physical integrity of installation.
2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will minimize evidence of patching and refinishing.

    a. Clean piping, conduit, and similar features before applying paint or other finishing materials.
    b. Restore damaged pipe covering to its original condition.

3. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove in-place floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.

    a. Where patching occurs in a painted surface, prepare substrate and apply primer and intermediate paint coats appropriate for substrate over the patch, and apply final paint coat over entire unbroken surface containing the patch. Provide additional coats until patch blends with adjacent surfaces.

4. Ceilings: Patch, repair, or rehang in-place ceilings as necessary to provide an even-plane surface of uniform appearance.
5. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition and ensures thermal and moisture integrity of building enclosure.

I. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

3.6 OWNER-INSTALLED PRODUCTS

A. Site Access: Provide access to Project site for Owner's construction personnel.

B. Coordination: Coordinate construction and operations of the Work with work performed by Owner's construction personnel.

1. Construction Schedule: Inform Owner of Contractor's preferred construction schedule for Owner's portion of the Work. Adjust construction schedule based on a mutually agreeable timetable. Notify Owner if changes to schedule are required due to differences in actual construction progress.
2. Preinstallation Conferences: Include Owner's construction personnel at preinstallation conferences covering portions of the Work that are to receive Owner's work. Attend preinstallation conferences conducted by Owner's construction personnel if portions of the Work depend on Owner's construction.

3.7 PROGRESS CLEANING

A. General: Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.

1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.
3. Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.

    a. Use containers intended for holding waste materials of type to be stored.

4. Coordinate progress cleaning for joint-use areas where Contractor and other contractors are working concurrently.

B. Site: Maintain Project site free of waste materials and debris.

C. Work Areas: Clean areas where work is in progress to the level of cleanliness necessary for proper execution of the Work.

1. Remove liquid spills promptly.
2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.

D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.

E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.

F. Exposed Surfaces in Finished Areas: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.

G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways. Comply with waste disposal requirements in Section 015000 "Temporary Facilities and Controls."

H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.

I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.

J. Limiting Exposures: Supervise construction operations to assure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.8 STARTING AND ADJUSTING

A. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.

B. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.

C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

D. Manufacturer's Field Service: Comply with qualification requirements in Section 014000 "Quality Requirements."

3.9 PROTECTION OF INSTALLED CONSTRUCTION

A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.

B. Comply with manufacturer's written instructions for temperature and relative humidity.

C. Comply with manufacturer's written instructions for temperature and relative humidity.

END OF SECTION 017300

SECTION 017700 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for contract closeout, including, but not limited to, the following:

1. Substantial Completion procedures.
2. Final completion procedures.
3. Warranties.
4. Final cleaning.
5. Repair of the Work.

B. Related Requirements:

1. Section 017300 "Execution" for progress cleaning of Project site.
2. Section 017823 "Operation and Maintenance Data" for operation and maintenance manual requirements.
3. Section 017839 "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.
4. Section 017900 "Demonstration and Training" for requirements for instructing Owner's personnel.

1.3 ACTION SUBMITTALS

A. Product Data: For cleaning agents.

B. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.

C. Certified List of Incomplete Items: Final submittal at Final Completion.

1.4 CLOSEOUT SUBMITTALS

A. Certificates of Release: From authorities having jurisdiction.

B. Certificate of Insurance: For continuing coverage.

1.5 MAINTENANCE MATERIAL SUBMITTALS

A. Schedule of Maintenance Material Items: For maintenance material submittal items specified in other Sections.

1.6 SUBSTANTIAL COMPLETION PROCEDURES

A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected (Contractor's punch list), indicating the value of each item on the list and reasons why the Work is incomplete.

B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.

1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
2. Submit closeout submittals specified in other Division 01 Sections, including project record documents, operation and maintenance manuals, final completion construction photographic documentation, damage or settlement surveys, property surveys, and similar final record information.
3. Submit closeout submittals specified in individual Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
4. Submit maintenance material submittals specified in individual Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Architect. Label with manufacturer's name and model number where applicable.

    a. Schedule of Maintenance Material Items: Prepare and submit schedule of maintenance material submittal items, including name and quantity of each item and name and number of related Specification Section. Obtain Architect's signature for receipt of submittals.

5. Submit test/adjust/balance records.
6. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.

C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.

1. Advise Owner of pending insurance changeover requirements.
2. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
3. Complete startup and testing of systems and equipment.
4. Perform preventive maintenance on equipment used prior to Substantial Completion.
5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems. Submit demonstration and training video recordings specified in

Section 017900 "Demonstration and Training."
6. Advise Owner of changeover in heat and other utilities.
7. Participate with Owner in conducting inspection and walkthrough with local emergency responders.
8. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
9. Complete final cleaning requirements, including touchup painting.
10. Touch up and otherwise repair and restore marred exposed finishes to eliminate visual defects.

D. Inspection: Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to date the work will be completed and ready for final inspection and tests. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.

1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for final completion.

1.7 FINAL COMPLETION PROCEDURES

A. Submittals Prior to Final Completion: Before requesting final inspection for determining final completion, complete the following:

1. Submit a final Application for Payment according to Section 012900 "Payment Procedures."
2. Certified List of Incomplete Items: Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. Certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
3. Certificate of Insurance: Submit evidence of final, continuing insurance coverage complying with insurance requirements.

B. Inspection: Submit a written request for final inspection to determine acceptance a minimum of 10 days prior to date the work will be completed and ready for final inspection and tests. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.

1. Reinspection: Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

1.8 LIST OF INCOMPLETE ITEMS (PUNCH LIST)

A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.

1. Organize list of spaces in sequential order.
2. Organize items applying to each space by major element, including categories for ceiling, individual walls, floors, equipment, and building systems.
3. Include the following information at the top of each page:

    a. Project name.
    b. Date.
    c. Name of Architect.
    d. Name of Contractor.
    e. Page number.

4. Submit list of incomplete items in the following format:

    a. PDF electronic file. Architect will return annotated file.

1.9 SUBMITTAL OF PROJECT WARRANTIES

A. Time of Submittal: Submit written warranties on request of Architect for designated portions of the Work where commencement of warranties other than date of Substantial Completion is indicated, or when delay in submittal of warranties might limit Owner's rights under warranty.

B. Partial Occupancy: Submit properly executed warranties within 15 days of completion of designated portions of the Work that are completed and occupied or used by Owner during construction period by separate agreement with Contractor.

C. Organize warranty documents into an orderly sequence based on the table of contents of Project Manual.

1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.
4. Warranty Electronic File: Scan warranties and bonds and assemble complete warranty and bond submittal package into a single indexed electronic PDF file with links enabling navigation to each item. Provide bookmarked table of contents at beginning of document.

D. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

1. Use cleaning products that comply with Green Seal's GS-37, or if GS-37 is not applicable, use products that comply with the California Code of Regulations maximum allowable VOC levels.

PART 3 - EXECUTION

3.1 FINAL CLEANING

A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.

B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.

1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:

a. Clean Project site, yard, and grounds, in areas disturbed by construction activities, including landscape development areas, of rubbish, waste material, litter, and other foreign substances.
b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
c. Rake grounds that are neither planted nor paved to a smooth, even-textured surface.
d. Remove tools, construction equipment, machinery, and surplus material from Project site.
e. Remove snow and ice to provide safe access to building.
f. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
g. Remove debris and surface dust from limited access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
h. Sweep concrete floors broom clean in unoccupied spaces.
i. Vacuum carpet and similar soft surfaces, removing debris and excess nap; clean according to manufacturer's recommendations if visible soil or stains remain.
j. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Polish mirrors and glass, taking care not to scratch surfaces.
k. Remove labels that are not permanent.
l. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.

m. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.
n. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
o. Clean ducts, blowers, and coils if units were operated without filters during construction or that display contamination with particulate matter on inspection.

1) Clean HVAC system in compliance with NADCA Standard 1992-01. Provide written report on completion of cleaning.

p. Clean light fixtures, lamps, globes, and reflectors to function with full efficiency.
q. Leave Project clean and ready for occupancy.

C. Construction Waste Disposal: Comply with waste disposal requirements in Section 015000 "Temporary Facilities and Controls."

3.2 REPAIR OF THE WORK

A. Complete repair and restoration operations before requesting inspection for determination of Substantial Completion.

B. Repair or remove and replace defective construction. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment. Where damaged or worn items cannot be repaired or restored, provide replacements. Remove and replace operating components that cannot be repaired. Restore damaged construction and permanent facilities used during construction to specified condition.

1. Remove and replace chipped, scratched, and broken glass, reflective surfaces, and other damaged transparent materials.
2. Touch up and otherwise repair and restore marred or exposed finishes and surfaces. Replace finishes and surfaces that that already show evidence of repair or restoration.

a. Do not paint over "UL" and other required labels and identification, including mechanical and electrical nameplates. Remove paint applied to required labels and identification.

3. Replace parts subject to operating conditions during construction that may impede operation or reduce longevity.
4. Replace burned-out bulbs, bulbs noticeably dimmed by hours of use, and defective and noisy starters in fluorescent and mercury vapor fixtures to comply with requirements for new fixtures.

END OF SECTION 017700

SECTION 017823 - OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for preparing operation and maintenance manuals, including the following:

1. Operation and maintenance documentation directory.
2. Emergency manuals.
3. Operation manuals for systems, subsystems, and equipment.
4. Product maintenance manuals.
5. Systems and equipment maintenance manuals.

B. Related Requirements:

1. Section 013300 "Submittal Procedures" for submitting copies of submittals for operation and maintenance manuals.

1.3 DEFINITIONS

A. System: An organized collection of parts, equipment, or subsystems united by regular interaction.

B. Subsystem: A portion of a system with characteristics similar to a system.

1.4 CLOSEOUT SUBMITTALS

A. Manual Content: Operations and maintenance manual content is specified in individual Specification Sections to be reviewed at the time of Section submittals. Submit reviewed manual content formatted and organized as required by this Section.

1. Architect will comment on whether content of operations and maintenance submittals are acceptable.
2. Where applicable, clarify and update reviewed manual content to correspond to revisions and field conditions.

B. Format: Submit operations and maintenance manuals in the following format:

1. PDF electronic file. Assemble each manual into a composite electronically indexed file. Submit on digital media acceptable to Architect.

    a. Name each indexed document file in composite electronic index with applicable item name. Include a complete electronically linked operation and maintenance directory.
    b. Enable inserted reviewer comments on draft submittals.

2. Two Paper copies (for final manual submittal only). Architect will return both copies for Contractor's delivery to Owner.

C. Initial Manual Submittal: Submit draft copy of each manual at least 30 days before commencing demonstration and training. Architect will comment on whether general scope and content of manual are acceptable.

D. Final Manual Submittal: Submit each manual in final form prior to requesting inspection for Substantial Completion and at least 15 days before commencing demonstration and training. Architect will return copy with comments.

1. Correct or revise each manual to comply with Architect's comments. Submit copies of each corrected manual within 15 days of receipt of Architect's comments and prior to commencing demonstration and training.

PART 2 - PRODUCTS

2.1 OPERATION AND MAINTENANCE DOCUMENTATION DIRECTORY

A. Directory: Prepare a single, comprehensive directory of emergency, operation, and maintenance data and materials, listing items and their location to facilitate ready access to desired information. Include a section in the directory for each of the following:

1. List of documents.
2. List of systems.
3. List of equipment.
4. Table of contents.

B. List of Systems and Subsystems: List systems alphabetically. Include references to operation and maintenance manuals that contain information about each system.

C. List of Equipment: List equipment for each system, organized alphabetically by system. For pieces of equipment not part of system, list alphabetically in separate list.

D. Tables of Contents: Include a table of contents for each emergency, operation, and maintenance manual.

E. Identification: In the documentation directory and in each operation and maintenance manual, identify each system, subsystem, and piece of equipment with same designation used in the Contract Documents. If no designation exists, assign a designation according to ASHRAE Guideline 4, "Preparation of Operating and Maintenance Documentation for Building Systems."

2.2 REQUIREMENTS FOR EMERGENCY, OPERATION, AND MAINTENANCE MANUALS

A. Organization: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:

1. Title page.
2. Table of contents.
3. Manual contents.

B. Title Page: Include the following information:

1. Subject matter included in manual.
2. Name and address of Project.
3. Name and address of Owner.
4. Date of submittal.
5. Name and contact information for Contractor.
6. Name and contact information for Construction Manager.
7. Name and contact information for Architect.
8. Name and contact information for Commissioning Authority.
9. Names and contact information for major consultants to the Architect that designed the systems contained in the manuals.
10. Cross-reference to related systems in other operation and maintenance manuals.

C. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.

1. If operation or maintenance documentation requires more than one volume to accommodate data, include comprehensive table of contents for all volumes in each volume of the set.

D. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.

E. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.

1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
2. File Names and Bookmarks: Enable bookmarking of individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.

F. Manuals, Paper Copy: Submit manuals in the form of hard copy, bound and labeled volumes.

1. Binders: Heavy-duty, three-ring, vinyl-covered, post-type binders, in thickness necessary to accommodate contents, sized to hold 8-1/2-by-11-inch paper; with clear plastic sleeve on spine to hold label describing contents and with pockets inside covers to hold folded oversize sheets.

    a. If two or more binders are necessary to accommodate data of a system, organize data in each binder into groupings by subsystem and related components. Cross-reference other binders if necessary to provide essential information for proper operation or maintenance of equipment or system.
    b. Identify each binder on front and spine, with printed title "OPERATION AND MAINTENANCE MANUAL," Project title or name, and subject matter of contents, and indicate Specification Section number on bottom of spine. Indicate volume number for multiple-volume sets.

2. Dividers: Heavy-paper dividers with plastic-covered tabs for each section of the manual. Mark each tab to indicate contents. Include typed list of products and major components of equipment included in the section on each divider, cross-referenced to Specification Section number and title of Project Manual.
3. Protective Plastic Sleeves: Transparent plastic sleeves designed to enclose diagnostic software storage media for computerized electronic equipment.
4. Supplementary Text: Prepared on 8-1/2-by-11-inch white bond paper.
5. Drawings: Attach reinforced, punched binder tabs on drawings and bind with text.

    a. If oversize drawings are necessary, fold drawings to same size as text pages and use as foldouts.
    b. If drawings are too large to be used as foldouts, fold and place drawings in labeled envelopes and bind envelopes in rear of manual. At appropriate locations in manual, insert typewritten pages indicating drawing titles, descriptions of contents, and drawing locations.

2.3 EMERGENCY MANUALS

A. Content: Organize manual into a separate section for each of the following:

1. Type of emergency.
2. Emergency instructions.
3. Emergency procedures.

B. Type of Emergency: Where applicable for each type of emergency indicated below, include instructions and procedures for each system, subsystem, piece of equipment, and component:

1. Fire.
2. Flood.
3. Gas leak.
4. Water leak.
5. Power failure.

6. Water outage.
7. System, subsystem, or equipment failure.
8. Chemical release or spill.

C. Emergency Instructions: Describe and explain warnings, trouble indications, error messages, and similar codes and signals. Include responsibilities of Owner's operating personnel for notification of Installer, supplier, and manufacturer to maintain warranties.

D. Emergency Procedures: Include the following, as applicable:

1. Instructions on stopping.
2. Shutdown instructions for each type of emergency.
3. Operating instructions for conditions outside normal operating limits.
4. Required sequences for electric or electronic systems.
5. Special operating instructions and procedures.

2.4 OPERATION MANUALS

A. Content: In addition to requirements in this Section, include operation data required in individual Specification Sections and the following information:

1. System, subsystem, and equipment descriptions. Use designations for systems and equipment indicated on Contract Documents.
2. Performance and design criteria if Contractor has delegated design responsibility.
3. Operating standards.
4. Operating procedures.
5. Operating logs.
6. Wiring diagrams.
7. Control diagrams.
8. Piped system diagrams.
9. Precautions against improper use.
10. License requirements including inspection and renewal dates.

B. Descriptions: Include the following:

1. Product name and model number. Use designations for products indicated on Contract Documents.
2. Manufacturer's name.
3. Equipment identification with serial number of each component.
4. Equipment function.
5. Operating characteristics.
6. Limiting conditions.
7. Performance curves.
8. Engineering data and tests.
9. Complete nomenclature and number of replacement parts.

C. Operating Procedures: Include the following, as applicable:

1. Startup procedures.
2. Equipment or system break-in procedures.
3. Routine and normal operating instructions.
4. Regulation and control procedures.
5. Instructions on stopping.
6. Normal shutdown instructions.
7. Seasonal and weekend operating instructions.
8. Required sequences for electric or electronic systems.
9. Special operating instructions and procedures.

D. Systems and Equipment Controls: Describe the sequence of operation, and diagram controls as installed.

E. Piped Systems: Diagram piping as installed, and identify color-coding where required for identification.

2.5 PRODUCT MAINTENANCE MANUALS

A. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair materials and sources, and warranties and bonds, as described below.

B. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.

C. Product Information: Include the following, as applicable:

1. Product name and model number.
2. Manufacturer's name.
3. Color, pattern, and texture.
4. Material and chemical composition.
5. Reordering information for specially manufactured products.

D. Maintenance Procedures: Include manufacturer's written recommendations and the following:

1. Inspection procedures.
2. Types of cleaning agents to be used and methods of cleaning.
3. List of cleaning agents and methods of cleaning detrimental to product.
4. Schedule for routine cleaning and maintenance.
5. Repair instructions.

E. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.

F. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.

1. Include procedures to follow and required notifications for warranty claims.

2.6 SYSTEMS AND EQUIPMENT MAINTENANCE MANUALS

A. Content: For each system, subsystem, and piece of equipment not part of a system, include source information, manufacturers' maintenance documentation, maintenance procedures, maintenance and service schedules, spare parts list and source information, maintenance service contracts, and warranty and bond information, as described below.

B. Source Information: List each system, subsystem, and piece of equipment included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.

C. Manufacturers' Maintenance Documentation: Manufacturers' maintenance documentation including the following information for each component part or piece of equipment:

1. Standard maintenance instructions and bulletins.
2. Drawings, diagrams, and instructions required for maintenance, including disassembly and component removal, replacement, and assembly.
3. Identification and nomenclature of parts and components.
4. List of items recommended to be stocked as spare parts.

D. Maintenance Procedures: Include the following information and items that detail essential maintenance procedures:

1. Test and inspection instructions.
2. Troubleshooting guide.
3. Precautions against improper maintenance.
4. Disassembly; component removal, repair, and replacement; and reassembly instructions.
5. Aligning, adjusting, and checking instructions.
6. Demonstration and training video recording, if available.

E. Maintenance and Service Schedules: Include service and lubrication requirements, list of required lubricants for equipment, and separate schedules for preventive and routine maintenance and service with standard time allotment.

1. Scheduled Maintenance and Service: Tabulate actions for daily, weekly, monthly, quarterly, semiannual, and annual frequencies.
2. Maintenance and Service Record: Include manufacturers' forms for recording maintenance.

F. Spare Parts List and Source Information: Include lists of replacement and repair parts, with parts identified and cross-referenced to manufacturers' maintenance documentation and local sources of maintenance materials and related services.

G. Maintenance Service Contracts: Include copies of maintenance agreements with name and telephone number of service agent.

H. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.

1. Include procedures to follow and required notifications for warranty claims.

PART 3 - EXECUTION

3.1 MANUAL PREPARATION

A. Operation and Maintenance Documentation Directory: Prepare a separate manual that provides an organized reference to emergency, operation, and maintenance manuals.

B. Emergency Manual: Assemble a complete set of emergency information indicating procedures for use by emergency personnel and by Owner's operating personnel for types of emergencies indicated.

C. Product Maintenance Manual: Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.

D. Operation and Maintenance Manuals: Assemble a complete set of operation and maintenance data indicating operation and maintenance of each system, subsystem, and piece of equipment not part of a system.

1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.

E. Manufacturers' Data: Where manuals contain manufacturers' standard printed data, include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.

1. Prepare supplementary text if manufacturers' standard printed data are not available and where the information is necessary for proper operation and maintenance of equipment or systems.

F. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in record Drawings to ensure correct illustration of completed installation.

1. Do not use original project record documents as part of operation and maintenance manuals.
2. Comply with requirements of newly prepared record Drawings in Section 017839 "Project Record Documents."

G. Comply with Section 017700 "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

END OF SECTION 017823

SECTION 017839 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for project record documents, including the following:

1. Record Drawings.
2. Record Specifications.

B. Related Requirements:

1. Section 017300 "Execution" for final property survey.
2. Section 017700 "Closeout Procedures" for general closeout procedures.
3. Section 017823 "Operation and Maintenance Data" for operation and maintenance manual requirements.

1.3 CLOSEOUT SUBMITTALS

A. Record Drawings: Comply with the following:

1. Submit PDF electronic files of scanned record prints and one set(s) of file prints.

B. Record Specifications: Submit one PDF electronic file and one paper copy of Project's Specifications, including addenda and contract modifications.

C. Reports: Submit written report weekly indicating items incorporated into project record documents concurrent with progress of the Work, including revisions, concealed conditions, field changes, product selections, and other notations incorporated.

PART 2 - PRODUCTS

2.1 RECORD DRAWINGS

A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised drawings as modifications are issued.

1. Preparation: Mark record prints to show the actual installation where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.

    a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
    b. Accurately record information in an acceptable drawing technique.
    c. Record data as soon as possible after obtaining it.
    d. Record and check the markup before enclosing concealed installations.
    e. Cross-reference record prints to corresponding archive photographic documentation.

2. Content: Types of items requiring marking include, but are not limited to, the following:

    a. Dimensional changes to Drawings.
    b. Revisions to details shown on Drawings.
    c. Revisions to routing of piping and conduits.
    d. Revisions to electrical circuitry.
    e. Actual equipment locations.
    f. Locations of concealed internal utilities.
    g. Changes made by Change Order or Construction Work Change Directive.
    h. Changes made following Architect's written orders.
    i. Details not on the original Contract Drawings.
    j. Field records for variable and concealed conditions.
    k. Record information on the Work that is shown only schematically.

3. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
4. Mark record sets with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
5. Mark important additional information that was either shown schematically or omitted from original Drawings.
6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.

B. Format: Identify and date each record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.

1. Record Prints: Organize record prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
2. Identification: As follows:

    a. Project name.
    b. Date.
    c. Designation "PROJECT RECORD DRAWINGS."
    d. Name of Architect.
    e. Name of Contractor.

2.2 RECORD SPECIFICATIONS

A. Preparation: Mark Specifications to indicate the actual product installation where installation varies from that indicated in Specifications, addenda, and contract modifications.

1. Give particular attention to information on concealed products and installations that cannot be readily identified and recorded later.
2. Mark copy with the proprietary name and model number of products, materials, and equipment furnished, including substitutions and product options selected.
3. Record the name of manufacturer, supplier, Installer, and other information necessary to provide a record of selections made.
4. For each principal product, indicate whether record Product Data has been submitted in operation and maintenance manuals instead of submitted as record Product Data.
5. Note related Change Orders and record Drawings where applicable.

B. Format: Submit record Specifications as PDF electronic and paper copy.

PART 3 - EXECUTION

3.1 RECORDING AND MAINTENANCE

A. Recording: Maintain one copy of each submittal during the construction period for project record document purposes. Post changes and revisions to project record documents as they occur; do not wait until end of Project.

B. Maintenance of Record Documents and Samples: Store record documents and Samples in the field office apart from the Contract Documents used for construction. Do not use project record documents for construction purposes. Maintain record documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to project record documents for Architect's reference during normal working hours.

END OF SECTION 017839

SECTION 017900 - DEMONSTRATION AND TRAINING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for instructing Owner's personnel, including the following:

1. Demonstration of operation of systems, subsystems, and equipment.
2. Training in operation and maintenance of systems, subsystems, and equipment.
3. Demonstration and training video recordings.

1.3 INFORMATIONAL SUBMITTALS

A. Instruction Program: Submit outline of instructional program for demonstration and training, including a list of training modules and a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module.

1. Indicate proposed training modules using manufacturer-produced demonstration and training video recordings for systems, equipment, and products in lieu of video recording of live instructional module.

B. Qualification Data: For instructor.

C. Attendance Record: For each training module, submit list of participants and length of instruction time.

D. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.

1.4 CLOSEOUT SUBMITTALS

A. Demonstration and Training Video Recordings: Submit two copies within seven days of end of each training module.

1. Identification: On each copy, provide an applied label with the following information:

    a. Name of Project.
    b. Name and address of videographer.
    c. Name of Architect.
    d. Name of Construction Manager.
    e. Name of Contractor.
    f. Date of video recording.

2. Transcript: Prepared and bound in format matching operation and maintenance manuals. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding video recording. Include name of Project and date of video recording on each page.
3. Transcript: Prepared in PDF electronic format. Include a cover sheet with same label information as the corresponding video recording and a table of contents with links to corresponding training components. Include name of Project and date of video recording on each page.
4. At completion of training, submit complete training manual(s) for Owner's use prepared and bound in format matching operation and maintenance manuals and in PDF electronic file format on compact disc.

1.5 QUALITY ASSURANCE

A. Instruction Program: Submit outline of instructional program for demonstration and training, including a list of training modules and a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module.

    1. Indicate proposed training modules using manufacturer-produced demonstration and training video recordings for systems, equipment, and products in lieu of video recording of live instructional module.

B. Qualification Data: For instructor.

C. Attendance Record: For each training module, submit list of participants and length of instruction time.

D. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.

1.6 COORDINATION

A. Coordinate instruction schedule with Owner's operations. Adjust schedule as required to minimize disrupting Owner's operations and to ensure availability of Owner's personnel.

B. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.

C. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by Architect.

PART 2 - PRODUCTS

2.1 INSTRUCTION PROGRAM

A. Program Structure: Develop an instruction program that includes individual training modules for each system and for equipment not part of a system, as required by individual Specification Sections.

B. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participant is expected to master. For each module, include instruction for the following as applicable to the system, equipment, or component:

1. Basis of System Design, Operational Requirements, and Criteria: Include the following:

    a. System, subsystem, and equipment descriptions.
    b. Performance and design criteria if Contractor is delegated design responsibility.
    c. Operating standards.
    d. Regulatory requirements.
    e. Equipment function.
    f. Operating characteristics.
    g. Limiting conditions.
    h. Performance curves.

2. Documentation: Review the following items in detail:

    a. Emergency manuals.
    b. Operations manuals.
    c. Maintenance manuals.
    d. Project record documents.
    e. Identification systems.
    f. Warranties and bonds.
    g. Maintenance service agreements and similar continuing commitments.

3. Emergencies: Include the following, as applicable:

    a. Instructions on meaning of warnings, trouble indications, and error messages.
    b. Instructions on stopping.
    c. Shutdown instructions for each type of emergency.
    d. Operating instructions for conditions outside of normal operating limits.
    e. Sequences for electric or electronic systems.
    f. Special operating instructions and procedures.

4. Operations: Include the following, as applicable:

    a. Startup procedures.
    b. Equipment or system break-in procedures.
    c. Routine and normal operating instructions.
    d. Regulation and control procedures.
    e. Control sequences.
    f. Safety procedures.
    g. Instructions on stopping.
    h. Normal shutdown instructions.
    i. Operating procedures for emergencies.
    j. Operating procedures for system, subsystem, or equipment failure.
    k. Seasonal and weekend operating instructions.
    l. Required sequences for electric or electronic systems.
    m. Special operating instructions and procedures.

5. Adjustments: Include the following:

    a. Alignments.
    b. Checking adjustments.
    c. Noise and vibration adjustments.
    d. Economy and efficiency adjustments.

6. Troubleshooting: Include the following:

    a. Diagnostic instructions.
    b. Test and inspection procedures.

7. Maintenance: Include the following:

    a. Inspection procedures.
    b. Types of cleaning agents to be used and methods of cleaning.
    c. List of cleaning agents and methods of cleaning detrimental to product.
    d. Procedures for routine cleaning
    e. Procedures for preventive maintenance.
    f. Procedures for routine maintenance.
    g. Instruction on use of special tools.

8. Repairs: Include the following:

    a. Diagnosis instructions.
    b. Repair instructions.
    c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
    d. Instructions for identifying parts and components.
    e. Review of spare parts needed for operation and maintenance.

PART 3 - EXECUTION

3.1 PREPARATION

A. Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a training manual organized in coordination with requirements in Section 017823 "Operation and Maintenance Data."

B. Set up instructional equipment at instruction location.

3.2 INSTRUCTION

A. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Owner for number of participants, instruction times, and location.

B. Engage qualified instructors to instruct Owner's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.

1. Owner will furnish Contractor with names and positions of participants.

C. Scheduling: Provide instruction at mutually agreed on times. For equipment that requires seasonal operation, provide similar instruction at start of each season.

1. Schedule training with Owner with at least seven days' advance notice.

D. Training Location and Reference Material: Conduct training on-site in the completed and fully operational facility using the actual equipment in-place. Conduct training using final operation and maintenance data submittals.

E. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of a demonstration performance-based test.

F. Cleanup: Collect used and leftover educational materials and give to Owner. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

3.3 DEMONSTRATION AND TRAINING VIDEO RECORDINGS

A. General: Engage a qualified commercial videographer to record demonstration and training video recordings. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice.

1. At beginning of each training module, record each chart containing learning objective and lesson outline.

B. Video: Provide minimum 640 x 480 video resolution converted to format file type acceptable to Owner, on electronic media.

1. Electronic Media: Read-only format compact disc acceptable to Owner, with commercial-grade graphic label.
2. File Hierarchy: Organize folder structure and file locations according to project manual table of contents. Provide complete screen-based menu.
3. File Names: Utilize file names based upon name of equipment generally described in video segment, as identified in Project specifications.
4. Contractor and Installer Contact File: Using appropriate software, create a file for inclusion on the Equipment Demonstration and Training DVD that describes the following for each Contractor involved on the Project, arranged according to Project table of contents:

    a. Name of Contractor/Installer.
    b. Business address.
    c. Business phone number.
    d. Point of contact.
    e. E-mail address.

C. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to adequately cover area of demonstration and training. Display continuous running time.

1. Film training session(s) in segments not to exceed 15 minutes.

    a. Produce segments to present a single significant piece of equipment per segment.
    b. Organize segments with multiple pieces of equipment to follow order of Project Manual table of contents.
    c. Where a training session on a particular piece of equipment exceeds 15 minutes, stop filming and pause training session. Begin training session again upon commencement of new filming segment.

D. Light Levels: Verify light levels are adequate to properly light equipment. Verify equipment markings are clearly visible prior to recording.

1. Furnish additional portable lighting as required.

E. Narration: Describe scenes on video recording by audio narration by microphone while video recording is recorded. Include description of items being viewed.

F. Transcript: Provide a transcript of the narration. Display images and running time captured from videotape opposite the corresponding narration segment.

G. Preproduced Video Recordings: Provide video recordings used as a component of training modules in same format as recordings of live training.

END OF SECTION 017900

SECTION 024119 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Demolition and removal of selected portions of building or structure.
2. Demolition and removal of selected site elements.
3. Salvage of existing items to be reused or recycled.

B. Related Requirements:

1. Section 011000 "Summary" for restrictions on use of the premises, Owner-occupancy requirements, and phasing requirements.
2. Section 017300 "Execution" for cutting and patching procedures.

1.3 DEFINITIONS

A. Remove: Detach items from existing construction and dispose of them off-site unless indicated to be salvaged or reinstalled.

B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and store.

C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage, prepare for reuse, and reinstall where indicated.

D. Existing to Remain: Leave existing items that are not to be removed and that are not otherwise indicated to be salvaged or reinstalled.

E. Dismantle: To remove by disassembling or detaching an item from a surface, using gentle methods and equipment to prevent damage to the item and surfaces; disposing of items unless indicated to be salvaged or reinstalled.

1.4 MATERIALS OWNERSHIP

A. Unless otherwise indicated, demolition waste becomes property of Contractor.

B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.

1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.5 PREINSTALLATION MEETINGS

A. Pre-demolition Conference: Conduct conference at Project site.

1. Inspect and discuss condition of construction to be selectively demolished.
2. Review structural load limitations of existing structure.
3. Review and finalize selective demolition schedule and verify availability of materials, demolition personnel, equipment, and facilities needed to make progress and avoid delays.
4. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
5. Review areas where existing construction is to remain and requires protection.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For refrigerant recovery technician.

B. Engineering Survey: Submit engineering survey of condition of building.

C. Proposed Protection Measures: Submit report, including Drawings, that indicates the measures proposed for protecting individuals and property, for environmental protection, for dust control and, for noise control. Indicate proposed locations and construction of barriers.

D. Schedule of Selective Demolition Activities: Indicate the following:

1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity. Ensure Owner's on-site operations are uninterrupted.
2. Interruption of utility services. Indicate how long utility services will be interrupted.
3. Coordination for shutoff, capping, and continuation of utility services.
4. Use of elevator and stairs.
5. Coordination of Owner's continuing occupancy of portions of existing building and of Owner's partial occupancy of completed Work.

E. Pre-demolition Photographs or Video: Show existing conditions of adjoining construction, including finish surfaces, that might be misconstrued as damage caused by demolition operations. Submit before Work begins.

F. Warranties: Documentation indicating that existing warranties are still in effect after completion of selective demolition.

1.7 CLOSEOUT SUBMITTALS

A. Inventory: Submit a list of items that have been removed and salvaged.

1.8 FIELD CONDITIONS

A. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.

1. Before selective demolition, Owner will remove the following items:

a. All furniture and loose equipment in throughout building.

B. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.

C. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.

1. Hazardous materials will be removed by Owner before start of the Work.

2. If suspected hazardous materials are encountered, do not disturb; immediately notify Architect and Owner. Hazardous materials will be removed by Owner under a separate contract.

D. Storage or sale of removed items or materials on-site is not permitted.

E. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.

1. Maintain fire-protection facilities in service during selective demolition operations.

1.9 WARRANTY

A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during selective demolition, by methods and with materials and using approved contractors so as not to void existing warranties. Notify warrantor before proceeding.

B. Notify warrantor on completion of selective demolition, and obtain documentation verifying that existing system has been inspected and warranty remains in effect. Submit documentation at Project closeout.

1.10 COORDINATION

A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.

B. Standards: Comply with ASSE A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify that utilities have been disconnected and capped before starting selective demolition operations.

B. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.

C. Perform an engineering survey of condition of building to determine whether removing any element might result in structural deficiency or unplanned collapse of any portion of structure or adjacent structures during selective building demolition operations.

1. Perform surveys as the Work progresses to detect hazards resulting from selective demolition activities.

D. Steel Tendons: Locate tensioned steel tendons and include recommendations for de-tensioning.

E. Verify that hazardous materials have been remediated before proceeding with building demolition operations.

F. Survey of Existing Conditions: Record existing conditions by use of preconstruction photographs or video.

1. Inventory and record the condition of items to be removed and salvaged. Provide photographs or video of conditions that might be misconstrued as damage caused by salvage operations.

3.2 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

A. Existing Services/Systems to Remain: Maintain services/systems indicated to remain and protect them against damage.

B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utility services and mechanical/electrical systems serving areas to be selectively demolished.

1. Arrange to shut off utilities with utility companies.
2. If services/systems are required to be removed, relocated, or abandoned, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of building.
3. Disconnect, demolish, and remove fire-suppression systems, plumbing, and HVAC systems, equipment, and components indicated on Drawings to be removed.

    a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
    b. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
    c. Equipment to Be Removed: Disconnect and cap services and remove equipment.
    d. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
    e. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and deliver to Owner.
    f. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
    g. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material and leave in place.

3.3 PROTECTION

A. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.

1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
4. Cover and protect furniture, furnishings, and equipment that have not been removed.
5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls."

B. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.

1. Strengthen or add new supports when required during progress of selective demolition.

C. Remove temporary barricades and protections where hazards no longer exist.

3.4 SELECTIVE DEMOLITION, GENERAL

A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:

1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.
3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
4. Do not use cutting torches until work area is cleared of flammable materials. At concealed spaces, such as duct and pipe interiors, verify condition and contents of hidden space before starting flame-cutting operations. Maintain portable fire-suppression devices during flame-cutting operations.
5. Maintain fire watch during and for at least 48 hours after flame-cutting operations.
6. Maintain adequate ventilation when using cutting torches.
7. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
8. Remove structural framing members and lower to ground by method suitable to avoid free fall and to prevent ground impact or dust generation.
9. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
10. Dispose of demolished items and materials promptly.

B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

C. Removed and Salvaged Items:

1. Clean salvaged items.
2. Pack or crate items after cleaning. Identify contents of containers.
3. Store items in a secure area until delivery to Owner.
4. Transport items to Owner's storage area designated by Owner.
5. Protect items from damage during transport and storage.

D. Removed and Reinstalled Items:

1. Clean and repair items to functional condition adequate for intended reuse.
2. Pack or crate items after cleaning and repairing. Identify contents of containers.
3. Protect items from damage during transport and storage.
4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.

E. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.5 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

A. Concrete: Demolish in small sections. Using power-driven saw, cut concrete to a depth of at least 3/4 inch at junctures with construction to remain. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete. Neatly trim openings to dimensions indicated.

B. Concrete: Demolish in sections. Cut concrete full depth at junctures with construction to remain and at regular intervals using power-driven saw, and then remove concrete between saw cuts.

C. Masonry: Demolish in small sections. Cut masonry at junctures with construction to remain, using power-driven saw, and then remove masonry between saw cuts.

D. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.

E. Resilient Floor Coverings: Remove floor coverings and adhesive according to recommendations in RFCI's "Recommended Work Practices for the Removal of Resilient Floor Coverings." Do not use methods requiring solvent-based adhesive strippers.

3.6 DISPOSAL OF DEMOLISHED MATERIALS

A. Remove demolition waste materials from Project site and dispose of them in an EPA-approved construction and demolition waste landfill acceptable to authorities having jurisdiction and recycle or dispose of them according to Section 017419 "Construction Waste Management and Disposal."

1. Do not allow demolished materials to accumulate on-site.
2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
3. Remove debris from elevated portions of building by chute, hoist, or other device that will convey debris to grade level in a controlled descent.

B. Burning: Do not burn demolished materials.

3.7 CLEANING

A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

SECTION 033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Cast-in-place concrete, including concrete materials, mixture design, placement procedures, and finishes.

B. Related Requirements:

1. Section 321313 "Concrete Paving" for concrete pavement and walks.

1.3 DEFINITIONS

A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash, slag cement, other pozzolans, and silica fume; materials subject to compliance with requirements.

B. Water/Cement Ratio (w/cm): The ratio by weight of water to cementitious materials.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Require representatives of each entity directly concerned with cast-in-place concrete to attend, including the following:

a. Contractor's superintendent.
b. Independent testing agency responsible for concrete design mixtures.
c. Ready-mix concrete manufacturer.
d. Concrete Subcontractor.
e. Special concrete finish Subcontractor.

2. Review the following:

a. Special inspection and testing and inspecting agency procedures for field quality control.
b. Construction joints, control joints, isolation joints, and joint-filler strips.
c. Semirigid joint fillers.

d. Anchor rod and anchorage device installation tolerances.
e. Cold and hot weather concreting procedures.
f. Concrete finishes and finishing.
g. Curing procedures.
h. Forms and form-removal limitations.
i. Shoring and reshoring procedures.
j. Methods for achieving specified floor and slab flatness and levelness.
k. Floor and slab flatness and levelness measurements.
l. Concrete repair procedures.
m. Concrete protection.
n. Initial curing and field curing of field test cylinders (ASTM C31/C31M.)
o. Protection of field cured field test cylinders.

1.5 ACTION SUBMITTALS

A. Product Data: For each of the following.

1. Portland cement.
2. Fly ash.
3. Slag cement.
4. Blended hydraulic cement.
5. Silica fume.
6. Performance-based hydraulic cement
7. Aggregates.
8. Admixtures:

    a. Include limitations of use, including restrictions on cementitious materials, supplementary cementitious materials, air entrainment, aggregates, temperature at time of concrete placement, relative humidity at time of concrete placement, curing conditions, and use of other admixtures.
9. Curing materials.

    a. Include documentation from color pigment manufacturer, indicating that proposed methods of curing are recommended by color pigment manufacturer.

10. Joint fillers.
11. Repair materials.

B. Design Mixtures: For each concrete mixture, include the following:

1. Mixture identification.
2. Minimum 28-day compressive strength.
3. Durability exposure class.
4. Maximum w/cm.
5. Calculated equilibrium unit weight, for lightweight concrete.
6. Slump limit.
7. Air content.
8. Nominal maximum aggregate size.

9. Indicate amounts of mixing water to be withheld for later addition at Project site if permitted.
10. Include manufacturer's certification that permeability-reducing admixture is compatible with mix design.
11. Include certification that dosage rate for permeability-reducing admixture matches dosage rate used in performance compliance test.
12. Intended placement method.
13. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.

C. Shop Drawings:

1. Construction Joint Layout: Indicate proposed construction joints required to construct the structure.

a. Location of construction joints is subject to approval of the Architect.

D. Samples: For vapor retarder.

E. Concrete Schedule: For each location of each Class of concrete indicated in "Concrete Mixtures" Article, including the following:

1. Concrete Class designation.
2. Location within Project.
3. Exposure Class designation.
4. Formed Surface Finish designation and final finish.
5. Final finish for floors.
6. Curing process.
7. Floor treatment if any.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For the following:

1. Installer: Include copies of applicable ACI certificates.
2. Ready-mixed concrete manufacturer.
3. Testing agency: Include copies of applicable ACI certificates.

B. Material Certificates: For each of the following, signed by manufacturers:

1. Cementitious materials.
2. Admixtures.
3. Fiber reinforcement.
4. Curing compounds.
5. Bonding agents.
6. Adhesives.
7. Vapor retarders.
8. Semirigid joint filler.
9. Joint-filler strips.
10. Repair materials.

C. Material Test Reports: For the following, from a qualified testing agency:

1. Portland cement.
2. Fly ash.
3. Slag cement.
4. Blended hydraulic cement.
5. Silica fume.
6. Performance-based hydraulic cement.
7. Aggregates.
8. Admixtures:

a. Permeability-Reducing Admixture: Include independent test reports, indicating compliance with specified requirements, including dosage rate used in test.

D. Floor surface flatness and levelness measurements report, indicating compliance with specified tolerances.

E. Research Reports:

1. For concrete admixtures in accordance with ICC's Acceptance Criteria AC198.

F. Preconstruction Test Reports: For each mix design.

G. Field quality-control reports.

H. Minutes of preinstallation conference.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: A qualified installer who employs Project personnel qualified as an ACI-certified Flatwork Technician and Finisher and a supervisor who is a certified ACI Flatwork Concrete Finisher/Technician or an ACI Concrete Flatwork Technician.

1. Post-Installed Concrete Anchors Installers: ACI-certified Adhesive Anchor Installer.

B. Ready-Mixed Concrete Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C94/C94M requirements for production facilities and equipment.

1. Manufacturer certified in accordance with NRMCA's "Certification of Ready Mixed Concrete Production Facilities."

C. Laboratory Testing Agency Qualifications: A testing agency qualified in accordance with ASTM C1077 and ASTM E329 for testing indicated and employing an ACI-certified Concrete Quality Control Technical Manager.

1. Personnel performing laboratory tests shall be an ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician, Grade I. Testing agency laboratory supervisor shall be an ACI-certified Concrete Laboratory Testing Technician, Grade II.

D. Field Quality Control Testing Agency Qualifications: An independent agency, acceptable to authorities having jurisdiction, qualified in accordance with ASTM C1077 and ASTM E329 for testing indicated.

1. Personnel conducting field tests shall be qualified as an ACI Concrete Field Testing Technician, Grade 1, in accordance with ACI CPP 610.1 or an equivalent certification program.

1.8 PRECONSTRUCTION TESTING

A. Preconstruction Testing Service: Engage a qualified testing agency to perform preconstruction testing on each concrete mixture.

1. Include the following information in each test report:

a. Admixture dosage rates.
b. Slump.
c. Air content.
d. Seven-day compressive strength.
e. 28-day compressive strength.
f. Permeability.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Comply with ASTM C94/C94M and ACI 301.

1.10 FIELD CONDITIONS

A. Cold-Weather Placement: Comply with ACI 301 and ACI 306.1 and as follows.

1. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.
2. When average high and low temperature is expected to fall below 40 deg F for three successive days, maintain delivered concrete mixture temperature within the temperature range required by ACI 301.
3. Do not use frozen materials or materials containing ice or snow.
4. Do not place concrete in contact with surfaces less than 35 deg F, other than reinforcing steel.
5. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.

B. Hot-Weather Placement: Comply with ACI 301 and ACI 305.1, and as follows:

1. Maintain concrete temperature at time of discharge to not exceed 95 deg F.
2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

A. ACI Publications: Comply with ACI 301unless modified by requirements in the Contract Documents.

2.2 CONCRETE MATERIALS

A. Source Limitations:

1. Obtain all concrete mixtures from a single ready-mixed concrete manufacturer for entire Project.
2. Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant.
3. Obtain aggregate from single source.
4. Obtain each type of admixture from single source from single manufacturer.

B. Cementitious Materials:

1. Portland Cement: ASTM C150/C150M, As indicated in General Structural Notes.
2. Fly Ash: ASTM C618, Class C or F.
3. Slag Cement: ASTM C989/C989M, Grade 100 or 120.
4. Silica Fume: ASTM C1240 amorphous silica.

C. Normal-Weight Aggregates: ASTM C33/C33M, Class 3S coarse aggregate or better, graded. Provide aggregates from a single source.

1. Alkali-Silica Reaction: Comply with one of the following:

a. Expansion Result of Aggregate: Not more than 0.04 percent at one-year when tested in accordance with ASTM C1293.
b. Expansion Results of Aggregate and Cementitious Materials in Combination: Not more than 0.10 percent at an age of 16 days when tested in accordance with ASTM C1567.
c. Alkali Content in Concrete: Not more than 4 lb./cu. yd. for moderately reactive aggregate or 3 lb./cu. yd. for highly reactive aggregate, when tested in accordance with ASTM C1293 and categorized in accordance with ASTM C1778, based on alkali content being calculated in accordance with ACI 301.

2. Maximum Coarse-Aggregate Size: As indicated in General Structural Notes.
3. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.

D. Air-Entraining Admixture: ASTM C260/C260M.

E. Chemical Admixtures: Certified by manufacturer to be compatible with other admixtures that do not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.

1. Water-Reducing Admixture: ASTM C494/C494M, Type A.
2. Retarding Admixture: ASTM C494/C494M, Type B.
3. Water-Reducing and -Retarding Admixture: ASTM C494/C494M, Type D.
4. High-Range, Water-Reducing Admixture: ASTM C494/C494M, Type F.
5. High-Range, Water-Reducing and -Retarding Admixture: ASTM C494/C494M, Type G.
6. Plasticizing and Retarding Admixture: ASTM C1017/C1017M, Type II.
7. Set-Accelerating Corrosion-Inhibiting Admixture: Commercially formulated, anodic inhibitor or mixed cathodic and anodic inhibitor; capable of forming a protective barrier and minimizing chloride reactions with steel reinforcement in concrete and complying with ASTM C494/C494M, Type C.
8. Non-Set-Accelerating Corrosion-Inhibiting Admixture: Commercially formulated, non-set-accelerating, anodic inhibitor or mixed cathodic and anodic inhibitor; capable of forming a protective barrier and minimizing chloride reactions with steel reinforcement in concrete.
9. Permeability-Reducing Admixture: ASTM C494/C494M, Type S, hydrophilic, permeability-reducing crystalline admixture, capable of reducing water absorption of concrete exposed to hydrostatic pressure (PRAH).

    a. Permeability: No leakage when tested in accordance with U.S. Army Corps of Engineers CRD C48 at a hydraulic pressure of 200 psi for 14 days.

2.3 RELATED MATERIALS

A. Semirigid Joint Filler: Two-component, semirigid, 100 percent solids, epoxy resin with a Type A shore durometer hardness of 80 in accordance with ASTM D2240.

B. Bonding Agent: ASTM C1059/C1059M, Type II, nonredispersible, acrylic emulsion or styrene butadiene.

C. Epoxy Bonding Adhesive: ASTM C881, two-component epoxy resin, capable of humid curing and bonding to damp surfaces, of class suitable for application temperature and of grade and class to suit requirements, and as follows:

1. Types IV and V, load bearing, for bonding hardened or freshly mixed concrete to hardened concrete.

D. Floor Slab Protective Covering: Eight-feet- wide cellulose fabric.

2.4 CONCRETE MIXTURES, GENERAL

A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, in accordance with ACI 301.

1. Use a qualified testing agency for preparing and reporting proposed mixture designs, based on laboratory trial mixtures.

B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:

1. Fly Ash or Other Pozzolans: 25 percent by mass.

C. Admixtures: Use admixtures in accordance with manufacturer's written instructions.

1. Use water-reducing high-range water-reducing or plasticizing admixture in concrete, as required, for placement and workability.
2. Use water-reducing and -retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
3. Use water-reducing admixture in pumped concrete and concrete with a w/cm below 0.50.
4. Use corrosion-inhibiting admixture in concrete mixtures where indicated.
5. Use permeability-reducing admixture in concrete mixtures where indicated.

D. Color Pigment: Add color pigment to concrete mixture in accordance with manufacturer's written instructions and to result in hardened concrete color consistent with approved mockup.

2.5 CONCRETE MIXTURES

A. Footings: Normal-weight concrete.

1. Minimum Compressive Strength: As indicated at 28 days.
2. Maximum W/C Ratio: 0.50.
3. Slump Limit: 4 inches
4. Air Content: 3 percent, plus or minus 1.5 percent at point of delivery for 1-1/2-inch nominal maximum aggregate size.

B. Foundation Walls: Normal-weight concrete.

1. Minimum Compressive Strength: 4500 psi at 28 days.
2. Maximum W/C Ratio: 0.45.
3. Slump Limit: 4 inches, 8 inches for concrete with verified slump of 2 to 4 inches before adding high-range water-reducing admixture or plasticizing admixture, plus or minus 1 inch.
4. Air Content: 6 percent, plus or minus 1.5 percent at point of delivery for 1-inch nominal maximum aggregate size.

C. Interior Slabs-on-Grade: Normal-weight concrete.

1. Minimum Compressive Strength: 3000 psi at 28 days.
2. Maximum W/C Ratio: 0.45.
3. Minimum Cementitious Materials Content: 470 lb/cu. yd.
4. Slump Limit: 4 inches, plus or minus 1 inch.
5. Air Content: Do not allow air content of trowel-finished floors to exceed 3 percent.

D. Other Concrete Mixes: As indicated.

2.6 CONCRETE MIXING

A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete in accordance with ASTM C94/C94M, and furnish batch ticket information.

B. Project-Site Mixing: Measure, batch, and mix concrete materials and concrete in accordance with ASTM C94/C94M. Mix concrete materials in appropriate drum-type batch machine mixer.

1. For mixer capacity of 1 cu. yd. or smaller, continue mixing at least 1-1/2 minutes, but not more than five minutes after ingredients are in mixer, before any part of batch is released.
2. For mixer capacity larger than 1 cu. yd., increase mixing time by 15 seconds for each additional 1 cu. yd..
3. Provide batch ticket for each batch discharged and used in the Work, indicating Project identification name and number, date, mixture type, mixture time, quantity, and amount of water added. Record approximate location of final deposit in structure.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of Conditions:

1. Before placing concrete, verify that installation of concrete forms, accessories, and reinforcement, and embedded items is complete and that required inspections have been performed.
2. Do not proceed until unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Provide reasonable auxiliary services to accommodate field testing and inspections, acceptable to testing agency, including the following:

1. Daily access to the Work.
2. Incidental labor and facilities necessary to facilitate tests and inspections.
3. Secure space for storage, initial curing, and field curing of test samples, including source of water and continuous electrical power at Project site during site curing period for test samples.
4. Security and protection for test samples and for testing and inspection equipment at Project site.

3.3 INSTALLATION OF EMBEDDED ITEMS

A. Place and secure anchorage devices and other embedded items required for adjoining Work that is attached to or supported by cast-in-place concrete.

1. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.

2. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of ANSI/AISC 303.
3. Install reglets to receive waterproofing and to receive through-wall flashings in outer face of concrete frame at exterior walls, where flashing is shown at lintels, shelf angles, and other conditions.

3.4 JOINTS

A. Construct joints true to line, with faces perpendicular to surface plane of concrete.

B. Construction Joints: Coordinate with floor slab pattern and concrete placement sequence.

1. Install so strength and appearance of concrete are not impaired, at locations indicated on Drawings or as approved by Architect.
2. Place joints perpendicular to main reinforcement.

a. Continue reinforcement across construction joints unless otherwise indicated.
b. Do not continue reinforcement through sides of strip placements of floors and slabs.

3. Form keyed joints as indicated. Embed keys at least 1-1/2 inches into concrete.
4. Locate joints for beams, slabs, joists, and girders at third points of spans. Offset joints in girders a minimum distance of twice the beam width from a beam-girder intersection.
5. Locate horizontal joints in walls and columns at underside of floors, slabs, beams, and girders and at the top of footings or floor slabs.
6. Space vertical joints in walls as indicated on Drawings. Unless otherwise indicated on Drawings, locate vertical joints beside piers integral with walls, near corners, and in concealed locations where possible.
7. Use a bonding agent at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
8. Use epoxy-bonding adhesive at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.

C. Control Joints in Slabs-on-Ground: Form weakened-plane control joints, sectioning concrete into areas as indicated. Construct control joints for a depth equal to at least one-fourth of concrete thickness as follows:

1. Grooved Joints: Form control joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch. Repeat grooving of control joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
2. Sawed Joints: Form control joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch- wide joints into concrete when cutting action does not tear, abrade, or otherwise damage surface and before concrete develops random cracks.

D. Isolation Joints in Slabs-on-Ground: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.

1. Extend joint-filler strips full width and depth of joint, terminating flush with finished concrete surface unless otherwise indicated on Drawings.
2. Terminate full-width joint-filler strips not less than 1/2 inch or more than 1 inch below finished concrete surface, where joint sealants, specified in Section 079200 "Joint Sealants," are indicated.
3. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.

E. Doweled Joints:

1. Install dowel bars and support assemblies at joints where indicated on Drawings.
2. Lubricate or asphalt coat one-half of dowel bar length to prevent concrete bonding to one side of joint.

F. Dowel Plates: Install dowel plates at joints where indicated on Drawings.

3.5 CONCRETE PLACEMENT

A. Before placing concrete, verify that installation of formwork, reinforcement, embedded items, and vapor retarder is complete and that required inspections are completed.

1. Immediately prior to concrete placement, inspect vapor retarder for damage and deficient installation, and repair defective areas.
2. Provide continuous inspection of vapor retarder during concrete placement and make necessary repairs to damaged areas as Work progresses.

B. Notify Architect and testing and inspection agencies 24 hours prior to commencement of concrete placement.

C. Do not add water to concrete during delivery, at Project site, or during placement unless approved by Architect in writing, but not to exceed the amount indicated on the concrete delivery ticket.

1. Do not add water to concrete after adding high-range water-reducing admixtures to mixture.

D. Before test sampling and placing concrete, water may be added at Project site, subject to limitations of ACI 301, but not to exceed the amount indicated on the concrete delivery ticket.

1. Do not add water to concrete after adding high-range water-reducing admixtures to mixture.

E. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete is placed on concrete that has hardened enough to cause seams or planes of weakness.

1. If a section cannot be placed continuously, provide construction joints as indicated.
2. Deposit concrete to avoid segregation.
3. Deposit concrete in horizontal layers of depth not to exceed formwork design pressures and in a manner to avoid inclined construction joints.

4. Consolidate placed concrete with mechanical vibrating equipment in accordance with ACI 301.

    a. Do not use vibrators to transport concrete inside forms.
    b. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least 6 inches into preceding layer.
    c. Do not insert vibrators into lower layers of concrete that have begun to lose plasticity.
    d. At each insertion, limit duration of vibration to time necessary to consolidate concrete, and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.

F. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.

1. Do not place concrete floors and slabs in a checkerboard sequence.
2. Consolidate concrete during placement operations, so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
3. Maintain reinforcement in position on chairs during concrete placement.
4. Screed slab surfaces with a straightedge and strike off to correct elevations.
5. Level concrete, cut high areas, and fill low areas.
6. Slope surfaces uniformly to drains where required.
7. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface.
8. Do not further disturb slab surfaces before starting finishing operations.

3.6 FINISHING FORMED SURFACES

A. As-Cast Surface Finishes:

1. ACI 301Surface Finish SF-2.0: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams.

    a. Patch voids larger than 3/4 inch wide or 1/2 inch deep.
    b. Remove projections larger than 1/4 inch.
    c. Patch tie holes.
    d. Surface Tolerance: ACI 117 Class B.
    e. Locations: Apply to concrete surfaces not exposed to public view

2. ACI 301 Surface Finish SF-3.0:

    a. Patch voids larger than 3/4 inch wide or 1/2 inch deep.
    b. Remove projections larger than 1/8 inch.
    c. Patch tie holes.
    d. Surface Tolerance: ACI 117 Class A.
    e. Locations: Apply to concrete surfaces exposed to public view

B. Related Unformed Surfaces:

1. At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a color and texture matching adjacent formed surfaces.
2. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.7 FINISHING FLOORS AND SLABS

A. Comply with ACI 302.1R recommendations for screeding, restraightening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.

B. Float Finish:

1. When bleedwater sheen has disappeared and concrete surface has stiffened sufficiently to permit operation of specific float apparatus, consolidate concrete surface with power-driven floats or by hand floating if area is small or inaccessible to power-driven floats.
2. Repeat float passes and restraightening until surface is left with a uniform, smooth, granular texture and complies with ACI 117 tolerances for conventional concrete.
3. Apply float finish to surfaces to receive trowel finish

C. Trowel Finish:

1. After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel.
2. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance.
3. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.
4. Do not add water to concrete surface.
5. Do not apply hard-troweled finish to concrete, which has a total air content greater than 3 percent.
6. Apply a trowel finish to surfaces exposed to view or to be covered with resilient flooring, carpet, ceramic or quarry tile set over a cleavage membrane, paint, or another thin-film-finish coating system
7. Finish surfaces to the following tolerances, in accordance with ASTM E1155, for a randomly trafficked floor surface:

    a. Slabs on Ground (Areas Receiving Tile):

        1) Finish and measure surface so gap at any point between concrete surface and an unleveled, freestanding, 10-ft.- long straightedge resting on two high spots and placed anywhere on the surface does not exceed 1/16 inch.

    b. Slabs on Ground (All Other Areas Receiving Floor Finish):

        1) Finish and measure surface so gap at any point between concrete surface and an unleveled, freestanding, 10-ft.- long straightedge resting on two high spots and placed anywhere on the surface does not exceed 3/16 inch.

D. Trowel and Fine-Broom Finish: Apply a first trowel finish to surfaces where ceramic or quarry tile is to be installed by either thickset or thinset method. While concrete is still plastic, slightly scarify surface with a fine broom perpendicular to main traffic route.

1. Comply with flatness and levelness tolerances for trowel-finished floor surfaces.

3.8 INSTALLATION OF MISCELLANEOUS CONCRETE ITEMS

A. Filling In:

1. Fill in holes and openings left in concrete structures after Work of other trades is in place unless otherwise indicated.
2. Mix, place, and cure concrete, as specified, to blend with in-place construction.
3. Provide other miscellaneous concrete filling indicated or required to complete the Work.

B. Curbs: Provide monolithic finish to interior curbs by stripping forms while concrete is still green and by steel-troweling surfaces to a hard, dense finish with corners, intersections, and terminations slightly rounded.

3.9 CONCRETE CURING

A. Protect freshly placed concrete from premature drying and excessive cold or hot temperatures.

1. Comply with ACI 301 and ACI 306.1 for cold weather protection during curing.
2. Comply with ACI 301 and ACI 305.1 for hot-weather protection during curing.
3. Maintain moisture loss no more than 0.2 lb/sq. ft. x h before and during finishing operations.

B. Curing Formed Surfaces: Comply with ACI 308.1 as follows:

1. Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces.
2. Cure concrete containing color pigments in accordance with color pigment manufacturer's instructions.
3. If forms remain during curing period, moist cure after loosening forms.
4. If removing forms before end of curing period, continue curing for remainder of curing period, as follows:

    a. Continuous Fogging: Maintain standing water on concrete surface until final setting of concrete.
    b. Continuous Sprinkling: Maintain concrete surface continuously wet.
    c. Absorptive Cover: Pre-dampen absorptive material before application; apply additional water to absorptive material to maintain concrete surface continuously wet.
    d. Water-Retention Sheeting Materials: Cover exposed concrete surfaces with sheeting material, taping, or lapping seams.

e. Membrane-Forming Curing Compound: Apply uniformly in continuous operation by power spray or roller in accordance with manufacturer's written instructions.

1) Recoat areas subject to heavy rainfall within three hours after initial application.
2) Maintain continuity of coating and repair damage during curing period.

C. Curing Unformed Surfaces: Comply with ACI 308.1 as follows:

1. Begin curing immediately after finishing concrete.
2. Interior Concrete Floors:

a. Floors to Receive Floor Coverings Specified in Other Sections: Contractor has option of the following:

1) Absorptive Cover: As soon as concrete has sufficient set to permit application without marring concrete surface, install prewetted absorptive cover over entire area of floor.

a) Lap edges and ends of absorptive cover not less than 12-inches.
b) Maintain absorptive cover water saturated, and in place, for duration of curing period, but not less than seven days.

2) Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover for curing concrete, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive.

a) Immediately repair any holes or tears during curing period, using cover material and waterproof tape.
b) Cure for not less than seven days.

3) Ponding or Continuous Sprinkling of Water: Maintain concrete surfaces continuously wet for not less than seven days, utilizing one, or a combination of, the following:

a) Water.
b) Continuous water-fog spray.

3.10 TOLERANCES

A. Conform to ACI 117.

3.11 JOINT FILLING

A. Prepare, clean, and install joint filler in accordance with manufacturer's written instructions.

1. Defer joint filling until concrete has aged at least one month(s).
2. Do not fill joints until construction traffic has permanently ceased.

B. Remove dirt, debris, saw cuttings, curing compounds, and sealers from joints; leave contact faces of joints clean and dry.

C. Install semirigid joint filler full depth in saw-cut joints and at least 2 inches deep in formed joints.

D. Overfill joint, and trim joint filler flush with top of joint after hardening.

3.12 CONCRETE SURFACE REPAIRS

A. Defective Concrete:

1. Repair and patch defective areas when approved by Architect.
2. Remove and replace concrete that cannot be repaired and patched to Architect's approval.

B. Patching Mortar: Mix dry-pack patching mortar, consisting of 1 part portland cement to 2-1/2 parts fine aggregate passing a No. 16 sieve, using only enough water for handling and placing.

C. Repairing Formed Surfaces: Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.

1. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch in any dimension to solid concrete.

    a. Limit cut depth to 3/4 inch.
    b. Make edges of cuts perpendicular to concrete surface.
    c. Clean, dampen with water, and brush-coat holes and voids with bonding agent.
    d. Fill and compact with patching mortar before bonding agent has dried.
    e. Fill form-tie voids with patching mortar or cone plugs secured in place with bonding agent.

2. Repair defects on surfaces exposed to view by blending white portland cement and standard portland cement, so that, when dry, patching mortar matches surrounding color.

    a. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching.
    b. Compact mortar in place and strike off slightly higher than surrounding surface.

3. Repair defects on concealed formed surfaces that will affect concrete's durability and structural performance as determined by Architect.

D. Repairing Unformed Surfaces:

1. Test unformed surfaces, such as floors and slabs, for finish, and verify surface tolerances specified for each surface.

    a. Correct low and high areas.
    b. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.

2. Repair finished surfaces containing surface defects, including spalls, popouts, honeycombs, rock pockets, crazing, and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions.
3. After concrete has cured at least 14 days, correct high areas by grinding.
4. Correct localized low areas during, or immediately after, completing surface-finishing operations by cutting out low areas and replacing with patching mortar.

    a. Finish repaired areas to blend into adjacent concrete.

5. Correct other low areas scheduled to receive floor coverings with a repair underlayment.

    a. Prepare, mix, and apply repair underlayment and primer in accordance with manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.
    b. Feather edges to match adjacent floor elevations.

6. Correct other low areas scheduled to remain exposed with repair topping.

    a. Cut out low areas to ensure a minimum repair topping depth of 1/4 inch to match adjacent floor elevations.
    b. Prepare, mix, and apply repair topping and primer in accordance with manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.

7. Repair defective areas, except random cracks and single holes 1 inch or less in diameter, by cutting out and replacing with fresh concrete.

    a. Remove defective areas with clean, square cuts, and expose steel reinforcement with at least a 3/4-inch clearance all around.
    b. Dampen concrete surfaces in contact with patching concrete and apply bonding agent.
    c. Mix patching concrete of same materials and mixture as original concrete, except without coarse aggregate.
    d. Place, compact, and finish to blend with adjacent finished concrete.
    e. Cure in same manner as adjacent concrete.

8. Repair random cracks and single holes 1 inch or less in diameter with patching mortar.

    a. Groove top of cracks and cut out holes to sound concrete, and clean off dust, dirt, and loose particles.
    b. Dampen cleaned concrete surfaces and apply bonding agent.
    c. Place patching mortar before bonding agent has dried.
    d. Compact patching mortar and finish to match adjacent concrete.
    e. Keep patched area continuously moist for at least 72 hours.

E. Perform structural repairs of concrete, subject to Architect's approval, using epoxy adhesive and patching mortar.

F. Repair materials and installation not specified above may be used, subject to Architect's approval.

3.13 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a special inspector to perform field tests and inspections and prepare testing and inspection reports.

B. Testing Agency: Owner will engage a qualified testing and inspecting agency to perform tests and inspections and to submit reports.

1. Testing agency shall be responsible for providing curing container for composite samples on Site and verifying that field-cured composite samples are cured in accordance with ASTM C31/C31M.
2. Testing agency shall immediately report to Architect, Contractor, and concrete manufacturer any failure of Work to comply with Contract Documents.
3. Testing agency shall report results of tests and inspections, in writing, to Owner, Architect, Contractor, and concrete manufacturer within 48 hours of inspections and tests.

a. Test reports shall include reporting requirements of ASTM C31/C31M, ASTM C39/C39M, and ACI 301, including the following as applicable to each test and inspection:

1) Project name.
2) Name of testing agency.
3) Names and certification numbers of field and laboratory technicians performing inspections and testing.
4) Name of concrete manufacturer.
5) Date and time of inspection, sampling, and field testing.
6) Date and time of concrete placement.
7) Location in Work of concrete represented by samples.
8) Date and time sample was obtained.
9) Truck and batch ticket numbers.
10) Design compressive strength at 28 days.
11) Concrete mixture designation, proportions, and materials.
12) Field test results.
13) Information on storage and curing of samples before testing, including curing method and maximum and minimum temperatures during initial curing period.
14) Type of fracture and compressive break strengths at seven days and 28 days.

C. Batch Tickets: For each load delivered, submit three copies of batch delivery ticket to testing agency, indicating quantity, mix identification, admixtures, design strength, aggregate size, design air content, design slump at time of batching, and amount of water that can be added at Project site.

D. Inspections:

1. Headed bolts and studs.
2. Verification of use of required design mixture.
3. Concrete placement, including conveying and depositing.
4. Curing procedures and maintenance of curing temperature.

5. Verification of concrete strength before removal of shores and forms from beams and slabs.
6. Batch Plant Inspections: On a random basis, as determined by Architect.

E. Concrete Tests: Testing of composite samples of fresh concrete obtained in accordance with ASTM C 172/C 172M shall be performed in accordance with the following requirements:

1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture exceeding 5 cu. yd., but less than 25 cu. yd., plus one set for each additional 50 cu. yd. or fraction thereof.

    a. When frequency of testing provides fewer than five compressive-strength tests for each concrete mixture, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.

2. Slump: ASTM C143/C143M:

    a. One test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture.
    b. Perform additional tests when concrete consistency appears to change.

3. Slump Flow: ASTM C1611/C1611M:

    a. One test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture.
    b. Perform additional tests when concrete consistency appears to change.

4. Air Content: ASTM C231/C231M pressure method, for normal-weight concrete.

    a. One test for each composite sample, but not less than one test for each day's pour of each concrete mixture.

5. Concrete Temperature: ASTM C1064/C1064M:

    a. One test hourly when air temperature is 40 deg F and below or 80 deg F and above, and one test for each composite sample.

6. Unit Weight: ASTM C567/C567M fresh unit weight of structural lightweight concrete.

    a. One test for each composite sample, but not less than one test for each day's pour of each concrete mixture.

7. Compression Test Specimens: ASTM C31/C31M:

    a. Cast and laboratory cure two sets of three 6-inch by 12-inch or 4-inch by 8-inch cylinder specimens for each composite sample.
    b. Cast, initial cure, and field cure two sets of three standard cylinder specimens for each composite sample.

8. Compressive-Strength Tests: ASTM C39/C39M.

    a. Test one set of three laboratory-cured specimens at seven days and one set of two specimens at 28 days.

b. Test one set of three field-cured specimens at seven days and one set of two specimens at 28 days.
c. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.

9. When strength of field-cured cylinders is less than 85 percent of companion laboratory-cured cylinders, Contractor shall evaluate operations and provide corrective procedures for protecting and curing in-place concrete.
10. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength, and no compressive-strength test value falls below specified compressive strength by more than 500 psi if specified compressive strength is 5000 psi, or no compressive strength test value is less than 10 percent of specified compressive strength if specified compressive strength is greater than 5000 psi.
11. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
12. Additional Tests:

    a. Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect.
    b. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C42/C42M or by other methods as directed by Architect.

        1) Acceptance criteria for concrete strength shall be in accordance with ACI 301 section 1.6.6.3.

13. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
14. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

F. Measure floor and slab flatness and levelness in accordance with ASTM E1155 within 24 hours of completion of floor finishing and promptly report test results to Architect.

3.14 PROTECTION

A. Protect concrete surfaces as follows:

1. Protect from petroleum stains.
2. Diaper hydraulic equipment used over concrete surfaces.
3. Prohibit vehicles from interior concrete slabs.
4. Prohibit use of pipe-cutting machinery over concrete surfaces.
5. Prohibit placement of steel items on concrete surfaces.
6. Prohibit use of acids or acidic detergents over concrete surfaces.

7. Protect liquid floor treatment from damage and wear during the remainder of construction period. Use protective methods and materials, including temporary covering, recommended in writing by liquid floor treatments installer.
8. Protect concrete surfaces scheduled to receive surface hardener or polished concrete finish using Floor Slab Protective Covering.

END OF SECTION 033000

SECTION 051200 - STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Structural-steel materials.
2. Shrinkage-resistant grout.
3. Shear stud connectors.

B. Related Requirements:

1. Section 053100 "Steel Decking" for field installation of shear stud connectors through deck.
2. Section 055000 "Metal Fabrications" for steel lintels and shelf angles not attached to structural-steel frame, miscellaneous steel fabrications and other steel items not defined as structural steel.
3. Section 099123 "Interior Painting" and Section 099600 "High-Performance Coatings" for painting requirements.

1.2 DEFINITIONS

A. Structural Steel: Elements of the structural frame indicated on Drawings and as described in ANSI/AISC 303.

B. Seismic-Load-Resisting System: Elements of structural-steel frame designated as "SLRS" or along grid lines designated as "SLRS" on Drawings, including columns, beams, and braces and their connections.

C. Heavy Sections: Rolled and built-up sections as follows:

1. Shapes included in ASTM A6/A6M with flanges thicker than 1-1/2 inches.
2. Welded built-up members with plates thicker than 2 inches.
3. Column base plates thicker than 2 inches.

D. Protected Zone: Structural members or portions of structural members indicated as "protected zone" on Drawings. Connections of structural and nonstructural elements to protected zones are limited.

E. Demand-Critical Welds: Those welds, the failure of which would result in significant degradation of the strength and stiffness of the seismic-load-resisting system and which are indicated as "demand critical" or "seismic critical" on Drawings.

1.3 COORDINATION

A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written recommendations to ensure that shop primers and topcoats are compatible with one another.

B. Coordinate installation of anchorage items to be embedded in or attached to other construction without delaying the Work. Provide setting diagrams, sheet metal templates, instructions, and directions for installation.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.5 ACTION SUBMITTALS

A. Product Data:

1. Structural-steel materials.
2. High-strength, bolt-nut-washer assemblies.
3. Shear stud connectors.
4. Anchor rods.
5. Threaded rods.
6. Forged-steel hardware.
7. Slide bearings.
8. Shop primer.
9. Galvanized-steel primer.
10. Etching cleaner.
11. Galvanized repair paint.
12. Shrinkage-resistant grout.

B. Shop Drawings: Show fabrication of structural-steel components.

1. Include details of cuts, connections, splices, camber, holes, and other pertinent data.
2. Include embedment Drawings.
3. Indicate welds by standard AWS symbols, distinguishing between shop and field welds, and show size, length, and type of each weld. Show backing bars that are to be removed and supplemental fillet welds where backing bars are to remain.
4. Indicate type, size, and length of bolts, distinguishing between shop and field bolts. Identify pretensioned and slip-critical, high-strength bolted connections.
5. Identify members and connections of the seismic-load-resisting system.
6. Indicate locations and dimensions of protected zones.
7. Identify demand-critical welds.
8. Identify members not to be shop primed.

C. Welding Procedure Specifications (WPSs) and Procedure Qualification Records (PQRs): Provide in accordance with AWS D1.1/D1.1M for each welded joint whether prequalified or qualified by testing, including the following:

1. Power source (constant current or constant voltage).
2. Electrode manufacturer and trade name, for demand-critical welds.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and fabricator.

B. Welding certificates.

C. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.

D. Mill test reports for structural-steel materials, including chemical and physical properties.

E. Product Test Reports: For the following:

1. Bolts, nuts, and washers, including mechanical properties and chemical analysis.
2. Direct-tension indicators.
3. Tension-control, high-strength, bolt-nut-washer assemblies.
4. Shear stud connectors.

F. Survey of existing conditions.

G. Source quality-control reports.

H. Field quality-control reports.

1.7 QUALITY ASSURANCE

A. Fabricator Qualifications: A qualified fabricator that participates in the AISC Quality Certification Program and is designated an AISC-Certified Plant, Category BU or is accredited by the IAS Fabricator Inspection Program for Structural Steel (Acceptance Criteria 172).

B. Installer Qualifications: A qualified Installer who participates in the AISC Quality Certification Program and is designated an AISC-Certified Erector,Category CSE.

C. Welding Qualifications: Qualify procedures and personnel in accordance with AWS D1.1/D1.1M.

1. Welders and welding operators performing work on bottom-flange, demand-critical welds are to pass the supplemental welder qualification testing, as required by AWS D1.8/D1.8M. FCAW-S and FCAW-G are to be considered separate processes for welding personnel qualification.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Store materials to permit easy access for inspection and identification. Keep steel members off ground and spaced by using pallets, dunnage, or other supports and spacers. Protect steel members and packaged materials from corrosion and deterioration.

1. Do not store materials on structure in a manner that might cause distortion, damage, or overload to members or supporting structures. Repair or replace damaged materials or structures as directed.

B. Store fasteners in a protected place in sealed containers with manufacturer's labels intact.

1. Fasteners may be repackaged provided Owner's testing and inspecting agency observes repackaging and seals containers.
2. Clean and relubricate bolts and nuts that become dry or rusty before use.
3. Comply with manufacturers' written recommendations for cleaning and lubricating ASTM F3125/F3125M, Grade F1852 bolt assemblies and for retesting bolt assemblies after lubrication.

PART 2 - PRODUCTS

2.1 STRUCTURAL-STEEL MATERIALS

A. W-Shapes: ASTM A992/A992M.

B. Channels, Angles, M-Shapes: ASTM A36/A36M.

C. Plate and Bar: ASTM A36/A36M.

D. Corrosion-Resisting (Weathering) Structural-Steel Shapes, Plates, and Bars: ASTM A588/A588M, 50 ksi.

E. Cold-Formed Hollow Structural Sections: ASTM A500/A500M, Grade C structural tubing.

F. Corrosion-Resisting (Weathering), Cold-Formed Hollow Structural Sections: ASTM A847/A847M structural tubing.

G. Steel Pipe: ASTM A53/A53M, Type E or Type S, Grade B.

1. Weight Class: Per structural drawings.
2. Finish: Black except where indicated to be galvanized.

H. Steel Castings: ASTM A216/A216M, Grade WCB, with supplementary requirement S11.

I. Steel Forgings: ASTM A668/A668M.

J. Welding Electrodes: Comply with AWS requirements.

2.2 BOLTS AND CONNECTORS

A. High-Strength A325 Bolts, Nuts, and Washers: ASTM F3125/F3125M, Grade A325 Type 1, heavy-hex steel structural bolts; ASTM A563, Grade DH, heavy-hex carbon-steel nuts; and ASTM F436/F436M, Type 1, hardened carbon-steel washers; all with plain finish.

1. Direct-Tension Indicators: ASTM F959/F959M, Type 325-1 compressible-washer type with plain finish.

B. High-Strength A490 Bolts, Nuts, and Washers: ASTM F3125/F3125M, Grade A490 Type 1, heavy-hex steel structural bolts, heavy-hex carbon-steel nuts; and ASTM F436/F436M, Type 1, hardened carbon-steel washers; all with plain finish.

1. Direct-Tension Indicators: ASTM F959/F959M, Type 490-1 compressible-washer type with plain finish.

C. Zinc-Coated High-Strength A325 Bolts, Nuts, and Washers: ASTM F3125/F3125M, Grade A325, Type 1, heavy-hex steel structural bolts; ASTM A563, Grade DH heavy-hex carbon-steel nuts; and ASTM F436/F436M, Type 1, hardened carbon-steel washers.

1. Finish: Hot-dip or mechanically deposited zinc coating.
2. Direct-Tension Indicators: ASTM F959/F959M, Type 325-1 compressible-washer type with mechanically deposited zinc coating, baked epoxy-coated finish.

D. Tension-Control, High-Strength Bolt-Nut-Washer Assemblies: ASTM F3125/F3125M, Grade F1852, Type 1, round head assemblies, consisting of steel structural bolts with splined ends; ASTM A563, Grade DH heavy-hex carbon-steel nuts; and ASTM F436/F436M, Type 1, hardened carbon-steel washers.

1. Finish: Mechanically deposited zinc coating.

E. Shear Stud Connectors: ASTM A108, AISI C-1015 through C-1020, headed-stud type, cold-finished carbon steel; AWS D1.1/D1.1M, Type B.

2.3 RODS

A. Unheaded Anchor Rods: ASTM F1554, Grade 36.

1. Configuration:Per drawings.
2. Nuts: ASTM A563heavy hex carbon steel.
3. Plate Washers: ASTM A36/A36M carbon steel.
4. Washers: ASTM F436 Type 1, hardened carbon steel.
5. Finish: Hot-dip zinc coating, ASTM A153/A153M, Class C.

B. Headed Anchor Rods: ASTM F1554, Grade 36, straight.

1. Nuts: ASTM A563heavy-hex carbon steel.
2. Plate Washers: ASTM A36/A36M carbon steel.
3. Washers: ASTM F436 Type 1, hardened carbon steel.
4. Finish: Hot-dip zinc coating, ASTM A153/A153M, Class C.

C. Threaded Rods: ASTM A36/A36M.

1. Nuts: ASTM A63heavy-hex carbon steel.
2. Washers: ASTM F436 Type 1, hardened carbon steel.
3. Finish: Hot-dip zinc coating, ASTM A153/A153M, Class C.

2.4 FORGED-STEEL STRUCTURAL HARDWARE

A. Clevises and Turnbuckles: Made from cold-finished carbon-steel bars, ASTM A108, AISI C-1035.

B. Eye Bolts and Nuts: Made from cold-finished carbon-steel bars, ASTM A108, AISI C-1030.

C. Sleeve Nuts: Made from cold-finished carbon-steel bars, ASTM A108, AISI C-1018.

2.5 PRIMER

A. Steel Primer:

1. Comply with Section 099123 "Interior Painting." Section 099600 "High-Performance Coatings."
2. SSPC-Paint 23, latex primer.
3. Fabricator's standard lead- and chromate-free, nonasphaltic, rust-inhibiting primer complying with MPI#79 and compatible with topcoat.

B. Galvanized-Steel Primer: MPI#26.

1. Etching Cleaner: MPI#25, for galvanized steel.
2. Galvanizing Repair Paint: MPI#18, MPI#19, or SSPC-Paint 20.

2.6 SHRINKAGE-RESISTANT GROUT

A. Metallic, Shrinkage-Resistant Grout: ASTM C1107/C1107M, factory-packaged, metallic aggregate grout, mixed with water to consistency suitable for application and a 30-minute working time.

B. Nonmetallic, Shrinkage-Resistant Grout: ASTM C1107/C1107M, factory-packaged, nonmetallic aggregate grout, noncorrosive and nonstaining, mixed with water to consistency suitable for application and a 30-minute working time.

2.7 FABRICATION

A. Structural Steel: Fabricate and assemble in shop to greatest extent possible. Fabricate in accordance with ANSI/AISC 303 and to ANSI/AISC 360.

1. Camber structural-steel members where indicated.
2. Fabricate beams with rolling camber up.
3. Identify high-strength structural steel in accordance with ASTM A6/A6M and maintain markings until structural-steel framing has been erected.
4. Mark and match-mark materials for field assembly.
5. Complete structural-steel assemblies, including welding of units, before starting shop-priming operations.

B. Thermal Cutting: Perform thermal cutting by machine to greatest extent possible.

1. Plane thermally cut edges to be welded to comply with requirements in AWS D1.1/D1.1M.

C. Bolt Holes: Cut, drill, or punch standard bolt holes perpendicular to metal surfaces.

D. Finishing: Accurately finish ends of columns and other members transmitting bearing loads.

E. Cleaning: Clean and prepare steel surfaces that are to remain unpainted in accordance with SSPC-SP 3.

F. Shear Stud Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Weld using automatic end welding of headed-stud shear connectors in accordance with AWS D1.1/D1.1M and manufacturer's written instructions.

G. Steel Wall-Opening Framing: Select true and straight members for fabricating steel wall-opening framing to be attached to structural-steel frame. Straighten as required to provide uniform, square, and true members in completed wall framing. Build up welded framing, weld exposed joints continuously, and grind smooth.

H. Welded-Steel Door Frames: Build up welded-steel doorframes attached to structural-steel frame. Weld exposed joints continuously and grind smooth. Plug-weld fixed steel bar stops to frames. Secure removable stops to frames with countersunk machine screws, uniformly spaced not more than 10 inches o.c. unless otherwise indicated on Drawings.

I. Holes: Provide holes required for securing other work to structural steel and for other work to pass through steel members.

1. Cut, drill, or punch holes perpendicular to steel surfaces. Do not thermally cut bolt holes or enlarge holes by burning.
2. Baseplate Holes: Cut, drill, mechanically thermal cut, or punch holes perpendicular to steel surfaces.
3. Weld threaded nuts to framing and other specialty items indicated to receive other work.

2.8 SHOP CONNECTIONS

A. High-Strength Bolts: Shop install high-strength bolts in accordance with RCSC's "Specification for Structural Joints Using High-Strength Bolts" for type of bolt and type of joint specified.

1. Joint Type: Per structural drawings.

B. Weld Connections: Comply with AWS D1.1/D1.1M and AWS D1.8/D1.8M for tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.

1. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in ANSI/AISC 303 for mill material.

2.9 GALVANIZING

A. Hot-Dip Galvanized Finish: Apply zinc coating by the hot-dip process to structural steel in accordance with ASTM A123/A123M.

1. Fill vent and drain holes that are exposed in the finished Work unless they function as weep holes, by plugging with zinc solder and filing off smooth.
2. Galvanize lintels shelf angles and welded door frames attached to structural-steel frame and located in exterior walls.

2.10 SHOP PRIMING

A. Shop prime steel surfaces, except the following:

1. Surfaces embedded in concrete or mortar. Extend priming of partially embedded members to a depth of 2 inches.
2. Surfaces to be field welded.
3. Surfaces of high-strength bolted, slip-critical connections.
4. Surfaces to receive sprayed fire-resistive materials (applied fireproofing).
5. Galvanized surfaces unless indicated to be painted.
6. Corrosion-resisting (weathering) steel surfaces.
7. Surfaces enclosed in interior construction.

B. Surface Preparation of Steel: Clean surfaces to be painted. Remove loose rust and mill scale and spatter, slag, or flux deposits. Prepare surfaces in accordance with the following specifications and standards:

1. SSPC-SP 2.
2. SSPC-SP 3.
3. SSPC-SP 7 (WAB)/NACE WAB-4.
4. SSPC-SP 14 (WAB)/NACE WAB-8.
5. SSPC-SP 11.
6. SSPC-SP 6 (WAB)/NACE WAB-3.
7. SSPC-SP 10 (WAB)/NACE WAB-2.
8. SSPC-SP 5 (WAB)/NACE WAB-1.
9. SSPC-SP 8.

C. Surface Preparation of Galvanized Steel: Prepare galvanized-steel surfaces for shop priming by thoroughly cleaning steel of grease, dirt, oil, flux, and other foreign matter, and treating with etching cleaner or in accordance with SSPC-SP 16.

D. Priming: Immediately after surface preparation, apply primer in accordance with manufacturer's written instructions and at rate recommended by SSPC to provide a minimum dry film thickness of 1.5 mils. Use priming methods that result in full coverage of joints, corners, edges, and exposed surfaces.

1. Stripe paint corners, crevices, bolts, welds, and sharp edges.
2. Apply two coats of shop paint to surfaces that are inaccessible after assembly or erection. Change color of second coat to distinguish it from first.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify, with certified steel erector present, elevations of concrete- and masonry-bearing surfaces and locations of anchor rods, bearing plates, and other embedments for compliance with requirements.

1. Prepare a certified survey of existing conditions. Include bearing surfaces, anchor rods, bearing plates, and other embedments showing dimensions, locations, angles, and elevations.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Provide temporary shores, guys, braces, and other supports during erection to keep structural steel secure, plumb, and in alignment against temporary construction loads and loads equal in intensity to design loads. Remove temporary supports when permanent structural steel, connections, and bracing are in place unless otherwise indicated on Drawings.

1. Do not remove temporary shoring supporting composite deck construction and structural-steel framing until cast-in-place concrete has attained its design compressive strength.

3.3 ERECTION

A. Set structural steel accurately in locations and to elevations indicated and in accordance with ANSI/AISC 303 and ANSI/AISC 360.

B. Baseplates, Bearing Plates, and Leveling Plates: Clean concrete- and masonry-bearing surfaces of bond-reducing materials, and roughen surfaces prior to setting plates. Clean bottom surface of plates.

1. Set plates for structural members on wedges, shims, or setting nuts as required.
2. Weld plate washers to top of baseplate.
3. Snug-tighten anchor rods after supported members have been positioned and plumbed. Do not remove wedges or shims but, if protruding, cut off flush with edge of plate before packing with grout.
4. Promptly pack shrinkage-resistant grout solidly between bearing surfaces and plates, so no voids remain. Neatly finish exposed surfaces; protect grout and allow to cure. Comply with manufacturer's written installation instructions for grouting.

C. Maintain erection tolerances of structural steel within ANSI/AISC 303.

D. Align and adjust various members that form part of complete frame or structure before permanently fastening. Before assembly, clean bearing surfaces and other surfaces that are in permanent contact with members. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.

1. Level and plumb individual members of structure. Slope roof framing members to slopes indicated on Drawings.
2. Make allowances for difference between temperature at time of erection and mean temperature when structure is completed and in service.

E. Splice members only where indicated.

F. Do not use thermal cutting during erection unless approved by Architect and Engineer. Finish thermally cut sections within smoothness limits in AWS D1.1/D1.1M.

G. Do not enlarge unfair holes in members by burning or using drift pins. Ream holes that must be enlarged to admit bolts.

3.4 FIELD CONNECTIONS

A. High-Strength Bolts: Install high-strength bolts in accordance with RCSC's "Specification for Structural Joints Using High-Strength Bolts" for bolt and joint type specified.

1. Joint Type: Per structural drawings.

B. Weld Connections: Comply with AWS D1.1/D1.1M and AWS D1.8/D1.8Mfor tolerances, appearances, welding procedure specifications, weld quality, and methods used in correcting welding work.

1. Comply with ANSI/AISC 303 and ANSI/AISC 360 for bearing, alignment, adequacy of temporary connections, and removal of paint on surfaces adjacent to field welds.
2. Remove backing bars or runoff tabs, back gouge, and grind steel smooth.
3. Assemble and weld built-up sections by methods that maintain true alignment of axes without exceeding tolerances in ANSI/AISC 303 for mill material.

C. Shear Stud Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Weld using end welding of headed-stud shear connectors in accordance with AWS D1.1/D1.1M and manufacturer's written instructions.

3.5 REPAIR

A. Galvanized Surfaces: Clean areas where galvanizing is damaged or missing, and repair galvanizing to comply with ASTM A780/A780M.

B. Touchup Painting:

1. Immediately after erection, clean exposed areas where primer is damaged or missing, and paint with the same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.

    a. Clean and prepare surfaces by SSPC-SP 2 hand-tool cleaning or SSPC-SP 3 power-tool cleaning.

2. Cleaning and touchup painting are specified in Section 099123 "Interior Painting." and Section 099600 "High-Performance Coatings."

C. Touchup Priming: Cleaning and touchup priming are specified in Section 099600 "High-Performance Coatings."

3.6 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a special inspector to perform the following special inspections:

1. Verify structural-steel materials and inspect steel frame joint details.
2. Verify weld materials and inspect welds.
3. Verify connection materials and inspect high-strength bolted connections.

B. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

1. Bolted Connections: Inspect and test bolted connections in accordance with RCSC's "Specification for Structural Joints Using High-Strength Bolts."
2. Welded Connections: Visually inspect field welds in accordance with AWS D1.1/D1.1M.

    a. In addition to visual inspection, test and inspect field welds in accordance with AWS D1.1/D1.1M and the following inspection procedures, at testing agency's option:

        1) Liquid Penetrant Inspection: ASTM E165/E165M.
        2) Magnetic Particle Inspection: ASTM E709; performed on root pass and on finished weld. Cracks or zones of incomplete fusion or penetration are not accepted.
        3) Ultrasonic Inspection: ASTM E164.
        4) Radiographic Inspection: ASTM E94/E94M.

3. Shear Stud Connectors: In addition to visual inspection, test and inspect field-welded shear connectors according to requirements in AWS D1.1/D1.1M for stud welding and as follows:

    a. Perform bend tests if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.
    b. Conduct tests according to requirements in AWS D1.1/D1.1M on additional shear connectors if weld fracture occurs on shear connectors already tested.

END OF SECTION 051200

SECTION 053100 - STEEL DECKING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Roof deck.

B. Related Requirements:
1. Section 051200 "Structural Steel Framing" for shop- and field-welded shear connectors.
2. Section 055000 "Metal Fabrications" for framing deck openings with miscellaneous steel shapes.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Roof deck.

B. Shop Drawings:

1. Include layout and types of deck panels, anchorage details, reinforcing channels, pans, cut deck openings, special jointing, accessories, and attachments to other construction.

1.3 INFORMATIONAL SUBMITTALS

A. Welding certificates.

B. Product Certificates: For each type of steel deck.

C. Test and Evaluation Reports:

1. Product Test Reports: For tests performed by a qualified testing agency, indicating that each of the following complies with requirements:

a. Power-actuated mechanical fasteners.

2. Research Reports: For steel deck, from ICC-ES showing compliance with the building code.

D. Field Quality-Control Submittals:

1. Field quality-control reports.

E. Qualification Statements: For welding personnel.

1.4 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel in accordance with SDI QA/QC and the following welding codes:

1. AWS D1.1/D1.1M.
2. AWS D1.3/D1.3M.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Protect steel deck from corrosion, deformation, and other damage during delivery, storage, and handling.

B. Store products in accordance with SDI MOC3. Stack steel deck on platforms or pallets and slope to provide drainage. Protect with a waterproof covering and ventilate to avoid condensation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. AISI Specifications: Comply with calculated structural characteristics of steel deck in accordance with AISI S100.

2.2 ROOF DECK

A. Fabrication of Roof Deck: Fabricate panels, without top-flange stiffening grooves, to comply with SDI RD and with the following:

1. Galvanized- and Shop-Primed Steel Sheet: ASTM A653/A653M, Structural Steel (SS), Grade 33, G60 zinc coating; cleaned, pretreated, and primed with manufacturer's standard baked-on, rust-inhibitive primer.

a. Color: Manufacturer's standard.
2. Deck Profile: As indicated.
3. Profile Depth: 1-1/2 inches.
4. Design Uncoated-Steel Thickness: As indicated.
5. Span Condition: Triple span or more.
6. Side Laps: Overlapped or interlocking seam at Contractor's option.

2.3 ACCESSORIES

A. Provide manufacturer's standard accessory materials for deck that comply with requirements indicated.

B. Mechanical Fasteners: Corrosion-resistant, low-velocity, power-actuated or pneumatically driven carbon-steel fasteners; or self-drilling, self-threading screws.

C. Side-Lap Fasteners: Corrosion-resistant, hexagonal washer head; self-drilling, carbon-steel screws, No. 10 minimum diameter.

D. Flexible Closure Strips: Vulcanized, closed-cell, synthetic rubber.

E. Miscellaneous Sheet Metal Deck Accessories: Steel sheet, minimum yield strength of 33,000 psi, not less than 0.0359-inch design uncoated thickness, of same material and finish as deck; of profile indicated or required for application.

F. Column Closures, End Closures, Z-Closures, and Cover Plates: Steel sheet, of same material, finish, and thickness as deck unless otherwise indicated.

G. Piercing Hanger Tabs: Piercing steel sheet hanger attachment devices for use with floor deck.

H. Weld Washers: Uncoated steel sheet, shaped to fit deck rib, 0.0598 inch thick, with factory-punched hole of 3/8-inch minimum diameter.

I. Shear Stud Connectors: ASTM A108, AISI C-1015 through C-1020, headed-stud type, cold-finished carbon steel; AWS D1.1/D1.1M, Type B.

J. Flat Sump Plates: Single-piece steel sheet, 0.0747 inch thick, of same material and finish as deck. For drains, cut holes in the field.

K. Recessed Sump Pans: Single-piece steel sheet, 0.0747 inch thick, of same material and finish as deck, with 3-inch-wide flanges and [**level**] [**sloped**] recessed pans of 1-1/2-inch minimum depth. For drains, cut holes in the field.

L. Galvanizing Repair Paint: ASTM A780/A780M.

M. Repair Paint: Manufacturer's standard rust-inhibitive primer of same color as primer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine supporting frame and field conditions for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install deck panels and accessories in accordance with SDI C, SDI NC, and SDI RD, as applicable; manufacturer's written instructions; and requirements in this Section.

B. Install temporary shoring before placing deck panels if required to meet deflection limitations.

C. Locate deck bundles to prevent overloading of supporting members.

D. Place deck panels on supporting frame and adjust to final position with ends accurately aligned and bearing on supporting frame before being permanently fastened. Do not stretch or contract side-lap interlocks.

1. Align cellular deck panels over full length of cell runs and align cells at ends of abutting panels.

E. Place deck panels flat and square and fasten to supporting frame without warp or deflection.

F. Cut and neatly fit deck panels and accessories around openings and other work projecting through or adjacent to deck.

G. Provide additional reinforcement and closure pieces at openings as required for strength, continuity of deck, and support of other work.

H. Comply with AWS requirements and procedures for manual shielded metal arc welding, appearance and quality of welds, and methods used for correcting welding work.

I. Mechanical fasteners may be used in lieu of welding to fasten deck. Locate mechanical fasteners and install in accordance with deck manufacturer's written instructions.

J. Shear Stud Connectors: Prepare steel surfaces as recommended by manufacturer of shear connectors. Weld using end welding of headed-stud shear connectors in accordance with AWS D1.1/D1.1M and manufacturer's written instructions.

3.3 INSTALLATION OF ROOF DECK

A. Fasten roof-deck panels to steel supporting members by arc spot (puddle) welds of the surface diameter indicated or arc seam welds with an equal perimeter that is not less than 1-1/2 inches long, and as follows:

1. Weld Diameter: 3/4 inch, nominal.
2. Weld Spacing: Weld edge and interior ribs of deck units with a minimum of two welds per deck unit at each support. Space welds as indicated.
3. Weld Washers: Install weld washers at each weld location.

B. Side-Lap and Perimeter Edge Fastening: Fasten side laps and perimeter edges of panels between supports, at intervals not exceeding the lesser of one-half of the span or 12 inches, and as follows:

1. Mechanically fasten with self-drilling, No. 10 diameter or larger, carbon-steel screws.
2. Mechanically clinch or button punch.
3. Fasten with a minimum of 1-1/2-inch-long welds.

C. End Bearing: Install deck ends over supporting frame with a minimum end bearing of 1-1/2 inches, with end joints as follows:

1. End Joints: Lapped 2 inches minimum.

D. Roof Sump Pans and Sump Plates: Install over openings provided in roof deck and weld flanges to top of deck. Space welds not more than 12 inches apart with at least one weld at each corner.

1. Install reinforcing channels or zees in ribs to span between supports and weld.

E. Miscellaneous Roof-Deck Accessories: Install ridge and valley plates, finish strips, end closures, and reinforcing channels in accordance with deck manufacturer's written instructions. Weld to substrate to provide a complete deck installation.

1. Weld cover plates at changes in direction of roof-deck panels unless otherwise indicated.

F. Flexible Closure Strips: Install flexible closure strips over partitions, walls, and where indicated. Install with adhesive in accordance with manufacturer's written instructions to ensure complete closure.

3.4 REPAIR

A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on both surfaces of deck with galvanized repair paint in accordance with ASTM A780/A780M and manufacturer's written instructions.

B. Repair Painting:

1. Wire brush and clean rust spots, welds, and abraded areas on both surfaces of prime-painted deck immediately after installation, and apply repair paint.
2. Apply repair paint, of same color as adjacent shop-primed deck, to bottom surfaces of deck exposed to view.
3. Wire brushing, cleaning, and repair painting of bottom deck surfaces are included in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."
4. Wire brushing, cleaning, and repair painting of rust spots, welds, and abraded areas of both deck surfaces are included in Section 099113 "Exterior Painting" and Section 099123 "Interior Painting."

3.5 FIELD QUALITY CONTROL

A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

B. Tests and Inspections:

1. Special inspections and qualification of welding special inspectors for cold-formed steel floor and roof deck in accordance with quality-assurance inspection requirements of SDI QA/QC.

    a. Field welds will be subject to inspection.

2. Steel decking will be considered defective if it does not pass tests and inspections.
3. Shear Stud Connectors: In addition to visual inspection, test and inspect field-welded shear connectors in accordance with requirements in AWS D1.1/D1.1M for stud welding and as follows:

    a. Perform bend tests if visual inspections reveal either a less-than-continuous 360-degree flash or welding repairs to any shear connector.
    b. Conduct tests in accordance with requirements in AWS D1.1/D1.1M on additional shear connectors if weld fracture occurs on shear connectors that are already tested.

C. Prepare test and inspection reports.

END OF SECTION 053100

SECTION 054000 - COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Exterior non-load-bearing wall framing.
2. Ceiling joist framing.
3. Soffit framing.

B. Related Requirements:

1. Section 055000 "Metal Fabrications" for miscellaneous steel shapes, masonry shelf angles, and connections used with cold-formed metal framing.
2. Section 092216 "Non-Structural Metal Framing" for standard, interior non-load-bearing, metal-stud framing, with height limitations and ceiling-suspension assemblies.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site

1.4 ACTION SUBMITTALS

A. Product Data: For the following:

1. Cold-formed steel framing materials.
2. Exterior non-load-bearing wall framing.
3. Vertical deflection clips.
4. Single deflection track.
5. Double deflection track.
6. Post-installed anchors.
7. Power-actuated anchors.

B. Sustainable Design Submittals.

C. Shop Drawings:

1. Include layout, spacings, sizes, thicknesses, and types of cold-formed steel framing; fabrication; and fastening and anchorage details, including mechanical fasteners.
2. Indicate reinforcing channels, opening framing, supplemental framing, strapping, bracing, bridging, splices, accessories, connection details, and attachment to adjoining work.

D. Delegated-Design Submittal: For cold-formed steel framing.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For testing agency.

B. Welding certificates.

C. Product Certificates: For each type of code-compliance certification for studs and tracks.

D. Product Test Reports: For each listed product, for tests performed by a qualified testing agency.

1. Steel sheet.
2. Expansion anchors.
3. Power-actuated anchors.
4. Mechanical fasteners.
5. Vertical deflection clips.
6. Horizontal drift deflection clips
7. Miscellaneous structural clips and accessories.

E. Research Reports:

1. For nonstandard cold-formed steel framing post-installed anchors and power-actuated fasteners, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.
2. For sill sealer gasket/termite barrier, showing compliance with ICC-ES AC380.

1.6 QUALITY ASSURANCE

A. Testing Agency Qualifications: Qualified according to ASTM E329 for testing indicated.

B. Product Tests: Mill certificates or data from a qualified independent testing agency indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.

C. Code-Compliance Certification of Studs and Tracks: Provide documentation that framing members are certified according to the product-certification program of the Certified Steel Stud Association the Steel Framing Industry Association or the Steel Stud Manufacturers Association.

D. Welding Qualifications: Qualify procedures and personnel according to the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
2. AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel."

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. CEMCO; California Expanded Metal Products Co.

B. ClarkDietrich Building Systems.

C. SCAFCO Steel Stud Company.

D. Steel Network, Inc. (The).

2.2 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design cold-formed steel framing.

B. Structural Performance: Provide cold-formed steel framing capable of withstanding design loads within limits and under conditions indicated.

1. Design Loads: As indicated on Drawings.
2. Deflection Limits: Design framing systems to withstand design loads without deflections greater than the following:
    a. Exterior Non-Load-Bearing Framing: Horizontal deflection of 1/240 of the wall height.
3. Design framing systems to provide for movement of framing members located outside the insulated building envelope without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change of 120 deg F.
4. Design framing system to maintain clearances at openings, to allow for construction tolerances, and to accommodate live load deflection of primary building structure as follows:
    a. Upward and downward movement of 1/2 inch.
5. Design exterior non-load-bearing wall framing to accommodate horizontal deflection without regard for contribution of sheathing materials.

C. Cold-Formed Steel Framing Standards: Unless more stringent requirements are indicated, framing shall comply with AISI S100, AISI S200, and the following:

1. Floor and Roof Systems: AISI S210.
2. Wall Studs: AISI S211.
3. Headers: AISI S212.
4. Lateral Design: AISI S213.

D. Fire-Resistance Ratings: Comply with ASTM E119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Indicate design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency acceptable to authorities having jurisdiction.

2.3 COLD-FORMED STEEL FRAMING MATERIALS

A. Steel Sheet: ASTM A1003/A1003M, Structural Grade, Type H, metallic coated, of grade and coating designation as follows:

1. Grade: As required by structural performance.
2. Coating: G60

B. Steel Sheet for Vertical Deflection Clips: ASTM A653/A653M, structural steel, zinc coated, of grade and coating as follows:

1. Grade: As required by structural performance.
2. Coating: G60.

2.4 EXTERIOR NON-LOAD-BEARING WALL FRAMING

A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0538 inch.
2. Flange Width: 1-5/8 inches.
3. Section Properties: As required to meet performance requirements.

B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with unstiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0538 inch.
2. Flange Width: 1-1/4 inches.

C. Vertical Deflection Clips: Manufacturer's standard bypass head clips, capable of accommodating upward and downward vertical displacement of primary structure through positive mechanical attachment to stud web.

D. Single Deflection Track: Manufacturer's single, deep-leg, U-shaped steel track; unpunched, with unstiffened flanges, of web depth to contain studs while allowing free vertical movement, with flanges designed to support horizontal loads and transfer them to the primary structure, and as follows:

1. Minimum Base-Metal Thickness: 0.0538 inch.
2. Flange Width: 1 inch plus the design gap for one-story structures.

2.5 FRAMING ACCESSORIES

A. Fabricate steel-framing accessories from ASTM A1003/A1003M, Structural Grade, Type H, metallic coated steel sheet, of same grade and coating designation used for framing members.

B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:

1. Supplementary framing.
2. Bracing, bridging, and solid blocking.
3. Web stiffeners.
4. Anchor clips.
5. End clips.
6. Foundation clips.
7. Gusset plates.
8. Stud kickers and knee braces.
9. Joist hangers and end closures.
10. Hole-reinforcing plates.
11. Backer plates.

2.6 ANCHORS, CLIPS, AND FASTENERS

A. Steel Shapes and Clips: ASTM A36/A36M, zinc coated by hot-dip process according to ASTM A123/A123M.

B. Anchor Bolts: ASTM F1554, Grade 36, threaded carbon-steel hex-headed bolts, carbon-steel nuts, and flat, hardened-steel washers; zinc coated by hot-dip process according to ASTM A153/A153M, Class C or mechanically deposition according to ASTM B695, Class 50.

C. Post-Installed Anchors: Fastener systems with bolts of same basic metal as fastened metal, if visible, unless otherwise indicated; with working capacity greater than or equal to the design load, according to an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01, ICC-ES AC193, ICC-ES AC58 or ICC-ES AC308 as appropriate for the substrate.

1. Uses: Securing cold-formed steel framing to structure.
2. Type: Torque-controlled expansion anchor, Torque-controlled adhesive anchor or adhesive anchor.
3. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B633 or ASTM F1941, Class Fe/Zn 5, unless otherwise indicated.

D. Power-Actuated Anchors: Fastener systems with working capacity greater than or equal to the design load, according to an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

E. Mechanical Fasteners: ASTM C1513, corrosion-resistant-coated, self-drilling, self-tapping, steel drill screws.

1. Head Type: Low-profile head beneath sheathing; manufacturer's standard elsewhere.

F. Welding Electrodes: Comply with AWS standards.

2.7 MISCELLANEOUS MATERIALS

A. Galvanizing Repair Paint: ASTM A780/A780M MIL-P-21035B or SSPC-Paint 20.

B. Cement Grout: Portland cement, ASTM C150/C150M, Type I; and clean, natural sand, ASTM C404. Mix at ratio of 1 part cement to 2-1/2 parts sand, by volume, with minimum water required for placement and hydration.

C. Nonmetallic, Non-shrink Grout: Factory-packaged, nonmetallic, noncorrosive, non-staining grout, complying with ASTM C1107/C1107M, and with a fluid consistency and 30-minute working time.

D. Shims: Load-bearing, high-density, multi-monomer, non-leaching plastic; or cold-formed steel of same grade and metallic coating as framing members supported by shims.

E. Sill Sealer Gasket: Closed-cell neoprene foam, 1/4 inch thick, selected from manufacturer's standard widths to match width of bottom track or rim track members as required.

F. Sill Sealer Gasket/Termite Barrier: Minimum 68-mil nominal thickness, self-adhering sheet consisting of 64 mils of rubberized asphalt laminated on one side to a 4-mil- thick, polyethylene-film reinforcement, and with release liner on adhesive side

1. Physical Properties:

a. Peel Adhesion: 17.0 lb/in of width when tested in accordance with ASTM D412.
b. Low-Temperature Flexibility: Pass at minus 25 deg FASTM D146/D146M.
c. Water Vapor Permeance: 0.05 perm maximum when tested in accordance with ASTM E96/E96M, Method B.
d. Resistance to Termite Penetration: Comply with ICC-ES AC380.

2.8 FABRICATION

A. Fabricate cold-formed steel framing and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI's specifications and standards, manufacturer's written instructions, and requirements in this Section.

1. Fabricate framing assemblies using jigs or templates.
2. Cut framing members by sawing or shearing; do not torch cut.
3. Fasten cold-formed steel framing members by welding, screw fastening, clinch fastening, pneumatic pin fastening, or riveting as standard with fabricator. Wire tying of framing members is not permitted.

a. Comply with AWS D1.3/D1.3M requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
b. Locate mechanical fasteners and install according to Shop Drawings, with screws penetrating joined members by no fewer than three exposed screw threads.

4. Fasten other materials to cold-formed steel framing by welding, bolting, pneumatic pin fastening, or screw fastening, according to Shop Drawings.

B. Reinforce, stiffen, and brace framing assemblies to withstand handling, delivery, and erection stresses. Lift fabricated assemblies by means that prevent damage or permanent distortion.

C. Tolerances: Fabricate assemblies level, plumb, and true to line to a maximum allowable variation of 1/8 inch in 10 feet and as follows:

1. Spacing: Space individual framing members no more than plus or minus 1/8 inch from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.
2. Squareness: Fabricate each cold-formed steel framing assembly to a maximum out-of-square tolerance of 1/8 inch.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, conditions, and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Before sprayed fire-resistive materials are applied, attach continuous angles, supplementary framing, or tracks to structural members indicated to receive sprayed fire-resistive materials.

B. After applying sprayed fire-resistive materials, remove only as much of these materials as needed to complete installation of cold-formed framing without reducing thickness of fire-resistive materials below that required to obtain fire-resistance ratings indicated. Protect remaining fire-resistive materials from damage.

C. Install load-bearing shims or grout between the underside of load-bearing wall bottom track and the top of foundation wall or slab at locations with a gap larger than 1/4 inch to ensure a uniform bearing surface on supporting concrete or masonry construction.

D. Install sill sealer gasket at the underside of wall bottom track or rim track and at the top of foundation wall or slab at stud or joist locations.

E. Install sill sealer gasket/termite barrier in accordance with manufacturer's written instructions at the underside of wall bottom track or rim track and at the top of foundation wall or slab at stud or joist locations.

3.3 INSTALLATION, GENERAL

A. Cold-formed steel framing may be shop or field fabricated for installation, or it may be field assembled.

B. Install cold-formed steel framing according to AISI S200, AISI S202, and manufacturer's written instructions unless more stringent requirements are indicated.

C. Install shop- or field-fabricated, cold-formed framing and securely anchor to supporting structure.

1. Screw, bolt, or weld wall panels at horizontal and vertical junctures to produce flush, even, true-to-line joints with maximum variation in plane and true position between fabricated panels not exceeding 1/16 inch.

D. Install cold-formed steel framing and accessories plumb, square, and true to line, and with connections securely fastened.

1. Cut framing members by sawing or shearing; do not torch cut.
2. Fasten cold-formed steel framing members by welding, screw fastening, clinch fastening, or riveting. Wire tying of framing members is not permitted.

a. Comply with AWS D1.3/D1.3M requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
b. Locate mechanical fasteners, install according to Shop Drawings, and comply with requirements for spacing, edge distances, and screw penetration.

E. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.

F. Install temporary bracing and supports to secure framing and support loads equal to those for which structure was designed. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.

G. Do not bridge building expansion joints with cold-formed steel framing. Independently frame both sides of joints.

H. Install insulation, specified in Section 072100 "Thermal Insulation," in framing-assembly members, such as headers, sills, boxed joists, and multiple studs at openings, that are inaccessible on completion of framing work.

I. Fasten hole-reinforcing plate over web penetrations that exceed size of manufacturer's approved or standard punched openings.

3.4 INSTALLATION OF EXTERIOR NONLOADBEARING WALL FRAMING

A. Install continuous tracks sized to match studs. Align tracks accurately and securely anchor to supporting structure.

B. Fasten both flanges of studs to top and bottom track unless otherwise indicated. Space studs as follows:

1. Stud Spacing: 16 inches.

C. Set studs plumb, except as needed for diagonal bracing or required for non-plumb walls or warped surfaces and similar requirements.

D. Isolate non-load-bearing steel framing from building structure to prevent transfer of vertical loads while providing lateral support.

1. Install single deep-leg deflection tracks and anchor to building structure.
2. Install double deep-leg deflection tracks and anchor outer track to building structure.
3. Connect vertical deflection clips to infill studs and anchor to building structure.
4. Connect drift clips to cold-formed steel framing and anchor to building structure.

E. Install horizontal bridging in wall studs, spaced vertically in rows indicated on Shop Drawings but not more than 48 inches apart. Fasten at each stud intersection.

1. Channel Bridging: Cold-rolled steel channel, welded or mechanically fastened to webs of punched studs.
2. Strap Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and stud-track solid blocking of width and thickness to match studs. Fasten flat straps to stud flanges and secure solid blocking to stud webs or flanges.
3. Bar Bridging: Proprietary bridging bars installed according to manufacturer's written instructions.

F. Top Bridging for Single Deflection Track: Install row of horizontal bridging within 18 inches of single deflection track. Install a combination of bridging and stud or stud-track solid blocking of width and thickness matching studs, secured to stud webs or flanges.

1. Install solid blocking at 48 inches on-center or as indicated in shop drawings if closer spacing is required.

G. Install miscellaneous framing and connections, including stud kickers, web stiffeners, clip angles, continuous angles, anchors, and fasteners, to provide a complete and stable wall-framing system.

3.5 INSTALLATION TOLERANCES

A. Install cold-formed steel framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet and as follows:

1. Space individual framing members no more than plus or minus 1/8 inch from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.6 REPAIR

A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed steel framing with galvanized repair paint according to ASTM A780/A780M and manufacturer's written instructions.

3.7 FIELD QUALITY CONTROL

A. Testing: Owner will engage a qualified independent testing and inspecting agency to perform field tests and inspections and prepare test reports.

B. Field and shop welds will be subject to testing and inspecting.

C. Testing agency will report test results promptly and in writing to Contractor and Architect.

D. Cold-formed steel framing will be considered defective if it does not pass tests and inspections.

E. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.8 PROTECTION

A. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, that ensure that cold-formed steel framing is without damage or deterioration at time of Substantial Completion.

END OF SECTION 054000

SECTION 055000 - METAL FABRICATIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Steel framing and supports for operable (folding) partitions.
2. Steel framing and supports for countertops.
3. Steel tube reinforcement for low partitions.
4. Steel framing and supports for applications where framing and supports are not specified in other Sections.
5. Slotted channel framing.
6. Shelf angles.

B. Products furnished, but not installed, under this Section include the following:

1. Loose steel lintels.
2. Anchor bolts, steel pipe sleeves, slotted-channel inserts, and wedge-type inserts indicated to be cast into concrete or built into unit masonry.
3. Steel weld plates and angles for casting into concrete for applications where they are not specified in other Sections.

C. Related Requirements:

1. Section 012200 “Unit Prices” for administrative and procedural requirements for unit prices related to steel framing and supports for operable (folding) partitions.

2. Section 051200 "Structural Steel Framing" for steel framing, supports, elevator machine beams, hoist beams, divider beams, door frames, and other steel items attached to the structural-steel framing.

1.3 COORDINATION

A. Coordinate selection of shop primers with topcoats to be applied over them. Comply with paint and coating manufacturers' written instructions to ensure that shop primers and topcoats are compatible with one another.

B. Coordinate installation of metal fabrications that are anchored to or that receive other work. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves,

concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

1.4 ACTION SUBMITTALS

A. Product Data: For the following:

1. Nonslip aggregates and nonslip-aggregate surface finishes.
2. Fasteners.
3. Shop primers.
4. Shrinkage-resisting grout.
5. Slotted channel framing.

B. Shop Drawings: Show fabrication and installation details. Include plans, elevations, sections, and details of metal fabrications and their connections. Show anchorage and accessory items. Provide Shop Drawings for the following:

1. Steel framing and supports for operable partitions.
2. Steel tube reinforcement for low partitions.
3. Steel framing and supports for mechanical and electrical equipment.
4. Steel framing and supports for applications where framing and supports are not specified in other Sections.
5. Shelf angles.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For professional engineer's experience with providing delegated-design engineering services of the kind indicated, including documentation that engineer is licensed in the jurisdiction in which Project is located.

B. Mill Certificates: Signed by stainless steel manufacturers, certifying that products furnished comply with requirements.

C. Welding certificates.

D. Paint Compatibility Certificates: From manufacturers of topcoats applied over shop primers, certifying that shop primers are compatible with topcoats.

E. Research Reports: For post-installed anchors.

1.6 QUALITY ASSURANCE

A. Welding Qualifications: Qualify procedures and personnel in accordance with the following:

1. AWS D1.1/D1.1M, "Structural Welding Code - Steel."
2. AWS D1.2/D1.2M, "Structural Welding Code - Aluminum."
3. AWS D1.6/D1.6M, "Structural Welding Code - Stainless Steel."

1.7 FIELD CONDITIONS

A. Field Measurements: Verify actual locations of walls, floor slabs, decks, and other construction contiguous with metal fabrications by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes acting on exterior metal fabrications by preventing buckling, opening of joints, overstressing of components, failure of connections, and other detrimental effects.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 METALS

A. Metal Surfaces, General: Provide materials with smooth, flat surfaces unless otherwise indicated. For metal fabrications exposed to view in the completed Work, provide materials without seam marks, roller marks, rolled trade names, or blemishes.

B. Steel Plates, Shapes, and Bars: ASTM A36/A36M.

C. Stainless Steel Sheet, Strip, and Plate: ASTM A240/A240M or ASTM A666, Type 304 or Type 316L.

D. Stainless Steel Bars and Shapes: ASTM A276/A276M, Type 304 or Type 316L.

E. Rolled-Steel Floor Plate: ASTM A786/A786M, rolled from plate complying with ASTM A36/A36M or ASTM A283/A283M, Grade C or D.

F. Rolled-Stainless Steel Floor Plate: ASTM A793.

G. Steel Tubing: ASTM A500/A500M, cold-formed steel tubing.

H. Steel Pipe: ASTM A53/A53M, Standard Weight (Schedule 40) unless otherwise indicated.

I. Zinc-Coated Steel Wire Rope: ASTM A741.

1. Wire Rope Fittings: Hot-dip galvanized-steel connectors with capability to sustain, without failure, a load equal to minimum breaking strength of wire rope with which they are used.

J. Stainless Steel Wire Rope: Wire rope manufactured from stainless steel wire complying with ASTM A492, Type 316.

1. Wire Rope Fittings: Stainless steel connectors, Type 316, with capability to sustain, without failure, a load equal to minimum breaking strength of wire rope with which they are used.

K. Steel Prestressing Strand: ASTM A416/A416M, Grade 270, low-relaxation, seven-wire, with 0.9-lb/sq. ft.zinc coating.

1. Steel Prestressing Strand Fittings: Hot-dip galvanized-steel anchors and connectors with capability to sustain, without failure, a load equal to minimum breaking strength of steel prestressing strand with which they are used.

L. Aluminum Plate and Sheet: ASTM B209, Alloy 6061-T6.

M. Aluminum Extrusions: ASTM B221, Alloy 6063-T6.

N. Aluminum-Alloy Rolled Tread Plate: ASTM B632/B632M, Alloy 6061-T6.

O. Aluminum Castings: ASTM B26/B26M, Alloy 443.0-F.

P. Bronze Extrusions: ASTM B455, Alloy UNS No. C38500 (extruded architectural bronze).

Q. Bronze Castings: ASTM B584, Alloy UNS No. C83600 (leaded red brass) or UNS No. C84400 (leaded semired brass).

R. Nickel Silver Extrusions: ASTM B151/B151M, Alloy UNS No. C74500.

S. Nickel Silver Castings: ASTM B584, Alloy UNS No. C97600 (20 percent leaded nickel bronze).

2.3 FASTENERS

A. General: Unless otherwise indicated, provide Type 304 or Type 316 stainless steel fasteners for exterior use and zinc-plated fasteners with coating complying with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5, at exterior walls. Select fasteners for type, grade, and class required.

1. Provide stainless steel fasteners for fastening aluminum or stainless steel.
2. Provide bronze fasteners for fastening bronze.

B. Steel Bolts and Nuts: Regular hexagon-head bolts, ASTM A307, Grade A; with hex nuts, ASTM A563; and, where indicated, flat washers.

C. High-Strength Bolts, Nuts, and Washers: ASTM F3125/F3125M, Grade A325, Type 3, heavy-hex steel structural bolts; ASTM A563, Grade DH3, heavy-hex carbon-steel nuts; and where indicated, flat washers.

D. Stainless Steel Bolts and Nuts: Regular hexagon-head annealed stainless steel bolts, ASTM F593; with hex nuts, ASTM F594; and, where indicated, flat washers; Alloy Group 2.

E. Anchor Bolts: ASTM F1554, Grade 36, of dimensions indicated; with nuts, ASTM A563; and, where indicated, flat washers.

1. Hot-dip galvanize or provide mechanically deposited, zinc coating where item being fastened is indicated to be galvanized.

F. Anchors, General: Capable of sustaining, without failure, a load equal to six times the load imposed when installed in unit masonry and four times the load imposed when installed in concrete, as determined by testing in accordance with ASTM E488/E488M, conducted by a qualified independent testing agency.

G. Cast-in-Place Anchors in Concrete: Either threaded or wedge type unless otherwise indicated; galvanized ferrous castings, either ASTM A47/A47M malleable iron or ASTM A27/A27M cast steel. Provide bolts, washers, and shims as needed, all hot-dip galvanized per ASTM F2329/F2329M.

H. Post-Installed Anchors: Torque-controlled expansion anchors or chemical anchors.

1. Material for Interior Locations: Carbon-steel components zinc plated to comply with ASTM B633 or ASTM F1941/F1941M, Class Fe/Zn 5, unless otherwise indicated.
2. Material for Exterior Locations and Where Stainless Steel Is Indicated: Alloy Group 2 stainless steel bolts, ASTM F593, and nuts, ASTM F594.

I. Slotted-Channel Inserts: Cold-formed, hot-dip galvanized-steel box channels (struts) complying with MFMA-4, 1-5/8 by 7/8 inches by length indicated with anchor straps or studs not less than 3 inches long at not more than 8 inches o.c. Provide with temporary filler and tee-head bolts, complete with washers and nuts, all zinc-plated to comply with ASTM B633, Class Fe/Zn 5, as needed for fastening to inserts.

2.4 MISCELLANEOUS MATERIALS

A. Shop Primers: Provide primers that comply with Section 099123 "Interior Painting."

B. Universal Shop Primer: Fast-curing, lead- and chromate-free, universal modified-alkyd primer complying with MPI#79 and compatible with topcoat.

1. Use primer containing pigments that make it easily distinguishable from zinc-rich primer.

C. Water-Based Primer: Emulsion type, anticorrosive primer for mildly corrosive environments that is resistant to flash rusting when applied to cleaned steel, complying with MPI#107 and compatible with topcoat.

D. Epoxy Zinc-Rich Primer: Complying with MPI#20 and compatible with topcoat.

E. Shop Primer for Galvanized Steel: Primer formulated for exterior use over zinc-coated metal and compatible with finish paint systems indicated.

F. Galvanizing Repair Paint: High-zinc-dust-content paint complying with SSPC-Paint 20 and compatible with paints specified to be used over it.

G. Bituminous Paint: Cold-applied asphalt emulsion complying with ASTM D1187/D1187M.

H. Shrinkage-Resistant Grout: Factory-packaged, nonmetallic, nonstaining, noncorrosive, nongaseous grout complying with ASTM C1107/C1107M. Provide grout specifically recommended by manufacturer for interior and exterior applications.

I. Concrete: Comply with requirements in Section 033000 "Cast-in-Place Concrete" for normal-weight, air-entrained concrete with a minimum 28-day compressive strength of 3000 psi.

2.5 FABRICATION, GENERAL

A. Shop Assembly: Preassemble items in the shop to greatest extent possible. Disassemble units only as necessary for shipping and handling limitations. Use connections that maintain structural value of joined pieces. Clearly mark units for reassembly and coordinated installation.

B. Cut, drill, and punch metals cleanly and accurately. Remove burrs and ease edges to a radius of approximately 1/32 inch unless otherwise indicated. Remove sharp or rough areas on exposed surfaces.

C. Form bent-metal corners to smallest radius possible without causing grain separation or otherwise impairing work.

D. Form exposed work with accurate angles and surfaces and straight edges.

E. Weld corners and seams continuously to comply with the following:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

F. Form exposed connections with hairline joints, flush and smooth, using concealed fasteners or welds where possible. Where exposed fasteners are required, use Phillips flat-head (countersunk) fasteners unless otherwise indicated. Locate joints where least conspicuous.

G. Fabricate seams and other connections that are exposed to weather in a manner to exclude water. Provide weep holes where water may accumulate.

H. Cut, reinforce, drill, and tap metal fabrications as indicated to receive finish hardware, screws, and similar items.

I. Provide for anchorage of type indicated; coordinate with supporting structure. Space anchoring devices to secure metal fabrications rigidly in place and to support indicated loads.

J. Where units are indicated to be cast into concrete or built into masonry, equip with integrally welded steel strap anchors, 1/8 by 1-1/2 inches, with a minimum 6-inch embedment and 2-inch

hook, not less than 8 inches from ends and corners of units and 24 inches o.c., unless otherwise indicated.

2.6 MISCELLANEOUS FRAMING AND SUPPORTS

A. General: Provide steel framing and supports not specified in other Sections as needed to complete the Work.

B. Fabricate units from steel shapes, plates, and bars of welded construction unless otherwise indicated. Fabricate to sizes, shapes, and profiles indicated and as necessary to receive adjacent construction.

1. Fabricate units from slotted channel framing where indicated.
2. Furnish inserts for units installed after concrete is placed.

C. Fabricate supports for operable partitions from continuous steel beams of sizes indicated with attached bearing plates, anchors, and braces as indicated. Drill or punch bottom flanges of beams to receive partition track hanger rods; locate holes where indicated on operable partition Shop Drawings.

D. Galvanize miscellaneous framing and supports where indicated.

2.7 SHELF ANGLES

A. Fabricate shelf angles from steel angles of sizes indicated and for attachment to concrete framing. Provide horizontally slotted holes to receive 3/4-inch bolts, spaced not more than 6 inches from ends and 24 inches o.c., unless otherwise indicated.

1. Provide mitered and welded units at corners.
2. Provide open joints in shelf angles at expansion and control joints. Make open joint approximately 2 inches larger than expansion or control joint.

B. For cavity walls, provide vertical channel brackets to support angles from backup masonry and concrete.

C. Galvanize and prime shelf angles located in exterior walls.

D. Prime shelf angles located in exterior walls with zinc-rich primer.

E. Furnish wedge-type concrete inserts, complete with fasteners, to attach shelf angles to cast-in-place concrete.

2.8 MISCELLANEOUS STEEL TRIM

A. Unless otherwise indicated, fabricate units from steel shapes, plates, and bars of profiles shown with continuously welded joints and smooth exposed edges. Miter corners and use concealed field splices where possible.

B. Provide cutouts, fittings, and anchorages as needed to coordinate assembly and installation with other work.

1. Provide with integrally welded steel strap anchors for embedding in concrete or masonry construction.

C. Galvanize and prime exterior miscellaneous steel trim.

D. Prime exterior miscellaneous steel trim with zinc-rich primer.

2.9 LOOSE STEEL LINTELS

A. Fabricate loose steel lintels from steel angles and shapes of size indicated for openings and recesses in masonry walls and partitions at locations indicated. Fabricate in single lengths for each opening unless otherwise indicated. Weld adjoining members together to form a single unit where indicated.

B. Size loose lintels to provide bearing length at each side of openings equal to 1/12 of clear span, but not less than 8 inches unless otherwise indicated.

C. Galvanize and prime loose steel lintels located in exterior walls.

D. Prime loose steel lintels located in exterior walls with zinc-rich primer.

2.10 STEEL WELD PLATES AND ANGLES

A. Provide steel weld plates and angles not specified in other Sections, for items supported from concrete construction as needed to complete the Work. Provide each unit with no fewer than two integrally welded steel strap anchors for embedding in concrete.

2.11 GENERAL FINISH REQUIREMENTS

A. Finish metal fabrications after assembly.

B. Finish exposed surfaces to remove tool and die marks and stretch lines, and to blend into surrounding surface.

2.12 STEEL AND IRON FINISHES

A. Galvanizing: Hot-dip galvanize items as indicated to comply with ASTM A153/A153M for steel and iron hardware and with ASTM A123/A123M for other steel and iron products.

1. Do not quench or apply post galvanizing treatments that might interfere with paint adhesion.

B. Preparation for Shop Priming Galvanized Items: After galvanizing, thoroughly clean galvanized surfaces of grease, dirt, oil, flux, and other foreign matter, and treat with metallic phosphate process.

C. Shop prime iron and steel items not indicated to be galvanized unless they are to be embedded in concrete, sprayed-on fireproofing, or masonry, or unless otherwise indicated.

1. Shop prime with primers specified in Section 099123 "Interior Painting" unless zinc-rich primer is indicated.

D. Preparation for Shop Priming: Prepare surfaces to comply with requirements indicated below:

1. Exterior Items: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
2. Items Indicated to Receive Zinc-Rich Primer: SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
3. Items Indicated to Receive Primers Specified in Section 099600 "High-Performance Coatings": SSPC-SP 6/NACE No. 3, "Commercial Blast Cleaning."
4. Other Steel Items: SSPC-SP 3, "Power Tool Cleaning."
5. Galvanized-Steel Items: SSPC-SP 16, "Brush-off Blast Cleaning of Coated and Uncoated Galvanized Steel, Stainless Steels, and Non-Ferrous Metals."

E. Shop Priming: Apply shop primer to comply with SSPC-PA 1, "Paint Application Specification No. 1: Shop, Field, and Maintenance Painting of Steel," for shop painting.

1. Stripe paint corners, crevices, bolts, welds, and sharp edges.

2.13 ALUMINUM FINISHES

A. As-Fabricated Finish: AA-M12.

B. Clear Anodic Finish: AAMA 611, Class I, AA-M12C22A41.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Cutting, Fitting, and Placement: Perform cutting, drilling, and fitting required for installing metal fabrications. Set metal fabrications accurately in location, alignment, and elevation; with edges and surfaces level, plumb, true, and free of rack; and measured from established lines and levels.

B. Fit exposed connections accurately together to form hairline joints. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations. Do not weld, cut, or abrade surfaces of exterior units that have been hot-dip galvanized after fabrication and are for bolted or screwed field connections.

C. Field Welding: Comply with the following requirements:

1. Use materials and methods that minimize distortion and develop strength and corrosion resistance of base metals.
2. Obtain fusion without undercut or overlap.
3. Remove welding flux immediately.
4. At exposed connections, finish exposed welds and surfaces smooth and blended so no roughness shows after finishing and contour of welded surface matches that of adjacent surface.

D. Fastening to In-Place Construction: Provide anchorage devices and fasteners where metal fabrications are required to be fastened to in-place construction. Provide threaded fasteners for use with concrete and masonry inserts, toggle bolts, through bolts, lag screws, wood screws, and other connectors.

E. Provide temporary bracing or anchors in formwork for items that are to be built into concrete, masonry, or similar construction.

F. Corrosion Protection: Coat concealed surfaces of aluminum that come into contact with grout, concrete, masonry, wood, or dissimilar metals with the following:

1. Cast Aluminum: Heavy coat of bituminous paint.
2. Extruded Aluminum: Two coats of clear lacquer.

3.2 INSTALLATION OF MISCELLANEOUS FRAMING AND SUPPORTS

A. General: Install framing and supports to comply with requirements of items being supported, including manufacturers' written instructions and requirements indicated on Shop Drawings.

B. Anchor supports for operable partitions securely to, and rigidly brace from, building structure.

C. Anchor shelf angles securely to existing construction with expansion anchors anchor bolts through bolts.

D. Support steel girders on solid grouted masonry, concrete, or steel pipe columns. Secure girders with anchor bolts embedded in grouted masonry or concrete or with bolts through top plates of pipe columns.

1. Where grout space under bearing plates is indicated for girders supported on concrete or masonry, install as specified in "Installing Bearing and Leveling Plates" Article.

E. Install pipe columns on concrete footings with grouted baseplates. Position and grout column baseplates as specified in "Installation of Bearing and Leveling Plates" Article.

1. Grout baseplates of columns supporting steel girders after girders are installed and leveled.

3.3 REPAIRS

A. Touchup Painting:

1. Immediately after erection, clean field welds, bolted connections, and abraded areas. Paint uncoated and abraded areas with same material as used for shop painting to comply with SSPC-PA 1 for touching up shop-painted surfaces.

    a. Apply by brush or spray to provide a minimum 2.0-mil dry film thickness.

2. Cleaning and touchup painting of field welds, bolted connections, and abraded areas of shop paint are specified in Section 099123 "Interior Painting."

B. Galvanized Surfaces: Clean field welds, bolted connections, and abraded areas and repair galvanizing to comply with ASTM A780/A780M.

END OF SECTION 055000

SECTION 061000 - ROUGH CARPENTRY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Wood blocking, cants, and nailers.
2. Wood furring.
3. Plywood backing panels.

B. Related Requirements:

1. Section 061600 "Sheathing" for sheathing.

1.3 DEFINITIONS

A. Boards or Strips: Lumber of less than 2 inches nominal size in least dimension.

B. Dimension Lumber: Lumber of 2 inches nominal size or greater but less than 5 inches nominal size in least dimension.

C. Exposed Framing: Framing not concealed by other construction.

D. OSB: Oriented strand board.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
2. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.

3. For fire-retardant treatments, include physical properties of treated lumber both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency according to ASTM D5664.
4. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.

B. Fastener Patterns: Full-size templates for fasteners in exposed framing.

1.5 INFORMATIONAL SUBMITTALS

A. Material Certificates: For dimension lumber specified to comply with minimum allowable unit stresses. Indicate species and grade selected for each use and design values approved by the ALSC Board of Review.

B. Evaluation Reports: For the following, from ICC-ES:

1. Wood-preservative-treated wood.
2. Fire-retardant-treated wood.
3. Engineered wood products.
4. Power-driven fasteners.
5. Post-installed anchors.
6. Metal framing anchors.

1.6 QUALITY ASSURANCE

A. Testing Agency Qualifications: For testing agency providing classification marking for fire-retardant treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Stack wood products flat with spacers beneath and between each bundle to provide air circulation. Protect wood products from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

A. Lumber: DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, comply with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Grade lumber by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.

1. Factory mark each piece of lumber with grade stamp of grading agency.

2. For exposed lumber indicated to receive a stained or natural finish, mark grade stamp on end or back of each piece.
3. Dress lumber, S4S, unless otherwise indicated.

B. Maximum Moisture Content of Lumber: 15 percent unless otherwise indicated.

C. Engineered Wood Products: Acceptable to authorities having jurisdiction and for which current model code research or evaluation reports exist that show compliance with building code in effect for Project.

1. Allowable design stresses, as published by manufacturer, shall meet or exceed those indicated. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency.

2.2 FIRE-RETARDANT-TREATED MATERIALS

A. General: Where fire-retardant-treated materials are indicated, materials shall comply with requirements in this article, that are acceptable to authorities having jurisdiction, and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.

B. Fire-Retardant-Treated Lumber and Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested according to ASTM E 84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet beyond the centerline of the burners at any time during the test.

1. Treatment shall not promote corrosion of metal fasteners.
2. Exterior Type: Treated materials shall comply with requirements specified above for fire-retardant-treated lumber and plywood by pressure process after being subjected to accelerated weathering according to ASTM D 2898. Use for exterior locations and where indicated.
3. Interior Type A: Treated materials shall have a moisture content of 28 percent or less when tested according to ASTM D 3201 at 92 percent relative humidity. Use where exterior type is not indicated.
4. Design Value Adjustment Factors: Treated lumber shall be tested according to ASTM D 5664, and design value adjustment factors shall be calculated according to ASTM D 6841.

C. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Kiln-dry plywood after treatment to a maximum moisture content of 15 percent.

D. Identify fire-retardant-treated wood with appropriate classification marking of qualified testing agency.

1. For exposed lumber indicated to receive a stained or natural finish, mark end or back of each piece or omit marking and provide certificates of treatment compliance issued by inspection agency.

E. For exposed items indicated to receive a stained or natural finish, chemical formulations shall not bleed through, contain colorants, or otherwise adversely affect finishes.

F. Application: Treat all miscellaneous carpentry unless otherwise indicated and the following:

1. Concealed blocking.
2. Roof framing and blocking.
3. Wood cants, nailers, curbs, equipment support bases, blocking, and similar members in connection with roofing.
4. Plywood backing panels.

2.3 WOOD-PRESERVATIVE-TREATED LUMBER

A. Preservative Treatment by Pressure Process: AWPA U1; Use Category UC2.

1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.
2. For exposed items indicated to receive a stained or natural finish, chemical formulations shall not require incising, contain colorants, bleed through, or otherwise adversely affect finishes.

B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or that does not comply with requirements for untreated material.

C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.

1. For exposed lumber indicated to receive a stained or natural finish, mark end or back of each piece.

D. Application: Treat all rough carpentry unless otherwise indicated.

1. Wood cants, nailers, curbs, equipment support bases, blocking, stripping, and similar members in connection with roofing, flashing, vapor barriers, and waterproofing.
2. Wood sills, sleepers, blocking, furring, stripping, and similar concealed members in contact with masonry or concrete.
3. Wood framing and furring attached directly to the interior of below-grade exterior masonry or concrete walls.
4. Wood framing members that are less than 18 inches above the ground in crawlspaces or unexcavated areas.
5. Wood floor plates that are installed over concrete slabs-on-grade.

2.4 PLYWOOD BACKING PANELS

A. Equipment Backing Panels: Plywood, DOC PS 1, Exterior, C-D Plugged, fire-retardant treated, in thickness indicated or, if not indicated, not less than 1/2-inch nominal thickness.

2.5 MISCELLANEOUS LUMBER

A. General: Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:

1. Blocking.
2. Nailers.
3. Cants.
4. Furring.
5. Grounds.
6. Utility shelving.

B. Dimension Lumber Items: Construction or No. 2 grade lumber of any of the following species:

1. Hem-fir; WCLIB or WWPA.
2. Western woods; WCLIB or WWPA.

C. For blocking not used for attachment of other construction, Utility, Stud, or No. 3 grade lumber of any species may be used provided that it is cut and selected to eliminate defects that will interfere with its attachment and purpose.

D. For blocking and nailers used for attachment of other construction, select and cut lumber to eliminate knots and other defects that will interfere with attachment of other work.

E. For furring strips for installing plywood or hardboard paneling, select boards with no knots capable of producing bent-over nails and damage to paneling.

2.6 FASTENERS

A. General: Fasteners shall be of size and type indicated and shall comply with requirements specified in this article for material and manufacture.

1. Where rough carpentry is exposed to weather, in ground contact, pressure-preservative treated, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A153/A153M.

B. Nails, Brads, and Staples: ASTM F1667.

C. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

D. Post-Installed Anchors: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC01, ICC-ES AC58, ICC-ES AC193 or ICC-ES AC308 as appropriate for the substrate.

1. Material: Carbon-steel components, zinc plated to comply with ASTM B633, Class Fe/Zn 5.
2. Material: Stainless steel with bolts and nuts complying with ASTM F593 and ASTM F594, Alloy Group 1 or 2.

2.7 METAL FRAMING ANCHORS

A. Allowable design loads, as published by manufacturer, shall meet or exceed those **indicated**. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency. Framing anchors shall be punched for fasteners adequate to withstand same loads as framing anchors.

B. Galvanized-Steel Sheet: Hot-dip, zinc-coated steel sheet complying with ASTM A653/A653M, G60 coating designation.

1. Use for interior locations unless otherwise indicated.

C. Hot-Dip, Heavy-Galvanized Steel Sheet: ASTM A653/A653M; structural steel (SS), high-strength low-alloy steel Type A (HSLAS Type A), or high-strength low-alloy steel Type B (HSLAS Type B); G185 coating designation; and not less than 0.036 inch thick.

1. Use for wood-preservative-treated lumber and where indicated.

D. Stainless Steel Sheet: ASTM A240/A240M or ASTM A666, Type 304.

1. Use for exterior locations and where indicated.

E. Top Flange Hangers: U-shaped joist hangers, full depth of joist, formed from metal strap with tabs bent to extend over and be fastened to supporting member.

1. Strap Width: 1-1/2 inches.
2. Thickness: 0.062 inch.

F. Bridging: Rigid, V-section, nailless type, 0.050 inch thick, length to suit joist size and spacing.

G. Hold-Downs: Brackets for bolting to wall studs and securing to foundation walls with anchor bolts or to other hold-downs with threaded rods and designed with first of two bolts placed seven bolt diameters from reinforced base.

1. Bolt Diameter: 5/8 inch.
2. Width: As indicated
3. Body Thickness: As indicated
4. Base Reinforcement Thickness: As indicated.

2.8 MISCELLANEOUS MATERIALS

A. Sill-Sealer Gaskets: Glass-fiber-resilient insulation, fabricated in strip form, for use as a sill sealer; 1-inch nominal thickness, compressible to 1/32 inch; selected from manufacturer's standard widths to suit width of sill members indicated.

B. Sill-Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch thick, selected from manufacturer's standard widths to suit width of sill members indicated.

C. Flexible Flashing: Composite, self-adhesive, flashing product consisting of a pliable, butyl rubber or rubberized-asphalt compound, bonded to a high-density polyethylene film, aluminum foil, or spunbonded polyolefin to produce an overall thickness of not less than 0.025 inch.

D. Adhesives for Gluing Furring to Concrete or Masonry: Formulation complying with ASTM D3498 that is approved for use indicated by adhesive manufacturer.

E. Water-Repellent Preservative: NWWDA-tested and -accepted formulation containing 3-iodo-2-propynyl butyl carbamate, combined with an insecticide containing chloropyrifos as its active ingredient.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Framing Standard: Comply with AF&PA's WCD 1, "Details for Conventional Wood Frame Construction," unless otherwise indicated.

B. Framing with Engineered Wood Products: Install engineered wood products to comply with manufacturer's written instructions.

C. Set rough carpentry to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry accurately to other construction. Locate furring, nailers, blocking, and similar supports to comply with requirements for attaching other construction.

D. Install plywood backing panels by fastening to studs; coordinate locations with utilities requiring backing panels. Install fire-retardant-treated plywood backing panels with classification marking of testing agency exposed to view.

E. Install shear wall panels to comply with manufacturer's written instructions.

F. Install metal framing anchors to comply with manufacturer's written instructions. Install fasteners through each fastener hole.

G. Install sill sealer gasket to form continuous seal between sill plates and foundation walls.

H. Do not splice structural members between supports unless otherwise indicated.

I. Provide blocking and framing as indicated and as required to support facing materials, fixtures, specialty items, and trim.

1. Provide metal clips for fastening gypsum board or lath at corners and intersections where framing or blocking does not provide a surface for fastening edges of panels. Space clips not more than 16 inches o.c.

J. Sort and select lumber so that natural characteristics do not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.

K. Comply with AWPA M4 for applying field treatment to cut surfaces of preservative-treated lumber.

1. Use inorganic boron for items that are continuously protected from liquid water.
2. Use copper naphthenate for items not continuously protected from liquid water.

L. Where wood-preservative-treated lumber is installed adjacent to metal decking, install continuous flexible flashing separator between wood and metal decking.

M. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:

1. Table 2304.9.1, "Fastening Schedule," in ICC's International Building Code (IBC).
2. Table R602.3(1), "Fastener Schedule for Structural Members," and Table R602.3(2), "Alternate Attachments," in ICC's International Residential Code for One- and Two-Family Dwellings.
3. ICC-ES evaluation report for fastener.

N. Use steel common nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood. Drive nails snug but do not countersink nail heads unless otherwise indicated.

O. For exposed work, arrange fasteners in straight rows parallel with edges of members, with fasteners evenly spaced, and with adjacent rows staggered.

1. Comply with approved and indicated fastener patterns where applicable.
2. Use finishing nails unless otherwise indicated. Countersink nail heads and fill holes with wood filler.
3. Use common nails unless otherwise indicated. Drive nails snug but do not countersink nail heads.

3.2 INSTALLATION OF WOOD BLOCKING AND NAILERS

A. Install where indicated and where required for attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.

B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.

C. Provide permanent grounds of dressed, pressure-preservative-treated, key-beveled lumber not less than 1-1/2 inches wide and of thickness required to bring face of ground to exact thickness of finish material. Remove temporary grounds when no longer required.

3.3 INSTALLATION OF WOOD FURRING

A. Install level and plumb with closure strips at edges and openings. Shim with wood as required for tolerance of finish work.

B. Furring to Receive Plywood or Hardboard Paneling: Install 1-by-3-inch nominal- size furring horizontally at 24 inches o.c.

C. Furring to Receive Gypsum Board: Install 1-by-2-inch nominal- size furring vertically at 16 inches o.c.

3.4 PROTECTION

A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

B. Protect rough carpentry from weather. If, despite protection, rough carpentry becomes wet enough that moisture content exceeds that specified, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION 061000

SECTION 061600 - SHEATHING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Wall sheathing.
2. Parapet sheathing.
3. Sheathing joint and penetration treatment.

B. Related Requirements:

1. Section 061053 “Rough Carpentry" for plywood backing panels and shear wall panels.
2. Section 072726 "Fluid Applied Air Barriers" for water-resistive barrier applied over wall sheathing.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated plywood complies with requirements. Indicate type of preservative used and net amount of preservative retained.
2. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated plywood complies with requirements. Include physical properties of treated materials.
3. For fire-retardant treatments, include physical properties of treated plywood both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency according to ASTM D 5516.

1.4 INFORMATIONAL SUBMITTALS

A. Product Certificates: From air-barrier and water-resistant glass-mat gypsum sheathing manufacturer, certifying compatibility of sheathing accessory materials with Project materials that connect to or that come in contact with the sheathing.

B. Product Test Reports: For each air-barrier and water-resistant glass-mat gypsum sheathing assembly, indicating compliance with specified requirements, for tests performed by a qualified testing agency.

C. Evaluation Reports: For the following, from ICC-ES:

1. Wood-preservative-treated plywood.
2. Fire-retardant-treated plywood.
3. Foam-plastic sheathing.
4. Water-resistant glass-mat gypsum sheathing.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer of air-barrier and water-resistant glass-mat gypsum sheathing.

1. Installer shall be licensed by ABAA according to ABAA's Quality Assurance Program and shall employ ABAA-certified installers and supervisors on Project.

B. Testing Agency Qualifications:

1. For testing agency providing classification marking for fire-retardant-treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Stack panels flat with spacers beneath and between each bundle to provide air circulation. Protect sheathing from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Resistance Ratings: As tested according to ASTM E 119; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Fire-Resistance Ratings: Indicated by design designations from UL's "Fire Resistance Directory" or from the listings of another qualified testing agency.

2.2 WOOD PANEL PRODUCTS

A. Emissions: Products shall meet the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

B. Thickness: As needed to comply with requirements specified, but not less than thickness indicated.

C. Factory mark panels to indicate compliance with applicable standard.

2.3 PRESERVATIVE-TREATED PLYWOOD

A. Preservative Treatment by Pressure Process: AWPA U1; Use Category UC2 for interior construction not in contact with ground, Use Category UC3b for exterior construction not in contact with ground, and Use Category UC4a for items in contact with ground.

1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium.

B. Mark plywood with appropriate classification marking of an inspection agency acceptable to authorities having jurisdiction.

C. Application: Treat items indicated on Drawings.

2.4 FIRE-RETARDANT-TREATED PLYWOOD

A. General: Where fire-retardant-treated materials are indicated, use materials complying with requirements in this article that are acceptable to authorities having jurisdiction and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.

B. Fire-Retardant-Treated Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested according to ASTM E 84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet beyond the centerline of the burners at any time during the test.

1. Use treatment that does not promote corrosion of metal fasteners.
2. Interior Type A: Treated materials shall have a moisture content of 28 percent or less when tested according to ASTM D 3201/D 3201M at 92 percent relative humidity. Use where exterior type is not indicated.

C. Kiln-dry material after treatment to a maximum moisture content of 15 percent. Do not use material that is warped or does not comply with requirements for untreated material.

D. Identify fire-retardant-treated plywood with appropriate classification marking of qualified testing agency.

E. Application: Treat plywood indicated on Drawings.

2.5 WALL SHEATHING

A. Plywood Sheathing: interior sheathing only.

1. Nominal Thickness: Not less than 1/2 inch.

B. Glass-Mat Gypsum Sheathing: ASTM C 1177/1177M. Exterior wall sheathing

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

a. United States Gypsum Company: Securock Glass Matt Sheathing Firecore X.

2. Type and Thickness: Type X, 5/8 inch thick.

2.6 FASTENERS

A. General: Provide fasteners of size and type indicated that comply with requirements specified in this article for material and manufacture.

1. For wall sheathing, provide fasteners with hot-dip zinc coating complying with ASTM A 153/A 153M.

B. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

C. Screws for Fastening Wood Structural Panels to Cold-Formed Metal Framing: ASTM C 954, except with wafer heads and reamer wings, length as recommended by screw manufacturer for material being fastened.

D. Screws for Fastening Gypsum Sheathing to Cold-Formed Metal Framing: Steel drill screws, in length recommended by sheathing manufacturer for thickness of sheathing to be attached.

1. For steel framing less than 0.0329 inch thick, use screws that comply with ASTM C 1002.
2. For steel framing from 0.033 to 0.112 inch thick, use screws that comply with ASTM C 954.

2.7 SHEATHING JOINT-AND-PENETRATION TREATMENT MATERIALS

A. Sealant for Glass-Mat Gypsum Sheathing: Silicone emulsion sealant complying with ASTM C 834, compatible with sheathing tape and sheathing and recommended by tape and sheathing manufacturers for use with glass-fiber sheathing tape and for covering exposed fasteners.

1. Sheathing Tape: Self-adhering glass-fiber tape, minimum 2 inches wide, 10 by 10 or 10 by 20 threads/inch, of type recommended by sheathing and tape manufacturers for use with silicone emulsion sealant in sealing joints in glass-mat gypsum sheathing and with a history of successful in-service use.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Do not use materials with defects that impair quality of sheathing or pieces that are too small to use with minimum number of joints or optimum joint arrangement. Arrange joints so that pieces do not span between fewer than three support members.

B. Cut panels at penetrations, edges, and other obstructions of work; fit tightly against abutting construction unless otherwise indicated.

C. Securely attach to substrate by fastening as indicated, complying with the following:

1. Table 2304.9.1, "Fastening Schedule," in the ICC's International Building Code.
2. Table R602.3(1), "Fastener Schedule for Structural Members," and Table R602.3(2), "Alternate Attachments," in the ICC's International Residential Code for One- and Two-Family Dwellings.
3. ICC-ES evaluation report for fastener.

D. Use common wire nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections. Install fasteners without splitting wood.

E. Coordinate wall sheathing installation with flashing and joint-sealant installation so these materials are installed in sequence and manner that prevent exterior moisture from passing through completed assembly.

F. Do not bridge building expansion joints; cut and space edges of panels to match spacing of structural support elements.

G. Coordinate sheathing installation with installation of materials installed over sheathing so sheathing is not exposed to precipitation or left exposed at end of the workday when rain is forecast.

3.2 GYPSUM SHEATHING INSTALLATION

A. Comply with GA-253 and with manufacturer's written instructions.

1. Fasten gypsum sheathing to cold-formed metal framing with screws.
2. Install panels with a 3/8-inch gap where non-load-bearing construction abuts structural elements.
3. Install panels with a 1/4-inch gap where they abut masonry or similar materials that might retain moisture, to prevent wicking.

B. Apply fasteners so heads bear tightly against face of sheathing, but do not cut into facing.

C. Horizontal Installation: Install sheathing with V-grooved edge down and tongue edge up. Interlock tongue with groove to bring long edges in contact with edges of adjacent panels without forcing. Abut ends over centers of studs, and stagger end joints of adjacent panels not less than one stud spacing. Attach at perimeter and within field of panel to each stud.

1. Space fasteners approximately 8 inches o.c. and set back a minimum of 3/8 inch from edges and ends of panels.

D. Vertical Installation: Install vertical edges centered over studs. Abut ends and edges with those of adjacent panels. Attach at perimeter and within field of panel to each stud.

1. Space fasteners approximately 8 inches o.c. and set back a minimum of 3/8 inch from edges and ends of panels.

E. Seal sheathing joints according to sheathing manufacturer's written instructions.

1. Apply elastomeric sealant to joints and fasteners and trowel flat. Apply sufficient amount of sealant to completely cover joints and fasteners after troweling. Seal other penetrations and openings.
2. Apply glass-fiber sheathing tape to glass-mat gypsum sheathing joints and apply and trowel sealant to embed entire face of tape in sealant. Apply sealant to exposed fasteners with a trowel so fasteners are completely covered. Seal other penetrations and openings.

END OF SECTION 061600

SECTION 064023 - INTERIOR ARCHITECTURAL WOODWORK

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Interior wayfinding portal frames and jambs for opaque finish.
   2. Miscellaneous materials.
   3. Shop priming.
   4. Shop finishing.

B. Related Requirements:

   1. Section 061000 "Rough Carpentry" for wood furring, blocking, shims, and hanging strips required for installing interior architectural woodwork that are concealed within other construction before interior architectural woodwork installation.

1.2 COORDINATION

A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections, to ensure that interior architectural woodwork can be supported and installed as indicated.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For the following:

   1. Anchors.
   2. Adhesives.
   3. Shop finishing materials.

B. Shop Drawings:

   1. Include the following:

      a. Dimensioned plans, elevations, and sections.
      b. Attachment details.

   2. Show large-scale details.

3. Show locations and sizes of furring, blocking, and hanging strips, including blocking and reinforcement concealed by construction and specified in other Sections.

C. Samples: For each exposed product and for each shop-applied color and finish specified.

1. Size:

a. Panel Products: 12 inches by 12 inches.

D. Samples for Verification: For the following:

1. Panel Products with Shop-Applied Opaque Finish: 12 by 12 inches for panels, for each finish system and color.

a. Finish entire exposed surface.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For architectural woodwork manufacturer.

B. Product Certificates: For the following:

1. Composite wood products.
2. Adhesives.

C. Evaluation Reports: For preservative-treated and fire-retardant-treated wood materials, from ICC-ES.

D. Field quality-control reports.

E. Engineering Reports documenting weight bearing capacity of panel clips and confirming capacity to support weight of interior architectural woodwork as designed.

1.6 QUALITY ASSURANCE

A. Manufacturer's Qualifications: Employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

1. Installer Qualifications: Manufacturer of products.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for materials and execution.

1. Build mockups of typical interior architectural woodwork as shown on Drawings.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Owner specifically approves such deviations by Change Order.

3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Comply with the Architectural Woodwork Standards, Section 2.

B. Do not deliver interior architectural woodwork until painting and similar finish operations that might damage woodwork have been completed in installation areas.

C. Store woodwork in installation areas or in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1. Handle and store fire-retardant-treated wood to comply with chemical treatment manufacturer's written instructions.

1.8 FIELD CONDITIONS

A. Environmental Limitations with Humidity Control: Do not deliver or install interior architectural woodwork until building is enclosed, wet-work is complete, and HVAC system is operating and maintaining temperature between 60 and 90 deg F and relative humidity between 25 and 55 percent during the remainder of the construction period.

B. Field Measurements: Where interior architectural woodwork is indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings.

1. Locate concealed framing, blocking, and reinforcements that support woodwork by field measurements before being concealed by construction, and indicate measurements on Shop Drawings.

C. Established Dimensions: Where interior architectural woodwork is indicated to fit to other construction, establish dimensions for areas where woodwork is to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL WOODWORK MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

1. Huetter Mill and Cabinet Company.
2. Granite Mill and Fixture Company.

3. Artistic Mill.
4. Swainston Mill.
5. Johnson Brothers.
6. Mapleleaf Cabinets Inc.
7. Masterpiece Commercial.
8. Unrivaled.
9. Fusion Imaging.
10. Atmosphere Studios.
11. Yesco.

2.2 ARCHITECTURAL WOODWORK, GENERAL

A. Quality Standard: Unless otherwise indicated, comply with the Architectural Woodwork Standards for grades of interior architectural woodwork indicated for construction, finishes, installation, and other requirements.

1. The Contract Documents may contain requirements that are more stringent than the Architectural Woodwork Standards. Comply with Contract Documents and Architectural Woodwork Standards.

2.3 INTERIOR WAYFINDING PORTAL FRAMES AND JAMBS FOR OPAQUE FINISH

A. Architectural Woodwork Standards Grade: Custom.

1. Composite Wood Products: Provide materials that comply with requirements of the Architectural Woodwork Standards for each type of interior architectural woodwork and quality grade specified unless otherwise indicated.

a. Medium-Density Fiberboard (MDF): ANSI A208.2, Grade 130.
b. Composite Wood Products: Verify products are made using ultra-low-emitting formaldehyde resins, as defined in the California Air Resources Board's "Airborne Toxic Control Measure to Reduce Formaldehyde Emissions from Composite Wood Products," or are made with no added formaldehyde.

2.4 MISCELLANEOUS MATERIALS

A. Furring, Blocking, Shims, and Nailers: Softwood or hardwood lumber, kiln-dried to less than 15 percent moisture content.

B. Provide self-drilling screws for metal-framing supports, as recommended by metal-framing manufacturer.

C. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage.

1. Provide metal expansion sleeves or expansion bolts for post-installed anchors.

2. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.

D. Adhesives: Use adhesives that meet the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

E. Installation Adhesive: Product recommended by fabricator for each substrate for secure anchorage.

1. Verify adhesives have a VOC content of 70 g/L or less.
2. Verify adhesive complies with the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

2.5 FABRICATION

A. Fabricate interior architectural woodwork to dimensions, profiles, and details indicated.

1. Ease edges to radius as indicated on Drawings.

B. Complete fabrication, including assembly, to maximum extent possible before shipment to Project site.

1. Disassemble components only as necessary for shipment and installation.
2. Where necessary for fitting at site, provide allowance for scribing, trimming, and fitting.
3. Notify Architect seven days in advance of the dates and times interior architectural woodwork fabrication will be complete.
4. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled.

a. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting.
b. Verify that parts fit as intended, and check measurements of assemblies against field measurements indicated on approved Shop Drawings before disassembling for shipment.

2.6 SHOP FINISHING

A. Finish interior architectural woodwork indicated on Drawings at fabrication shop. Defer only final touchup, cleaning, and polishing until after installation.

B. Preparation for Finishing: Comply with Architectural Woodwork Standards, Section 5 for sanding, filling countersunk fasteners, sealing concealed surfaces, and similar preparations for finishing interior architectural woodwork, as applicable to each unit of work.

1. Backpriming: Apply one coat of sealer or primer, compatible with finish coats, to concealed surfaces of interior architectural woodwork. Apply two coats to end-grain surfaces.

C. Opaque Finish:

1. Architectural Woodworking Standards Grade: Custom.
2. Finish System:
   a. 9: UV Curable, Acrylated Epoxy, Polyester, or Urethane.

3. Color: See Wayfinding Drawings for color designations.
4. Sheen: Semigloss, 46-60 gloss units measured on 60-degree gloss meter in accordance with ASTM D523.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition interior architectural woodwork to humidity conditions in installation areas for not less than 72 hours prior to beginning of installation.

B. Before installing interior architectural woodwork, examine shop-fabricated work for completion and complete work as required, including removal of packing and backpriming of concealed surfaces.

3.2 INSTALLATION

A. Grade: Install interior architectural woodwork to comply with same grade as item to be installed.

B. Assemble interior architectural woodwork and complete fabrication at Project site to the extent that it was not completed during shop fabrication.

C. Install interior architectural woodwork level, plumb, true in line, and without distortion.

1. Shim as required with concealed shims.
2. Install level and plumb to a tolerance of 1/8 inch in 96 inches.

D. Scribe and cut interior architectural woodwork to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.

E. Preservative-Treated Wood: Where cut or drilled in field, treat cut ends and drilled holes in accordance with AWPA M4.

F. Fire-Retardant-Treated Wood: Install fire-retardant-treated wood to comply with chemical treatment manufacturer's written instructions, including those for adhesives used to install woodwork.

G. Anchor interior architectural woodwork paneling to supporting substrate with concealed panel-hanger clips.

1. Do not use face fastening unless otherwise indicated.

3.3 REPAIR

A. Repair damaged and defective interior architectural woodwork, where possible, to eliminate functional and visual defects and to result in interior architectural woodwork being in compliance with requirements of Architectural Woodwork Standards for the specified grade.

B. Where not possible to repair, replace defective woodwork.

C. Shop Finish: Touch up finishing work specified in this Section after installation of interior architectural woodwork.
1. Apply specified finish coats, including stains and paste fillers if any, to exposed surfaces where only sealer/prime coats are shop applied.

3.4 CLEANING

A. Clean interior architectural woodwork on exposed and semi-exposed surfaces.

END OF SECTION 064023

SECTION 064113 - WOOD-VENEER-FACED ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Architectural wood display cabinets.
2. Wood furring, blocking, shims, and hanging strips for installing architectural wood cabinets unless concealed within other construction before cabinet installation.
3. Shop finishing of architectural wood cabinets.
4. Cable suspended glass shelving systems.
5. Hardware and Accessories

B. Related Requirements:

1. Section 061000 "Rough Carpentry" for wood furring, blocking, shims, and hanging strips required for installing cabinets and concealed within other construction before cabinet installation.
2. Section 064116 “Plastic-Laminate-Faced Architectural Cabinets” for cabinet hardware and accessories not found in this section.

1.3 PRE-INSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product, including panel products, fire-retardant-treated materials, cabinet hardware and accessories, and finishing materials and processes.

1. Include data for fire-retardant treatment from chemical-treatment manufacturer and certification by treating plant that treated materials comply with requirements.

B. Shop Drawings: Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices, and other components.

1. Show details full size.

2. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
3. Show locations and sizes of cutouts and holes for electrical switches and outlets and other items installed in architectural wood cabinets.
4. Show veneer leaves with dimensions, grain direction, exposed face, and identification numbers indicating the flitch and sequence within the flitch for each leaf.

C. Samples for Initial Selection:

1. Shop-applied transparent finishes.

D. Samples for Verification:

1. Lumber for transparent finish, not less than 5 inches wide by 12 inches long, for each species and cut, finished on one side and one edge.
2. Veneer leaves representative of and selected from flitches to be used for transparent-finished cabinets.
3. Corner pieces as follows:

    a. Cabinet-front frame joints between stiles and rails, as well as exposed end pieces, 18 inches high by 18 inches wide by 6 inches deep.
    b. Miter joints for standing trim.

4. Exposed cabinet hardware and accessories, one unit for each type and finish.
5. 4 by 4 inch sample Cable suspended glass shelving system:

    a. Cable sample.
    b. Samples of all brackets and fittings.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and fabricator.

B. Product Certificates: For the following:

1. Composite wood and agrifiber products.
2. Thermoset decorative panels.
3. Glass.
4. Adhesives.

C. Evaluation Reports: For fire-retardant-treated materials, from ICC-ES.

1.6 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

B. Installer Qualifications: Fabricator of products.

C. Testing Agency Qualifications: For testing agency providing classification marking for fire-retardant-treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

D. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Build mockups of typical architectural wood cabinets as shown on Drawings.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Do not deliver cabinets until painting and similar operations that could damage woodwork have been completed in installation areas. If cabinets must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Do not deliver or install cabinets until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.

B. Field Measurements: Where cabinets are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

1. Locate concealed framing, blocking, and reinforcements that support cabinets by field measurements before being enclosed, and indicate measurements on Shop Drawings.

C. Established Dimensions: Where cabinets are indicated to fit to other construction, establish dimensions for areas where cabinets are to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

1.9 COORDINATION

A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to ensure that wood-veneer-faced architectural cabinets can be supported and installed as indicated.

B. Hardware Coordination: Distribute copies of approved hardware schedule specified in Section 087111 "Door Hardware (Descriptive Specification)" to fabricator of architectural woodwork; coordinate Shop Drawings and fabrication with hardware requirements.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL CABINET FABRICATORS

A. Source Limitations: Engage a qualified woodworking firm to assume undivided responsibility for production of architectural wood cabinets with sequence-matched wood veneers wood paneling.

1. Artistic Mills.
2. Heutter Mill
3. Granite Mill
4. Johnson Brothers.
5. Mapleleaf Cabinets, Inc.
6. Masterpiece Commercial.
7. Swainston Mill.

2.2 ARCHITECTURAL WOOD CABINETS, GENERAL

A. Quality Standard: Unless otherwise indicated, comply with the "Architectural Woodwork Standards" for grades of architectural wood cabinets indicated for construction, finishes, installation, and other requirements.

1. Provide labels and certificates from AWI certification program indicating that woodwork complies with requirements of grades specified.
2. The Contract Documents contain selections chosen from options in the quality standard and additional requirements beyond those of the quality standard. Comply with those selections and requirements in addition to the quality standard.

2.3 WOOD CABINETS FOR TRANSPARENT FINISH

A. Grade: Custom.

B. Type of Construction: As detailed on Drawings.

C. Cabinet and Door and Drawer Front Interface Style: As detailed on Drawings.

D. Reveal Dimension: As indicated.

E. Wood for Exposed Surfaces:

1. Species: White Maple.
2. Cut: Plain sliced.

3. Grain Direction: Vertical.
4. Matching of Veneer Leaves: Book match.
5. Veneer Matching within Panel Face: Panels are to be purchased in nominal size, center balance. Miller worker to size components for best matched.
6. Veneer Matching within Room: Provide cabinet veneers in each room or other space from a single flitch with doors, drawer fronts, and other surfaces matched in a sequenced set with continuous match where veneers are interrupted perpendicular to the grain.

F. Semi-exposed Surfaces: Provide surface materials indicated below:

1. Surfaces Other Than Drawer Bodies: Same species and cut indicated for exposed surfaces.

G. Dust Panels: 1/4-inch plywood or tempered hardboard above compartments and drawers unless located directly under tops.

2.4 WOOD MATERIALS

A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.

1. Do not use plain-sawn softwood lumber with exposed, flat surfaces more than 3 inches wide.
2. Wood Moisture Content: 4 to 9 percent.
3. Veneer-Faced Panel Products (Hardwood Plywood): HPVA HP-1.

2.5 MISCELLANEOUS MATERIALS

A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber and Fire-retardant-treated softwood lumber, kiln dried to less than 15 percent moisture content.

B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.

2.6 FABRICATION

A. Fabricate woodwork to dimensions, profiles, and details indicated. Ease edges to radius indicated for the following:

1. Corners of Cabinets: 1/16 inch unless otherwise indicated.

B. Complete fabrication, including assembly, finishing, and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.

1. Notify Architect seven days in advance of the dates and times woodwork fabrication will be complete.
2. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.

C. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

D. Install glass to comply with applicable requirements in Section 088000 "Glazing" and in GANA's "Glazing Manual." For glass in wood frames, secure glass with removable stops.

2.7 SHOP FINISHING

A. General: Finish architectural wood cabinets at fabrication shop as specified in this Section. Defer only final touchup, cleaning, and polishing until after installation.

B. Preparation for Finishing: Comply with referenced quality standard for sanding, filling countersunk fasteners, sealing concealed surfaces, and similar preparations for finishing architectural wood cabinets, as applicable to each unit of work.

1. Backpriming: Apply one coat of sealer or primer, compatible with finish coats, to concealed surfaces of cabinets.

C. Transparent Finish:

1. Grade: Custom.
2. Finish: System - 12, water-based polyurethane.
3. Wash Coat for Closed-Grain Woods: Apply wash-coat sealer to cabinets made from closed-grain wood before staining and finishing.
4. Staining: Match Architect's sample.
5. Sheen: Satin, 31-45 gloss units measured on 60-degree gloss meter per ASTM D 523.

2.8 GLASS SHELVING SYSTEM

A. Products:

1. Display shelf system with track-and-bracket supported glass shelves for display cabinets.

B. Basis-of-Design Product: Subject to compliance with requirements, provide Mockett; SH15 Set with M-Style Track and Brackets or comparable product as approved by Architect and Owner.

1. Track: 6-foot-tall track sections, shop cut as required to span top to bottom of display cabinet.
2. Brackets: 15-13/16 inches long, six brackets per track section.

3. Capacity: 55 pounds at 32-inch track spacing.
4. Finish: Satin aluminum.
5. Accessories: Provide hold-down brackets and glass bumpers at each bracket location.

C. Glass Shelves:

1. 1/2 inch tempered glass; clear.
2. Size: As indicated in Drawings.

2.9 DISPLAY CABINET DOORS AND HARDWARE

A. Products:

1. Glass for display case doors:

a. Tempered, clear with polished exposed edges.
b. 3/8 inch thick.

2. Sliding glass door track assembly.

a. Basis-of-Design Product: Subject to compliance with requirements, provide C.R. Laurence Co., Inc.; CRL Satin Anodized Standard Upper and Lower Channel, CRL Satin Anodized H Bar and CRL Nylon Assembly or equivalent products. Provide all pieces needed for fully functioning sliding glass assembly.

3. Sliding glass door locks:

a. Basis-of-Design Product: Subject to compliance with requirements, provide C.R. Laurence Co., Inc.; CRL Keymatic Sliding Glass Door Plunger Lock or equivalent.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition cabinets to average prevailing humidity conditions in installation areas.

B. Before installing cabinets, examine shop-fabricated work for completion and complete work as required, including removal of packing and backpriming.

3.2 INSTALLATION

A. Grade: Install cabinets to comply with same grade as item to be installed.

B. Assemble cabinets and complete fabrication at Project site to the extent that it was not completed in the shop.

C. Install cabinets level, plumb, true, and straight. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches.

D. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.

E. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with countersunk, concealed fasteners and blind nailing. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with woodwork.

1. For shop finished items use filler matching finish of items being installed.

F. Cabinets: Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.

1. Install cabinets with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
2. Maintain veneer sequence matching of cabinets with transparent finish.
3. Fasten wall cabinets through back, near top and bottom, and at ends not more than 16 inches o.c. with No. 10 wafer-head sheet metal screws through metal backing or metal framing behind wall finish.

G. Touch up finishing work specified in this Section after installation of woodwork. Fill nail holes with matching filler where exposed.

1. Apply specified finish coats, including stains and paste fillers if any, to exposed surfaces where only sealer/prime coats are applied in shop.

3.3 ADJUSTING AND CLEANING

A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects; where not possible to repair, replace woodwork. Adjust joinery for uniform appearance.

B. Clean, lubricate, and adjust hardware.

C. Clean cabinets on exposed and semi-exposed surfaces. Touch up shop-applied finishes to restore damaged or soiled areas.

END OF SECTION 064113

SECTION 064116 - PLASTIC-LAMINATE-FACED ARCHITECTURAL CABINETS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Plastic-laminate-faced architectural cabinets.
2. Cabinet hardware and accessories
3. Wood furring, blocking, shims, and hanging strips for installing plastic-laminate-faced architectural cabinets unless concealed within other construction before cabinet installation.
4. Tackable panel applied to plastic-laminate-faced architectural cabinets.

B. Related Requirements:

1. Section 123623.13 “Plastic-Laminate-Clad Countertops.”
2. Section 123661.19 “Quartz Agglomerate Countertops.”
3. Section 123661.15 “Solid Surfacing Countertops.”

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product, including panel products high-pressure decorative laminate adhesive for bonding plastic laminate fire-retardant-treated materials and cabinet hardware and accessories.

1. Include data for fire-retardant treatment from chemical-treatment manufacturer and certification by treating plant that treated materials comply with requirements.

B. Shop Drawings: Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices, and other components.

1. Show details full size.

2. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
3. Show locations and sizes of cutouts and holes for electrical switches and outlets and other items installed in architectural plastic-laminate cabinets.

C. Samples for Initial Selection:

1. Plastic laminates.
2. PVC edge material.
3. Thermoset decorative panels.
4. Tackable panel.

D. Samples for Verification:

1. Plastic laminates, 8 by 10 inches, for each type, color, pattern, and surface finish, with one sample applied to core material and specified edge material applied to one edge.
2. Wood-grain plastic laminates, 24 by 24 inches, for each type, pattern and surface finish, with one sample applied to core material and specified edge material applied to one edge.
3. Thermoset decorative panels, 8 by 10 inches, for each color, pattern, and surface finish, with edge banding on one edge.
4. Corner pieces as follows:

    a. Cabinet-front frame joints between stiles and rails, as well as exposed end pieces, 18 inches high by 18 inches wide by 6 inches deep.
    b. Miter joints for standing trim.

5. Exposed cabinet hardware and accessories, one unit for each type and finish.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and fabricator.

B. Product Certificates: For each type of product.

C. Woodwork Quality Standard Compliance Certificates: Submit statement from Fabricator that woodwork fabrication complies with quality grades and other requirements indicated.

D. Evaluation Reports: For fire-retardant-treated materials, from ICC-ES.

1.6 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

B. Installer Qualifications: Fabricator of products.

C. AWS Quality Standard: Comply with applicable requirements of Architectural Woodwork Standards (AWS) – 1st Edition, October 1, 2009, except as otherwise indicated.

D. Casework Integrity: All cabinets shall satisfy the AWS Appendix A testing standards:

1. Structural Integrity Test.
2. Concentrated Load Test.
3. Torsion Test.
4. Door Durability Test.
5. Door Impact Test.
6. Door Hinge Test.
7. Drawer Bottom Impact Test.
8. Drawer Support Test.
9. Drawer and Door Pull Test.
10. Drawer Rolling Load Test.
11. Shelf Load Test.

E. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Do not deliver cabinets until painting and similar operations that could damage woodwork have been completed in installation areas. If cabinets must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Do not deliver or install cabinets until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.

B. Field Measurements: Where cabinets are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

1. Locate concealed framing, blocking, and reinforcements that support cabinets by field measurements before being enclosed, and indicate measurements on Shop Drawings.

C. Established Dimensions: Where cabinets are indicated to fit to other construction, establish dimensions for areas where cabinets are to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

1.9 COORDINATION

A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to ensure that cabinets can be supported and installed as indicated.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL CABINET FABRICATORS

A. Fabricators: Subject to compliance with requirements, provide products by one of the following:

1. Huetter Mill and Cabinet Company.
2. Granite Mill and Fixture Company.
3. Artistic Mill.
4. Swainston Mill.
5. Johnson Brothers.
6. Mapleleaf Cabinets Inc.
7. Masterpiece Commercial.

2.2 PLASTIC-LAMINATE-FACED ARCHITECTURAL CABINETS

A. Quality Standard: Unless otherwise indicated, comply with the "Architectural Woodwork Standards" for grades of architectural plastic-laminate cabinets indicated for construction, finishes, installation, and other requirements.

1. The Contract Documents contain selections chosen from options in the quality standard and additional requirements beyond those of the quality standard. Comply with those selections and requirements in addition to the quality standard.

B. Grade: Custom.

C. Type of Construction: Frameless.

D. Cabinet, Door, and Drawer Front Interface Style: Flush overlay.

E. High-Pressure Decorative Laminate: NEMA LD 3, grades as indicated or if not indicated, as required by woodwork quality standard.

F. Manufacturers:

1. Formica Corporation.
2. Pionite.
3. WilsonArt.
4. Nevamar.

G. Laminate Cladding for Exposed Surfaces:

1. Horizontal Surfaces: Grade HGS.
2. Postformed Surfaces: Grade HGP.
3. Vertical Surfaces: Grade VGS.
4. Edges: PVC edge banding, 0.12 inch thick, matching laminate in color, pattern, and finish. Color as selected by Architect from Manufacturer's full range.
5. Pattern Direction: Vertically for drawer fronts, doors, and fixed panels.

H. Materials for Semiexposed Surfaces:

1. Surfaces Other Than Drawer Bodies: Thermoset decorative panels.

    a. Edges of Plastic-Laminate Shelves: PVC edge banding, 0.12 inch thick, matching laminate in color, pattern, and finish.
    b. Edges of Thermoset Decorative Panel Shelves: PVC or polyester edge banding.
    c. For semi-exposed backs of panels with exposed plastic-laminate surfaces, provide surface of high-pressure decorative laminate, NEMA LD 3, Grade VGS.

2. Drawer Sides and Backs: Thermoset decorative panels with PVC, 0.12 inch (3 mm) thick edge banding. Color as selected by Architect from Manufacturer's full range.
3. Drawer Bottoms: Thermoset decorative panels.

I. Case Body:

1. Ends: Case ends shall be ¾ inch fused melamine laminated to multi-core premium grade panel product with phenolic backer on concealed side.
2. Tops and Bottoms:

    a. Base and tall cabinet top and bottom shall be ¾" thick with melamine fused to multi-core premium grade panel product and phenolic backer sheets on concealed sides.
    b. Wall cabinet top and bottom shall be 1 inch thick for cabinets 36 ½ inch and wider. Melamine thermally fused to multi-core premium grade panel product both sides.

3. Drawers:

    a. Box sides, backs, and sub-fronts: 5/8" inch thick with melamine thermos-fused to multi-core premium grade product.
    b. Bottoms: ¼ inch thick pre-finished hardboard recessed into sides, back and sub-front.
    c. Paper storage drawers: Fitted with hood at back for paper retainage, and shall have 1/2 inch reinforced bottom.

d. Drawer fronts: Mounted with an adjusting mechanical to allow full adjustability and alignment in field.

J. Dust Panels: 1/4-inch plywood or tempered hardboard above compartments and drawers unless located directly under tops.

K. Concealed Backs of Panels with Exposed Plastic-Laminate Surfaces: High-pressure decorative laminate, NEMA LD 3, Grade BKL.

L. Drawer Construction: Fabricate with exposed fronts fastened to sub-front with mounting screws from interior of body.

1. Join sub-fronts, backs, and sides with glued rabbeted joints supplemented by mechanical fasteners or glued dovetail joints.

M. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces complying with the following requirements:

1. As indicated in Drawings.

2.3 WOOD MATERIALS

A. Wood Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.

B. Composite Wood and Agrifiber Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.

1. Particleboard: ANSI A208.1, Grade M-2 or Grade M-2-Exterior Glue.
2. Thermoset Decorative Panels: Particleboard or medium-density fiberboard finished with thermally fused, melamine-impregnated decorative paper and complying with requirements of NEMA LD 3, Grade VGL, for test methods 3.3, 3.4, 3.6, 3.8, and 3.10.
3. 45-pound density or better.

C. Cores:

1. All sides, tops, bottoms, doors, drawer fronts, and partitions shall have minimum ¾-inch thick multi-core premium grade panel product cores manufactured for use as a core material for laminated casework. Provide 1-inch thickness for bottom panels of wall hung units (same as shelves).
2. Shelf cores: Shelves shall have the same core material as specified for cabinet body except provide 1-inch thickness.
3. Multi-Core Panel Products:

a. Simpson Plyron, Simpson.
b. Vencore, Timber Products Company.
c. States Industries, “Armorcore”.
d. True North “Multi-Core
e. The Jordan School District will not consider particleboard an acceptable substitution.

2.4 CABINET HARDWARE AND ACCESSORIES

A. General: Provide cabinet hardware and accessory materials associated with architectural cabinets except for items specified in Section 087111 "Door Hardware (Descriptive Specification)."

B. Frameless Concealed Hinges (European Type): ANSI/BHMA A156.9, B01602, 135 degrees of opening, self-closing.

1. BLUM full overlay #B71T658, or equal as approved by Architect.
2. Doors up to 48-inches in height shall have two hinges per door. Doors over 48-inches in height shall have three hinges per door. Hinges which require cutting the edge banding shall not be allowed.

C. Back-Mounted Pulls: BHMA A156.9, B02011.

D. Wire Pulls: Back mounted, solid metal, 4 inches long, 5/16 inch in diameter.

E. Catches: Friction Roller catches, BHMA A156.9, B03071.

F. Shelf Rests: ANSI/BHMA A156.9, B04013; metal. Supports shall be inserted in shelf holes drilled into case ends or partitions and adjustable on 32 mm (1 ¼ inch) centers.

G. Drawer Slides: BHMA A156.9.

1. Drawer slides for standard drawers shall be Blum Series 230 or equal, as approved by Architect and Owner, with 100-pound rating and baked enamel corrosion resistant finish.

a. File drawers and paper drawer slides shall be KV8500 or equal, as approved by Architect and Owner, full extension with 150-pound rating.

H. Wardrobe Clothes Rod: Rods shall be KV 660 SS with stainless steel finish. Sockets shall be KV 734 chrome finish. Equivalents only as approved by Architect and Owner.

I. Door Locks: Locks for drawers and ¾-inch hinged doors shall be CompX National Lock #C 8053 disc tumbler. Locks to have a two-level keying system. Coordinate with Owner for master locks and keying system.

1. Provide locks on all cabinets.

2. Cabinet locks in Principal's Office, Assistant Principal's Office and Health Room to be keyed separately from other cabinets in school. Cabinet locks in these three rooms may be keyed the same.

J. Coat Hooks: Single prong hooks.

1. Basis-of-Design Coat Hook for Principal's Office 152: Subject to compliance with requirements, provide Kohler; Draft K-27363-BL or comparable product as approved by Architect and Owner.

    a. Color: Matte Black.

2. Basis-of-Design Coat for other locations: Subject to compliance with requirements, provide Kohler; Purist K-14443-CP or comparable product as approved by Architect and Owner.

    a. Color: Polished Chrome.

K. Screws: Reed and Prince square drive screws or equivalent as approved by Architect and District. Standard wood screws and sheet metal screws are not acceptable.

L. Door and Drawer Silencers: BHMA A156.16, L03011.

M. Cable Grommets: Hafele 429.94.310, zinc die-cast, black finish at dark surfaces and white on light surfaces, or equal as approved by Architect.

N. Hanging File Hardware: As required to accommodate letter-sized file folders with top-inserted label tabs, filed front to back, as indicated on Drawings.

O. Exposed Hardware Finishes: For exposed hardware where not indicated above, provide finish that complies with BHMA A156.18 for BHMA finish number indicated.

1. Satin Chromium Plated: BHMA 626 for brass or bronze base; BHMA 652 for steel base.

P. For concealed hardware where not indicated above, provide manufacturer's standard finish that complies with product class requirements in BHMA A156.9.

Q. Tackable panel: Tackable surface sheet material as indicated in Finishes Schedule on Drawings.

1. Facing:

    a. 1/4-inch-thick.
    b. Homogeneous tackable surface material made of primary natural materials consisting of linseed oil, cork, rosin binders and dry pigments mixed and calendared onto a natural jute backing.
    c. Uni-color extending throughout the thickness of the material.

2. Backing: Jute.
3. Color: As indicated.

2.5 MISCELLANEOUS MATERIALS

A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln dried to less than 15 percent moisture content.

B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.

C. Adhesive for Bonding Plastic Laminate: As recommended by laminate manufacturer for condition indicated. Do not use Urea Formaldehyde.

2.6 FABRICATION

A. Fabricate cabinets to dimensions, profiles, and details indicated.

B. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.

1. Notify Architect seven days in advance of the dates and times woodwork fabrication will be complete.
2. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.

C. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

D. Joinery:

1. All parts shall be accurately machined and fit for square and true.
2. Cabinet components shall be doweled into ends using 10 mm hardwood dowels on 4-inch centers, securely glued.
3. All backs shall be rabbeted into case, glued and stapled at four inches on center. 4-inch wide wood rails shall be mounted on backs for installation purposes, one top and one bottom in wall and base cabinets. Three rails shall be used for all tall cabinets.
4. Drawer bodies shall be box type construction with detachable door fronts. Joints shall be securely fastened with hardwood dowels and glue.

E. File Drawer Construction: Fabricate file drawers with adequate clearance to ensure drawers open and close easily when filled with letter-sized file folders with top-inserted tabs.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition cabinets to average prevailing humidity conditions in installation areas.

B. Before installing cabinets, examine shop-fabricated work for completion and complete work as required.

3.2 INSTALLATION

A. Grade: Install cabinets to comply with same grade as item to be installed.

B. Assemble cabinets and complete fabrication at Project site to the extent that it was not completed in the shop.

C. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with wafer-head cabinet installation screws.

D. Install cabinets level, plumb, true, and straight. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches.

E. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.

F. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with countersunk, concealed fasteners and blind nailing. Use fine finishing nails or finishing screws for exposed fastening, countersunk and filled flush with woodwork.

1. Use filler matching finish of items being installed.

G. Cabinets: Install without distortion so doors and drawers fit openings properly and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.

1. Install cabinets with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
2. Fasten wall cabinets through back, near top and bottom, and at ends not more than 16 inches o.c. with No. 10 wafer-head sheet metal screws through metal backing or metal framing behind wall finish.

H. Hanging File Hardware: Install to ensure full clearance of file folders and top-inserted label tabs while opening and closing drawers.

3.3 ADJUSTING AND CLEANING

A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects; where not possible to repair, replace woodwork. Adjust joinery for uniform appearance.

B. Clean, lubricate, and adjust hardware.

C. Clean cabinets on exposed and semi-exposed surfaces. Touch-up shop-applied finishes to restore damaged or soiled areas.

3.4 PROTECTION

A. Provide final protection and maintain conditions, in a manner acceptable to Fabricator/Installer, to ensure architectural cabinets are without damage or deterioration at time of substantial completion.

END OF SECTION 064116

SECTION 072100 - THERMAL INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Extruded polystyrene foam-plastic board.
2. Glass-fiber blanket insulation.
3. Mineral wool blanket insulation.

B. Related Sections:

1. Section 072119 “Foamed-In-Place Insulation”.
2. Section 075419 "Polyvinyl-Chloride (PVC) Roofing” for insulation specified as part of roofing construction.
3. Section 092900 "Gypsum Board" for sound attenuation blanket used as acoustic insulation.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Provide product data for sealant used to adhere insulation to air/vapor barrier.
2. Provide letter certifying chemical/physical compatibility between adhesive and air/vapor barrier.

1.4 INFORMATIONAL SUBMITTALS

A. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for each product.

B. Research/Evaluation Reports: For foam-plastic insulation, from ICC-ES.

1.5 QUALITY ASSURANCE

A. Surface-Burning Characteristics: As determined by testing identical products according to ASTM E 84 by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Protect insulation materials from physical damage and from deterioration due to moisture, soiling, and other sources. Store inside and in a dry location. Comply with manufacturer's written instructions for handling, storing, and protecting during installation.

B. Protect foam-plastic board insulation as follows:

1. Do not expose to sunlight except to necessary extent for period of installation and concealment.
2. Protect against ignition at all times. Do not deliver foam-plastic board materials to Project site before installation time.
3. Quickly complete installation and concealment of foam-plastic board insulation in each area of construction.

PART 2 - PRODUCTS

2.1 EXTRUDED POLYSTYRENE BOARD

A. Extruded Polystyrene Board, Type VI: ASTM C 578, Type VI, 40-psi minimum compressive strength; maximum flame-spread and smoke-developed indexes of 25 and 450, respectively, per ASTM E 84.

2.2 GLASS-FIBER BLANKET INSULATION

A. Polypropylene-Scrim-Kraft-Faced, Glass-Fiber Blanket Insulation: ASTM C 665, Type II (non-reflective faced), Class A (faced surface with a flame-spread index of 25 or less); Category 1 (membrane is a vapor barrier).

2.3 Mineral-Wool Blanket Insulation, Reinforced-Foil Faced: ASTM C665, Type III (reflective faced); Category 1 (membrane is a vapor barrier), faced with foil scrim, foil-scrim kraft, or foil-scrim polyethylene.

2.4 INSULATION FASTENERS

A. Adhesively Attached, Spindle-Type Anchors: Plate welded to projecting spindle; capable of holding insulation of specified thickness securely in position with self-locking washer in place.

1. Plate: Perforated, galvanized carbon-steel sheet, 0.030 inch thick by 2 inches square.
2. Spindle: Copper-coated, low-carbon steel; fully annealed; 0.105 inch in diameter; length to suit depth of insulation.

B. Adhesively Attached, Angle-Shaped, Spindle-Type Anchors: Angle welded to projecting spindle; capable of holding insulation of specified thickness securely in position with self-locking washer in place.

1. Angle: Formed from 0.030-inch-thick, perforated, galvanized carbon-steel sheet with each leg 2 inches square.
2. Spindle: Copper-coated, low-carbon steel; fully annealed; 0.105 inch in diameter; length to suit depth of insulation.

C. Anchor Adhesive: Product with demonstrated capability to bond insulation anchors securely to substrates without damaging insulation, fasteners, or substrates.

2.5 ACCESSORIES

A. Insulation for Miscellaneous Voids:

1. Glass-Fiber Insulation: ASTM C 764, Type II, loose fill; with maximum flame-spread and smoke-developed indexes of 5, per ASTM E 84.

B. Adhesive for Bonding Insulation: Product compatible with insulation and air and water barrier materials, and with demonstrated capability to bond insulation securely to substrates without damaging insulation and substrates.

PART 3 - EXECUTION

3.1 PREPARATION

A. Clean substrates of substances that are harmful to insulation or vapor retarders, including removing projections capable of puncturing vapor retarders, or that interfere with insulation attachment.

3.2 INSTALLATION, GENERAL

A. Comply with insulation manufacturer's written instructions applicable to products and applications indicated.

B. Install insulation that is undamaged, dry, and unsoiled and that has not been left exposed to ice, rain, or snow at any time.

C. Extend insulation to envelop entire area to be insulated. Cut and fit tightly around obstructions and fill voids with insulation. Remove projections that interfere with placement.

D. Provide sizes to fit applications indicated and selected from manufacturer's standard thicknesses, widths, and lengths. Apply single layer of insulation units to produce thickness indicated unless multiple layers are otherwise shown or required to make up total thickness.

E. Exterior cavity wall insulation board joints must be butted tightly to adjacent boards, penetrations and terminations.

3.3 INSTALLATION OF FOUNDATION WALL INSULATION

A. Butt panels together for tight fit.

B. Anchor Installation: Install board insulation on concrete substrates by adhesively attached, spindle-type insulation anchors as follows:

1. Fasten insulation anchors to concrete substrates with insulation anchor adhesive according to anchor manufacturer's written instructions.
2. Space anchors according to insulation manufacturer's written instructions for insulation type, thickness, and application.
3. Apply insulation standoffs to each spindle to create cavity width indicated on Drawings between concrete substrate and insulation.
4. After adhesive has dried, install board insulation by pressing insulation into position over spindles and securing it tightly in place with insulation-retaining washers, taking care not to compress insulation.
5. Where insulation will not be covered by other building materials, apply capped washers to tips of spindles.

C. Adhesive Installation: Install with adhesive or press into tacky waterproofing or damp proofing according to manufacturer's written instructions.

3.4 INSTALLATION OF INSULATION FOR FRAMED CONSTRUCTION

A. Apply insulation units to substrates by method indicated, complying with manufacturer's written instructions. If no specific method is indicated, bond units to substrate with adhesive or use mechanical anchorage to provide permanent placement and support of units.

B. Glass-Fiber or Mineral-Wool Blanket Insulation: Install in cavities formed by framing members according to the following requirements:

1. Use insulation widths and lengths that fill the cavities formed by framing members. If more than one length is required to fill the cavities, provide lengths that will produce a snug fit between ends.
2. Place insulation in cavities formed by framing members to produce a friction fit between edges of insulation and adjoining framing members.
3. Maintain 3-inch clearance of insulation around recessed lighting fixtures not rated for or protected from contact with insulation.
4. Vapor-Retarder-Faced Blankets: Tape joints and ruptures in vapor-retarder facings, and seal each continuous area of insulation to ensure airtight installation.

    a. Exterior Walls: Set units with facing placed toward interior of construction.
    b. Interior Walls: Set units with facing placed as indicated on Drawings.

C. Miscellaneous Voids: Install insulation in miscellaneous voids and cavity spaces where required to prevent gaps in insulation using the following materials:

1. Glass-Fiber Insulation: Compact to approximately 40 percent of normal maximum volume equaling a density of approximately 2.5 lb/cu. ft.

D. Install insulation in curtain-wall construction where indicated on Drawings according to curtain-wall manufacturer's written instructions.

1. Hold insulation in place by securing metal clips and straps or integral pockets within window frames, spaced at intervals recommended in writing by insulation manufacturer to hold insulation securely in place without touching spandrel glass. Maintain cavity width of dimension indicated between insulation and glass.

3.5 PROTECTION

A. Protect installed insulation and vapor retarders from damage due to harmful weather exposures, physical abuse, and other causes. Provide temporary coverings or enclosures where insulation is subject to abuse and cannot be concealed and protected by permanent construction immediately after installation.

END OF SECTION 072100

SECTION 072119 - FOAMED-IN-PLACE INSULATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Closed-cell spray polyurethane foam.

B. Related Requirements:

1. Section 072100 "Thermal Insulation".

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For each product, for tests performed by a qualified testing agency.

C. Evaluation Reports: For spray-applied polyurethane foam-plastic insulation, from ICC-ES

1.5 QUALITY ASSURANCE

A. Installer Qualifications: An authorized representative who is trained and approved by manufacturer.

PART 2 - PRODUCTS

2.1 CLOSED-CELL SPRAY POLYURETHANE FOAM

A. Closed-Cell Spray Polyurethane Foam: ASTM C 1029, Type II, density of 2lb/cu. ft. and minimum aged R-value at 1-inch thickness of 6.2 deg F x h x sq. ft./Btu at 75 deg F.

1. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

    a. Flame-Spread Index: 25 or less.
    b. Smoke-Developed Index: 450 or less.

2. This spray applied insulation must be separated from the interior of the building by an approved thermal barrier of 0.5" gypsum wallboard or an equivalent 15 minute thermal barrier.
3. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.

2.2 MISCELLANEOUS MATERIALS

A. Primer: Material recommended by insulation manufacturer where required for adhesion of insulation to substrates.

PART 3 - EXECUTION

3.1 PREPARATION

A. Verify that substrates are clean, dry, and free of substances that are harmful to insulation.

B. Priming: Prime substrates where recommended by insulation manufacturer. Apply primer to comply with insulation manufacturer's written instructions. Confine primers to areas to be insulated; do not allow spillage or migration onto adjoining surfaces.

3.2 INSTALLATION

A. Comply with insulation manufacturer's written instructions applicable to products and applications.

B. Spray insulation to envelop entire area to be insulated and fill voids.

C. Apply in multiple passes to not exceed maximum thicknesses recommended by manufacturer. Do not spray into rising foam.

D. Framed Construction: Install into cavities formed by framing members to achieve thickness indicated on Drawings.

E. Cavity Walls: Install into cavities to thickness indicated on Drawings and fully fill void.

F. Miscellaneous Voids: Apply according to manufacturer's written instructions.

3.3 PROTECTION

A. Protect installed insulation from damage due to harmful weather exposures, physical abuse, and other causes.

END OF SECTION 072119

SECTION 072726 - FLUID-APPLIED MEMBRANE AIR BARRIERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Vapor-permeable, fluid-applied air barriers.

B. Related Requirements:

1. Section 061600 "Sheathing" for wall sheathings and wall sheathing joint-and-penetration treatments.

1.2 DEFINITIONS

A. Air-Barrier Material: A primary element that provides a continuous barrier to the movement of air.

B. Air-Barrier Accessory: A transitional component of the air barrier that provides continuity.

C. Air-Barrier Assembly: The collection of air-barrier materials and accessories applied to an opaque wall, including joints and junctions to abutting construction, to control air movement through the wall.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review air-barrier requirements and installation, special details, mockups, air-leakage and bond testing, air-barrier protection, and work scheduling that covers air barriers.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include manufacturer's written instructions for evaluating, preparing, and treating each substrate; technical data; dry film thickness; and tested physical and performance properties of products.

B. Shop Drawings: For air-barrier assemblies.

1. Show locations and extent of air-barrier materials, accessories, and assemblies specific to Project conditions.
2. Include details for substrate joints and cracks, counterflashing strips, penetrations, inside and outside corners, terminations, and tie-ins with adjoining construction.
3. Include details of interfaces with other materials that form part of air barrier.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer. Include list of ABAA-certified installers and supervisors employed by Installer, who work on Project.

B. Product Certificates: From air-barrier manufacturer, certifying compatibility of air barriers and accessory materials with Project materials that connect to or that come in contact with the barrier.

C. Product Test Reports: For each air-barrier assembly, for tests performed by a qualified testing agency.

D. Field quality-control reports.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1. Installer to be licensed by ABAA according to ABAA's Quality Assurance Program and to employ ABAA-certified installers and supervisors on Project.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Remove and replace liquid materials that cannot be applied within their stated shelf life.

B. Protect stored materials from direct sunlight.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Apply air barrier within the range of ambient and substrate temperatures recommended in writing by air-barrier manufacturer.

1. Protect substrates from environmental conditions that affect air-barrier performance.
2. Do not apply air barrier to a damp or wet substrate or during snow, rain, fog, or mist.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Source Limitations: Obtain primary air-barrier materials and air-barrier accessories from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Air-Barrier Performance: Air-barrier assembly and seals with adjacent construction to be capable of performing as a continuous air barrier and as a liquid-water drainage plane flashed to discharge to the exterior incidental condensation or water penetration. Air-barrier assemblies to be capable of accommodating substrate movement and of sealing substrate expansion and control joints, construction material changes, penetrations, tie-ins to installed waterproofing, and transitions at perimeter conditions without deterioration and air leakage exceeding specified limits.

B. Air-Barrier Assembly Air Leakage: Maximum 0.04 cfm/sq. ft. of surface area at 1.57 lbf/sq. ft., when tested according to ASTM E2357.

2.3 MEDIUM-BUILD AIR BARRIERS, VAPOR PERMEABLE

A. Medium-Build, Vapor-Permeable Air Barrier: Synthetic polymer material with an installed dry film thickness, according to manufacturer's written instructions, of 17 to 30 mils over smooth, void-free substrates.
   1. Physical and Performance Properties:
      a. Air Permeance: Maximum 0.004 cfm/sq. ft. of surface area at 1.57-lbf/sq. ft. pressure difference; ASTM E2178.
      b. Vapor Permeance: Minimum 5 perms; ASTM E96/E96M, Procedure B, Water Method.
      c. Ultimate Elongation: Minimum 250 percent; ASTM D412, Die C.
      d. Adhesion to Substrate: Minimum 30 lbf/sq. in. when tested according to ASTM D4541.
      e. Fire Propagation Characteristics: Passes NFPA 285 testing as part of an approved assembly.
      f. UV Resistance: Can be exposed to sunlight for 180 days according to manufacturer's written instructions.

2.4 ACCESSORY MATERIALS

A. Provide primers, transition strips, termination strips, joint reinforcing fabric and strips, joint sealants, counterflashing strips, flashing sheets and metal termination bars, termination mastic, substrate patching materials, adhesives, tapes, foam sealants, lap sealants, and other accessory materials that are recommended in writing by air-barrier manufacturer to produce a complete

air-barrier assembly and that are compatible with primary air-barrier material and adjacent construction to which they may seal.

B. Primer: Liquid waterborne primer recommended for substrate by air-barrier material manufacturer.

C. Stainless Steel Sheet: ASTM A240/A240M, Type 304, 0.0250 inch thick, and Series 300 stainless steel fasteners.

D. Preformed Silicone Extrusion: Manufacturer's standard system consisting of cured low-modulus silicone extrusion, sized to fit opening widths, with a single-component, neutral-curing, Class 100/50 (low-modulus) silicone sealant for bonding extrusions to substrates.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work.

1. Verify that substrates are sound and free of oil, grease, dirt, excess mortar, or other contaminants.
2. Verify that substrates have cured and aged for minimum time recommended in writing by air-barrier manufacturer.
3. Verify that substrates are visibly dry and free of moisture.
4. Verify that masonry joints are flush and completely filled with mortar.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 SURFACE PREPARATION

A. Clean, prepare, treat, fill, and seal substrate and joints and cracks in substrate according to manufacturer's written instructions and details. Provide clean, dust-free, and dry substrate for air-barrier application.

B. Mask off adjoining surfaces not covered by air barrier to prevent spillage and overspray affecting other construction.

C. Remove grease, oil, bitumen, form-release agents, paints, curing compounds, and other penetrating contaminants or film-forming coatings from concrete.

D. Remove fins, ridges, mortar, and other projections and fill honeycomb, aggregate pockets, holes, and other voids in concrete with substrate-patching material.

E. Remove excess mortar from masonry ties, shelf angles, and other obstructions.

F. At changes in substrate plane, apply sealant or termination mastic beads at sharp corners and edges to form a smooth transition from one plane to another.

G. Cover gaps in substrate plane and form a smooth transition from one substrate plane to another with stainless steel sheet mechanically fastened to structural framing to provide continuous support for air barrier.

H. Bridge isolation joints, expansion joints and discontinuous wall-to-wall, deck-to-wall, and deck-to-deck joints with air-barrier accessory material that accommodates joint movement according to manufacturer's written instructions and details.

3.3 ACCESSORIES INSTALLATION

A. Install accessory materials according to air-barrier manufacturer's written instructions and details to form a seal with adjacent construction and ensure continuity of air and water barrier.

1. Coordinate the installation of air barrier with installation of roofing membrane and base flashing to ensure continuity of air barrier with roofing membrane.
2. Install transition strip on roofing membrane or base flashing so that a minimum of 3 inches of coverage is achieved over each substrate.
3. Unless manufacturer recommends in writing against priming, apply primer to substrates at required rate and allow it to dry.
4. Apply primer to substrates at required rate and allow it to dry. Limit priming to areas that will be covered by air-barrier material on same day. Reprime areas exposed for more than 24 hours.

B. Connect and seal exterior wall air-barrier material continuously to roofing-membrane air barrier, concrete below-grade structures, floor-to-floor construction, exterior glazing and window systems, glazed curtain-wall systems, storefront systems, exterior louvers, exterior door framing, and other construction used in exterior wall openings, using accessory materials.

C. At end of each working day, seal top edge of strips and transition strips to substrate with termination mastic.

D. Apply joint sealants forming part of air-barrier assembly within manufacturer's recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.

E. Wall Openings: Prime concealed, perimeter frame surfaces of windows, curtain walls, storefronts, and doors. Apply preformed silicone extrusion so that a minimum of 3 inches of coverage is achieved over each substrate. Maintain 3 inches of full contact over firm bearing to perimeter frames, with not less than 1 inch of full contact.

1. Preformed Silicone Extrusion: Set in full bed of silicone sealant applied to walls, frame, and air-barrier material.

F. Fill gaps in perimeter frame surfaces of windows, curtain walls, storefronts, and doors, and miscellaneous penetrations of air-barrier material with foam sealant.

G. Seal strips and transition strips around masonry reinforcing or ties and penetrations with termination mastic.

H. Seal top of through-wall flashings to air barrier with an additional 6-inch-wide, transition strip.

I. Seal exposed edges of strips at seams, cuts, penetrations, and terminations not concealed by metal counterflashings or ending in reglets with termination mastic.

J. Repair punctures, voids, and deficient lapped seams in strips and transition strips. Slit and flatten fishmouths and blisters. Patch with transition strips extending 6 inches beyond repaired areas in strip direction.

3.4 PRIMARY AIR-BARRIER MATERIAL INSTALLATION

A. Apply air-barrier material to form a seal with strips and transition strips and to achieve a continuous air barrier according to air-barrier manufacturer's written instructions and details. Apply air-barrier material within manufacturer's recommended application temperature ranges.

1. Unless manufacturer recommends in writing against priming, apply primer to substrates at required rate and allow it to dry.
2. Limit priming to areas that will be covered by air-barrier material on same day. Reprime areas exposed for more than 24 hours.
3. Where multiple prime coats are needed to achieve required bond, allow adequate drying time between coats.

B. Medium-Build Air Barriers: Apply continuous unbroken air-barrier material to substrates according to the following thickness. Apply an increased thickness of air-barrier material in full contact around protrusions such as masonry ties.

1. Vapor-Permeable, Medium-Build Air Barrier: Total dry film thickness as recommended in writing by manufacturer to comply with performance requirements, applied in one or more equal coats. Apply additional material as needed to achieve void- and pinhole-free surface, but do not exceed thickness on which required vapor permeability is based.

C. Do not cover air barrier until it has been tested and inspected by testing agency.

D. Correct deficiencies in or remove air barrier that does not comply with requirements; repair substrates and reapply air-barrier components.

3.5 FIELD QUALITY CONTROL

A. ABAA Quality Assurance Program: Perform examinations, preparation, installation, testing, and inspections under ABAA's Quality Assurance Program.

B. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

C. Inspections: Air-barrier materials, accessories, and installation are subject to inspection for compliance with requirements. Inspections may include the following:

1. Continuity of air-barrier system has been achieved throughout the building envelope with no gaps or holes.
2. Air-barrier dry film thickness.
3. Continuous structural support of air-barrier system has been provided.
4. Masonry and concrete surfaces are smooth, clean, and free of cavities, protrusions, and mortar droppings.
5. Site conditions for application temperature and dryness of substrates have been maintained.
6. Maximum exposure time of materials to UV deterioration has not been exceeded.
7. Surfaces have been primed, if applicable.
8. Laps in strips and transition strips have complied with minimum requirements and have been shingled in the correct direction (or mastic has been applied on exposed edges), with no fishmouths.
9. Termination mastic has been applied on cut edges.
10. Strips and transition strips have been firmly adhered to substrate.
11. Compatible materials have been used.
12. Transitions at changes in direction and structural support at gaps have been provided.
13. Connections between assemblies (air-barrier and sealants) have complied with requirements for cleanliness, surface preparation and priming, structural support, integrity, and continuity of seal.
14. All penetrations have been sealed.

D. Tests: As determined by testing agency from among the following tests:

1. Air-Leakage-Location Testing: Air-barrier assemblies will be tested for evidence of air leakage according to ASTM E1186, chamber pressurization or depressurization with smoke tracers.
2. Air-Leakage-Volume Testing: Air-barrier assemblies will be tested for air-leakage rate according to ASTM E783 or ASTM E2357.
3. Adhesion Testing: Air-barrier assemblies will be tested for required adhesion to substrate according to ASTM D4541 for each 600 sq. ft. of installed air barrier or part thereof.

E. Air barriers will be considered defective if they do not pass tests and inspections.

1. Apply additional air-barrier material, according to manufacturer's written instructions, where inspection results indicate insufficient thickness.
2. Remove and replace deficient air-barrier components for retesting as specified above.

F. Repair damage to air barriers caused by testing; follow manufacturer's written instructions.

G. Prepare test and inspection reports.

3.6 CLEANING AND PROTECTION

A. Protect air-barrier system from damage during application and remainder of construction period, according to manufacturer's written instructions.

1. Protect air barrier from exposure to UV light and harmful weather exposure as recommended in writing by manufacturer. If exposed to these conditions for longer than recommended, remove and replace air barrier or install additional, full-thickness, air-barrier application after repairing and preparing the overexposed materials according to air-barrier manufacturer's written instructions.
2. Protect air barrier from contact with incompatible materials and sealants not approved by air-barrier manufacturer.

B. Clean spills, stains, and soiling from construction that would be exposed in the completed work using cleaning agents and procedures recommended in writing by manufacturer of affected construction.

C. Remove masking materials after installation.

END OF SECTION 072726

SECTION 074213.23 - METAL COMPOSITE MATERIAL WALL PANELS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Metal composite material (MCM) system.

1.2 DEFINITIONS

A. DBVC: Drained and back-ventilated cavity rainscreen system designed to drain and dry water entering cavity through drainage channels, weeps, and air ventilation.

B. MCM: Metal composite material; cladding material formed by joining two thin metal skins to polyethylene or fire-retardant core and bonded under precise temperature, pressure, and tension.

C. PER: Pressure-equalized rainscreen system designed for no water intrusion, with equal pressure within air cavity and outside cladding barrier.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

   1. Meet with Owner, Architect, Owner's insurer if applicable, MCM system Installer, MCM system manufacturer's representative, and installers whose work interfaces with or affects MCM panels, including installers of doors, windows, and louvers.
   2. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
   3. Review methods and procedures related to MCM system installation, including manufacturer's written instructions.
   4. Examine support conditions for compliance with requirements, including alignment between and attachment to structural members.
   5. Review flashings, special siding details, wall penetrations, openings, and condition of other construction that affect MCM system.
   6. Review governing regulations and requirements for insurance, certificates, and tests and inspections if applicable.
   7. Review temporary protection requirements for system assembly during and after installation.
   8. Review procedures for repair of panels damaged after installation.
   9. Document proceedings, including corrective measures and actions required, and furnish copy of record to each participant.

1.4 ACTION SUBMITTALS

A. Product Data: Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of panel, system, and accessory.

1. Metal composite material (MCM) system.

B. Shop Drawings:

1. Include fabrication and installation layouts of MCM system; details of edge conditions, joints, panel profiles, corners, anchorages, attachment assembly, trim, flashings, closures, accessories, and special details.
2. Accessories: Include details of flashing, trim, and anchorage, at a scale of not less than 1-1/2 inches per 12 inches.

C. Samples for Initial Selection: For each type of MCM panel indicated, with factory-applied color finishes.

1. Size: Manufacturers' standard size.
2. Include Samples of trim and accessories involving color selection.

D. Samples for Verification: For each type of MCM panel and MCM system required, with factory-applied color finishes.
1. MCM System: 12 inches long by actual panel width, fabricated into panel systems indicated. Include fasteners, closures, and other MCM panel accessories. Panel sample need not be provided in the specified color.

1.5 INFORMATIONAL SUBMITTALS

A. Test and Evaluation Reports:

1. Product Test Reports: For each MCM system, for tests performed by qualified testing agency.

a. MCM Panel Manufacturer's Material Test Reports: Certified test reports showing compliance with specific performance or third-party listing documenting compliance in accordance with the IBC.
b. Fabricator's MCM System Test Reports: Certified test reports showing system compliance with specific performance or third-party listing documenting compliance in accordance with the IBC.

1) Dry or Wet Seal System: Tested to AAMA 501.1.
2) DBVC System: Tested to AAMA 509.
3) PER System: Tested to AAMA 508.

B. Field Quality-Control Submittals:

1. Field quality-control reports.

C. Qualification Statements: For manufacturer and installer.

D. Sample warranties.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For MCM panels.

B. Warranty Documentation:

1. Manufacturers' special warranties.
2. Installer's special warranties.

1.7 QUALITY ASSURANCE

A. Manufacturer Qualifications: Minimum 5 years' experience.

B. Installer Qualifications: Entity that employs installers and supervisors who are trained and approved by MCM system manufacturer.

C. Testing Agency Qualifications: An agency acceptable to authorities having jurisdiction.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver components, MCM panels, and other manufactured items so as not to be damaged or deformed. Package MCM panels for protection during transportation and handling.

B. Unload, store, and erect MCM panels in a manner to prevent bending, warping, twisting, and surface damage.

C. Stack MCM panels horizontally on platforms or pallets, covered with suitable weathertight and ventilated covering. Store MCM panels to ensure dryness, with positive slope for drainage of water. Do not store MCM panels in contact with other materials that might cause staining, denting, or other surface damage.

D. Retain strippable protective covering on MCM panels during installation.

1.9 FIELD CONDITIONS

A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit assembly of MCM panels to be performed in accordance with manufacturers' written instructions and warranty requirements.

1.10 COORDINATION

A. Coordinate MCM panel installation with rain drainage work, flashing, trim, construction of soffits, and other adjoining work to provide a leakproof, secure, and noncorrosive installation.

1.11 WARRANTY

A. Panel Integrity Warranty: Manufacturer agrees to repair or replace components of MCM panels that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including rupturing, cracking, or puncturing.
b. Deterioration of metals and other materials beyond normal weathering.

2. Warranty Period: Five years from date of Substantial Completion.

B. Panel Finish Warranty: Manufacturer agrees to repair finish or replace MCM panels that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Hunter units when tested in accordance with ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of Substantial Completion.

C. MCM System Warranty: System manufacturer's standard form in which manufacturer agrees to repair or replace components of MCM systems that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Seismic Performance: No failure or deterioration of the system when laterally racked to 3/4 inch in both directions and repeated for three cycles in accordance with AAMA 501.4. System must pass the static water test as described in ASTM E331 following the seismic racking.

B. Structural Performance: MCM systems to withstand the effects of the following loads, based on testing in accordance with ASTM E330/E330M:

1. Wind Loads: As indicated on Drawings.
2. Other Design Loads: As indicated on Drawings.
3. Deflection Limits: For wind loads, no greater than 1/240 of the span.

C. Air Infiltration: Air leakage of not more than 0.06 cfm/sq. ft. when tested in accordance with ASTM E283/E283M at the following test-pressure difference:

1. Test-Pressure Difference: 6.24 lbf/sq. ft..

D. Water Penetration under Static Pressure: No water penetration when tested in accordance with ASTM E331 at the following test-pressure difference:

1. Test-Pressure Difference: 6.24 lbf/sq. ft..

E. Water Penetration under Dynamic Pressure: No water penetration when tested in accordance with AAMA 501.1 at the following test pressure:

1. Test Pressure: 6.24 psf.

F. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

G. Fire-Resistance Ratings: Comply with ASTM E119 or UL 263; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Indicate design designations from UL's "Fire Resistance Directory" or from listings of another qualified testing agency.

H. Fire Propagation Characteristics: MCM system passes NFPA 285 testing.

2.2 METAL COMPOSITE MATERIAL (MCM) WALL PANELS

A. Metal Composite Material (MCM) Wall Panels: Provide MCM panels fabricated from two metal facings bonded to a solid, extruded thermoplastic core.

1. Basis-of-Design Product: Subject to compliance with requirements, provide PAC-CLAD; PAC 3000-RS, or a comparable product by one of the following:

a. ALPOLIC Materials; Mitsubishi Chemical Composites.
b. ALUCOBOND; 3A Composites USA, Inc.
c. Alucoil North America.
d. Americlad, Quality Metalcrafts, LLC.
e. CENTRIA Architectural Systems.
f. Northclad.
g. VM Building Solutions USA; Umicore Building Products USA, Inc.

2. Core: FR.
3. Panel Thickness: 0.157 inch.
4. Bond Strength: 22.5 in-lb/in. when tested for bond integrity in accordance with ASTM D1781.
5. Fire Performance: Flame-spread index less than 25 and smoke-developed index less than 450, in accordance with ASTM E84 or UL 723.

B. MCM Panel Materials:

1. Aluminum-Faced Panels: ASTM B209/B209M alloy as standard with manufacturer, temper as required to suit finish and forming operations with 0.020-inch- thick, aluminum sheet facings.

a. Exterior Finish: Clear anodized.

2.3 METAL COMPOSITE MATERIAL (MCM) SYSTEM

A. PER MCM System: Provide factory-formed and -assembled, MCM panels formed into profile for PER system installation, drained at horizontal joints and at base of wall. Include attachment assembly components, panel stiffeners, and accessories required for compartmentalized and weathertight system.

B. DBVC MCM System: Provide factory-formed and -assembled, MCM panels formed into profile for DBVC system installation, drained at horizontal joints and at base of wall. Include attachment assembly components, panel stiffeners, and accessories required for weathertight system.

C. Dry-Seal Barrier MCM System: Provide factory-formed and -assembled, MCM panels formed into profile for dry-seal barrier system installation. Include attachment assembly components, panel stiffeners, and accessories required for weathertight system.

D. System Panel Depth: 1-5/8 inch.

E. Attachment Assembly Components:
1. Factory applied continuous aluminum extrusions.
2. Tracks formed from material compatible with panel facing and anchored to substrate.

F. Labeling: Comply with labeling requirement of applicable building code.

2.4 ACCESSORIES

A. Metal Subframing and Furring: ASTM C955 cold-formed, metallic-coated steel sheet ASTM A653/A653M, G90 hot-dip galvanized coating designation or ASTM A792/A792M, Class AZ50 aluminum-zinc-alloy coating designation unless otherwise indicated. Provide manufacturer's standard sections as required for support and alignment of MCM system.

B. System Accessories: Provide components required for a complete, weathertight wall system including trim, copings, fasciae, mullions, sills, corner units, clips, flashings, sealants, gaskets, fillers, closure strips, and similar items. Match material and finish of MCM panels unless otherwise indicated.

C. Flashing and Trim: Provide flashing and trim formed from same material as MCM panels as required to seal against weather and to provide finished appearance. Locations include, but are not limited to, bases, drips, sills, jambs, corners, endwalls, framed openings, rakes, fasciae, parapet caps, reveals, and fillers. Finish flashing and trim with same finish system as adjacent MCM panels.

D. Panel Fasteners: Self-tapping screws designed to withstand design loads. Use gasketed or approved coated fasteners between dissimilar metals.

1. Aluminum Panels: Use aluminum or stainless steel fasteners for surfaces exposed to the exterior; use aluminum or galvanized-steel fasteners for surfaces exposed to the interior.

2.5 FABRICATION

A. Fabricate and finish MCM panels at the factory, by panel manufacturer's standard procedures and processes, as necessary to fulfill indicated panel performance requirements demonstrated by laboratory testing.

B. Shop-fabricate MCM systems and accessories by fabricator's standard procedures and processes, as necessary to fulfill indicated performance requirements demonstrated by laboratory testing. Comply with requirements of MCM panel manufacturer, of indicated system profiles, and with dimensional and structural requirements.

1. Fabricate panels to dimensions indicated on Drawings based on an assumed design temperature of 70 deg F. Allow for ambient temperature range at time of fabrication.
2. Formed MCM panel lines, breaks, and angles to be sharp and straight, with surfaces free from warp or buckle.
3. Fabricate panels with sharply cut edges and no displacement of face sheet or protrusion of core.
4. Fabricated Panel Tolerances: Shop-fabricate panels to sizes and joint configurations indicated on Drawings.

    a. Width: Plus or minus 0.079 inch at 70 deg F.
    b. Length: Plus or minus 0.079 inch at 70 deg F.
    c. Squareness: Plus or minus 0.079 inch at 70 deg F.

5. Fabricate MCM panel joints with factory-installed captive gaskets or separator strips that provide a weathertight seal and prevent metal-to-metal contact, and that minimize noise from movements.
6. Attach routed-and-returned panel flanges to perimeter extrusions with manufacturer's standard fasteners or structural silicone adhesive.

2.6 FINISHES

A. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

C. Anodized Aluminum Finish: Clear in accordance with AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, MCM system supports, and other conditions affecting performance of the Work.

1. Examine wall framing to verify that girts, angles, channels, studs, and other structural panel support members and anchorage have been installed within alignment tolerances required by MCM system manufacturer.
2. Examine wall sheathing to verify that sheathing joints are supported by framing or blocking and that installation is within flatness tolerances required by MCM system manufacturer.

    a. Verify that air- or water-resistive barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Examine roughing-in for components and assemblies penetrating MCM system to verify actual locations of penetrations relative to seam locations of MCM panels before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF MCM SYSTEM

A. General: Install MCM system in accordance with system manufacturer's written instructions in orientation, sizes, and locations indicated on Drawings. Install panels perpendicular to supports unless otherwise indicated. Anchor MCM system securely in place, with provisions for thermal and structural movement.

1. Shim or otherwise plumb substrates receiving MCM system.
2. Flash and seal MCM system at perimeter of all openings. Fasten with self-tapping screws.
3. Install screw fasteners in predrilled holes.

4. Locate and space fastenings in uniform vertical and horizontal alignment.
5. Install flashing and trim as MCM system work proceeds.
6. Align bottoms of MCM panels and fasten with blind rivets, bolts, or self-tapping screws. Fasten flashings and trim around openings and similar elements with self-tapping screws.
7. Provide weathertight escutcheons for all items penetrating system.
8. Where dissimilar metals contact each other or corrosive substrates, protect against galvanic action as recommended in writing by MCM system manufacturer.
9. Attach MCM panels to supports at locations, spacings, and with fasteners recommended by manufacturer to meet listed performance requirements.

B. Attachment Assembly, General: Install attachment assembly required to support MCM panels and to provide a complete weathertight wall system, including tracks, drainage channels, anchor channels, perimeter extrusions.

1. Install subframing, furring, and other panel support members and anchorages in accordance with ASTM C955.
2. Install support system at locations, at spacings, and with fasteners recommended by MCM system manufacturer to meet listed performance requirements.

C. PER MCM System: Install vertical tracks and horizontal tracks providing compartmentalization at locations, at spacings, and with fasteners recommended by system manufacturer.

1. Attach MCM panels by interlocking panel perimeter extrusion into tracks.
2. Insert matching MCM spline into tracks at joint reveal locations.

D. DBVC MCM System: Install vertical tracks and horizontal tracks at locations, at spacings, and with fasteners recommended by system manufacturer.

1. Attach MCM panels by interlocking panel perimeter extrusion into tracks.
2. Insert matching MCM spline into tracks at joint reveal locations.

E. Dry-Seal MCM System: Attach MCM panels by interlocking panel perimeter extrusion into tracks.

1. Seal horizontal and vertical joints between adjacent MCM panels with manufacturer's standard gaskets.

F. Install panels to allow individual panels to "free float" and be installed and removed without disturbing adjacent panels.

G. Install accessories with positive anchorage to building and weathertight mounting, and provide for thermal expansion. Coordinate installation with flashings and other components.

1. Install accessory components required for a complete MCM system assembly including trim, copings, corners, seam covers, flashings, fillers, closure strips, and similar items. Provide types indicated by MCM system manufacturer.

H. Flashing and Trim: Comply with performance requirements, manufacturer's written installation instructions, and SMACNA's "Architectural Sheet Metal Manual." Provide concealed fasteners

where possible, and set units true to line and level as indicated. Install work with laps, joints, and seams that are permanently watertight.

1. Install exposed flashing and trim that is without buckling and tool marks and that is true to line and levels indicated, with exposed edges folded back to form hems. Install trim to fit substrates and to result in waterproof performance.
2. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at a maximum of 10 ft. with no joints allowed within 24 inches of corner or intersection. Where lapped expansion provisions cannot be used or would not be sufficiently waterproof, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with mastic sealant (concealed within joints).

3.3 INSTALLATION TOLERANCES

A. Shim and align MCM panels within installed tolerance of 1/4 inch in 20 ft., non-accumulative, on level, plumb, and location lines as indicated, and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

3.4 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Water-Spray Test: After installation, test area of assembly as directed by Architect for water penetration in accordance with AAMA 501.2.

C. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect completed MCM system installation, including accessories.

D. MCM system will be considered defective if it does not pass test and inspections.

E. Additional tests and inspections, at Contractor's expense, are performed to determine compliance of replaced or additional work with specified requirements.

F. Prepare test and inspection reports.

3.5 CLEANING

A. Remove temporary protective coverings and strippable films as MCM panels are installed unless otherwise indicated in manufacturer's written installation instructions. On completion of installation, clean finished surfaces as recommended by MCM panel manufacturer. Maintain in a clean condition during construction.

B. After installation, clear weep holes and drainage channels of obstructions, dirt, and sealant.

3.6 PROTECTION

A. Replace MCM panels that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 074213.23

SECTION 074293 - SOFFIT PANELS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Metal soffit panels.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of panel and accessory.

B. Shop Drawings:

1. Include fabrication and installation layouts of metal panels; details of edge conditions, joints, panel profiles, corners, anchorages, attachment system, trim, flashings, closures, and accessories; and special details.
2. Accessories: Include details of flashing, trim, and anchorage systems, at a scale of not less than 1-1/2 inches per 12 inches.

C. Samples for Initial Selection: For each type of metal panel indicated with factory-applied color finishes.

1. Include similar Samples of trim and accessories involving color selection.

D. Samples for Verification: For each type of exposed finish required, prepared on Samples of size indicated below:

1. Metal Panels: 12 inches long by actual panel width. Include fasteners, closures, and other metal panel accessories.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For each product, tests performed by a qualified testing agency.

C. Sample Warranties: For special warranties.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For metal panels to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

B. UL-Certified, Portable Roll-Forming Equipment: UL-certified, portable roll-forming equipment capable of producing metal panels warranted by manufacturer to be the same as factory-formed products. Maintain UL certification of portable roll-forming equipment for duration of work.

C. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for fabrication and installation.

1. Build mockup of typical roof eave.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver components, metal panels, and other manufactured items so as not to be damaged or deformed. Package metal panels for protection during transportation and handling.

B. Unload, store, and erect metal panels in a manner to prevent bending, warping, twisting, and surface damage.

C. Stack metal panels horizontally on platforms or pallets, covered with suitable weathertight and ventilated covering. Store metal panels to ensure dryness, with positive slope for drainage of water. Do not store metal panels in contact with other materials that might cause staining, denting, or other surface damage.

D. Retain strippable protective covering on metal panels during installation.

1.9 FIELD CONDITIONS

A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit assembly of metal panels to be performed according to manufacturers' written instructions and warranty requirements.

1.10 COORDINATION

A. Coordinate metal panel installation with rain drainage work, flashing, trim, construction of walls, and other adjoining work to provide a leakproof, secure, and noncorrosive installation.

1.11 WARRANTY

A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of metal panel systems that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including rupturing, cracking, or puncturing.
b. Deterioration of metals and other materials beyond normal weathering.

2. Warranty Period: Two years from date of Substantial Completion.

B. Special Warranty on Panel Finishes: Manufacturer's standard form in which manufacturer agrees to repair finish or replace metal panels that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested according to ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Structural Performance: Provide metal panel systems capable of withstanding the effects of the following loads, based on testing according to ASTM E1592:

1. Wind Loads: As indicated on Drawings.
2. Deflection Limits: For wind loads, no greater than 1/180 the span.

B. Air Infiltration: Air leakage of not more than 0.06 cfm/sq. ft. when tested according to ASTM E283 at the following test-pressure difference:

1. Test-Pressure Difference: 1.57 lbf/sq. ft.

C. Water Penetration under Static Pressure: No water penetration when tested according to ASTM E331 at the following test-pressure difference:

1. Test-Pressure Difference: 2.86 lbf/sq. ft.

D. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes by preventing buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change (Range): 120 deg F, ambient; 180 deg F, material surfaces.

2.2 METAL SOFFIT PANELS

A. Provide metal soffit panels designed to be installed by lapping and interconnecting side edges of adjacent panels and mechanically attaching through panel to supports using concealed fasteners in side laps. Include accessories required for weathertight installation.

1. Sealant: Factory applied within interlocking joint.

B. Flush-Profile Metal Soffit Panels Solid panels formed with vertical panel edges and intermediate stiffening ribs symmetrically spaced between panel edges; with flush joint between panels.

1. Basis-of-Design Product: MBCI Artisan Series – 12” Smooth finish.

   a. Firestone.
   b. Pac-Clad.
   c. Centria.

2. Material: Metal, smooth.

3. Aluminum Sheet: Coil-coated sheet, ASTM B209, alloy as standard with manufacturer, with temper as required to suit forming operations and structural performance required.

   a. Thickness: 0.032 inch.
   b. Surface: Smooth, flat finish.
   c. Exterior Finish: Three-coat fluoropolymer.
   d. Color: As selected by Architect from manufacturer's full range. Intent is to matching existing adjacent soffit finish.

2.3 MISCELLANEOUS MATERIALS

A. Miscellaneous Metal Subframing and Furring: ASTM C645, cold-formed, metallic-coated steel sheet, ASTM A653/A653M, G90 coating designation or ASTM A792/A792M, Class AZ50 aluminum-zinc-alloy coating designation unless otherwise indicated. Provide manufacturer's standard sections as required for support and alignment of metal panel system.

B. Panel Accessories: Provide components required for a complete, weathertight panel system including trim, clips, flashings, sealants, gaskets, fillers, closure strips, and similar items. Match material and finish of metal panels unless otherwise indicated.

1. Closure Strips: Closed-cell, expanded, cellular, rubber or crosslinked, polyolefin-foam or closed-cell laminated polyethylene; minimum 1-inch- thick, flexible closure strips; cut or premolded to match metal panel profile. Provide closure strips where indicated or necessary to ensure weathertight construction.

C. Flashing and Trim: Provide flashing and trim formed from same material as metal panels as required to seal against weather and to provide finished appearance. Finish flashing and trim with same finish system as adjacent metal panels.

D. Panel Fasteners: Self-tapping screws designed to withstand design loads. Provide exposed fasteners with heads matching color of metal panels by means of plastic caps or factory-applied coating. Provide EPDM or PVC sealing washers for exposed fasteners.

E. Panel Sealants: Provide sealant types recommended by manufacturer that are compatible with panel materials, are nonstaining, and do not damage panel finish.

1. Sealant Tape: Pressure-sensitive, 100 percent solids, gray polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch wide and 1/8 inch thick.
2. Joint Sealant: ASTM C920; elastomeric polyurethane or silicone sealant; of type, grade, class, and use classifications required to seal joints in metal panels and remain weathertight; and as recommended in writing by metal panel manufacturer.
3. Butyl-Rubber-Based, Solvent-Release Sealant: ASTM C1311.

2.4 FABRICATION

A. Fabricate and finish metal panels and accessories at the factory, by manufacturer's standard procedures and processes, as necessary to fulfill indicated performance requirements demonstrated by laboratory testing. Comply with indicated profiles and with dimensional and structural requirements.

B. On-Site Fabrication: Subject to compliance with requirements of this Section, metal panels may be fabricated on-site using UL-certified, portable roll-forming equipment if panels are of same profile and warranted by manufacturer to be equal to factory-formed panels. Fabricate according to equipment manufacturer's written instructions and to comply with details shown.

C. Provide panel profile, including major ribs and intermediate stiffening ribs, if any, for full length of panel.

D. Fabricate metal panel joints with factory-installed captive gaskets or separator strips that provide a weathertight seal and prevent metal-to-metal contact, and that minimize noise from movements.

E. Sheet Metal Flashing and Trim: Fabricate flashing and trim to comply with manufacturer's recommendations and recommendations in SMACNA's "Architectural Sheet Metal Manual" that apply to design, dimensions, metal, and other characteristics of item indicated.

1. Form exposed sheet metal accessories that are without excessive oil canning, buckling, and tool marks and that are true to line and levels indicated, with exposed edges folded back to form hems.
2. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints for additional strength.
3. Seams for Other Than Aluminum: Fabricate nonmoving seams in accessories with flat-lock seams. Tin edges to be seamed, form seams, and solder.
4. Sealed Joints: Form nonexpansion, but movable, joints in metal to accommodate sealant and to comply with SMACNA standards.
5. Conceal fasteners and expansion provisions where possible. Exposed fasteners are not allowed on faces of accessories exposed to view.
6. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal recommended in writing by metal panel manufacturer.

    a. Size: As recommended by SMACNA's "Architectural Sheet Metal Manual" or metal soffit panel manufacturer for application but not less than thickness of metal being secured.

2.5 FINISHES

A. Protect mechanical and painted finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in same piece are not acceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

C. Aluminum Panels and Accessories:
1. Three-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent polyvinylidene fluoride (PVDF) resin by weight in both color coat and clear topcoat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, metal panel supports, and other conditions affecting performance of the Work.

1. Examine framing to verify that girts, angles, channels, studs, and other structural panel support members and anchorage have been installed within alignment tolerances required by metal panel manufacturer.
2. Examine sheathing to verify that sheathing joints are supported by framing or blocking and that installation is within flatness tolerances required by metal panel manufacturer.

a. Verify that air- or water-resistive barriers been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Examine roughing-in for components and systems penetrating metal panels to verify actual locations of penetrations relative to seam locations of metal panels before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Miscellaneous Supports: Install subframing, furring, and other miscellaneous panel support members and anchorages according to ASTM C754 and metal panel manufacturer's written recommendations.

1. Soffit Framing: Wire tie or clip furring channels to supports, as required to comply with requirements for assemblies indicated.

3.3 INSTALLATION

A. Install metal panels according to manufacturer's written instructions in orientation, sizes, and locations indicated. Install panels perpendicular to supports unless otherwise indicated. Anchor metal panels and other components of the Work securely in place, with provisions for thermal and structural movement.

1. Shim or otherwise plumb substrates receiving metal panels.
2. Flash and seal metal panels at perimeter of all openings. Fasten with self-tapping screws. Do not begin installation until air- or water-resistive barriers and flashings that will be concealed by metal panels are installed.
3. Install screw fasteners in predrilled holes.
4. Locate and space fastenings in uniform vertical and horizontal alignment.
5. Install flashing and trim as metal panel work proceeds.

6. Locate panel splices over, but not attached to, structural supports. Stagger panel splices and end laps to avoid a four-panel lap splice condition.
7. Provide weathertight escutcheons for pipe- and conduit-penetrating panels.

B. Fasteners:

1. Steel Panels: Use stainless steel fasteners for surfaces exposed to the exterior; use galvanized-steel fasteners for surfaces exposed to the interior.
2. Aluminum Panels: Use aluminum or stainless steel fasteners for surfaces exposed to the exterior; use aluminum or galvanized-steel fasteners for surfaces exposed to the interior.
3. Copper Panels: Use copper, stainless steel, or hardware-bronze fasteners.
4. Stainless Steel Panels: Use stainless steel fasteners.

C. Metal Protection: Where dissimilar metals contact each other or corrosive substrates, protect against galvanic action as recommended in writing by metal panel manufacturer.

D. Lap-Seam Metal Panels: Fasten metal panels to supports with fasteners at each lapped joint at location and spacing recommended by manufacturer.

1. Apply panels and associated items true to line for neat and weathertight enclosure.
2. Provide metal-backed washers under heads of exposed fasteners bearing on weather side of metal panels.
3. Locate and space exposed fasteners in uniform vertical and horizontal alignment. Use proper tools to obtain controlled uniform compression for positive seal without rupture of washer.
4. Install screw fasteners with power tools having controlled torque adjusted to compress washer tightly without damage to washer, screw threads, or panels. Install screws in predrilled holes.

E. Watertight Installation:

1. Apply a continuous ribbon of sealant or tape to seal lapped joints of metal panels, using sealant or tape as recommend by manufacturer on side laps of nesting-type panels and elsewhere as needed to make panels watertight.
2. Provide sealant or tape between panels and protruding equipment, vents, and accessories.
3. At panel splices, nest panels with minimum 6-inch end lap, sealed with sealant and fastened together by interlocking clamping plates.

F. Accessory Installation: Install accessories with positive anchorage to building and weathertight mounting, and provide for thermal expansion. Coordinate installation with flashings and other components.

1. Install components required for a complete metal panel system including trim, corners, seam covers, flashings, sealants, gaskets, fillers, closure strips, and similar items. Provide types indicated by metal panel manufacturer; or, if not indicated, provide types recommended by metal panel manufacturer.

G. Flashing and Trim: Comply with performance requirements, manufacturer's written installation instructions, and SMACNA's "Architectural Sheet Metal Manual." Provide concealed fasteners

where possible, and set units true to line and level as indicated. Install work with laps, joints, and seams that are permanently watertight.

1. Install exposed flashing and trim that is without buckling, and tool marks, and that is true to line and levels indicated, with exposed edges folded back to form hems. Install sheet metal flashing and trim to fit substrates and to achieve waterproof performance.
2. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at a maximum of 10 feet with no joints allowed within 24 inches of corner or intersection. Where lapped expansion provisions cannot be used or would not be waterproof, form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with mastic sealant (concealed within joints).

3.4 CLEANING AND PROTECTION

A. Remove temporary protective coverings and strippable films, if any, as metal panels are installed unless otherwise indicated in manufacturer's written installation instructions. On completion of metal panel installation, clean finished surfaces as recommended by metal panel manufacturer. Maintain in a clean condition during construction.

B. After metal panel installation, clear weep holes and drainage channels of obstructions, dirt, and sealant.

C. Replace metal panels that have been damaged or have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 074293

SECTION 075419 - POLYVINYL-CHLORIDE (PVC) ROOFING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Mechanically fastened (Rhinobond) polyvinyl-chloride (PVC) roofing system.
2. Roof insulation.
3. Cover board.
4. PVC coated metal flashings
5. Vapor/Air Barrier

B. Section includes the installation of insulation strips in ribs of roof deck. Insulation strips are furnished under Section 053100 "Steel Decking."

C. Related Requirements:

1. Section 024119 “Selective Demolition” for selective demolition of portions of the existing roofing system.
2. Section 061000 "Rough Carpentry" for wood nailers, curbs, and blocking; and for wood-based, roof based panels at roof.
3. Section 076200 "Sheet Metal Flashing and Trim" for metal roof flashings and counterflashings.
4. Section 079200 "Joint Sealants" for joint sealants, joint fillers, and joint preparation.
5. Section 221423 "Storm Drainage Piping Specialties" for roof drains.

1.3 DEFINITIONS

A. Roofing Terminology: Definitions in ASTM D 1079 and glossary in NRCA's "The NRCA Roofing and Waterproofing Manual" apply to work of this Section.

B. Preinstallation Roofing Conference: Conduct conference at Project site.

1. Meet with Owner, Architect, Owner's testing agency if applicable, roofing Installer, roofing system manufacturer's representative, deck Installer, and installers whose work interfaces with or affects roofing, including installers of roof accessories and roof-mounted equipment.

2. Review methods and procedures related to roofing installation, including manufacturer's written instructions.
3. Review and finalize construction schedule, and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
4. Examine deck substrate conditions and finishes for compliance with requirements, including flatness and fastening.
5. Review structural loading limitations of roof deck during and after roofing.
6. Review base flashings, special roofing details, roof drainage, roof penetrations, equipment curbs, and condition of other construction that affects roofing system.
7. Review governing regulations and requirements for insurance and certificates if applicable.
8. Review temporary protection requirements for roofing system during and after installation.
9. Review roof observation and repair procedures after roofing installation.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For roofing system. Include plans, elevations, sections, details, and attachments to other work, including:

1. Base flashings and membrane transitions to existing roofing and terminations.
2. Tapered insulation, including slopes.
3. Roof plan showing orientation locations of adhered and mechanically fastened roofing, steel roof deck and orientation of roofing, fastening spacings, and patterns for mechanically fastened roofing.
4. Insulation fastening patterns for corner, perimeter, and field-of-roof locations.

C. Samples for Verification: For the following products:

1. Sheet roofing, of color required.
2. Flashing color selections.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and manufacturer.

B. Manufacturer Certificates: Signed by roofing manufacturer certifying that roofing system complies with requirements specified in "Performance Requirements" Article.

1. Submit evidence of compliance with performance requirements.

C. Product Test Reports: For components of roofing system, for tests performed by manufacturer and witnessed by a qualified testing agency.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For roofing system to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Manufacturer Qualifications: A qualified manufacturer that is UL listed.

B. Installer Qualifications: A qualified firm that is approved, authorized, or licensed by roofing system manufacturer to install manufacturer's product and that is eligible to receive manufacturer's special warranty.

1. The Owner prefers having a single roofing subcontractor responsible for all roofing work.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, approval or listing agency markings, and directions for storing and mixing with other components.

B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.

1. Discard and legally dispose of liquid material that cannot be applied within its stated shelf life.

C. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location. Comply with insulation manufacturer's written instructions for handling, storing, and protecting during installation.

D. Handle and store roofing materials, and place equipment in a manner to avoid permanent deflection of deck.

1.9 FIELD CONDITIONS

A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.

1.10 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of roofing system that fail in materials or workmanship within specified warranty period.

1. Special warranty includes membrane roofing, base flashings, roof insulation, fasteners, cover boards, roofing accessories, and other components of roofing system.
2. Wind Speed Warranty: 120 mph. for roofing assembly over new roofs.
3. Warranty Period: 30 years from date of Substantial Completion

B. Special Project Warranty: Submit roofing Installer's warranty, on warranty form at end of this Section, signed by Installer, covering the Work of this Section, including all components of roofing system such as membrane roofing, base flashing, roof insulation, fasteners, cover boards, substrate boards, vapor retarders, roof pavers, and walkway products, for the following warranty period:

1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. General Performance: Installed roofing and base flashings shall withstand specified uplift pressures, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Roofing and base flashings shall remain watertight.

B. Material Compatibility: Roofing materials shall be compatible with one another and adjacent materials under conditions of service and application required, as demonstrated by roofing manufacturer based on testing and field experience.

C. FM Global Listing: Roofing, base flashings, and component materials shall comply with requirements in FM Global 4450 or FM Global 4470 as part of a built-up roofing system, and shall be listed in FM Global's "RoofNav" for Class 1 or noncombustible construction, as applicable. Identify materials with FM Global markings.

1. Fire/Windstorm Classification: Class 1A-90.
2. Hail-Resistance Rating: SH.

D. Energy Star Listing: Roofing system shall be listed on the DOE's ENERGY STAR "Roof Products Qualified Product List" for low-slope roof products.

2.2 PVC ROOFING

A. PVC Sheet: ASTM D 5635, ASTM D 2136, ASTM D 5602, ASTM D 4434/D 4434M, Type III, polyester reinforced scrim near the center of the sheet (36 mils minimum polymer above the scrim).

1. Manufacturers: Subject to compliance with requirements, provide products by:
   a. Carlisle Syntec; Sureflex Kee HP or Sureflex 80 mil reinforced
   b. Johns Manville; Kee HP
   c. Sika Sarnafil; S327

2. Thickness: 80 mil (76 mm).

3. Exposed Face Color: White.

2.3 AUXILIARY ROOFING MATERIALS

A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with roofing.

1. Liquid-type auxiliary materials shall comply with VOC limits of authorities having jurisdiction.

B. Sheet Flashing: Manufacturer's standard sheet flashing of same material, type, reinforcement, thickness, and color as PVC sheet.

C. Metal Termination Bars: Manufacturer's standard, predrilled stainless-steel or aluminum bars, approximately 1 by 1/8 inch thick; with anchors.

D. Metal Battens: Manufacturer's standard, aluminum-zinc-alloy-coated or zinc-coated steel sheet, approximately 1 inch wide by 0.05 inch thick, prepunched.

E. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Global 4470, designed for fastening roofing to substrate, and acceptable to roofing system manufacturer.

1. Cover board anchors: Rhinobond anchors with polymer coated round top plates for induction welding, or approved equal by the roof system manufacturer.

F. Miscellaneous Accessories: Provide pourable sealers, preformed cone and vent sheet flashings, preformed inside and outside corner sheet flashings, T-joint covers, lap sealants, termination reglets, and other accessories.

1. PVC coated metal made from a flexible non-reinforced polyvinyl-chloride membrane factory laminated to hot-dipped galvanized steel.
2. Color: White if covered – Provide full range of colors to match metal soffit and wall panels, or provide an acceptable cover metal to match soffit/wall panel colors.
3. Sheet Metal Type: Gauge determined by roof manufacturer to meet wind uplift and design requirements. Provide G-90 hot dipped galvanized steel.
4. Length: 10'
5. Width: As required for project conditions.

2.4 ROOF INSULATION

A. General: Preformed roof insulation boards manufactured or approved by PVC roofing manufacturer, selected from manufacturer's standard sizes suitable for application, of thicknesses indicated and that produce FM Global-approved roof insulation.

B. Polyisocyanurate Board Insulation: ASTM C 1289, Type II, Class 1, Grade 2, felt or glass-fiber mat facer on both major surfaces.

C. Tapered Insulation: Provide factory-tapered insulation boards fabricated to slope of 1/4 inch per 12 inches unless otherwise indicated.

D. Provide preformed saddles, crickets, tapered edge strips, and other insulation shapes where indicated for sloping to drain. Fabricate to slopes indicated or required to provide positive slope to drain.

2.5 INSULATION ACCESSORIES

A. General: Roof insulation accessories recommended by insulation manufacturer for intended use and compatibility with roofing.

B. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Global 4470, designed for fastening roof insulation and cover boards to substrate, and acceptable to roofing system manufacturer.

C. Insulation Adhesive: Insulation manufacturer's recommended adhesive formulated to attach roof insulation to substrate or to another insulation layer as follows:

1. Modified Asphaltic, asbestos-free, cold-applied adhesive.
2. Bead-applied, low-rise, one-component or multi-component urethane adhesive.
3. Full-spread, spray-applied, low-rise, two-component urethane adhesive.

D. Cover Board: ASTM C 1177/C 1177M, glass mat, water resistant gypsum substrate, ¼" thick at vertical parapet surfaces and ½ inch thick at horizontal roofing surfaces. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to the following:

1. CertainTeed Corporation: GlassRoc Sheathing.
2. Georgia-Pacific Corporation: Dens Deck Prime.
3. USG Corporation: Secureock Glassmat Roof Board.

E. Fasteners: Rhinobond, as specified.

2.6 WALKWAYS

A. Flexible Walkways: Factory-formed, nonporous, heavy-duty, slip-resisting, surface-textured walkway rolls, approximately 3/16 inch thick and acceptable to roofing system manufacturer.

2.7 VAPOR/AIR BARRIER

A. Sarnavap – 10. Locations are on areas where there will be new metal deck installed.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance of the Work:

1. Verify that roof openings and penetrations are in place, curbs are set and braced, and roof-drain bodies are securely clamped in place.
2. Verify that wood blocking, curbs, and nailers are securely anchored to roof deck at penetrations and terminations and that nailers match thicknesses of insulation.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 SELECTIVE DEMOLITION AND PARTIAL ROOF REMOVAL

A. Remove the existing roof system, flashing and accessories completely, unless noted otherwise, and disposed of in accordance with local health and safety requirements. Review Owner's hazardous materials reports and documents prior to beginning demolition.

3.3 PREPARATION

A. Clean substrate of dust, debris, moisture, and other substances detrimental to roofing installation according to roofing system manufacturer's written instructions. Remove sharp projections.

B. Prevent materials from entering and clogging roof drains and conductors and from spilling or migrating onto surfaces of other construction. Remove roof-drain plugs when no work is taking place or when rain is forecast.

C. Install insulation strips according to acoustical roof deck manufacturer's written instructions.

3.4 ROOFING INSTALLATION, GENERAL

A. Install roofing system according to roofing system manufacturer's written instructions.

B. Complete terminations and base flashings and provide temporary seals to prevent water from entering completed sections of roofing system at end of workday or when rain is forecast. Remove and discard temporary seals before beginning work on adjoining roofing.

C. Install roofing and auxiliary materials to tie in to existing roofing to maintain weathertightness of transition and to not void warranty for existing roofing system.

3.5 INSULATION INSTALLATION

A. Coordinate installing roofing system components so insulation is not exposed to precipitation or left exposed at the end of the workday.

B. Comply with roofing system and insulation manufacturer's written instructions for installing roof insulation.

C. Installation Over Metal Decking:

1. Install base layer of insulation with joints staggered not less than 24 inches in adjacent rows and with long joints continuous at right angle to flutes of decking.

    a. Locate end joints over crests of decking.
    b. Where installing composite and noncomposite insulation in two or more layers, install noncomposite board insulation for bottom layer and intermediate layers, if applicable, and install composite board insulation for top layer.
    c. Trim insulation neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks.
    d. Make joints between adjacent insulation boards not more than 1/4 inch in width.
    e. At internal roof drains, slope insulation to create a square drain sump with each side equal to the diameter of the drain bowl plus 24 inches.

        1) Trim insulation so that water flow is unrestricted.

    f. Fill gaps exceeding 1/4 inch with insulation.
    g. Cut and fit insulation within 1/4 inch of nailers, projections, and penetrations.
    h. Loosely lay base layer of insulation units over substrate.
    i. Mechanically attach base layer of insulation and substrate board using mechanical fasteners specifically designed and sized for fastening specified board-type roof insulation to metal decks.

        1) Fasten insulation according to requirements in FM Approvals' RoofNav for specified Windstorm Resistance Classification.
        2) Fasten insulation to resist specified uplift pressure at corners, perimeter, and field of roof.

2. Install upper layers of insulation and tapered insulation with joints of each layer offset not less than 12 inches from previous layer of insulation.

    a. Staggered end joints within each layer not less than 24 inches in adjacent rows.
    b. Install with long joints continuous and with end joints staggered not less than 12 inches in adjacent rows.
    c. Trim insulation neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks.
    d. Make joints between adjacent insulation boards not more than 1/4 inch in width.
    e. At internal roof drains, slope insulation to create a square drain sump with each side equal to the diameter of the drain bowl plus 24 inches.

f. Trim insulation so that water flow is unrestricted.
g. Fill gaps exceeding 1/4 inch with insulation.
h. Cut and fit insulation within 1/4 inch of nailers, projections, and penetrations.
i. Loosely lay each layer of insulation units over substrate.
j. Adhere each layer of insulation to substrate using adhesive according to FM Approvals' RoofNav assembly requirements and FM Global Property Loss Prevention Data Sheet 1-29 for specified Windstorm Resistance Classification, as follows:

1) Set each layer of insulation in a solid mopping of hot roofing asphalt, applied within plus or minus 25 deg F of equiviscous temperature.
2) Set each layer of insulation in ribbons of bead-applied insulation adhesive, firmly pressing and maintaining insulation in place.
3) Set each layer of insulation in a uniform coverage of full-spread insulation adhesive, firmly pressing and maintaining insulation in place.

3.6 INSTALLATION OF COVER BOARDS

A. Install cover boards over insulation with long joints in continuous straight lines with end joints staggered between rows. Offset joints of insulation below a minimum of 6 inches (150 mm) in each direction.

1. Trim cover board neatly to fit around penetrations and projections, and to fit tight to intersecting sloping roof decks.
2. At internal roof drains, conform to slope of drain sump.

a. Trim cover board so that water flow is unrestricted.

3. Cut and fit cover board tight to nailers, projections, and penetrations.
4. Adhere cover board to substrate using adhesive according to FM Approvals' RoofNav assembly requirements and FM Global Property Loss Prevention Data Sheet 1-29 for specified Windstorm Resistance Classification, as follows:

a. Set cover board in a solid mopping of hot roofing asphalt, applied within plus or minus 25 deg F (14 deg C) of equiviscous temperature.
b. Set cover board in ribbons of bead-applied insulation adhesive, firmly pressing and maintaining insulation in place.
c. Set cover board in a uniform coverage of full-spread insulation adhesive, firmly pressing and maintaining insulation in place.

B. Install slip sheet over cover board and immediately beneath roof membrane.

3.7 ADHERED ROOFING INSTALLATION

A. Adhere roof membrane over area to receive roofing according to roofing system manufacturer's written instructions.

B. Unroll roof membrane and allow to relax before installing.

C. Start installation of roofing in presence of roofing system manufacturer's technical personnel and Owner's testing and inspection agency.

D. Accurately align roof membrane, and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.

E. Bonding Adhesive: Apply to substrate and underside of roof membrane at rate required by manufacturer, and allow to partially dry before installing roof membrane. Do not apply to splice area of roof membrane.

F. Fabric-Backed Roof Membrane Adhesive: Apply to substrate at rate required by manufacturer, and install fabric-backed roof membrane.

G. In addition to adhering, mechanically fasten roof membrane securely at terminations, penetrations, and perimeter of roofing.

H. Apply roof membrane with side laps shingled with slope of roof deck where possible.

I. Seams: Clean seam areas, overlap roofing, and hot-air weld side and end laps of roof membrane and sheet flashings to ensure a watertight seam installation.

J. Test lap edges with probe to verify seam weld continuity. Apply lap sealant to seal cut edges of roof membrane and sheet flashings.

K. Verify field strength of seams a minimum of twice daily, and repair seam sample areas.

L. Repair tears, voids, and lapped seams in roof membrane that do not comply with requirements.

M. Spread sealant bed over deck-drain flange at roof drains, and securely seal roof membrane in place with clamping ring.

3.8 MECHANICALLY FASTENED ROOFING INSTALLATION

A. Mechanically fasten roofing over area to receive roofing according to roofing system manufacturer's written instructions. Unroll roofing and allow to relax before retaining.

1. Install sheet according to ASTM D 5082.
2. For in-splice attachment, install roofing with long dimension perpendicular to steel roof deck flutes.

B. Start installation of roofing in presence of roofing system manufacturer's technical personnel.

C. Accurately align roofing, and maintain uniform side and end laps of minimum dimensions required by manufacturer. Stagger end laps.

D. Mechanically fasten or adhere roofing securely at terminations, penetrations, and perimeter of roofing.

E. Apply roofing with side laps shingled with slope of roof deck where possible.

F. In-Seam Attachment: Secure one edge of PVC sheet using fastening plates or metal battens centered within seam, and mechanically fasten PVC sheet to roof deck.

G. Seams: Clean seam areas, overlap roofing, and hot-air weld side and end laps of roofing and sheet flashings according to manufacturer's written instructions to ensure a watertight seam installation.

1. Test lap edges with probe to verify seam weld continuity. Apply lap sealant to seal cut edges of sheet.
2. Verify field strength of seams a minimum of twice daily, and repair seam sample areas.
3. Repair tears, voids, and lapped seams in roofing that do not comply with requirements.

H. Spread sealant bed over deck-drain flange at roof drains, and securely seal roofing in place with clamping ring.

3.9 BASE FLASHING INSTALLATION

A. Install sheet flashings and preformed flashing accessories, and adhere to substrates according to roofing system manufacturer's written instructions.

B. Apply bonding adhesive to substrate and underside of sheet flashing at required rate, and allow to partially dry. Do not apply to seam area of flashing.

C. Flash penetrations and field-formed inside and outside corners with cured or uncured sheet flashing.

D. Clean seam areas, overlap, and firmly roll sheet flashings into the adhesive. Hot-air weld side and end laps to ensure a watertight seam installation.

E. Terminate and seal top of sheet flashings and mechanically anchor to substrate through termination bars.

3.10 WALKWAY INSTALLATION

A. Flexible Walkways: Install walkway products in locations indicated. Heat weld to substrate or adhere walkway products to substrate with compatible adhesive according to roofing system manufacturer's written instructions.

B. Roof-Paver Walkways: Install walkway roof pavers according to manufacturer's written instructions in locations required to form walkways or as indicated. Leave 3 inches of space between adjacent roof pavers.

3.11 FIELD QUALITY CONTROL

A. Coordinate the work with the Owner's roofing department and quality control representatives and cooperate and respond to their review and communications.

B. Testing Agency: Owner may engage a qualified testing agency to inspect substrate conditions, surface preparation, membrane application, flashings, protection, and drainage components, and to furnish reports to Owner.

C. Final Roof Inspection: Arrange for roofing system manufacturer's technical personnel to inspect roofing installation on completion.

D. Repair or remove and replace components of roofing system where inspections indicate that they do not comply with specified requirements.

3.12 PROTECTING AND CLEANING

A. Protect roofing system from damage and wear during remainder of construction period. When remaining construction does not affect or endanger roofing, inspect roofing for deterioration and damage, describing its nature and extent in a written report, with copies to Architect and Owner.

B. Correct deficiencies in or remove roofing system that does not comply with requirements, repair substrates, and repair or reinstall roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.

C. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

3.13 ROOFING INSTALLER'S WARRANTY

A. WHEREAS _____ of _____, herein called the "Roofing Installer," has performed roofing and associated work ("work") on the following project:

1. Owner: Granite School District.
2. Address: 2500 South State Street, Salt Lake City, Utah 84115
3. Building Name/Type: Vista Elementary School
4. Address: 4925 South 2200 West
5. Area of Work: Administration Building Addition
6. Acceptance Date: _____.
7. Warranty Period: <**Insert time**>.
8. Expiration Date: _____.

B. AND WHEREAS Roofing Installer has contracted (either directly with Owner or indirectly as a subcontractor) to warrant said work against leaks and faulty or defective materials and workmanship for designated Warranty Period,

C. NOW THEREFORE Roofing Installer hereby warrants, subject to terms and conditions herein set forth, that during Warranty Period he will, at his own cost and expense, make or cause to be made such repairs to or replacements of said work as are necessary to correct faulty and defective work and as are necessary to maintain said work in a watertight condition.

D. This Warranty is made subject to the following terms and conditions:

1. Specifically excluded from this Warranty are damages to work and other parts of the building, and to building contents, caused by:

    a. lightning;
    b. peak gust wind speed exceeding 120 mph;
    c. fire;
    d. failure of roofing system substrate, including cracking, settlement, excessive deflection, deterioration, and decomposition;
    e. faulty construction of parapet walls, copings, chimneys, skylights, vents, equipment supports, and other edge conditions and penetrations of the work;
    f. vapor condensation on bottom of roofing; and
    g. activity on roofing by others, including construction contractors, maintenance personnel, other persons, and animals, whether authorized or unauthorized by Owner.

2. When work has been damaged by any of foregoing causes, Warranty shall be null and void until such damage has been repaired by Roofing Installer and until cost and expense thereof have been paid by Owner or by another responsible party so designated.
3. Roofing Installer is responsible for damage to work covered by this Warranty but is not liable for consequential damages to building or building contents resulting from leaks or faults or defects of work.
4. During Warranty Period, if Owner allows alteration of work by anyone other than Roofing Installer, including cutting, patching, and maintenance in connection with penetrations, attachment of other work, and positioning of anything on roof, this Warranty shall become null and void on date of said alterations, but only to the extent said alterations affect work covered by this Warranty. If Owner engages Roofing Installer to perform said alterations, Warranty shall not become null and void unless Roofing Installer, before starting said work, shall have notified Owner in writing, showing reasonable cause for claim, that said alterations would likely damage or deteriorate work, thereby reasonably justifying a limitation or termination of this Warranty.
5. During Warranty Period, if original use of roof is changed and it becomes used for, but was not originally specified for, a promenade, work deck, spray-cooled surface, flooded basin, or other use or service more severe than originally specified, this Warranty shall become null and void on date of said change, but only to the extent said change affects work covered by this Warranty.

6. Owner shall promptly notify Roofing Installer of observed, known, or suspected leaks, defects, or deterioration and shall afford reasonable opportunity for Roofing Installer to inspect work and to examine evidence of such leaks, defects, or deterioration.
7. This Warranty is recognized to be the only warranty of Roofing Installer on said work and shall not operate to restrict or cut off Owner from other remedies and resources lawfully available to Owner in cases of roofing failure. Specifically, this Warranty shall not operate to relieve Roofing Installer of responsibility for performance of original work according to requirements of the Contract Documents, regardless of whether Contract was a contract directly with Owner or a subcontract with Owner's General Contractor.

E. IN WITNESS THEREOF, this instrument has been duly executed this _____ day of _____, _____.

1. Authorized Signature: _____.
2. Name: _____.
3. Title: _____.

END OF SECTION 075419

SECTION 076200 - SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Manufactured reglets with counterflashing.
2. Formed wall sheet metal fabrications.

B. Related Requirements:

1. Section 061000 "Rough Carpentry" for wood nailers, curbs, and blocking.
2. Section 074213.23 –"Metal Composite Material Wall Panels" for exposed composite metal cap flashing at new entry roof canopy.

1.3 COORDINATION

A. Coordinate sheet metal flashing and trim layout and seams with sizes and locations of penetrations to be flashed, and joints and seams in adjacent materials.

B. Coordinate sheet metal flashing and trim installation with adjoining roofing and wall materials, joints, and seams to provide leakproof, secure, and noncorrosive installation.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review construction schedule. Verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
2. Review special details and condition of other construction that affect sheet metal flashing and trim.
3. Review requirements for insurance and certificates if applicable.
4. Review sheet metal flashing observation and repair procedures after flashing installation.

1.5 ACTION SUBMITTALS

A. Product Data: For each of the following

1. Elastomeric sealant.

2. Butyl sealant.
3. Epoxy seam sealer.

B. Shop Drawings: For sheet metal flashing and trim.

1. Include plans, elevations, sections, and attachment details.
2. Detail fabrication and installation layouts, expansion-joint locations, and keyed details. Distinguish between shop- and field-assembled Work.
3. Include identification of material, thickness, weight, and finish for each item and location in Project.
4. Include details for forming, including profiles, shapes, seams, and dimensions.
5. Include details for joining, supporting, and securing, including layout and spacing of fasteners, cleats, clips, and other attachments. Include pattern of seams.
6. Include details of termination points and assemblies.
7. Include details of special conditions.
8. Include details of connections to adjoining work.
9. Detail formed flashing and trim at scale of not less than 1-1/2 inches per 12 inches

C. Samples: For each exposed product and for each color and texture specified, 12 inches long by actual width.

D. Samples for Verification: For each type of exposed finish.

1. Sheet Metal Flashing: 12 inches long by actual width of unit, including finished seam and in required profile. Include fasteners, cleats, clips, closures, and other attachments.
2. Trim, Metal Closures, Expansion Joints, Joint Intersections, and Miscellaneous Fabrications: 12 inches long and in required profile. Include fasteners and other exposed accessories.
3. Unit-Type Accessories and Miscellaneous Materials: Full-size Sample.
4. Anodized Aluminum Samples: Samples to show full range to be expected for each color required.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

B. Product Test Reports: For each product, for tests performed by a qualified testing agency.

C. Evaluation Reports: For copings and roof edge flashing, from ICC-ES showing compliance with ANSI/SPRI/FM 4435/ES-1.

D. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For sheet metal flashing and trim, and its accessories, to include in maintenance manuals.

B. Special warranty.

1.8 QUALITY ASSURANCE

A. Fabricator Qualifications: Employs skilled workers who custom fabricate sheet metal flashing and trim similar to that required for this Project and whose products have a record of successful in-service performance.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for fabrication and installation.

1. Build mockup of typical roof wall to window jamb flashing, including approximately 9 feet long, including supporting construction cleats, seams, attachments, underlayment, and accessories.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Owner specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Do not store sheet metal flashing and trim materials in contact with other materials that might cause staining, denting, or other surface damage.

1. Store sheet metal flashing and trim materials away from uncured concrete and masonry.
2. Protect stored sheet metal flashing and trim from contact with water.

B. Protect strippable protective covering on sheet metal flashing and trim from exposure to sunlight and high humidity, except to extent necessary for period of sheet metal flashing and trim installation.

1.10 WARRANTY

A. Special Warranty on Finishes: Manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Delta E units when tested in accordance with ASTM D2244.
b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Sheet metal flashing and trim assemblies, including cleats, anchors, and fasteners, shall withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight.

B. Sheet Metal Standard for Flashing and Trim: Comply with SMACNA's "Architectural Sheet Metal Manual" requirements for dimensions and profiles shown unless more stringent requirements are indicated.

C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 SHEET METALS

A. Protect mechanical and other finishes on exposed surfaces from damage by applying strippable, temporary protective film before shipping.

B. Aluminum Sheet: ASTM B209, alloy as standard with manufacturer for finish required, with temper as required to suit forming operations and performance required; with smooth, flat surface.

1. As-Milled Finish: Standard one-side bright.
2. Clear Anodic Finish, Coil Coated: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

2.3 MISCELLANEOUS MATERIALS

A. Provide materials and types of fasteners protective coatings, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and as recommended by manufacturer of primary sheet metal or manufactured item unless otherwise indicated.

B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal or manufactured item.

1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.

a. Blind Fasteners: High-strength aluminum or stainless steel rivets suitable for metal being fastened.

2. Fasteners for Aluminum Sheet: Aluminum or Series 300 stainless steel.

C. Sealant Tape: Pressure-sensitive, 100 percent solids, polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch wide and 1/8 inch thick.

D. Elastomeric Sealant: ASTM C920, elastomeric silicone polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.

E. Butyl Sealant: ASTM C1311, single-component, solvent-release butyl rubber sealant; polyisobutylene plasticized; heavy bodied for hooked-type expansion joints with limited movement.

F. Epoxy Seam Sealer: Two-part, noncorrosive, aluminum seam-cementing compound, recommended by aluminum manufacturer for exterior nonmoving joints, including riveted joints.

G. Bituminous Coating: Cold-applied asphalt emulsion in accordance with ASTM D1187/D1187M.

H. Reglets: Units of type, material, and profile required, formed to provide secure interlocking of separate reglet and counterflashing pieces, and compatible with flashing indicated with factory-mitered and -welded corners and junctions and with interlocking counterflashing on exterior face, of same metal as reglet.

1. Source Limitations: Obtain reglets from single source from single manufacturer.
2. Material: Aluminum, 0.024 inch thick.
3. Surface-Mounted Type: Provide with slotted holes for fastening to substrate, with neoprene or other suitable weatherproofing washers, and with channel for sealant at top edge.
4. Concrete Type: Provide temporary closure tape to keep reglet free of concrete materials, special fasteners for attaching reglet to concrete forms, and guides to ensure alignment of reglet section ends.
5. Accessories:

a. Flexible-Flashing Retainer: Provide resilient plastic or rubber accessory to secure flexible flashing in reglet where clearance does not permit use of standard metal counterflashing or where Drawings show reglet without metal counterflashing.

6. Finish: Clear Anodic Finish, Coil Coated: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

2.4 FABRICATION, GENERAL

A. Custom fabricate sheet metal flashing and trim to comply with details indicated and recommendations in cited sheet metal standard that apply to design, dimensions, geometry, metal thickness, and other characteristics of item required.

1. Fabricate sheet metal flashing and trim in shop to greatest extent possible.
2. Fabricate sheet metal flashing and trim in thickness or weight needed to comply with performance requirements, but not less than that specified for each application and metal.
3. Verify shapes and dimensions of surfaces to be covered and obtain field measurements for accurate fit before shop fabrication.
4. Form sheet metal flashing and trim to fit substrates without excessive oil-canning, buckling, and tool marks; true to line, levels, and slopes; and with exposed edges folded back to form hems.
5. Conceal fasteners and expansion provisions where possible. Do not use exposed fasteners on faces exposed to view.

B. Fabrication Tolerances:

1. Fabricate sheet metal flashing and trim that is capable of installation to a tolerance of 1/4 inch in 20 feet on slope and location lines indicated on Drawings and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

C. Sealant Joints: Where movable, nonexpansion-type joints are required, form metal in accordance with cited sheet metal standard to provide for proper installation of elastomeric sealant.

D. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.

E. Seams:

1. Seams for Aluminum: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with epoxy seam sealer. Rivet joints where necessary for strength.

F. Do not use graphite pencils to mark metal surfaces.

2.5 WALL SHEET METAL FABRICATIONS

A. Through-Wall Flashing: Fabricate continuous flashings in minimum 96-inch- long, but not exceeding 12-foot- long, sections, under copings, and at shelf angles. Fabricate discontinuous lintel, sill, and similar flashings to extend 6 inches beyond each side of wall openings; and form with 2-inch- high, end dams. Fabricate from the following materials:

1. Stainless Steel: 0.0156 inch thick.

B. Opening Flashings in Frame Construction: Fabricate head, sill, jamb, and similar flashings to extend 4 inches beyond wall openings. Form head and sill flashing with 2-inch- high, end dams. Fabricate from the following materials:

1. Aluminum: 0.0508 inch thick.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with installer present, for compliance with requirements for installation tolerances, substrate, and other conditions affecting performance of the Work.

1. Verify compliance with requirements for installation tolerances of substrates.
2. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored.
3. Verify that air- or water-resistant barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

A. Install sheet metal flashing and trim to comply with details indicated and recommendations of cited sheet metal standard that apply to installation characteristics required unless otherwise indicated on Drawings.

1. Install fasteners, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.
2. Install sheet metal flashing and trim true to line, levels, and slopes. Provide uniform, neat seams with minimum exposure of welds and sealant.
3. Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement.
4. Install sheet metal flashing and trim to fit substrates and to result in watertight performance.
5. Install continuous cleats with fasteners spaced not more than 12 inches o.c.
6. Space individual cleats not more than 12 inches apart. Attach each cleat with at least two fasteners. Bend tabs over fasteners.
7. Install exposed sheet metal flashing and trim with limited oil-canning, and free of buckling and tool marks.
8. Do not field cut sheet metal flashing and trim by torch.
9. Do not use graphite pencils to mark metal surfaces.

B. Metal Protection: Where dissimilar metals contact each other, or where metal contacts pressure-treated wood or other corrosive substrates, protect against galvanic action or corrosion by painting contact surfaces with bituminous coating or by other permanent separation as recommended by sheet metal manufacturer or cited sheet metal standard.

1. Coat concealed side of uncoated-aluminum and stainless steel sheet metal flashing and trim with bituminous coating where flashing and trim contact wood, ferrous metal, or cementitious construction.

C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim.

1. Space movement joints at maximum of 10 feet with no joints within 24 inches of corner or intersection.
2. Form expansion joints of intermeshing hooked flanges, not less than 1 inch deep, filled with sealant concealed within joints.
3. Use lapped expansion joints only where indicated on Drawings.

D. Fasteners: Use fastener sizes that penetrate substrate not less than recommended by fastener manufacturer to achieve maximum pull-out resistance.

E. Conceal fasteners and expansion provisions where possible in exposed work and locate to minimize possibility of leakage. Cover and seal fasteners and anchors as required for a tight installation.

F. Seal joints as required for watertight construction.

1. Use sealant-filled joints unless otherwise indicated.

a. Embed hooked flanges of joint members not less than 1 inch into sealant.
b. Form joints to completely conceal sealant.
c. When ambient temperature at time of installation is between 40 and 70 deg F, set joint members for 50 percent movement each way.
d. Adjust setting proportionately for installation at higher ambient temperatures.

1) Do not install sealant-type joints at temperatures below 40 deg F.

2. Prepare joints and apply sealants to comply with requirements in Section 079200 "Joint Sealants."

G. Rivets: Rivet joints in uncoated aluminum where necessary for strength.

3.3 INSTALLATION OF WALL FLASHINGS

A. Install sheet metal wall flashing to intercept and exclude penetrating moisture in accordance with cited sheet metal standard unless otherwise indicated. Coordinate installation of wall flashing with installation of wall-opening components such as windows, doors, and louvers.

B. Opening Flashings in Frame Construction: Install continuous head, sill, jamb, and similar flashings to extend 4 inches beyond wall openings.

C. Reglets: Installation of reglets is specified in Section 033000 "Cast-in-Place Concrete."

3.4 INSTALLATION TOLERANCES

A. Installation Tolerances: Shim and align sheet metal flashing and trim within installed tolerance of 1/4 inch in 20 feet on slope and location lines indicated on Drawings and within 1/8-inch offset of adjoining faces and of alignment of matching profiles.

3.5 CLEANING

A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.

B. Clean and neutralize flux materials. Clean off excess solder.

C. Clean off excess sealants.

3.6 PROTECTION

A. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions.

B. On completion of sheet metal flashing and trim installation, remove unused materials and clean finished surfaces as recommended in writing by sheet metal flashing and trim manufacturer.

C. Maintain sheet metal flashing and trim in clean condition during construction.

D. Replace sheet metal flashing and trim that have been damaged or that have deteriorated beyond successful repair by finish touchup or similar minor repair procedures, as determined by Architect.

END OF SECTION 076200

SECTION 078413 - PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Penetrations in fire-resistance-rated walls.
2. Penetrations in horizontal assemblies.
3. Penetrations in smoke barriers.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Product Schedule: For each penetration firestopping system. Include location, illustration of firestopping system, and design designation of qualified testing and inspecting agency.

1. Engineering Judgments: Where Project conditions require modification to a qualified testing and inspecting agency's illustration for a particular penetration firestopping system, submit illustration, with modifications marked, approved by penetration firestopping system manufacturer's fire-protection engineer as an engineering judgment or equivalent fire-resistance-rated assembly. Obtain approval of authorities having jurisdiction prior to submittal.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Test Reports: For each penetration firestopping system, for tests performed by a qualified testing agency.

1.5 CLOSEOUT SUBMITTALS

A. Installer Certificates: From Installer indicating that penetration firestopping systems have been installed in compliance with requirements and manufacturer's written instructions.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991, "Approval of Firestop Contractors," or been evaluated by UL and found to comply with its "Qualified Firestop Contractor Program Requirements."

B. Fire-Test-Response Characteristics: Penetration firestopping shall comply with the following requirements:

1. Penetration firestopping is identical to those tested per testing standard referenced in "Penetration Firestopping" Article. Provide rated systems complying with the following requirements:

a. Penetration firestopping products bear classification marking of qualified testing and inspecting agency.
b. Classification markings on penetration firestopping correspond to designations listed by the following:

1) UL in its "Fire Resistance Directory."

1.7 PROJECT CONDITIONS

A. Environmental Limitations: Do not install penetration firestopping system when ambient or substrate temperatures are outside limits permitted by penetration firestopping system manufacturers or when substrates are wet because of rain, frost, condensation, or other causes.

B. Install and cure penetration firestopping materials per manufacturer's written instructions using natural means of ventilations or, where this is inadequate, forced-air circulation.

1.8 COORDINATION

A. Coordinate construction of openings and penetrating items to ensure that penetration firestopping systems can be installed according to specified firestopping system design.

B. Coordinate sizing of sleeves, openings, core-drilled holes, or cut openings to accommodate penetration firestopping systems.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics:

1. Perform penetration firestopping system tests by a qualified testing agency acceptable to authorities having jurisdiction.

2.2 PENETRATION FIRESTOPPING SYSTEMS

A. Penetration Firestopping Systems: Systems that resist spread of fire, passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated. Penetration firestopping systems shall be compatible with one another, with the substrates forming openings, and with penetrating items if any.

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

a. A/D Fire Protection Systems, Inc.
b. Grace Construction Products.
c. Hilti, Inc.
d. Johns Mansville.
e. Nelson Firestop Products.
f. NUCO, Inc.
g. Passive Fire Protection Partners.
h. RectorSeal Corporation.
i. Specified Technologies, Inc.
j. 3M Fire Protection Products.
k. Tremco Inc.; Tremco Fire Protection Systems Group.
l. USG Corporation.

B. Penetrations in Fire-Resistance-Rated Walls: Penetration firestopping systems with ratings determined per ASTM E 814 or UL 1479, based on testing at a positive pressure differential of 0.01-inch wg.

1. F-Rating: Not less than the fire-resistance rating of constructions penetrated.

C. Provide penetration firestopping that is produced and installed to resist spread of fire according to requirements indicated, resist passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated. Penetration firestopping systems shall be compatible with one another, with the substrates forming openings, and with penetrating items if any.

D. Penetrations in Horizontal Assemblies: Penetration firestopping systems with ratings determined per ASTM E 814 or UL 1479, based on testing at a positive pressure differential of 0.01-inch wg.

1. F-Rating: At least one hour, but not less than the fire-resistance rating of constructions penetrated.
2. T-Rating: At least one hour, but not less than the fire-resistance rating of constructions penetrated except for floor penetrations within the cavity of a wall.
3. W-Rating: Provide penetration firestopping systems showing no evidence of water leakage when tested according to UL 1479.

E. Penetrations in Smoke Barriers: Penetration firestopping systems with ratings determined per UL 1479, based on testing at a positive pressure differential of 0.30-inch wg.

1. L-Rating: Not exceeding 5.0 cfm/sq. ft. of penetration opening at and no more than 50-cfm cumulative total for any 100 sq. ft. at both ambient and elevated temperatures.

F. Exposed Penetration Firestopping Systems: Flame-spread and smoke-developed indexes of less than 25 and 450, respectively, per ASTM E 84.

G. VOC Content: Penetration firestopping sealants and sealant primers shall comply with the following limits for VOC content:

1. Sealants: 250 g/L.
2. Sealant Primers for Nonporous Substrates: 250 g/L.
3. Sealant Primers for Porous Substrates: 775 g/L.

H. Accessories: Provide components for each penetration firestopping system that are needed to install fill materials and to maintain ratings required. Use only those components specified by penetration firestopping system manufacturer and approved by qualified testing and inspecting agency for conditions indicated.

1. Permanent forming/damming/backing materials.
2. Substrate primers.
3. Collars.
4. Steel sleeves.

2.3 FILL MATERIALS

A. Latex Sealants: Single-component latex formulations that do not re-emulsify after cure during exposure to moisture.

B. Firestop Devices: Factory-assembled collars formed from galvanized steel and lined with intumescent material sized to fit specific diameter of penetrant.

C. Intumescent Composite Sheets: Rigid panels consisting of aluminum-foil-faced intumescent elastomeric sheet bonded to galvanized-steel sheet.

D. Intumescent Putties: Nonhardening, water-resistant, intumescent putties containing no solvents or inorganic fibers.

E. Intumescent Wrap Strips: Single-component intumescent elastomeric sheets with aluminum foil on one side.

F. Mortars: Prepackaged dry mixes consisting of a blend of inorganic binders, hydraulic cement, fillers and lightweight aggregate formulated for mixing with water at Project site to form a nonshrinking, homogeneous mortar.

G. Pillows/Bags: Reusable heat-expanding pillows/bags consisting of glass-fiber cloth cases filled with a combination of mineral-fiber, water-insoluble expansion agents, and fire-retardant additives. Where exposed, cover openings with steel-reinforcing wire mesh to protect pillows/bags from being easily removed.

H. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.

I. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants.

2.4 MIXING

A. Penetration Firestopping Materials: For those products requiring mixing before application, comply with penetration firestopping system manufacturer's written instructions for accurate proportioning of materials, water (if required), type of mixing equipment, selection of mixer speeds, mixing containers, mixing time, and other items or procedures needed to produce products of uniform quality with optimum performance characteristics for application indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Installer present, for compliance with requirements for opening configurations, penetrating items, substrates, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Cleaning: Before installing penetration firestopping systems, clean out openings immediately to comply with manufacturer's written instructions and with the following requirements:

1. Remove from surfaces of opening substrates and from penetrating items foreign materials that could interfere with adhesion of penetration firestopping materials.
2. Clean opening substrates and penetrating items to produce clean, sound surfaces capable of developing optimum bond with penetration firestopping materials. Remove loose particles remaining from cleaning operation.
3. Remove laitance and form-release agents from concrete.

B. Prime substrates where recommended in writing by manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

3.3 INSTALLATION

A. General: Install penetration firestopping systems to comply with manufacturer's written installation instructions and published drawings for products and applications.

B. Install forming materials and other accessories of types required to support fill materials during their application and in the position needed to produce cross-sectional shapes and depths required to achieve fire ratings.

1. After installing fill materials and allowing them to fully cure, remove combustible forming materials and other accessories not forming permanent components of firestopping.

C. Install fill materials by proven techniques to produce the following results:

1. Fill voids and cavities formed by openings, forming materials, accessories and penetrating items to achieve required fire-resistance ratings.
2. Apply materials so they contact and adhere to substrates formed by openings and penetrating items.
3. For fill materials that will remain exposed after completing the Work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.4 IDENTIFICATION

A. Wall Identification: Permanently label walls containing penetration firestopping systems with the words "FIRE AND/OR SMOKE BARRIER - PROTECT ALL OPENINGS," using lettering not less than 3 inches high and with minimum 0.375-inch strokes.

1. Locate in accessible concealed floor, floor-ceiling, or attic space at 15 feet from end of wall and at intervals not exceeding 30 feet.

B. Penetration Identification: Identify each penetration firestopping system with legible metal or plastic labels. Attach labels permanently to surfaces adjacent to and within 6 inches of penetration firestopping system edge so labels are visible to anyone seeking to remove penetrating items or firestopping systems. Use mechanical fasteners or self-adhering-type labels with adhesives capable of permanently bonding labels to surfaces on which labels are placed. Include the following information on labels:

1. The words "Warning - Penetration Firestopping - Do Not Disturb. Notify Building Management of Any Damage."
2. Contractor's name, address, and phone number.
3. Designation of applicable testing and inspecting agency.
4. Date of installation.
5. Manufacturer's name.
6. Installer's name.

3.5 FIELD QUALITY CONTROL

A. Owner will engage a qualified testing agency to perform tests and inspections according to ASTM E 2174.

B. Where deficiencies are found or penetration firestopping system is damaged or removed because of testing, repair or replace penetration firestopping system to comply with requirements.

C. Proceed with enclosing penetration firestopping systems with other construction only after inspection reports are issued and installations comply with requirements.

3.6 CLEANING AND PROTECTION

A. Clean off excess fill materials adjacent to openings as the Work progresses by methods and with cleaning materials that are approved in writing by penetration firestopping system manufacturers and that do not damage materials in which openings occur.

B. Provide final protection and maintain conditions during and after installation that ensure that penetration firestopping systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, immediately cut out and remove damaged or deteriorated penetration firestopping material and install new materials to produce systems complying with specified requirements.

END OF SECTION 078413

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Silicone joint sealants.
2. Urethane joint sealants.
3. Latex joint sealants.
4. Acoustical joint sealants.

B. Related Requirements:
1. Section 074213.23 – Metal Composite Material Wall Panels.
2. Section 076200 – Sheet Metal Flashing and Trim
3. Section 081213 – Hollow Metal Frames.
4. Section 084113 – Aluminum Framed Entrances and Storefronts.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each joint-sealant product.

B. Provide proof of chemical/physical compatibility with all adjacent materials and other air/vapor barrier components.

C. Samples for Initial Selection: Manufacturer's color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.

D. Samples for Verification: For each kind and color of joint sealant required, provide Samples with joint sealants in 1/2-inch- wide joints formed between two 6-inch- long strips of material matching the appearance of exposed surfaces adjacent to joint sealants.

E. Joint-Sealant Schedule: Include the following information:

1. Joint-sealant application, joint location, and designation.
2. Joint-sealant manufacturer and product name.
3. Joint-sealant formulation.
4. Joint-sealant color.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified testing agency.

B. Product Test Reports: For each kind of joint sealant, for tests performed by a qualified testing agency.

C. Sample Warranties: For special warranties.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: An authorized representative who is trained and approved by manufacturer.

B. Product Testing: Test joint sealants using a qualified testing agency.

1. Testing Agency Qualifications: Qualified according to ASTM C 1021 to conduct the testing indicated.

1.7 FIELD CONDITIONS

A. Do not proceed with installation of joint sealants under the following conditions:

1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below 40 deg F.
2. When joint substrates are wet.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.8 WARRANTY

A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Two years from date of Substantial Completion.

B. Special Manufacturer's Warranty: Manufacturer agrees to furnish joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

C. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:

1. Movement of the structure caused by stresses on the sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
2. Disintegration of joint substrates from causes exceeding design specifications.
3. Mechanical damage caused by individuals, tools, or other outside agents.
4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS

2.1 JOINT SEALANTS, GENERAL

A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.

B. Strain-Test Response Characteristics shall be in accordance with ASTM C1248.

C. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.2 SILICONE JOINT SEALANTS

A. Silicone, S, NS, 100/50, NT: Single-component, nonsag, plus 100 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 100/50, Use NT.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

a. Sika Corporation, Construction Products Division; SikaSil WS-290 FPS.
b. Approved Equal.

B. Silicone, S, NS, 50, NT: Single-component, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 50, Use NT.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

a. Sika Corporation, Construction Products Division; SikaSil WS-295 FPS.

b. Approved Equal.

2.3 URETHANE JOINT SEALANTS

A. Urethane, M, NS, 25, NT: Multicomponent, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, urethane joint sealant; ASTM C 920, Type M, Grade NS, Class 25, Use NT.

1. Products: Subject to compliance with requirements, provide one of the following:

a. BASF Building Systems; Sonolastic NP 2.
b. Bostik, Inc.; Chem-Calk 500.
c. Sika Corporation, Construction Products Division; Sikaflex - 2c NS.
d. Tremco Incorporated; Vulkem 227.

2.4 LATEX JOINT SEALANTS

A. Acrylic Latex: Acrylic latex or siliconized acrylic latex, ASTM C 834, Type OP, Grade NF.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

a. BASF Building Systems; Sonolac.
b. Bostik, Inc.; Chem-Calk 600.
c. May National Associates, Inc.; Bondaflex 600.
d. Pecora Corporation; AC-20+.
e. Schnee-Morehead, Inc.; SM 8200.
f. Tremco Incorporated; Tremflex 834.

2.5 ACOUSTICAL JOINT SEALANTS

A. Acoustical Joint Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

a. Pecora Corporation; AC-20 FTR.
b. USG Corporation; SHEETROCK Acoustical Sealant.
c. Hilti; CP 506 Smoke & Acoustic Sealant, CP 572 Smoke & Acoustic Spray

2.6 JOINT-SEALANT BACKING

A. Sealant Backing Material, General: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C 1330, Type C (closed-cell material with a surface skin) Type O (open-cell material) Type B (bicellular material with a surface skin) or any of the preceding types, as approved in writing by joint-sealant manufacturer for joint application indicated, and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.

C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.7 MISCELLANEOUS MATERIALS

A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.

B. Cleaners for Nonporous Surfaces: Chemical cleaners acceptable to manufacturers of sealants and sealant backing materials, free of oily residues or other substances capable of staining or harming joint substrates and adjacent nonporous surfaces in any way, and formulated to promote optimum adhesion of sealants to joint substrates.

C. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:

1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing

optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:

a. Concrete.
b. Masonry.
c. Unglazed surfaces of ceramic tile.

3. Remove laitance and form-release agents from concrete.
4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous joint substrates include the following:

a. Metal.
b. Glass.
c. Glazed surfaces of ceramic tile.

B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.

B. Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.

C. Inspect or review sealant after installation and repair sealants with visible defects.

D. Install sealant backings of kind indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.

1. Do not leave gaps between ends of sealant backings.
2. Do not stretch, twist, puncture, or tear sealant backings.
3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.
4. Miter backer rod or in some other way assure that the rod is not pinched or deformed in such a way as to lessen or increase its depth or cause variation in the sealant depth.

E. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.

F. Install sealants using proven techniques that comply with the following and at the same time backings are installed:

1. Place sealants so they directly contact and fully wet joint substrates.
2. Completely fill recesses in each joint configuration.
3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
4. Do not stretch, twist, puncture or tear sealant backing.
5. Miter backer rod or in some other way assure that the rod is not pinched or deformed in such a way as to lessen or increase its depth or cause variation in the sealant depth.

G. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.

1. Remove excess sealant from surfaces adjacent to joints.
2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
3. Provide concave joint profile per Figure 8A in ASTM C 1193 unless otherwise indicated.
4. Provide flush joint profile at locations indicated on Drawings according to Figure 8B in ASTM C 1193.
5. Provide recessed joint configuration of recess depth and at locations indicated on Drawings according to Figure 8C in ASTM C 1193.

    a. Use masking tape to protect surfaces adjacent to recessed tooled joints.

3.4 CLEANING

A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.5 PROTECTION

A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

3.6 JOINT-SEALANT SCHEDULE

A. Joint-Sealant Application: Exterior joints in vertical surfaces and horizontal nontraffic surfaces.

1. Joint Locations:

    a. Construction joints in cast-in-place concrete.

b. Control and expansion joints in unit masonry.
c. Joints between different materials listed above.
d. Perimeter joints between materials listed above and frames of doors windows and louvers.
e. Control and expansion joints in ceilings and other overhead surfaces.
f. Other joints as indicated on Drawings.

2. Joint Sealant: Silicone, single component, nonsag, neutral curing, Class 100/50.
3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.

B. Joint-Sealant Application: Interior joints in horizontal traffic surfaces.

1. Joint Locations:

a. Isolation joints in cast-in-place concrete slabs.
b. Control and expansion joints in tile flooring.
c. Other joints as indicated on Drawings.

2. Joint Sealant: Urethane, multi-component, nonsag, traffic grade, Class 25.
3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.

C. Joint-Sealant Application: Interior joints in vertical surfaces and horizontal nontraffic surfaces not subject to significant movement.

1. Joint Locations:

a. Control joints on exposed interior surfaces of exterior walls.
b. Perimeter joints between interior wall surfaces and frames of interior doors, windows, and elevator entrances.
c. Other joints as indicated on Drawings.

2. Joint Sealant: Acrylic latex.
3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.

D. Joint-Sealant Application: Mildew-resistant interior joints in vertical surfaces and horizontal nontraffic surfaces.

1. Joint Locations:

a. Joints between plumbing fixtures and adjoining walls, floors, and counters.
b. Tile control and expansion joints where indicated.
c. Other joints as indicated on Drawings.

2. Joint Sealant: Silicone, mildew resistant, acid curing, S, NS, 25, NT.
3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.

END OF SECTION 079200

SECTION 081213 - HOLLOW METAL FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes:

1. Interior custom hollow-metal frames.

B. Related Requirements:

1. Section 087100 "Door Hardware" for door hardware for hollow-metal doors.

1.3 DEFINITIONS

A. Minimum Thickness: Minimum thickness of base metal without coatings according to NAAMM-HMMA 803 or SDI A250.8.

1.4 COORDINATION

A. Coordinate anchorage installation for hollow-metal frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.

B. Coordinate requirements for installation of door hardware, electrified door hardware, and access control and security systems.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, core descriptions, fire-resistance ratings, temperature-rise ratings, and finishes.

B. Shop Drawings: Include the following:

1. Elevations of each frame type.
2. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
3. Locations of reinforcement and preparations for hardware.

4. Details of each different wall opening condition.
5. Details of anchorages, joints, field splices, and connections.
6. Details of accessories.
7. Details of moldings, removable stops, and glazing.
8. Details of conduit and preparations for power, signal, and control systems.

C. Samples for Verification:
1. For "Frames" subparagraphs below, prepare Samples approximately 12 by 12 inches to demonstrate compliance with requirements for quality of materials and construction:
a. Frames: Show profile, corner joint, floor and wall anchors, and silencers. Include separate section showing fixed hollow-metal panels and glazing if applicable.

D. Schedule: Provide a schedule of hollow-metal work prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final Door Hardware Schedule.

1.6 INFORMATIONAL SUBMITTALS

A. Product Test Reports: For each type of hollow-metal frame assembly, for tests performed by a qualified testing agency.

B. Oversize Construction Certification: For assemblies required to be fire rated and exceeding limitations of labeled assemblies.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Deliver hollow-metal work palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use non-vented plastic.

1. Provide additional protection to prevent damage to factory-finished units.

B. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.

C. Store hollow-metal work vertically under cover at Project site with head up. Place on minimum 4-inch-high wood blocking. Provide minimum 1/4-inch space between each stacked door to permit air circulation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain hollow-metal work from single source from single manufacturer.

2.2 REGULATORY REQUIREMENTS

A. Fire-Rated Assemblies: Complying with NFPA 80 and listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings and temperature-rise limits indicated, based on testing at positive pressure according to NFPA 252 or UL 10C.

1. Smoke- and Draft-Control Assemblies: Provide an assembly with gaskets listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing according to UL 1784 and installed in compliance with NFPA 105.

B. Fire-Rated, Borrowed-Lite Assemblies: Complying with NFPA 80 and listed and labeled by a testing and inspecting agency acceptable to authorities having jurisdiction for fire-protection ratings indicated, based on testing according to NFPA 257 or UL 9.

2.3 INTERIOR DOORS AND FRAMES

A. Construct interior frames to comply with the standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.

B. Extra-Heavy-Duty Frames: SDI A250.8, Level 3.

1. Physical Performance: Level A according to SDI A250.4.

2. Frames:

a. Materials: Metallic-coated, steel sheet, minimum thickness of 0.053 inch.
b. Sidelite and Transom Frames: Fabricated from same thickness material as adjacent door frame.
c. Construction: Full profile welded.

3. Exposed Finish: Prime.

2.4 FRAME ANCHORS

A. Jamb Anchors:

1. Masonry Type: Adjustable strap-and-stirrup or T-shaped anchors to suit frame size, not less than 0.042 inch thick, with corrugated or perforated straps not less than 2 inches wide by 10 inches long; or wire anchors not less than 0.177 inch thick.
2. Stud-Wall Type: Designed to engage stud, welded to back of frames; not less than 0.042 inch thick.
3. Post-installed Expansion Type for In-Place Concrete or Masonry: Minimum 3/8-inch- diameter bolts with expansion shields or inserts. Provide pipe spacer from frame to wall, with throat reinforcement plate, welded to frame at each anchor location.

B. Floor Anchors: Formed from same material as frames, minimum thickness of 0.042 inch, and as follows:

1. Monolithic Concrete Slabs: Clip-type anchors, with two holes to receive fasteners.
2. Separate Topping Concrete Slabs: Adjustable-type anchors with extension clips, allowing not less than 2-inch height adjustment. Terminate bottom of frames at finish floor surface.

2.5 MATERIALS

A. Cold-Rolled Steel Sheet: ASTM A 1008/A 1008M, Commercial Steel (CS), Type B; suitable for exposed applications.

B. Hot-Rolled Steel Sheet: ASTM A 1011/A 1011M, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.

C. Metallic-Coated Steel Sheet: ASTM A 653/A 653M, Commercial Steel (CS), Type B.

D. Frame Anchors: ASTM A 879/A 879M, Commercial Steel (CS), 04Z coating designation; mill phosphatized.

1. For anchors built into exterior walls, steel sheet complying with ASTM A 1008/A 1008M or ASTM A 1011/A 1011M, hot-dip galvanized according to ASTM A 153/A 153M, Class B.

E. Inserts, Bolts, and Fasteners: Hot-dip galvanized according to ASTM A 153/A 153M.

F. Power-Actuated Fasteners in Concrete: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with clips or other accessory devices for attaching hollow-metal frames of type indicated.

G. Grout: ASTM C 476, except with a maximum slump of 4 inches, as measured according to ASTM C 143/C 143M.

H. Glazing: Comply with requirements in Section 088000 "Glazing."

2.6 FABRICATION

A. Hollow-Metal Frames: Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as frames.

1. Sidelite and Transom Bar Frames: Provide closed tubular members with no visible face seams or joints, fabricated from same material as door frame. Fasten members at crossings and to jambs by welding.
2. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
3. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers as follows. Keep holes clear during construction.

a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.

b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.

4. Terminated Stops: Terminate stops 6 inches above finish floor with a 45-degree angle cut, and close open end of stop with steel sheet closure. Cover opening in extension of frame with welded-steel filler plate, with welds ground smooth and flush with frame.

B. Hardware Preparation: Factory prepare hollow-metal frames to receive templated mortised hardware, and electrical wiring; include cutouts, reinforcement, mortising, drilling, and tapping according to SDI A250.6, the Door Hardware Schedule, and templates.

1. Reinforce frames to receive non-templated, mortised, and surface-mounted door hardware.
2. Comply with BHMA A156.115 for preparing hollow-metal frames for hardware.

C. Glazed Lites: Provide stops and moldings around glazed lites where indicated. Form corners of stops and moldings with mitered hairline joints.

1. Multiple Glazed Lites: Provide fixed and removable stops and moldings so that each glazed lite is capable of being removed independently.
2. Provide fixed frame moldings on outside of exterior and on secure side of interior frames. Provide loose stops and moldings on inside of hollow-metal frames.
3. Coordinate rabbet width between fixed and removable stops with glazing and installation types indicated.
4. Provide stops for installation with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

2.7 STEEL FINISHES

A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.

1. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with SDI A250.10; recommended by primer manufacturer for substrate; compatible with substrate and field-applied coatings despite prolonged exposure.

2.8 ACCESSORIES

A. Mullions and Transom Bars: Join to adjacent members by welding or rigid mechanical anchors.

B. Grout Guards: Formed from same material as frames, not less than 0.016 inch thick.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine roughing-in for embedded and built-in anchors to verify actual locations before frame installation.

C. Prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Remove welded-in shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make repaired area smooth, flush, and invisible on exposed faces. Touch up factory-applied finishes where spreaders are removed.

B. Drill and tap doors and frames to receive non-templated, mortised, and surface-mounted door hardware.

3.3 INSTALLATION

A. General: Install hollow-metal work plumb, rigid, properly aligned, and securely fastened in place. Comply with Drawings and manufacturer's written instructions.

B. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces without damage to completed Work.

1. Where frames are fabricated in sections, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces. Touch-up finishes.
2. Install frames with removable stops located on secure side of opening.

C. Fire-Rated Openings: Install frames according to NFPA 80.

D. Floor Anchors: Secure with post-installed expansion anchors.

1. Floor anchors may be set with power-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.

E. Solidly pack mineral-fiber insulation inside frames.

F. Masonry Walls: Coordinate installation of frames to allow for solidly filling space between frames and masonry with grout or mortar.

G. In-Place Concrete or Masonry Construction: Secure frames in place with post-installed expansion anchors.

H. Installation Tolerances: Adjust hollow-metal frames to the following tolerances:

1. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
2. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
3. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
4. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.

I. Glazing: Comply with installation requirements in Section 088000 "Glazing" and with hollow-metal manufacturer's written instructions.

1. Secure stops with countersunk flat machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

3.4 ADJUSTING AND CLEANING

A. Final Adjustments: Check and readjust operating hardware items immediately before final inspection. Leave work in complete and proper operating condition. Remove and replace defective work, including hollow-metal work that is warped, bowed, or otherwise unacceptable.

B. Remove grout and other bonding material from hollow-metal work immediately after installation.

C. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.

D. Metallic-Coated Surface Touchup: Clean abraded areas and repair with galvanizing repair paint according to manufacturer's written instructions.

E. Factory-Finish Touchup: Clean abraded areas and repair with same material used for factory finish according to manufacturer's written instructions.

F. Touchup Painting: Cleaning and touchup painting of abraded areas of paint are specified in painting Sections.

END OF SECTION 081113

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Solid-core doors with wood-veneer faces.
2. Factory finishing flush wood doors.
3. Factory fitting flush wood doors to frames and factory machining for hardware.

B. Related Requirements:

1. Section 081113 "Hollow Metal Frames" for frames for flush wood doors.
2. Section 088000 "Glazing" for glass view panels in flush wood doors.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of door. Include details of core and edge construction and trim for openings. Include factory-finishing specifications.

B. Shop Drawings: Indicate location, size, and hand of each door; elevation of each kind of door; construction details not covered in Product Data; and the following:

1. Dimensions and locations of blocking.
2. Dimensions and locations of mortises and holes for hardware.
3. Dimensions and locations of cutouts.
4. Undercuts.
5. Requirements for veneer matching.
6. Doors to be factory finished and finish requirements.
7. Fire-protection ratings for fire-rated doors.

C. Samples for Initial Selection: For factory-finished doors.

D. Samples for Verification:

1. Factory finishes applied to actual door face materials, approximately 8 by 10 inches (200 by 250 mm), for each material and finish**.** For each wood species and transparent finish, provide set of three Samples showing typical range of color and grain to be expected in finished Work.

2. Corner sections of doors, approximately 8 by 10 inches (200 by 250 mm), with door faces and edges representing actual materials to be used.

    a. Provide Samples for each species of veneer and solid lumber required.
    b. Finish veneer-faced door Samples with same materials proposed for factory-finished doors.

3. Frames for light openings, 6 inches (150 mm) long, for each material, type, and finish required.

1.4 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For special warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Comply with requirements of referenced standard and manufacturer's written instructions.

B. Package doors individually in cardboard cartons and wrap bundles of doors in plastic sheeting.

C. Mark each door on top and bottom rail with opening number used on Shop Drawings.

1.6 FIELD CONDITIONS

A. Environmental Limitations: Do not deliver or install doors until spaces are enclosed and weathertight, wet work in spaces is complete and dry, and HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during remainder of construction period.

1.7 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

    a. Warping (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section.
    b. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span.

2. Warranty shall also include installation and finishing that may be required due to repair or replacement of defective doors.
3. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Algoma Hardwoods, Inc.
2. Chappell Door Co.
3. Eggers Industries.
4. Marshfield Door Systems, Inc.
5. Mohawk Doors; a Masonite company.
6. Oshkosh Door Company.
7. Vancouver Door Company.
8. VT Industries, Inc.

B. Source Limitations: Obtain flush wood doors from single manufacturer.

2.2 FLUSH WOOD DOORS, GENERAL

A. Quality Standard: In addition to requirements specified, comply with WDMA I.S.1-A, "Architectural Wood Flush Doors."

1. Contract Documents contain selections chosen from options in quality standard and additional requirements beyond those of quality standard. Comply with those selections and requirements in addition to quality standard.

B. WDMA I.S.1-A Performance Grade: Extra Heavy Duty.

C. Particleboard-Core Doors:

1. Particleboard: ANSI A208.1, Grade LD-2 with binders containing no urea formaldehyde.
2. Blocking: Provide wood blocking in particleboard-core doors as needed to eliminate through-bolting hardware.

a. 5-inch top-rail blocking, in doors indicated to have closers.
b. 5-inch bottom-rail blocking, in exterior doors and doors indicated to have kick, mop, or armor plates.
c. 5-inch midrail blocking, in doors indicated to have exit devices.

3. Provide doors with glued-wood-stave or structural-composite-lumber cores instead of particleboard cores for doors indicated to receive exit devices.

2.3 VENEER-FACED DOORS FOR TRANSPARENT FINISH

A. Interior Solid-Core Doors:

1. Grade: Premium, with Grade A faces.
2. Species: White Maple.
3. Cut: Plain Sliced.
4. Match between Veneer Leaves: Slip Match.
5. Assembly of Veneer Leaves on Door Faces: To match existing adjacent wood doors.
6. Room Match: Provide door faces of compatible color and grain within each separate room or area of building.
7. Exposed Vertical and Top Edges: Same species as faces - edge Type A.
8. Core: Particleboard.
9. Construction: Five plies. Stiles and rails are bonded to core, then entire unit is abrasive planed before veneering. Faces are bonded to core using a hot press.
10. WDMA I.S.1-A Performance Grade: Extra Heavy Duty.

2.4 LIGHT FRAMES AND LOUVERS

A. Wood Beads for Light Openings in Wood Doors: Provide manufacturer's standard wood beads unless otherwise indicated.

1. Wood Species: Same species as door faces.
2. Profile: Manufacturer's standard shape.
3. At wood-core doors with 20-minute fire-protection ratings, provide wood beads and metal glazing clips approved for such use.

2.5 FABRICATION

A. Factory fit doors to suit frame-opening sizes indicated. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.

1. Comply with NFPA 80 requirements for fire-rated doors.

B. Factory machine doors for hardware that is not surface applied. Locate hardware to comply with DHI-WDHS-3. Comply with final hardware schedules, door frame Shop Drawings, BHMA-156.115-W, and hardware templates.

1. Coordinate with hardware mortises in metal frames to verify dimensions and alignment before factory machining.
2. Metal Astragals: Factory machine astragals and formed-steel edges for hardware for pairs of fire-rated doors.

C. Openings: Factory cut and trim openings through doors.

1. Light Openings: Trim openings with moldings of material and profile indicated.
2. Glazing: Factory install glazing in doors indicated to be factory finished. Comply with applicable requirements in Section 088000 "Glazing."

2.6 FACTORY FINISHING

A. General: Comply with referenced quality standard for factory finishing. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.

1. Finish faces, all four edges, edges of cutouts, and mortises. Stains and fillers may be omitted on bottom edges, edges of cutouts, and mortises.

B. Factory finish doors.

C. Transparent Finish:

1. Grade: Premium.
   a. Finish:
      1) AWI's, AWMAC's, and WI's "Architectural Woodwork Standards" System 11, catalyzed polyurethane.
      2) WDMA I.S. 6A TR-6 Catalyzed Polyurethane.
2. Sheen: Satin.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors and installed door frames, with Installer present, before hanging doors.

1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
2. Reject doors with defects.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Hardware: For installation, see Section 087100 "Door Hardware."

B. Installation Instructions: Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.

1. Install fire-rated doors according to NFPA 80.
2. Install smoke- and draft-control doors according to NFPA 105.

C. Job-Fitted Doors: Align and fit doors in frames with uniform clearances and bevels as indicated below; do not trim stiles and rails in excess of limits set by manufacturer or permitted for fire-rated doors. Machine doors for hardware. Seal edges of doors, edges of cutouts, and mortises after fitting and machining.

1. Clearances: Provide 1/8 inch at heads, jambs, and between pairs of doors. Provide 1/8 inch from bottom of door to top of decorative floor finish or covering unless otherwise indicated. Where threshold is shown or scheduled, provide1/4 inch from bottom of door to top of threshold unless otherwise indicated.

    a. Comply with NFPA 80 for fire-rated doors.
    b. Bevel non-fire-rated doors 1/8 inch in 2 inches at lock and hinge edges.

2. Bevel fire-rated doors 1/8 inch in 2 inches at lock edge; trim stiles and rails only to extent permitted by labeling agency.

D. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.

E. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 ADJUSTING

A. Operation: Rehang or replace doors that do not swing or operate freely.

B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

END OF SECTION 081416

SECTION 081433 - STILE AND RAIL WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior stile and rail wood doors.
2. Factory finishing.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product, including the following:

1. Details of construction and glazing.
2. Factory-machining criteria.
3. Factory- finishing specifications.

B. Shop Drawings: Indicate location, size, and hand of each door; elevation of each type of door; construction details not covered in Product Data, including those for stiles, rails, panels, and moldings (sticking); and other pertinent data, including the following:

1. Door schedule indicating door location, type, size, fire protection rating, and swing.
2. Door elevations, dimensions and location of hardware, lite locations, and glazing thickness.
3. Details of frame for each frame type, including dimensions and profile.
4. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
5. Dimensions and locations of mortises and holes for hardware.
6. Clearances and undercuts.
7. Requirements for veneer matching.
8. Doors to be factory finished and application requirements.

C. Samples for Initial Selection: For factory-finished doors.

D. Samples for Verification:

1. Factory finishes applied to actual door face materials, approximately 8 by 10 inches, for each material and finish. For each wood species and transparent finish, provide set of three Samples showing typical range of color and grain to be expected in finished Work.

2. Corner sections of doors, approximately 8 by 10 inches, with door faces and edges representing actual materials to be used.

1.4 INFORMATIONAL SUBMITTALS

A. Field quality control reports.

B. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS.

A. Special warranties.

B. Record Documents: For fire-rated doors, list of door numbers and applicable room name and number to which door accesses.

1.6 QUALITY ASSURANCE

A. Woodwork Quality Standard Compliance Certificates: Submit statement from Fabricator that woodwork fabrication complies with quality grades and other requirements indicated.

B. AWS Quality Standard: Comply with applicable requirements of Architectural Woodwork Standards (AWS) – 1st Edition, October 1, 2009, except as otherwise indicated.

C. Fire-Rated Door Inspector Qualifications: Inspector for field quality control inspections of fire-rated door assemblies shall meet the qualifications set forth in NFPA 80, section 5.2.3.1 and the following:

1. Door and Hardware Institute Fire and Egress Door Assembly Inspector (FDAI) certification.

D. Egress Door Inspector Qualifications: Inspector for field quality control inspections of egress door assemblies shall meet the qualifications set forth in NFPA 101, Section 7.2.1.15.4 and the following:

1. Door and Hardware Institute Fire and Egress Door Assembly Inspector (FDAI) certification.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Comply with requirements of referenced standard and manufacturer's written instructions.

B. Package doors individually in opaque plastic bags or cardboard cartons.

C. Mark each door on bottom rail with opening number used on Shop Drawings.

1.8 FIELD CONDITIONS

A. Environmental Limitations:

1. Do not deliver or install doors until spaces are enclosed and weathertight, wet work in spaces is complete and dry, and HVAC system is operating and maintaining temperature and relative humidity levels designed for building occupants for the remainder of construction period.

1.9 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Delamination of veneer.
b. Warping (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section.
c. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span.

2. Warranty shall also include installation and finishing that may be required due to repair or replacement of defective doors.
3. Warranty shall be in effect during specified period of time from date of Substantial Completion.
4. Warranty Period for Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations:

1. Obtain stile and rail wood doors from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Fire-Rated Wood Door Assemblies: Complying with NFPA 80 that are listed and labeled by a qualified testing agency acceptable to authorities having jurisdiction for fire-protection ratings indicated on Drawings, based on testing at positive pressure according to NFPA 252.

B. Smoke- and Draft-Control Door Assemblies: Listed and labeled for smoke and draft control by a qualified testing agency acceptable to authorities having jurisdiction, based on testing according to UL 1784 and installed in compliance with NFPA 105.

2.3 MATERIALS

A. Use only materials that comply with referenced standards and other requirements specified.
   1. Assemble interior doors, including components, with either dry-use or wet-use adhesives complying with ASTM D5572 for finger joints and with ASTM D5751 for joints other than finger joints.

B. Panel Products: Any of the following unless otherwise indicated:

   1. Particleboard: ANSI A208.1, Grade M-2.
   2. Medium-density fiberboard (MDF), complying with ANSI A208.2, Grade 130.
   3. Hardboard complying with ANSI A135.4.
   4. Veneer-core plywood.

C. Safety Glass: Provide products complying with testing requirements in 16 CFR 1201, for Category II materials, unless those of Category I are expressly indicated and permitted.

2.4 INTERIOR STILE AND RAIL WOOD DOORS

A. Interior Stile and Rail Wood Doors: Interior stock doors complying with WDMA I.S. 6A and with other requirements specified.

   1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:

      a. ETO Doors Corp.
      b. Karona by JELD-WEN.
      c. Masonite Architectural.
      d. VT Industries, Inc.

   2. Performance Grade:

      a. WDMA I.S. 6A: Extra Heavy Duty.

   3. Panel Designs: Indicated on Drawings. Do not modify intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If modifications are proposed, submit comprehensive explanatory data to Architect for review.
   4. Finish: Transparent.
   5. Wood Species and Cut for Transparent Finish: White Maple, plain sliced.
   6. Door Construction for Transparent Finish:

      a. Stile and Rail Construction:
         1) Veneered, structural composite lumber or veneered, edge- and end-glued clear lumber. Select veneers for similarity of grain and color, and arrange for optimum match between adjacent pieces. Use veneers not less than 1/16 inch thick.

7. Stile and Rail Widths: Manufacturer's standard, but not less than the following:

    a. Stiles, Top and Intermediate Rails: 5-inches.
    b. Bottom Rails: 10 inches.
8. Glass: Uncoated, clear, fully tempered float glass, 6.0 mm thick, complying with Section 088000 "Glazing."
9. Mark, label, or otherwise identify stile and rail wood doors as complying with WDMA I.S. 6A and grade specified.

2.5 STILE AND RAIL WOOD DOOR FABRICATION

A. Factory fit doors to suit frame-opening sizes indicated, with the following uniform clearances and bevels unless otherwise indicated:

    1. Clearances:

        a. Provide 1/8 inch at heads, jambs, and between pairs of doors.
        b. Provide 1/2 inch from bottom of door to top of decorative floor finish or covering.
        c. Where threshold is shown on Drawings or scheduled, provide not more than 3/8 inch from bottom of door to top of threshold.
        d. Comply with NFPA 80 requirements for fire-rated doors.

    2. Bevel non-fire-rated doors 1/8 inch in 2 inches at lock and hinge edges.
    3. Bevel fire-rated doors 1/8 inch in 2 inches on lock edge; trim stiles and rails only to extent permitted by labeling agency.

B. Fabricate stile and rail wood doors in sizes indicated for field fitting.

C. Factory machine doors for hardware that is not surface applied.

    1. Locate hardware to comply with DHI-WDHS-3.
    2. Comply with final hardware schedules, door frame Shop Drawings, BHMA-156.115-W, and hardware templates.
    3. For doors scheduled to receive electrified locksets, provide factory-installed raceway and wiring to accommodate specified hardware.
    4. Coordinate measurements of hardware mortises in metal frames to verify dimensions and alignment before factory machining.

D. Glazed Openings:

    1. Trim openings indicated for glazing with solid-wood moldings, with one side removable. Miter wood moldings at corner joints.
    2. Factory install glazing in doors, complying with Section 088000 "Glazing." Install glass using manufacturer's standard elastomeric glazing sealant complying with ASTM C920. Secure glass in place with removable wood moldings. Miter wood moldings at corner joints.

2.6 FACTORY FINISHING

A. Comply with referenced quality standard for factory finishing.

1. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
2. Finish faces, all four edges, edges of cutouts, and mortises.
3. Stains and fillers may be omitted on top and bottom edges, edges of cutouts, and mortises.

B. Factory finish doors.

C. Transparent Finish:

1. WDMA I.S. 6A Grade: Premium.
2. Finish:
   a. Architectural Woodwork Standards System 11, Polyurethane, Catalyzed.
   b. WDMA I.S. 6A TR-6 Catalyzed Polyurethane.
3. Effect: Open-grain finish.
4. Sheen: Satin.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine doors with Installer present, before hanging doors.

1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
2. Reject doors with defects.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Hardware: For installation, see Section 087100 "Door Hardware."

B. Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.

1. Install fire-rated doors according to NFPA 80.
2. Install smoke- and draft-control doors according to NFPA 105.

C. Job-Fitted Doors:

1. Align and fit doors in frames with uniform clearances and bevels as indicated below.

a. Do not trim stiles and rails in excess of limits set by manufacturer or permitted for fire-rated doors.

2. Machine doors for hardware.
3. Seal edges of doors, edges of cutouts, and mortises after fitting and machining.
4. Clearances:

a. Provide 1/8 inch at heads, jambs, and between pairs of doors.
b. Provide 1/2 inch from bottom of door to top of decorative floor finish or covering unless otherwise indicated on Drawings.
c. Where threshold is shown on Drawings or scheduled, provide 3/8 inch from bottom of door to top of threshold unless otherwise indicated.
d. Comply with NFPA 80 for fire-rated doors.

5. Bevel non-fire-rated doors 1/8 inch in 2 inches at lock and hinge edges.
6. Bevel fire-rated doors 1/8 inch in 2 inches on lock edge; trim stiles and rails only to extent permitted by labeling agency.

D. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.

E. Factory- Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 FIELD QUALITY CONTROL

A. Repair or remove and replace installations where inspections indicate that they do not comply with specified requirements.

B. Reinspect repaired or replaced installations to determine if replaced or repaired door installations comply with specified requirements.

C. Prepare and submit separate inspection report for each fire-rated door assembly indicating compliance with each item listed in NFPA 80 and NFPA 101.

3.4 ADJUSTING

A. Operation: Rehang or replace doors that do not swing or operate freely.

B. Finished Doors: Replace doors that are damaged or do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

END OF SECTION 081433

SECTION 084313 - ALUMINUM-FRAMED STOREFRONTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Interior and Exterior Storefront framing.
2. Manual-swing entrance doors.

B. Related Requirements:

1. Section 054000 “Cold-Formed Metal Framing.”
2. Section 072715 “Non-Bituminous Self-Adhering Sheet Air Barrier” for air barriers.
3. Section 087100 “Door Hardware.”
4. Section 088000 “Glazing” for glazing.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.

B. Shop Drawings: For aluminum-framed storefronts. Include plans, elevations, sections, full-size details, and attachments to other work.

1. Include details of provisions for assembly expansion and contraction and for draining moisture occurring within the assembly to the exterior.
2. Include full-size isometric details of each type of vertical-to-horizontal intersection of aluminum-framed storefronts, showing the following:

a. Joinery, including concealed welds.
b. Anchorage.

c. Expansion provisions.
d. Glazing.
e. Flashing and drainage.
f. Setting blocks.
g. Seals.
h. Metal closures and splices.

3. Show connection to and continuity with adjacent thermal, weather, air, and vapor barriers.
4. Include point-to-point wiring diagrams showing the following:

a. Power requirements for each electrically operated door hardware.
b. Location and types of switches, signal device, conduit sizes, and number and size of wires.

C. Samples for Initial Selection: For units with factory-applied color finishes.

D. Samples for Verification: For each type of exposed finish required, in manufacturer's standard sizes.

E. Entrance Door Hardware Schedule: Prepared by or under supervision of supplier, detailing fabrication and assembly of entrance door hardware, as well as procedures and diagrams. Coordinate final entrance door hardware schedule with doors, frames, and related work to ensure proper size, thickness, hand, function, and finish of entrance door hardware.

F. Fabrication Sample: Of each vertical-to-horizontal intersection of assemblies, made from 12-inch lengths of full-size components and showing details of the following:

1. Joinery, including concealed welds.
2. Anchorage.
3. Expansion provisions.
4. Glazing.
5. Flashing and drainage.

G. Delegated-Design Submittal: For aluminum-framed storefronts indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Energy Performance Certificates: For aluminum-framed storefronts, accessories, and components, from manufacturer.

1. Basis for Certification: NFRC-certified energy performance values for each aluminum-framed storefront.

C. Product Test Reports: For aluminum-framed storefronts, for tests performed by manufacturer and witnessed by a qualified testing agency.

D. Quality-Control Program: Developed specifically for Project, including fabrication and installation, according to recommendations in ASTM C 1401. Include periodic quality-control reports.

E. Source quality-control reports.

F. Field quality-control reports.

G. Sample Warranties: For special warranties.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For aluminum-framed storefronts to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

B. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of assemblies. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, to one another, and to adjoining construction.

1. Do not change intended aesthetic effects, as judged solely by Architect, except with Architect's approval. If changes are proposed, submit comprehensive explanatory data to Architect for review.

1.8 WARRANTY

A. Special Warranty: Manufacturer and Installer agrees to repair or replace components of aluminum-framed storefronts that do not comply with requirements or that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures, including, but not limited to, excessive deflection.
b. Noise or vibration created by wind and thermal and structural movements.
c. Deterioration of metals, metal finishes, and other materials beyond normal weathering.
d. Water penetration through fixed glazing and framing areas.
e. Failure of operating components.

2. Warranty Period: 10 years from date of Substantial Completion.

B. Special Finish Warranty: Standard form in which manufacturer agrees to repair finishes or replace aluminum that shows evidence of deterioration of factory-applied finishes within specified warranty period.

1. Deterioration includes, but is not limited to, the following:

a. Color fading more than 5 Hunter units when tested according to ASTM D 2244.
b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Warranty Period: 20 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design aluminum-framed storefronts.

B. General Performance: Comply with performance requirements specified, as determined by testing of aluminum-framed storefronts representing those indicated for this Project without failure due to defective manufacture, fabrication, installation, or other defects in construction.

1. Aluminum-framed storefronts shall withstand movements of supporting structure, including, but not limited to, twist, column shortening, long-term creep, and deflection from uniformly distributed and concentrated live loads.
2. Failure also includes the following:

a. Thermal stresses transferring to building structure.
b. Glass breakage.
c. Noise or vibration created by wind and thermal and structural movements.
d. Loosening or weakening of fasteners, attachments, and other components.
e. Failure of operating units.

C. Structural Loads:

1. Wind Loads: As indicated on Drawings.
2. Other Design Loads: Insert loads.

D. Deflection of Framing Members: At design wind pressure, as follows:

1. Deflection Normal to Wall Plane: Limited to edge of glass in a direction perpendicular to glass plane not exceeding 1/175 of the glass edge length for each individual glazing lite
2. Cantilever Deflection: Where framing members overhang an anchor point, as follows:

a. Perpendicular to Plane of Wall: No greater than 1/240 of clear span plus 1/4-inch for spans greater than 11 feet 8-1/4 inches or 1/175 times span, for spans less than 11 feet 8-1/4 inches.

E. Structural: Test according to ASTM E 330/E 330M as follows:

1. When tested at positive and negative wind-load design pressures, storefront assemblies do not evidence deflection exceeding specified limits.
2. When tested at 150 percent of positive and negative wind-load design pressures, storefront assemblies, including anchorage, do not evidence material failures, structural distress, or permanent deformation of main framing members exceeding 0.2 percent of span.
3. Test Durations: As required by design wind velocity, but not less than 10 seconds.

F. Air Infiltration: Test according to ASTM E 283 for infiltration as follows:

1. Fixed Framing and Glass Area:

   a. Maximum air leakage of 0.06 cfm/sq. ft. at a static-air-pressure differential of 6.24 lbf/sq. ft.

2. Entrance Doors:

   a. Single Doors: Maximum air leakage of 0.5 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft.
   b. Pair of Doors: Maximum air leakage of 1.0 cfm/sq. ft. at a static-air-pressure differential of 1.57 lbf/sq. ft.

G. Water Penetration under Static Pressure: Test according to ASTM E 331 as follows:

1. No evidence of water penetration through fixed glazing and framing areas when tested according to a minimum static-air-pressure differential of 20 percent of positive wind-load design pressure, but not less than 10 lbf/sq. ft

H. Seismic Performance: Glazed aluminum curtain walls shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1. Seismic Drift Causing Glass Fallout: Complying with criteria for passing based on building occupancy type when tested according to AAMA 501.6 at design displacement and 1.5 times the design displacement.
2. Vertical Interstory Movement: Complying with criteria for passing based on building occupancy type when tested according to AAMA 501.7 at design displacement and 1.5 times the design displacement.

I. Energy Performance: Certify and label energy performance according to NFRC as follows:

1. Thermal Transmittance (U-factor): Fixed glazing and framing areas shall have U-factor of not more than 0.42 Btu/sq. ft. x h x deg Fas determined according to NFRC 100.
2. Solar Heat Gain Coefficient: Fixed glazing and framing areas shall have a solar heat gain coefficient of no greater than 0.26 as determined according to NFRC 200.
3. Condensation Resistance: Fixed glazing and framing areas shall have an NFRC-certified condensation resistance rating of no less than 45 as determined according to NFRC 500.

J. Noise Reduction: Test according to ASTM E 90, with ratings determined by ASTM E 1332, as follows:

1. Outdoor-Indoor Transmission Class: Minimum 30.

K. Thermal Movements: Allow for thermal movements resulting from ambient and surface temperature changes:

1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.
2. Thermal Cycling: No buckling; stress on glass; sealant failure; excess stress on framing, anchors, and fasteners; or reduction of performance when tested according to AAMA 501.5.

a. High Exterior Ambient-Air Temperature: That which produces an exterior metal-surface temperature of 180 deg F.
b. Low Exterior Ambient-Air Temperature: 0 deg F.

2.2 STOREFRONT SYSTEMS

A. Aluminum Storefront

1. Basis of Design: Subject to compliance with requirements, provide either the named product or a comparable product by another manufacturer.

a. Kawneer 451UT, exterior and vestibule.
b. Kawneer 451, interior.

2. Source Limitations: Obtain all components of curtain wall system, including framing, operable panel hardware, and accessories from a single manufacturer.

B. Framing Members: Manufacturer's extruded- or formed-aluminum framing members of thickness required and reinforced as required to support imposed loads.

1. Exterior Framing Construction: Thermally broken.
2. Glazing System: Retained mechanically with gaskets on four sides.
3. Glazing Plane: Front.
4. Finish: Clear anodic finish.
5. Fabrication Method: Field-fabricated stick system.
6. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.
7. Steel Reinforcement: As required by manufacturer.

C. Backer Plates: Manufacturer's standard, continuous backer plates for framing members, if not integral, where framing abuts adjacent construction.

D. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning system components.

E. Materials:

1. Aluminum: Alloy and temper recommended by manufacturer for type of use and finish indicated.

   a. Sheet and Plate: ASTM B 209.
   b. Extruded Bars, Rods, Profiles, and Tubes: ASTM B 221.
   c. Extruded Structural Pipe and Tubes: ASTM B 429/B 429M.
   d. Structural Profiles: ASTM B 308/B 308M.

2. Steel Reinforcement: Manufacturer's standard zinc-rich, corrosion-resistant primer complying with SSPC-PS Guide No. 12.00; applied immediately after surface preparation and pretreatment. Select surface preparation methods according to recommendations in SSPC-SP COM, and prepare surfaces according to applicable SSPC standard.

   a. Structural Shapes, Plates, and Bars: ASTM A 36/A 36M.
   b. Cold-Rolled Sheet and Strip: ASTM A 1008/A 1008M.
   c. Hot-Rolled Sheet and Strip: ASTM A 1011/A 1011M.

2.3 ENTRANCES

A. Source Limitations: Obtain all components of aluminum storefront systems, aluminum entrance systems and aluminum curtain wall systems from same manufacturer

B. Exterior and Vestibule Door Basis-of-Design Product: Subject to compliance with requirements, provide Kawneer North America; an Alcoa company; AA 425 Thermal Entrance or a comparable product.

C. Interior Door Basis-of-Design Product: Subject to compliance with requirements, provide Kawneer North America; an Alcoa company; 350 Standard Entrance or a comparable product

D. Entrance Doors: Manufacturer's standard glazed entrance doors for manual-swing or automatic operation.

1. Door Construction: 2- to 2-1/4-inch overall thickness, with minimum 0.125-inch- thick, extruded-aluminum tubular rail and stile members. Mechanically fasten corners with reinforcing brackets that are deeply penetrated and fillet welded or that incorporate concealed tie rods.

   a. Thermal Construction: High-performance plastic connectors separate aluminum members exposed to the exterior from members exposed to the interior.

2. Door Design: As indicated by Basis of Design product and door type illustrated in construction documents.
3. Glazing Stops and Gaskets: Snap-on, extruded-aluminum stops and preformed gasket to match aluminum curtain wall.

   a. Provide nonremovable glazing stops on outside of door.

2.4 ENTRANCE DOOR HARDWARE

A. Entrance Door Hardware: Hardware not specified in this Section is specified in Section 087100 "Door Hardware."

B. General: Provide entrance door hardware and entrance door hardware sets indicated in door and frame schedule for each entrance door, to comply with requirements in this Section.

1. Entrance Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and products complying with BHMA standard referenced.
2. Sequence of Operation: Provide electrified door hardware function, sequence of operation, and interface with other building control systems indicated.
3. Opening-Force Requirements:

    a. Egress Doors: Not more than 15 lbf to release the latch and not more than 30 lbf to set the door in motion and not more than 15 lbf to open the door to its minimum required width.
    b. Accessible Interior Doors: Not more than 5 lbf to fully open door.

C. Strikes: Provide strike with black-plastic dust box for each latch or lock bolt; fabricated for aluminum framing.

D. Operating Trim: BHMA A156.6.

E. Weather Stripping: Manufacturer's standard replaceable components.

1. Compression Type: Made of ASTM D 2000 molded neoprene or ASTM D 2287 molded PVC.
2. Sliding Type: AAMA 701/702, made of wool, polypropylene, or nylon woven pile with nylon-fabric or aluminum-strip backing.

F. Weather Sweeps: Manufacturer's standard exterior-door bottom sweep with concealed fasteners on mounting strip.

G. Thresholds: BHMA A156.21 raised thresholds beveled with a slope of not more than 1:2, with maximum height of 1/2 inch.

H. Finger Guards: Manufacturer's standard collapsible neoprene or PVC gasket anchored to frame hinge-jamb at center-pivoted doors.

2.5 GLAZING

A. Glazing: Comply with Section 088000 "Glazing."

B. Glazing Gaskets: Manufacturer's standard sealed-corner pressure-glazing system of black, resilient elastomeric glazing gaskets, setting blocks, and shims or spacers. and Comply with Section 088000 "Glazing."

C. Glazing Sealants: As recommended by manufacturer, and Comply with Section 088000 "Glazing."

1. Sealant shall have a VOC content of 250 g/L or less.
2. Sealant shall comply with the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

D. Weatherseal Sealants: ASTM C 920 for Type S; Grade NS; Class 25; Uses NT, G, A, and O; chemically curing silicone formulation that is compatible with structural sealant and other system components with which it comes in contact; recommended by structural-sealant, weatherseal-sealant, and structural-sealant-glazed curtain-wall manufacturers for this use.

1. Color: Match structural sealant.

2.6 ACCESSORIES

A. Fasteners and Accessories: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding fasteners and accessories compatible with adjacent materials.

1. Use self-locking devices where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration.
2. Reinforce members as required to receive fastener threads.
3. Use exposed fasteners with countersunk Phillips screw heads, fabricated from 300 series stainless steel.

B. Anchors: Three-way adjustable anchors with minimum adjustment of 1 inch that accommodate fabrication and installation tolerances in material and finish compatible with adjoining materials and recommended by manufacturer.

1. Concrete and Masonry Inserts: Hot-dip galvanized cast-iron, malleable-iron, or steel inserts complying with ASTM A 123/A 123M or ASTM A 153/A 153M requirements.

C. Concealed Flashing: Manufacturer's standard corrosion-resistant, nonstaining, nonbleeding flashing compatible with adjacent materials.

D. Bituminous Paint: Cold-applied asphalt-mastic paint containing no asbestos, formulated for 30-mil thickness per coat.

2.7 FABRICATION

A. Form or extrude aluminum shapes before finishing.

B. Weld in concealed locations to greatest extent possible to minimize distortion or discoloration of finish. Remove weld spatter and welding oxides from exposed surfaces by descaling or grinding.

C. Fabricate components that, when assembled, have the following characteristics:

1. Profiles that are sharp, straight, and free of defects or deformations.
2. Accurately fitted joints with ends coped or mitered.
3. Physical and thermal isolation of glazing from framing members.
4. Accommodations for thermal and mechanical movements of glazing and framing to maintain required glazing edge clearances.
5. Provisions for field replacement of glazing from exterior.
6. Fasteners, anchors, and connection devices that are concealed from view to greatest extent possible.

D. Mechanically Glazed Framing Members: Fabricate for flush glazing without projecting stops.

E. Storefront Framing: Fabricate components for assembly using screw-spline system.

F. Entrance Door Frames: Reinforce as required to support loads imposed by door operation and for installing entrance door hardware.

1. At interior and exterior doors, provide compression weather stripping at fixed stops.

G. Entrance Doors: Reinforce doors as required for installing entrance door hardware.

1. At pairs of exterior doors, provide sliding-type weather stripping retained in adjustable strip and mortised into door edge.
2. At exterior doors, provide weather sweeps applied to door bottoms.

H. Entrance Door Hardware Installation: Factory install entrance door hardware to the greatest extent possible. Cut, drill, and tap for factory-installed entrance door hardware before applying finishes.

I. After fabrication, clearly mark components to identify their locations in Project according to Shop Drawings.

2.8 ALUMINUM FINISHES

A. Clear Anodic Finish: AAMA 611, AA-M12C22A41, Class I, 0.018 mm or thicker.

2.9 SOURCE QUALITY CONTROL

A. Structural Sealant: Perform quality-control procedures complying with ASTM C 1401 recommendations, including, but not limited to, assembly material qualification procedures, sealant testing, and assembly fabrication reviews and checks.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Prepare surfaces that are in contact with structural sealant according to sealant manufacturer's written instructions, to ensure compatibility and adhesion. Preparation includes, but is not limited to, cleaning and priming surfaces.

3.3 INSTALLATION

A. General:

1. Comply with manufacturer's written instructions.
2. Do not install damaged components.
3. Fit joints to produce hairline joints free of burrs and distortion.
4. Rigidly secure nonmovement joints.
5. Install anchors with separators and isolators to prevent metal corrosion and electrolytic deterioration and to prevent impeding movement of moving joints.
6. Seal perimeter and other joints watertight unless otherwise indicated.

B. Metal Protection:

1. Where aluminum is in contact with dissimilar metals, protect against galvanic action by painting contact surfaces with materials recommended by manufacturer for this purpose or by installing nonconductive spacers.
2. Where aluminum is in contact with concrete or masonry, protect against corrosion by painting contact surfaces with bituminous paint.

C. Set continuous sill members and flashing in full sealant bed, as specified in Section 079200 "Joint Sealants," to produce weathertight installation.

D. Install components plumb and true in alignment with established lines and grades.

E. Install operable units level and plumb, securely anchored, and without distortion. Adjust weather-stripping contact and hardware movement to produce proper operation.

F. Install glazing as specified in Section 088000 "Glazing."

G. Install weatherseal sealant according to Section 079200 "Joint Sealants" and according to sealant manufacturer's written instructions to produce weatherproof joints. Install joint filler behind sealant as recommended by sealant manufacturer.

H. Entrance Doors: Install doors to produce smooth operation and tight fit at contact points.

1. Exterior Doors: Install to produce weathertight enclosure and tight fit at weather stripping.
2. Field-Installed Entrance Door Hardware: Install surface-mounted entrance door hardware according to entrance door hardware manufacturers' written instructions using concealed fasteners to greatest extent possible.

3.4 ERECTION TOLERANCES

A. Erection Tolerances: Install aluminum-framed storefronts to comply with the following maximum tolerances:

1. Plumb: 1/8 inch in 10 feet; 1/4 inch in 40 feet.
2. Level: 1/8 inch in 20 feet; 1/4 inch in 40 feet.
3. Alignment:

a. Where surfaces abut in line or are separated by reveal or protruding element up to 1/2 inch wide, limit offset from true alignment to 1/16 inch.
b. Where surfaces are separated by reveal or protruding element from 1/2 to 1 inch wide, limit offset from true alignment to 1/8 inch.
c. Where surfaces are separated by reveal or protruding element of 1 inch wide or more, limit offset from true alignment to 1/4 inch.

4. Location: Limit variation from plane to 1/8 inch in 12 feet; 1/2 inch over total length.

3.5 FIELD QUALITY CONTROL

A. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections.

B. Aluminum-framed storefronts will be considered defective if they do not pass tests and inspections.

C. Prepare test and inspection reports.

END OF SECTION 084313

SECTION 084523 - FIBERGLASS-SANDWICH-PANEL ASSEMBLIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes aluminum-framed assemblies incorporating insulated, translucent fiberglass-sandwich panels as follows:

1. Skylight assemblies.

a. Shed, pyramid, and self-supported ridge roof types.

B. Related Sections:

1. Section 12300 “Alternates” for a description of Alternate No. 5.

1.2 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for aluminum components of panel assemblies.

B. Shop Drawings: For panel assemblies.

1. Include plans, elevations, sections, details, and attachments to other work.
2. Include details of provisions for assembly expansion and contraction and for draining moisture within the assembly to the exterior.

C. Samples: In manufacturer's standard size.

1. For each type of fiberglass-sandwich panel, 7-inch by 12-inch units.
2. For each type of exposed finish for framing members, 3-inches long.

D. Fabrication Samples: Of each framing system intersection and adjacent panels, made from 12-inch lengths of full-size framing members and showing details of the following:

1. Joinery.
2. Anchorage.
3. Expansion provisions.

4. Fiberglass-sandwich panels.
5. Flashing and drainage.

E. Delegated Design Submittals: For panel assemblies indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified Installer and manufacturer.

B. Product Test Reports: For each fiberglass-sandwich-panel assembly, for tests performed by a qualified testing agency.

C. Evaluation Reports: For fiberglass-sandwich-panel assemblies from ICC-ES.

D. Field quality-control reports.

E. Sample Warranties: For special warranties.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For panel assemblies to include in maintenance manuals.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications: For fiberglass-sandwich panels, a qualified manufacturer whose facilities, processes, and products are monitored by an independent, accredited quality-control agency for compliance with applicable requirements in ICC-ES AC04 or ICC-ES AC177.

1. Material and products shall be manufactured by a company continuously and regularly employed in the manufacture of specified materials for a period of at least ten consecutive years and which can show evidence of those materials being satisfactorily used on at least six projects of similar size, scope, and location. At least three of the projects shall have been in successful use for ten years or longer.
2. Quality control inspections shall be conducted at least once each year and shall include manufacturing facilities, sandwich panel components, and production sandwich panels for conformance with AC177 “Translucent Fiberglass Reinforced Plastic (FRP) Faced Panel Wall, Roof and Skylight Systems” as issued by the ICC-ES.

B. Installer Qualifications: An authorized representative who is trained and approved by manufacturer.

1.7 MOCKUPS

A. Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for fabrication and installation.

1. Build mockup of typical panel assemblies as shown on Drawings.
2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 WARRANTY

A. Manufacturer's Warranty: Manufacturer agrees to repair or replace components of panel assemblies that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including, but not limited to, excessive deflection.
b. Deterioration of metals, metal finishes, and other materials beyond normal weathering.
c. Water leakage.

2. Warranty Period: Five years from date of Substantial Completion.

B. Manufacturer's Special Warranty: Manufacturer agrees to repair or replace fiberglass-sandwich panels that exhibit defects in materials or workmanship within specified warranty period.

1. Defects include, but are not limited to, the following:

a. Fiberbloom.
b. Delamination of coating, if any, from exterior face sheet.
c. Color change exceeding requirements.
d. Delamination of panel face sheets from panel cores.

2. Warranty Period: 10 years from date of Substantial Completion.

C. Special Aluminum-Finish Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components on which finishes fail within specified warranty period. Warranty does not include normal weathering.

1. Failures include, but are not limited to, checking, crazing, peeling, chalking, and fading of finishes.
2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. The manufacturer shall be responsible for the configuration and fabrication of the complete panel system.

B. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design fiberglass-sandwich-panel assemblies.

1. Include span analysis data.

C. Structural Loads. Provide Skyroof system capable of handling the following loads:

a. Live Load (PSF): 40 PSF
b. Snow Load (PSF): 30 PSF
c. Wind Load (PSF): 25 PSF

D. Deflection Limits:

1. Vertical Panel Assemblies: Limited to 1/60 of clear span for each assembly component.
2. Overhead Panel Assemblies: Limited to 1/60 of clear span for each assembly component.

E. Structural-Test Performance: Provide panel assemblies tested in accordance with ASTM E330, as follows:

1. When tested at positive and negative wind-load design pressures, assemblies do not show evidence of deflection exceeding specified limits.
2. When tested at 150 percent of positive and negative wind-load design pressures, assemblies, including anchorage, do not show evidence of material failures, structural distress, and permanent deformation of main framing members exceeding 0.2 percent of span.
3. Test Durations: As required by design wind velocity, but not less than 10 seconds.

F. Water Penetration under Static Pressure: Provide panel assemblies that do not evidence water penetration through fixed glazing and framing areas when tested in accordance with ASTM E331 at a minimum static-air-pressure difference of 20 percent of positive wind-load design pressure, but not less than 15 lbf/sq. ft..

G. Water Penetration under Dynamic Pressure: Provide panel assemblies that do not evidence water leakage through fixed glazing and framing areas when tested in accordance with AAMA 501.1 under dynamic pressure equal to 20 percent of positive wind-load design pressure, but not less than 6.24 lbf/sq. ft.

1. Maximum Water Leakage: According to AAMA 501.1 No uncontrolled water penetrating aluminum-framed systems or water appearing on systems' normally exposed interior surfaces from sources other than condensation. Water leakage does not include water that is controlled by flashing and gutters and drained to the exterior, or water that cannot damage adjacent materials or finishes.

H. Thermal Movements: Allow for thermal movements from ambient- and surface-temperature changes. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.

1. Temperature Change (Range): 110 deg F, ambient; 150 deg F, material surfaces.

I. Energy Performance: Provide panel assemblies with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below and certified and labeled according to NFRC:

1. Thermal Transmittance (U-Factor): Fixed glazing and framing areas to have U-factor of not more than 0.14 Btu/sq. ft. x h x deg F as determined in accordance with NFRC 100.
2. Air Infiltration: Maximum air leakage through fixed glazing and framing areas of 0.010 cfm/sq. ft. of fixed wall area as determined in accordance with ASTM E283 at a minimum static-air-pressure differential of 6.24 lbf/sq. ft..

2.2 FIBERGLASS-SANDWICH-PANEL ASSEMBLIES

A. Fiberglass-Sandwich-Panel Assemblies: Translucent assemblies that are supported by aluminum framing and glazed with fiberglass-sandwich panels.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Kalwall Corporation; or a comparable product by one of the following:

a. Kingspan Light + Air LLC.
b. Major Industries, Inc.

2. Basis-of-Design Contact Information:

a. Kalwall Corporation:

1) Email: info@kalwall.com

b. Alder Sales Corp:

1) CJ Mansfield cj@alders.com

2.3 FIBERGLASS-SANDWICH PANELS

A. Fiberglass-Sandwich Panels: Uniformly colored, translucent, thermoset, fiberglass-reinforced-polymer face sheets bonded to both sides of a grid core.

1. Thermoplastic (e.g. polycarbonate, acrylic) faces are not acceptable.
2. Face sheets shall not deform, deflect, or drip when subjected to fire or flame.
3. Core Insulation: Fill panel cores with fiberglass batt.

B. Panel Thickness: 2-3/4 inches.

C. Grid Core: Mechanically interlocked, extruded-aluminum I-beams, with a minimum flange width of 7/16 inch.

1. Extruded Aluminum: ASTM B221, in alloy and temper recommended in writing by manufacturer.
2. I-Beam Construction: Thermally broken, extruded aluminum.

    a. Minimum 1", thermoset fiberglass composite. Poured and de-bridged thermal break is not acceptable.

3. Grid Pattern: Inline rectangle, nominal 12 by 24 inches, Shoji pattern.

D. Exterior Face Sheet:

1. Thickness: 0.070 inch.
2. Color: Crystal.
3. Protective Weathering Surface: Integral, embedded-glass erosion barrier.

E. Interior Face Sheet:

1. Thickness: 0.045 inch.
2. Color: White.

F. Fiberglass-Sandwich-Panel Adhesive: Manufacturer's standard for permanent adhesion of facings to cores.

G. Panel Strength:

1. Maximum Panel Deflection: 3-1/2 inches when a 4-by-12-foot panel is tested in accordance with ASTM E72 at 34 lbf/sq. ft., with a maximum 0.090-inch set deflection after five minutes.
2. Panel Support Strength: Capable of supporting, without failure, a 300-lbf concentrated load when applied to a 3-inch-diameter disk in accordance with ASTM E661.

H. Panel Performance:

1. Self-Ignition Temperature: 650 deg F or more in accordance with ASTM D1929.
2. Smoke-Developed Index: 450 or less in accordance with ASTM E84, or 75 or less in accordance with ASTM D2843.
3. Combustibility Classification: Class CC1 based on testing in accordance with ASTM D635.
4. Roof-Covering Classification: Class A, Burning Brand Test in accordance with ASTM E108 or UL 790.
5. Interior Finish Classification: Class B based on testing in accordance with ASTM E84.
6. Color Change: Not more than 3.0 units Delta E, when measured in accordance with ASTM D2244, after outdoor weathering compliant with procedures in ASTM D1435.

    a. Outdoor Weathering Conditions: Sixty months in southern Florida.

7. Impact Resistance: No fracture or tear at impact of 70 ft. x lbf by a 3-1/4-inch-diameter, 5-lb freefalling ball in accordance with UL 972 test procedure.
8. Haze Factor: Greater than 90 percent when tested in accordance with ASTM D1003.

2.4 ALUMINUM FRAMING SYSTEMS

A. Components: Manufacturer's standard extruded-aluminum members of thickness required and reinforced as required to support imposed loads.

1. Construction: Thermally broken, extruded aluminum.

B. Aluminum: Alloy and temper recommended in writing by manufacturer for type of use and finish indicated.

1. Sheet and Plate: ASTM B209.
2. Extruded Bars, Rods, Profiles, and Tubes: ASTM B221.
3. Extruded Structural Pipe and Tubes: ASTM B429/B429M.
4. Structural Profiles: ASTM B308/B308M.

C. Brackets and Reinforcements: Manufacturer's standard high-strength aluminum with nonstaining, nonferrous shims for aligning skylight components.

D. Fasteners and Accessories: Manufacturer's standard, corrosion-resistant, nonstaining, and nonbleeding fasteners and accessories; compatible with adjacent materials.

1. At closures, retaining caps, or battens, use ASTM A193/A193M, 300 series stainless steel screws.
2. Use self-locking devices where fasteners are subject to loosening or turning out from thermal and structural movements, wind loads, or vibration.
3. At movement joints, use slip-joint linings, spacers, and sleeves of material and type recommended in writing by manufacturer.

E. Concrete and Masonry Inserts: Hot-dip galvanized cast-iron, malleable-iron, or steel inserts complying with ASTM A123/A123M orASTM A153/A153Mrequirements.

F. Anchor Bolts: ASTM A307, Grade A, galvanized steel.

G. Concealed Flashing: Corrosion-resistant, nonstaining, nonbleeding flashing compatible with adjacent materials.

H. Exposed Flashing and Closures: Aluminum sheet not less than 0.063 inch thick, finished to match framing.

I. Framing Gaskets: Manufacturer's standard.

J. Frame-System Sealants: As recommended in writing by manufacturer.

K. Corrosion-Resistant Coating: Cold-applied asphalt mastic, compounded for 15-mil dry film thickness per coat. Provide inert-type noncorrosive compound free of asbestos fibers, sulfur components, and other deleterious impurities.

2.5 FABRICATION

A. Frame System Fabrication:

1. Fabricate components that, when assembled, have the following characteristics:

   a. Profiles that are sharp, straight, and free of defects or deformations.
   b. Accurately fitted joints with ends coped or mitered.
   c. Internal guttering systems or other means to drain water passing through joints, and moisture migrating within assembly to exterior.

2. Fabricate sill closures with weep holes and for installation as continuous component.
3. Reinforce components as required to receive fastener threads.

B. Panel Fabrication: Factory assemble and seal panels.

1. Laminate face sheets to grid core under a controlled process using heat and pressure to produce straight adhesive bonding lines that cover width of core members and that have sharp edges.

   a. White spots indicating lack of bond at intersections of grid-core members are limited in number to four for every 40 sq. ft. of panel and limited in diameter to 3/64 inch.

2. Fabricate with grid pattern that is symmetrical about centerlines of each panel.
3. Fabricate panel to allow condensation within panel to escape.
4. Reinforce panel corners.

2.6 ALUMINUM FINISHES

A. High-Performance Organic Finish: Two-coat fluoropolymer finish complying with AAMA 2604 and containing not less than 50 percent PVDF or FEVE resin by weight in color coat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Color and Gloss: As selected by Architect from manufacturer's full range.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Comply with manufacturer's written instructions.

1. Do not install damaged components.
2. Fit joints between aluminum components to produce hairline joints free of burrs and distortion.
3. Rigidly secure nonmovement joints.
4. Install anchors with separators and isolators to prevent metal corrosion, electrolytic deterioration, and immobilization of moving joints.
5. Seal joints watertight unless otherwise indicated.

B. Metal Protection: Where aluminum components will contact dissimilar materials, protect against galvanic action by painting contact surfaces with corrosion-resistant coating or by installing nonconductive spacers as recommended in writing by manufacturer for this purpose.

C. Install components plumb and true in alignment with established lines and elevations.

D. Skylight Assemblies: Install continuous aluminum sill closures with weatherproof expansion joints and locked and sealed corners. Locate weep holes at rafters. Install components to drain water passing through joints and moisture migrating within assembly to exterior.

E. Erection Tolerances: Install panel assemblies to comply with the following maximum tolerances:

1. Alignment: Limit offset from true alignment to 1/32 inch where surfaces abut in line, edge to edge, at corners, or where a reveal or protruding element separates aligned surfaces by less than 3 inches; otherwise, limit offset to 1/8 inch.
2. Location and Plane: Limit variation from true location and plane to 1/8 inch in 12 feet, but no greater than 1/2 inch over total length.

3.3 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

1. Water-Spray Test: Before installation of interior finishes has begun, panel assemblies to be tested in accordance with AAMA 501.2 and to not show evidence of water penetration.
2. Water Penetration under Static Pressure: Before installation of interior finishes has begun, areas to be tested in accordance with ASTM E1105.

    a. Test Procedures: Test under uniform and cyclic static-air pressure.
    b. Static-Air-Pressure Difference: 0.67 times the pressure specified for laboratory testing according to ASTM E331.
    c. Water Penetration: None.

B. Repair or remove work where test results and inspections indicate that it does not comply with specified requirements.

C. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

D. Prepare test and inspection reports.

END OF SECTION 084523

SECTION 087100 - DOOR HARDWARE

PART 1 - GENERAL

1.01 SUMMARY

A. Section includes:

1. Mechanical and electrified door hardware
2. Electronic access control system components

B. Section excludes:

1. Windows
2. Cabinets (casework), including locks in cabinets.
3. Signage
4. Toilet accessories
5. Overhead doors

C. Related Sections:

1. Division 01 "General Requirements" sections for Allowances, Alternates, Owner Furnished Contractor Installed, Project Management and Coordination.
2. Division 06 Section "Rough Carpentry"
3. Division 06 Section "Finish Carpentry"
4. Division 07 Section "Joint Sealants" for sealant requirements applicable to threshold installation specified in this section.
5. Division 08 Sections:
   a. "Metal Doors and Frames"
   b. "Flush Wood Doors"
   c. "Stile and Rail Wood Doors"
   d. "Interior Aluminum Doors and Frames"
   e. "Aluminum-Framed Entrances and Storefronts"
   f. "Stainless Steel Doors and Frames"
   g. "Special Function Doors"
   h. "Entrances"
6. Division 26 "Electrical" sections for connections to electrical power system and for low-voltage wiring.
7. Division 28 "Electronic Safety and Security" sections for coordination with other components of electronic access control system and fire alarm system.

1.02 REFERENCES

A. UL LLC

1. UL 10B - Fire Test of Door Assemblies

2. UL 10C - Positive Pressure Test of Fire Door Assemblies
3. UL 1784 - Air Leakage Tests of Door Assemblies
4. UL 305 - Panic Hardware

B. DHI - Door and Hardware Institute

1. Sequence and Format for the Hardware Schedule
2. Recommended Locations for Builders Hardware
3. Keying Systems and Nomenclature
4. Installation Guide for Doors and Hardware

C. NFPA – National Fire Protection Association

1. NFPA 70 – National Electric Code
2. NFPA 80 – 2016 Edition – Standard for Fire Doors and Other Opening Protectives
3. NFPA 101 – Life Safety Code
4. NFPA 105 – Smoke and Draft Control Door Assemblies
5. NFPA 252 – Fire Tests of Door Assemblies

D. ANSI - American National Standards Institute

1. ANSI A117.1 – 2017 Edition – Accessible and Usable Buildings and Facilities
2. ANSI/BHMA A156.1 - A156.29, and ANSI/BHMA A156.31 - Standards for Hardware and Specialties
3. ANSI/BHMA A156.28 - Recommended Practices for Keying Systems
4. ANSI/WDMA I.S. 1A - Interior Architectural Wood Flush Doors
5. ANSI/SDI A250.8 - Standard Steel Doors and Frames

1.03 SUBMITTALS

A. General:

1. Submit in accordance with Conditions of Contract and Division 01 Submittal Procedures.
2. Prior to forwarding submittal:

a. Review drawings and Sections from related trades to verify compatibility with specified hardware.
b. Highlight, encircle, or otherwise specifically identify on submittals: deviations from Contract Documents, issues of incompatibility or other issues which may detrimentally affect the Work.

B. Action Submittals:

1. Product Data: Submit technical product data for each item of door hardware, installation instructions, maintenance of operating parts and finish, and other information necessary to show compliance with requirements.
2. Riser and Wiring Diagrams: After final approval of hardware schedule, submit details of electrified door hardware, indicating:

a. Wiring Diagrams: For power, signal, and control wiring and including:
    1) Details of interface of electrified door hardware and building safety and security systems.
    2) Schematic diagram of systems that interface with electrified door hardware.
    3) Point-to-point wiring.
    4) Risers.

3. Door Hardware Schedule:

    a. Submit concurrent with submissions of Product Data, Samples, and Shop Drawings. Coordinate submission of door hardware schedule with scheduling requirements of other work to facilitate fabrication of other work critical in Project construction schedule.
    b. Submit under direct supervision of a Door Hardware Institute (DHI) certified Architectural Hardware Consultant (AHC) or Door Hardware Consultant (DHC) with hardware sets in vertical format as illustrated by Sequence of Format for the Hardware Schedule published by DHI.
    c. Indicate complete designations of each item required for each opening, include:

        1) Door Index: door number, heading number, and Architect's hardware set number.
        2) Quantity, type, style, function, size, and finish of each hardware item.
        3) Name and manufacturer of each item.
        4) Fastenings and other pertinent information.
        5) Location of each hardware set cross-referenced to indications on Drawings.
        6) Explanation of all abbreviations, symbols, and codes contained in schedule.
        7) Mounting locations for hardware.
        8) Door and frame sizes and materials.
        9) Degree of door swing and handing.
        10) Operational Description of openings with electrified hardware covering egress, ingress (access), and fire/smoke alarm connections.

4. Key Schedule:

    a. After Keying Conference, provide keying schedule that includes levels of keying, explanations of key system's function, key symbols used, and door numbers controlled.
    b. Use ANSI/BHMA A156.28 "Recommended Practices for Keying Systems" as guideline for nomenclature, definitions, and approach for selecting optimal keying system.
    c. Provide 3 copies of keying schedule for review prepared and detailed in accordance with referenced DHI publication. Include schematic keying diagram and index each key to unique door designations.
    d. Index keying schedule by door number, keyset, hardware heading number, cross keying instructions, and special key stamping instructions.
    e. Provide one complete bitting list of key cuts and one key system schematic illustrating system usage and expansion. Forward bitting list, key cuts and key system schematic directly to Owner, by means as directed by Owner.
    f. Prepare key schedule by or under supervision of supplier, detailing Owner's final keying instructions for locks.

C. Informational Submittals:

1. Provide Qualification Data for Supplier, Installer and Architectural Hardware Consultant.
2. Provide Product Data:

    a. Certify that door hardware approved for use on types and sizes of labeled fire-rated doors complies with listed fire-rated door assemblies.
    b. Include warranties for specified door hardware.

D. Closeout Submittals:

1. Operations and Maintenance Data: Provide in accordance with Division 01 and include:

    a. Complete information on care, maintenance, and adjustment; data on repair and replacement parts, and information on preservation of finishes.
    b. Catalog pages for each product.
    c. Final approved hardware schedule edited to reflect conditions as installed.
    d. Final keying schedule
    e. Copy of warranties including appropriate reference numbers for manufacturers to identify project.
    f. As-installed wiring diagrams for each opening connected to power, both low voltage and 110 volts.

1.04 QUALITY ASSURANCE

A. Qualifications and Responsibilities:

1. Supplier: Recognized architectural hardware supplier with a minimum of 5 years documented experience supplying both mechanical and electromechanical door hardware similar in quantity, type, and quality to that indicated for this Project. Supplier to be recognized as a factory direct distributor by the manufacturer of the primary materials with a warehousing facility in the Project's vicinity. Supplier to have on staff, a certified Architectural Hardware Consultant (AHC) or Door Hardware Consultant (DHC) available to Owner, Architect, and Contractor, at reasonable times during the Work for consultation.
2. Installer: Qualified tradesperson skilled in the application of commercial grade hardware with experience installing door hardware similar in quantity, type, and quality as indicated for this Project.
3. Architectural Hardware Consultant: Person who is experienced in providing consulting services for door hardware installations that are comparable in material, design, and extent to that indicated for this Project and meets these requirements:

    a. For door hardware: DHI certified AHC or DHC.
    b. Can provide installation and technical data to Architect and other related subcontractors.
    c. Can inspect and verify components are in working order upon completion of installation.
    d. Capable of producing wiring diagram and coordinating installation of electrified hardware with Architect and electrical engineers.

4. Single Source Responsibility: Obtain each type of door hardware from single manufacturer.

B. Pre-Installation Meetings

1. Keying Conference

a. Incorporate keying conference decisions into final keying schedule after reviewing door hardware keying system including:

1) Function of building, flow of traffic, purpose of each area, degree of security required, and plans for future expansion.
2) Preliminary key system schematic diagram.
3) Requirements for key control system.
4) Requirements for access control.
5) Address for delivery of keys.

2. Pre-installation Conference

a. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.
b. Inspect and discuss preparatory work performed by other trades.
c. Inspect and discuss electrical roughing-in for electrified door hardware.
d. Review sequence of operation for each type of electrified door hardware.
e. Review required testing, inspecting, and certifying procedures.
f. Review questions or concerns related to proper installation and adjustment of door hardware.

3. Electrified Hardware Coordination Conference:

a. Prior to ordering electrified hardware, schedule and hold meeting to coordinate door hardware with security, electrical, doors and frames, and other related suppliers.

1.05 DELIVERY, STORAGE, AND HANDLING

A. Inventory door hardware on receipt and provide secure lock-up for hardware delivered to Project site. Promptly replace products damaged during shipping.

B. Tag each item or package separately with identification coordinated with final door hardware schedule, and include installation instructions, templates, and necessary fasteners with each item or package. Deliver each article of hardware in manufacturer's original packaging.

C. Maintain manufacturer-recommended environmental conditions throughout storage and installation periods.

D. Provide secure lock-up for door hardware delivered to Project. Control handling and installation of hardware items so that completion of Work will not be delayed by hardware losses both before and after installation.

E. Handle hardware in manner to avoid damage, marring, or scratching. Correct, replace or repair products damaged during Work. Protect products against malfunction due to paint, solvent, cleanser, or any chemical agent.

1.06 COORDINATION

A. Coordinate layout and installation of floor-recessed door hardware with floor construction. Cast anchoring inserts into concrete.

B. Installation Templates: Distribute for doors, frames, and other work specified to be factory or shop prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.

C. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.

D. Electrical System Roughing-In: Coordinate layout and installation of electrified door hardware with connections to power supplies and building safety and security systems.

1.07 WARRANTY

A. Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within published warranty period.

1. Warranty does not cover damage or faulty operation due to improper installation, improper use or abuse.
2. Warranty Period: Beginning from date of Substantial Completion, for durations indicated in manufacturer's published listings.

a. Mechanical Warranty

1) Locks

a) Schlage L Series: 3 years
b) Schlage ND Series: 10 years

2) Exit Devices

a) Von Duprin: 3 years

3) Closers

a) LCN 4000 Series: 30 years

4) Automatic Operators

a) LCN: 2 years

b. Electrical Warranty

1) Locks

a) Schlage: 1 year

2) Exit Devices

a) Von Duprin: 1 year

3) Closers
a) LCN: 2 years

1.08 MAINTENANCE

A. Turn over unused materials to Owner for maintenance purposes.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

A. The Owner requires use of certain products for their unique characteristics and project suitability to ensure continuity of existing and future performance and maintenance standards. After investigating available product offerings, the Awarding Authority has elected to prepare proprietary specifications. These products are specified with the notation: "No Substitute."

1. Where "No Substitute" is noted, submittals and substitution requests for other products will not be considered.

B. Approval of alternate manufacturers and/or products other than those listed as "Scheduled Manufacturer" or "Acceptable Manufacturers" in the individual article for the product category are only to be considered by official substitution request in accordance with section 01 25 00.

C. Approval of products from manufacturers indicated in "Acceptable Manufacturers" is contingent upon those products providing all functions and features and meeting all requirements of scheduled manufacturer's product.

D. Where specified hardware is not adaptable to finished shape or size of members requiring hardware, furnish suitable types having same operation and quality as type specified, subject to Architect's approval.

2.02 MATERIALS

A. Fabrication

1. Provide door hardware manufactured to comply with published templates generally prepared for machine, wood, and sheet metal screws. provide screws according to manufacturer's recognized installation standards for application intended.
2. Finish exposed screws to match hardware finish, or, if exposed in surfaces of other work, to match finish of this other work including prepared for paint surfaces to receive painted finish.
3. Provide concealed fasteners wherever possible for hardware units exposed when door is closed. Coordinate with "Metal Doors and Frames", "Flush Wood Doors", "Stile and Rail Wood Doors" to ensure proper reinforcements. Advise the Architect where visible fasteners, such as thru bolts, are required.

B. Provide screws, bolts, expansion shields, drop plates and other devices necessary for hardware installation.

1. Where fasteners are exposed to view: Finish to match adjacent door hardware material.

C. Cable and Connectors:

1. Where scheduled in the hardware sets, provide each item of electrified hardware and wire harnesses with number and gage of wires enough to accommodate electric function of specified hardware.
2. Provide Molex connectors that plug directly into connectors from harnesses, electric locking and power transfer devices.
3. Provide through-door wire harness for each electrified locking device installed in a door and wire harness for each electrified hinge, electrified continuous hinge, electrified pivot, and electric power transfer for connection to power supplies.

2.03 HINGES

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

a. Ives 5BB series

2. Acceptable Manufacturers and Products:

a. Hager BB1191/1279 series
b. Best FBB series

B. Requirements:

1. Provide hinges conforming to ANSI/BHMA A156.1.
2. Provide five knuckle, ball bearing hinges.
3. 1-3/4 inch (44 mm) thick doors, up to and including 36 inches (914 mm) wide:

a. Exterior: Standard weight, bronze or stainless steel, 4-1/2 inches (114 mm) high
b. Interior: Standard weight, steel, 4-1/2 inches (114 mm) high.

4. 1-3/4 inch (44 mm) thick doors over 36 inches (914 mm) wide:

    a. Exterior: Heavy weight, bronze/stainless steel, 5 inches (127 mm) high
    b. Interior: Heavy weight, steel, 5 inches (127 mm) high

5. 2 inches or thicker doors:

    a. Exterior: Heavy weight, bronze or stainless steel, 5 inches (127 mm) high
    b. Interior: Heavy weight, steel, 5 inches (127 mm) high

6. Adjust hinge width for door, frame, and wall conditions to allow proper degree of opening.
7. Provide three hinges per door leaf for doors 90 inches (2286 mm) or less in height, and one additional hinge for each 30 inches (762 mm) of additional door height.
8. Hinge Pins: Except as otherwise indicated, provide hinge pins as follows:

    a. Steel Hinges: Steel pins
    b. Non-Ferrous Hinges: Stainless steel pins
    c. Out-Swinging Exterior Doors: Non-removable pins
    d. Out-Swinging Interior Lockable Doors: Non-removable pins
    e. Interior Non-lockable Doors: Non-rising pins

9. Provide hinges with electrified options as scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware. Locate electric hinge at second hinge from bottom or nearest to electrified locking component. Provide mortar guard for each electrified hinge specified.

2.04 CONTINUOUS HINGES

A. Manufacturers:

1. Scheduled Manufacturer:

    a. Ives

2. Acceptable Manufacturers:

    a. Select
    b. ABH

B. Requirements:

1. Provide aluminum geared continuous hinges conforming to ANSI/BHMA A156.26, Grade 1.
2. Provide aluminum geared continuous hinges, where specified in the hardware sets, fabricated from 6063-T6 aluminum.
3. Provide split nylon bearings at each hinge knuckle for quiet, smooth, self-lubricating operation.

4. Provide hinges capable of supporting door weights up to 450 pounds, and successfully tested for 1,500,000 cycles.
5. On fire-rated doors, provide aluminum geared continuous hinges classified for use on rated doors by testing agency acceptable to authority having jurisdiction.
6. Provide aluminum geared continuous hinges with electrified option scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware.
7. Provide hinges 1 inch (25 mm) shorter in length than nominal height of door, unless otherwise noted or door details require shorter length and with symmetrical hole pattern.

2.05 ELECTRIC POWER TRANSFER

A. Manufacturers:

1. Scheduled Manufacturer and Product:

   a. Von Duprin EPT-10

2. Acceptable Manufacturers and Products:

   a. ABH PT1000
   b. Security Door Controls PTM

B. Requirements:

1. Provide power transfer with electrified options as scheduled in the hardware sets. Provide with number and gage of wires enough to accommodate electric function of specified hardware.
2. Locate electric power transfer per manufacturer's template and UL requirements, unless interference with operation of door or other hardware items.

2.06 MORTISE LOCKS

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

   a. Schlage L9000 series (Owner Standard)

B. Requirements:

1. Provide mortise locks conforming to ANSI/BHMA A156.13 Series 1000, Grade 1, and UL Listed for 3-hour fire doors.
2. Indicators: Where specified, provide indicator window measuring a minimum 2-3/5-inch x 3/5 inch with 180-degree visibility. Provide messages color-coded using ANSI Z535 Safety Red with full text and/or symbols, as scheduled, for easy visibility. When applicable allows for lock status indication on both sides of the door.
3. Provide locks manufactured from heavy gauge steel, containing components of steel with a zinc dichromate plating for corrosion resistance.

4. Provide lock case that is multi-function and field reversible for handing without opening case. Cylinders: Refer to "KEYING" article, herein.
5. Provide locks with standard 2-3/4 inches (70 mm) backset with full 3/4 inch (19 mm) throw stainless steel mechanical anti-friction latchbolt. Provide deadbolt with full 1-inch (25 mm) throw, constructed of stainless steel.
6. Provide standard ASA strikes unless extended lip strikes are necessary to protect trim. Provide electrified options as scheduled in the hardware sets. Where scheduled, provide switches and sensors integrated into the locks and latches.
7. Provide motor based electrified locksets that comply with the following requirements:

    a. Universal input voltage – single chassis accepts 12 or 24VDC to allow for changes in the field without changing lock chassis.
    b. Fail Safe/Fail Secure – changing mode between electrically locked (fail safe) and electrically unlocked (fail secure) is field selectable without opening the lock case.
    c. Low maximum current draw – maximum 0.4 amps to allow for multiple locks on a single power supply.
    d. Low holding current – maximum 0.01 amps to produce minimal heat, eliminate “hot levers” in electrically locked applications, and to provide reliable operation in wood doors that provide minimal ventilation and air flow.
    e. Connections – provide quick-connect Molex system standard.

8. (KEY OVERRIDE OPTION WHEN XL13-439 IS SPECIFIED IN HARDWARE SETS) Provide locks with a key override feature built into the chassis that allows the outside key to retract the deadbolt and/or latchbolt, overriding the inside thumbturn when it is being held in the locked position.
9. Lever Trim: Solid brass, bronze, or stainless steel, cast or forged in design specified, with wrought roses and external lever spring cages. Provide thru-bolted levers with 2-piece spindles.

    a. Vandlgard: Provide levers with vandal resistant technology for use at heavy traffic or abusive applications.
    b. Lever Design: 06

2.07 CYLINDRICAL LOCKS – GRADE 1

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

    a. Schlage ND series (Owner Standard)

B. Requirements:

1. Provide cylindrical locks conforming to ANSI/BHMA A156.2 Series 4000, Grade 1, and UL Listed for 3-hour fire doors.
2. Cylinders: Refer to "KEYING" article, herein.
3. Provide locks with standard 2-3/4 inches (70 mm) backset, unless noted otherwise, with 1/2-inch latch throw. Provide proper latch throw for UL listing at pairs.
4. Provide locksets with separate anti-rotation thru-bolts, and no exposed screws.

5. Provide independently operating levers with two external return spring cassettes mounted under roses to prevent lever sag.
6. Provide standard ASA strikes unless extended lip strikes are necessary to protect trim.
7. Provide electrified options as scheduled in the hardware sets.
8. Lever Trim: Solid cast levers without plastic inserts and wrought roses on both sides.

    a. Vandlgard: Provide levers with vandal resistant technology for use at heavy traffic or abusive applications.
    b. Lever Design: RHODES

2.08 EXIT DEVICES

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

    a. Von Duprin 98 (Owner Standard)

B. Requirements:

1. Provide exit devices tested to ANSI/BHMA A156.3 Grade 1 and UL listed for Panic Exit or Fire Exit Hardware.
2. Cylinders: Refer to "KEYING" article, herein.
3. Provide smooth touchpad type exit devices, fabricated of brass, bronze, stainless steel, or aluminum, plated to standard architectural finishes to match balance of door hardware.
4. Touchpad must extend a minimum of one half of door width. No plastic inserts are allowed in touchpads.
5. Provide exit devices with deadlatching feature for security and for future addition of alarm kits and/or other electrified requirements.
6. Provide exit devices with weather resistant components that can withstand harsh conditions of various climates and corrosive cleaners used in outdoor pool environments.
7. Provide flush end caps for exit devices.
8. Provide exit devices with manufacturer's approved strikes.
9. Provide exit devices cut to door width and height. Install exit devices at height recommended by exit device manufacturer, allowable by governing building codes, and approved by Architect.
10. Mount mechanism case flush on face of doors or provide spacers to fill gaps behind devices. Where glass trim or molding projects off face of door, provide glass bead kits.
11. Provide cylinder or hex-key dogging as specified at non fire-rated openings.
12. Removable Mullions: 2 inches (51 mm) x 3 inches (76 mm) steel tube. Where scheduled as keyed removable mullion, provide type that can be removed by use of a keyed cylinder, which is self-locking when re-installed.
13. Provide factory drilled weep holes for exit devices used in full exterior application, highly corrosive areas, and where noted in hardware sets.
14. Provide electrified options as scheduled.
15. Top latch mounting: double- or single-tab mount for steel doors, face mount for aluminum doors eliminating requirement of tabs, and double tab mount for wood doors.

16. Provide exit devices with optional trim designs to match other lever and pull designs used on the project.

2.09 ACCESS CONTROL READER

A. Manufacturers and Products: VERIFY WITH OWNER

1. Scheduled Manufacturer and Product:

a. Schlage MT Series

B. Requirements:

1. Provide access control card readers manufactured by a global company who is a recognized leader in the production of access control devices. Card reader manufactured for non-access control applications are not acceptable
2. Provide multi-technology contactless readers complying with ISO 14443.
3. Provide access control card readers capable of reading the following technologies:

a. CSN - DESFire® CSN, HID iCLASS® CSN, Inside Contactless PicoTag® CSN, ST Microelectronics® CSN, Texas Instruments Tag-It®, CSN, Phillips I-Code® CSN
b. 125 KHz proximity - Schlage® Proximity, HID® Proximity, GE/CASI® Proximity, AWID® Proximity, LenelProx®
c. 13.56 MHz Smart card - Schlage smart cards using MIFARE Classic® EV1, Schlage smart cards using MIFARE Plus®, Schlage smart cards using MIFARE® DESFire® EV1, Schlage smart cards using MIFARE® DESFire® EV2/EV3

2.10 POWER SUPPLIES

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

a. Schlage/Von Duprin PS900 Series

B. Requirements:

1. Provide power supplies approved by manufacturer of supplied electrified hardware.
2. Provide appropriate quantity of power supplies necessary for proper operation of electrified locking components as recommended by manufacturer of electrified locking components with consideration for each electrified component using power supply, location of power supply, and approved wiring diagrams. Locate power supplies as directed by Architect.
3. Provide regulated and filtered 24 VDC power supply, and UL class 2 listed.
4. Provide power supplies with the following features:

a. 12/24 VDC Output, field selectable.

b. Class 2 Rated power limited output.
c. Universal 120-240 VAC input.
d. Low voltage DC, regulated and filtered.
e. Polarized connector for distribution boards.
f. Fused primary input.
g. AC input and DC output monitoring circuit w/LED indicators.
h. Cover mounted AC Input indication.
i. Tested and certified to meet UL294.
j. NEMA 1 enclosure.
k. Hinged cover w/lock down screws.
l. High voltage protective cover.

2.11 CYLINDERS

A. Manufacturers and Products: Verify with owner.

1. Scheduled Manufacturer and Product:

a. Schlage Everest D/Everest 29 T (Everest D not patented)

B. Requirements:

1. Provide cylinders/cores compliant with ANSI/BHMA A156.5; latest revision; cylinder face finished to match lockset; manufacturer's series as indicated. Refer to "KEYING" article, herein.
2. Provide cylinders in the below-listed configuration(s), distributed throughout the Project as indicated.

a. Patented Restricted: cylinder with permanent core with patented, restricted keyway.
b. Patented Restricted: cylinder with interchangeable core with patented, restricted keyway.

3. Patent Protection: Cylinders/cores requiring use of restricted, patented keys, patent protected.
4. Nickel silver bottom pins.

2.12 KEYING

A. Scheduled System: VERIFY WITH OWNER

1. New factory registered system:

a. Provide a factory registered keying system, complying with guidelines in ANSI/BHMA A156.28, incorporating decisions made at keying conference.

2. Existing factory registered system:

a. Provide cylinders/cores keyed into Owner's existing factory registered keying system. Comply with guidelines in ANSI/BHMA A156.28, incorporating decisions made at keying conference.

3. Existing non-factory registered system:

    a. Provide cylinders/cores keyed into Owner's existing keying system managed by Owner's locksmith, complying with guidelines in ANSI/BHMA A156.28, incorporating decisions made at keying conference. Contact:

        1) Firm Name:
        2) Contact Person:
        3) Telephone:

B. Requirements:

1. Construction Keying:

    a. Temporary Construction Cylinder Keying.

        1) Provide construction cores that permit voiding construction keys without cylinder removal, furnished in accordance with the following requirements.

            a) Split Key or Lost Ball Construction Keying System.
            b) 3 construction control keys, and extractor tools or keys as required to void construction keying.
            c) 12 construction change (day) keys.

        2) Owner or Owner's Representative will void operation of temporary construction keys.

    b. Replaceable Construction Cores.

        1) Provide temporary construction cores replaceable by permanent cores, furnished in accordance with the following requirements.

            a) 3 construction control keys
            b) 12 construction change (day) keys.

        2) Owner or Owner's Representative will replace temporary construction cores with permanent cores.

2. Permanent Keying:

    a. Provide permanent cylinders/cores keyed by the manufacturer according to the following key system.

        1) Master Keying system as directed by the Owner.

    b. Forward bitting list and keys separately from cylinders, by means as directed by Owner. Failure to comply with forwarding requirements will be cause for replacement of cylinders/cores involved at no additional cost to Owner.
    c. Provide keys with the following features:

        1) Material: Nickel silver; minimum thickness of .107-inch (2.3mm)

2) Patent Protection: Keys and blanks protected by one or more utility patent(s).
3) Geographically Exclusive: Where High Security or Security cylinders/cores are indicated, provide nationwide, geographically exclusive key system complying with the following restrictions.

d. Identification:

1) Mark permanent cylinders/cores and keys with applicable blind code for identification. Do not provide blind code marks with actual key cuts.
2) Identification stamping provisions must be approved by the Architect and Owner.
3) Stamp cylinders/cores and keys with Owner's unique key system facility code as established by the manufacturer; key symbol and embossed or stamped with "DO NOT DUPLICATE" along with the "PATENTED" or patent number to enforce the patent protection.
4) Failure to comply with stamping requirements will be cause for replacement of keys involved at no additional cost to Owner.
5) Forward permanent cylinders/cores to Owner, separately from keys, by means as directed by Owner.

e. Quantity: Furnish in the following quantities.

1) Permanent Control Keys: As required.
2) Master Keys: As required.
3) Change (Day) Keys: As required per cylinder/core that is keyed differently.
4) Key Blanks: Quantity as determined in the keying meeting.

2.13 KEY CONTROL SYSTEM

A. Manufacturers: Verify with owner

1. Scheduled Manufacturer:

a. Telkee

2. Acceptable Manufacturers:

a. HPC
b. Lund

B. Requirements:

1. Provide key control system, including envelopes, labels, tags with self-locking key clips, receipt forms, 3-way visible card index, temporary markers, permanent markers, and standard metal cabinet, all as recommended by system manufacturer, with capacity for 150% of number of locks required for Project.

a. Provide complete cross index system set up by hardware supplier, and place keys on markers and hooks in cabinet as determined by final key schedule.
b. Provide hinged-panel type cabinet for wall mounting.

2.14 DOOR CLOSERS

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

a. LCN 4040XP series (owner standard)

B. Requirements:

1. Provide door closers conforming to ANSI/BHMA A156.4 Grade 1 requirements by BHMA certified independent testing laboratory. ISO 9000 certify closers. Stamp units with date of manufacture code.
2. Provide door closers with fully hydraulic, full rack and pinion action with high strength cast iron cylinder, and full complement bearings at shaft.
3. Cylinder Body: 1-1/2-inch (38 mm) diameter piston with 5/8-inch (16 mm) diameter double heat-treated pinion journal. QR code with a direct link to maintenance instructions.
4. Hydraulic Fluid: Fireproof, passing requirements of UL10C, and requiring no seasonal closer adjustment for temperatures ranging from 120 degrees F to -30 degrees F.
5. Spring Power: Continuously adjustable over full range of closer sizes, and providing reduced opening force as required by accessibility codes and standards. Provide snap-on cover clip, with plastic covers, that secures cover to spring tube.
6. Hydraulic Regulation: By tamper-proof, non-critical valves, with separate adjustment for latch speed, general speed, and backcheck. Provide graphically labelled instructions on the closer body adjacent to each adjustment valve. Provide positive stop on reg valve that prevents reg screw from being backed out.
7. Provide closers with solid forged steel main arms and factory assembled heavy-duty forged forearms for parallel arm closers.
8. Pressure Relief Valve (PRV) Technology: Not permitted.
9. Finish for Closer Cylinders, Arms, Adapter Plates, and Metal Covers: Powder coating finish which has been certified to exceed 100 hours salt spray testing as described in ANSI Standard A156.4 and ASTM B117, or has special rust inhibitor (SRI).
10. Provide special templates, drop plates, mounting brackets, or adapters for arms as required for details, overhead stops, and other door hardware items interfering with closer mounting.

2.15 ELECTRO-HYDRAULIC AUTOMATIC OPERATORS

A. Manufacturers and Products:

1. Scheduled Manufacturer and Product:

a. LCN 4600 series (owner standard)

B. Requirements:

1. Provide low energy automatic operator units with hydraulic closer complying with ANSI/BHMA A156.19.

2. Hydraulic Fluid: Fireproof, passing requirements of UL10C, and requiring no seasonal closer adjustment for temperatures ranging from 120 degrees F to -30 degrees F.
3. Provide units with conventional door closer opening and closing forces unless power operator motor is activated. Provide door closer assembly with adjustable spring size, back-check, and opening and closing speed adjustment valves to control door
4. Provide units with on/off switch for manual operation, motor start up delay, vestibule interface delay, electric lock delay, and door hold open delay.
5. Provide drop plates, brackets, and adapters for arms as required for details.
6. Provide actuator switches and receivers for operation as specified.
7. Provide weather-resistant actuators at exterior applications.
8. Provide key switches with LED's, recommended and approved by manufacturer of automatic operator as required for function described in operation description of hardware group below. Cylinders: Refer to "KEYING" article, herein.
9. Provide complete assemblies of controls, switches, power supplies, relays, and parts/material recommended and approved by manufacturer of automatic operator for each individual leaf. Actuators control both doors simultaneously at pairs. Sequence operation of exterior and vestibule doors with automatic operators to allow ingress or egress through both sets of openings as directed by Architect. Locate actuators, key switches, and other controls as directed by Architect.
10. Provide units with vestibule inputs that allow sequencing operation of two units, and SPDT relay for interfacing with latching or locking devices.

2.16 PROTECTION PLATES

A. Manufacturers:

1. Scheduled Manufacturer:

a. Ives

2. Acceptable Manufacturers:

a. Trimco
b. Rockwood

B. Requirements:

1. Provide protection plates with a minimum of 0.050 inch (1 mm) thick, beveled four edges as scheduled. Furnish with sheet metal or wood screws, finished to match plates.
2. Sizes plates 2 inches (51 mm) less width of door on single doors, pairs of doors with a mullion, and doors with edge guards. Size plates 1 inch (25 mm) less width of door on pairs without a mullion or edge guards.
3. At fire rated doors, provide protection plates over 16 inches high with UL label.

2.17 OVERHEAD STOPS AND OVERHEAD STOP/HOLDERS

A. Manufacturers:

1. Scheduled Manufacturers:

    a. Glynn-Johnson

2. Acceptable Manufacturers:

    a. Rixson
    b. ABH

B. Requirements:

1. Provide overhead stop at any door where conditions do not allow for a wall stop or floor stop presents tripping hazard.

2.18 DOOR STOPS AND HOLDERS

A. Manufacturers:

1. Scheduled Manufacturer:

    a. Ives

2. Acceptable Manufacturers:

    a. Trimco
    b. Rockwood

B. Provide door stops at each door leaf:

1. Provide wall stops wherever possible. Provide concave type where lockset has a push button of thumbturn.
2. Where a wall stop cannot be used, provide universal floor stops.
3. Where wall or floor stop cannot be used, provide overhead stop.
4. Provide roller bumper where doors open into each other and overhead stop cannot be used.

2.19 THRESHOLDS, SEALS, DOOR SWEEPS, AUTOMATIC DOOR BOTTOMS, AND GASKETING

A. Manufacturers:

1. Scheduled Manufacturer:

    a. Zero International

2. Acceptable Manufacturers:

    a. National Guard
    b. Pemko

B. Requirements:

1. Provide thresholds, weather-stripping, and gasketing systems as specified and per architectural details. Match finish of other items.
2. Smoke- and Draft-Control Door Assemblies: Where smoke- and draft-control door assemblies are required, provide door hardware that meets requirements of assemblies tested according to UL 1784 and installed in compliance with NFPA 105.
3. Provide door sweeps, seals, astragals, and auto door bottoms only of type where resilient or flexible seal strip is easily replaceable and readily available.
4. Size thresholds 1/2 inch (13 mm) high by 5 inches (127 mm) wide by door width unless otherwise specified in the hardware sets or detailed in the drawings.

2.20 SILENCERS

A. Manufacturers:

1. Scheduled Manufacturer:

a. Ives

2. Acceptable Manufacturers:

a. Rockwood
b. Trimco

B. Requirements:

1. Provide "push-in" type silencers for hollow metal or wood frames.
2. Provide one silencer per 30 inches (762 mm) of height on each single frame, and two for each pair frame.
3. Omit where gasketing is specified.

2.21 DOOR POSITION SWITCHES

A. Manufacturers:

1. Scheduled Manufacturer:

a. Schlage

2. Acceptable Manufacturers:

a. GE-Interlogix
b. Sargent

B. Requirements:

1. Provide recessed or surface mounted type door position switches as specified.

2. Coordinate door and frame preparations with door and frame suppliers. If switches are being used with magnetic locking device, provide minimum of 4 inches (102 mm) between switch and magnetic locking device.

2.22 COAT HOOKS

A. Manufacturers:

1. Scheduled Manufacturer:

a. Ives

2. Acceptable Manufacturers:

a. Burns
b. Rockwood

B. Provide coat hooks as specified.

2.23 FINISHES

A. FINISH: BHMA 626/652 (US26D); EXCEPT:

1. Hinges at Exterior Doors: BHMA 630 (US32D)
2. Aluminum Geared Continuous Hinges: BHMA 628 (US28)
3. Push Plates, Pulls, and Push Bars: BHMA 630 (US32D)
4. Protection Plates: BHMA 630 (US32D)
5. Overhead Stops and Holders: BHMA 630 (US32D)
6. Door Closers: Powder Coat to Match
7. Wall Stops: BHMA 630 (US32D)
8. Latch Protectors: BHMA 630 (US32D)
9. Weatherstripping: Clear Anodized Aluminum
10. Thresholds: Mill Finish Aluminum

PART 3 - EXECUTION

3.01 EXAMINATION

A. Prior to installation of hardware, examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance. Verify doors, frames, and walls have been properly reinforced for hardware installation.

B. Examine roughing-in for electrical power systems to verify actual locations of wiring connections before electrified door hardware installation.

C. Submit a list of deficiencies in writing and proceed with installation only after unsatisfactory conditions have been corrected.

3.02 INSTALLATION

A. Mount door hardware units at heights to comply with the following, unless otherwise indicated or required to comply with governing regulations.

1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
2. Custom Steel Doors and Frames: HMMA 831.
3. Interior Architectural Wood Flush Doors: ANSI/WDMA I.S. 1A
4. Installation Guide for Doors and Hardware: DHI TDH-007-20

B. Install door hardware in accordance with NFPA 80, NFPA 101 and provide post-install inspection, testing as specified in section 1.03.E unless otherwise required to comply with governing regulations.

C. Install each hardware item in compliance with manufacturer's instructions and recommendations, using only fasteners provided by manufacturer.

D. Do not install surface mounted items until finishes have been completed on substrate. Protect all installed hardware during painting.

E. Set units level, plumb and true to line and location. Adjust and reinforce attachment substrate as necessary for proper installation and operation.

F. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.

G. Install operating parts so they move freely and smoothly without binding, sticking, or excessive clearance.

H. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than quantity recommended by manufacturer for application indicated.

I. Lock Cylinders:

1. Install construction cores to secure building and areas during construction period.
2. Replace construction cores with permanent cores as indicated in keying section.
3. Furnish permanent cores to Owner for installation.

J. Wiring: Coordinate with Division 26, ELECTRICAL and Division 28 ELECTRONIC SAFETY AND SECURITY sections for:

1. Conduit, junction boxes and wire pulls.
2. Connections to and from power supplies to electrified hardware.
3. Connections to fire/smoke alarm system and smoke evacuation system.
4. Connection of wire to door position switches and wire runs to central room or area, as directed by Architect.

5. Connections to panel interface modules, controllers, and gateways.
6. Testing and labeling wires with Architect's opening number.

K. Key Control System: Tag keys and place them on markers and hooks in key control system cabinet, as determined by final keying schedule.

L. Continuous Hinges: Re-locate the door and frame fire rating labels where they will remain visible so that the hinge does not cover the label once installed.

M. Door Closers & Auto Operators: Mount closers/operators on room side of corridor doors, inside of exterior doors, and stair side of stairway doors from corridors. Mount closers/operators so they are not visible in corridors, lobbies and other public spaces unless approved by Architect.

N. Overhead Stops/Holders: Mount overhead stops/holders on room side of corridor doors, inside of exterior doors, and stair side of stairway doors.

O. Power Supplies: Locate power supplies as indicated or, if not indicated, above accessible ceilings or in equipment room, or alternate location as directed by Architect.

P. Thresholds: Set thresholds in full bed of sealant complying with requirements specified in Division 07 Section "Joint Sealants."

Q. Stops: Provide floor stops for doors unless wall or other type stops are indicated in door hardware schedule. Do not mount floor stops where they may impede traffic or present tripping hazard.

R. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.

S. Meeting Stile Gasketing: Fasten to meeting stiles, forming seal when doors are closed.

T. Door Bottoms and Sweeps: Apply to bottom of door, forming seal with threshold when door is closed.

3.03 ADJUSTING

A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.

1. Spring Hinges: Adjust to achieve positive latching when door can close freely from an open position of 30 degrees.
2. Electric Strikes: Adjust horizontal and vertical alignment of keeper to properly engage lock bolt.
3. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

B. Occupancy Adjustment: Approximately three to six months after date of Substantial Completion, examine and readjust each item of door hardware, including adjusting operating forces, as necessary to ensure function of doors and door hardware.

3.04 CLEANING AND PROTECTION

A. Clean adjacent surfaces soiled by door hardware installation.

B. Clean operating items per manufacturer's instructions to restore proper function and finish.

C. Provide final protection and maintain conditions that ensure door hardware is without damage or deterioration at time of Substantial Completion.

3.05 DOOR HARDWARE SCHEDULE

A. The intent of the hardware specification is to specify the hardware for interior and exterior doors, and to establish a type, continuity, and standard of quality. However, it is the door hardware supplier's responsibility to thoroughly review existing conditions, schedules, specifications, drawings, and other Contract Documents to verify the suitability of the hardware specified.

B. Discrepancies, conflicting hardware, and missing items are to be brought to the attention of the architect with corrections made prior to the bidding process. Omitted items not included in a hardware set should be scheduled with the appropriate additional hardware required for proper application.

C. Hardware items are referenced in the following hardware schedule. Refer to the above specifications for special features, options, cylinders/keying, and other requirements.

D. Hardware Sets:

Hardware Group No. 01

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5 NRP	652	IVE
1	EA	KEYED PRIVACY W/ IND CE KEYWAY	L9496P6 06A L583-363 XL11-986	626	SCH
1	EA	OH STOP	450S	689	GLY
1	EA	GASKETING	488SBK PSA	BK	ZER
1	EA	COAT AND HAT HOOK	507	626	IVE

Hardware Group No. 02

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5	652	IVE
1	EA	ENTRANCE LOCK	ND53P6D RHO	626	SCH
1	EA	WALL STOP	WS406/407CCV	630	IVE
1	EA	GASKETING	488SBK PSA	BK	ZER

Hardware Group No. 03

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5	652	IVE
1	EA	CLASSROOM LOCK	ND70P6D RHO	626	SCH
1	EA	WALL STOP	WS406/407CCV	630	IVE
3	EA	GASKETING	488SBK PSA	BK	ZER

Hardware Group No. 04

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5	652	IVE
1	EA	CLASSROOM SECURITY	ND75P6D RHO XN12-035	626	SCH
1	EA	WALL STOP	WS406/407CCV	630	IVE
1	EA	GASKETING	488SBK PSA	BK	ZER

Hardware Group No. 05

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
3	EA	HINGE	5BB1 4.5 X 4.5	652	IVE
1	EA	CLASSROOM SECURITY	ND75P6D RHO XN12-035	626	SCH
1	EA	SURFACE CLOSER	4040XP HEDA MC	689	LCN
1	EA	KICK PLATE	8400 10" X 2" LDW B-CS	630	IVE
1	EA	WALL STOP	WS406/407CCV	630	IVE
1	EA	GASKETING	488SBK PSA	BK	ZER

Hardware Group No. 06

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	EA	CONT. HINGE	112XY TWP CON	↯	628	IVE
1	EA	VANDL EU STOREROOM	ND96P6DEU CON RHO 12V/24V DC	↯	626	SCH
1	EA	SURFACE CLOSER	4040XP EDA MC		689	LCN
1	EA	PA MOUNTING PLATE	4040XP-18PA		689	LCN
1	EA	WALL STOP	WS406/407CCV		630	IVE
3	EA	SILENCER	SR64		GRY	IVE
1	EA	WIRE HARNESS	CON-X (LENGTH AS REQ'D)	↯		SCH
1	EA	POWER SUPPLY WIRE HARNESS	CON-XX AS REQUIRED	↯		SCH
1	EA	MULTITECH READER (REF DIV 28)	MT11-485 / MT15-485 12 VDC	↯	BLK	SCE
1		POWER SUPPLY	BY DIV 28	↯		B/O

LOCKSET MAY BE AUTO LOCK/UNLOCK THROUGH ACCESS CONTROL/SECURITY SYSTEM. WHEN LOCKED, CARD IN. USER PRESENTS CREDENTIAL, ELECTRIFIED LOCKSET LEVER RELEASES, USER DEPRESSES LEVER TO RETRACT LATCH AND OPEN DOOR.

Hardware Group No. AL01

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
2	EA	CONT. HINGE	112XY EPT		628	IVE
2	EA	POWER TRANSFER	EPT10 CON	✓	689	VON
1	EA	REMOVABLE MULLION	KR4954 STAB		689	VON
1	EA	ELEC PANIC HARDWARE	LXRX-LC-QEL-XP98-NL-CON 24 VDC	✓	626	VON
1	EA	ELEC PANIC HARDWARE	RX-QEL-XP98-DT-CON 24 VDC	✓	626	VON
1	EA	RIM CYLINDER	20-057 (EXIT DEVICE)		626	SCH
1	EA	MORTISE CYLINDER	20-061 36-083 (MULLION)		626	SCH
2	EA	OH STOP	100S ADJ		630	GLY
1	EA	SURFACE CLOSER	4040XP EDA MC		689	LCN
1	EA	SURF. AUTO OPERATOR	4642 CS FC WMS 120 VAC	✓	689	LCN
1	EA	PA MOUNTING PLATE	4040XP-18PA		689	LCN
1	EA	5TH SCREW SUPPORT	4040XP-30		689	LCN
1	EA	BLADE STOP SPACER	4040XP-61		689	LCN
2	EA	ACTUATOR, TOUCH	8310-853 (BOLLARD AND VESTIBULE WALL)	✓	630	LCN
1	EA	BOLLARD PART	8310-866			LCN
1	EA	MOUNT BOX	8310-867S/8310-867F AS REQUIRED			LCN
1	SET	PERIMETER SEALS	BY DOOR MFG/SUPPLIER			B/O
2	EA	DOOR SWEEP	39A		A	ZER
1	EA	THRESHOLD	BY DOOR MFG/SUPPLIER			B/O
2	EA	WIRE HARNESS	CON-X (LENGTH AS REQ'D)	✓		SCH
2	EA	POWER SUPPLY WIRE HARNESS	CON-XX AS REQUIRED	✓		SCH
1	EA	MULTITECH READER (REF DIV 28)	MT11-485 / MT15-485 12 VDC	✓	BLK	SCE
2	EA	DOOR CONTACT	679-05HM	✓	BLK	SCE
1	EA	POWER SUPPLY	PS902 900-2RS 120/240 VAC	✓		VON

AUTO LOCK/UNLOCK THROUGH ACCESS CONTROL SYSTEM FOR PUSH/PULL OPERATION DURING NORMAL BUSINESS HOURS. CARD IN WHEN LOCKED. USER PRESENTS CREDENTIAL, EXIT DEVICE LATCH RETRACTS AND EXTERIOR ACTUATOR TURNS ON. USER EITHER OPENS DOOR MANUALLY OR PUSHES ACTUATOR TO ENGAGE AUTO OPERATOR TO OPEN DOOR. EXTERIOR OPERATOR FUNCTIONS INDEPENDENT FROM INTERIOR OPERATOR. DOOR POSITION IS MONITORED THROUGH ACCESS CONTROL/SECURITY SYSTEM. REQUEST TO EXIT IS IN EXIT DEVICE PUSH BAR.

Hardware Group No. AL02

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
2	EA	CONT. HINGE	112XY EPT		628	IVE
2	EA	POWER TRANSFER	EPT10 CON	✓	689	VON
1	EA	REMOVABLE MULLION	KR4954 STAB		689	VON
1	EA	ELEC PANIC HARDWARE	LXRX-LC-QEL-XP98-NL-CON 24 VDC	✓	626	VON
1	EA	ELEC PANIC HARDWARE	RX-QEL-XP98-DT-CON 24 VDC	✓	626	VON
1	EA	RIM CYLINDER	20-057 (EXIT DEVICE)		626	SCH
1	EA	MORTISE CYLINDER	20-061 36-083 (MULLION)		626	SCH
2	EA	OH STOP	100S ADJ		630	GLY
1	EA	SURFACE CLOSER	4040XP EDA MC		689	LCN
1	EA	SURF. AUTO OPERATOR	4642 CS FC WMS 120 VAC	✓	689	LCN
1	EA	PA MOUNTING PLATE	4040XP-18PA		689	LCN
1	EA	5TH SCREW SUPPORT	4040XP-30		689	LCN
1	EA	BLADE STOP SPACER	4040XP-61		689	LCN
2	EA	ACTUATOR, TOUCH	8310-853 (VESITUBLE WALL & CORRIDOR WALL)	✓	630	LCN
2	EA	MOUNT BOX	8310-867S/8310-867F AS REQUIRED			LCN
1	SET	PERIMETER SEALS	BY DOOR MFG/SUPPLIER			B/O
1	EA	THRESHOLD	BY DOOR MFG/SUPPLIER			B/O
2	EA	WIRE HARNESS	CON-X (LENGTH AS REQ'D)	✓		SCH
2	EA	POWER SUPPLY WIRE HARNESS	CON-XX AS REQUIRED	✓		SCH
1	EA	MULTITECH READER (REF DIV 28)	MT11-485 / MT15-485 12 VDC	✓	BLK	SCE
2	EA	DOOR CONTACT	679-05HM	✓	BLK	SCE
1		POWER SUPPLY	BY DIV 28	✓		B/O

AUTO LOCK/UNLOCK THROUGH ACCESS CONTROL SYSTEM FOR PUSH/PULL OPERATION DURING NORMAL BUSINESS HOURS. CARD IN WHEN LOCKED. USER PRESENTS CREDENTIAL, EXIT DEVICE LATCH RETRACTS AND VESTIBULE ACTUATOR TURNS ON. USER EITHER OPENS DOOR MANUALLY OR PUSHES ACTUATOR TO ENGAGE AUTO OPERATOR TO OPEN DOOR. EXTERIOR OPERATOR FUNCTIONS INDEPENDENT FROM INTERIOR OPERATOR. DOOR POSITION IS MONITORED THROUGH ACCESS CONTROL/SECURITY SYSTEM. REQUEST TO EXIT IS IN EXIT DEVICE PUSH BAR.

Hardware Group No. AL03

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
2	EA	CONT. HINGE	112XY EPT		628	IVE
2	EA	POWER TRANSFER	EPT10 CON	✓	689	VON
1	EA	REMOVABLE MULLION	KR4954 STAB		689	VON
1	EA	ELEC PANIC HARDWARE	RX-QEL-XP98-DT-CON 24 VDC	✓	626	VON
1	EA	ELEC PANIC HARDWARE	RX-QEL-XP98-NL-CON 24 VDC	✓	626	VON
1	EA	RIM CYLINDER	20-057 (EXIT DEVICE)		626	SCH
1	EA	MORTISE CYLINDER	20-061 36-083 (MULLION)		626	SCH
2	EA	OH STOP	100S ADJ		630	GLY
2	EA	SURFACE CLOSER	4040XP EDA MC		689	LCN
2	EA	PA MOUNTING PLATE	4040XP-18PA		689	LCN
2	EA	5TH SCREW SUPPORT	4040XP-30		689	LCN
1	EA	BLADE STOP SPACER	4040XP-61		689	LCN
1	SET	PERIMETER SEALS	BY DOOR MFG/SUPPLIER			B/O
2	EA	DOOR SWEEP	39A		A	ZER
1	EA	THRESHOLD	BY DOOR MFG/SUPPLIER			B/O
2	EA	WIRE HARNESS	CON-X (LENGTH AS REQ'D)	✓		SCH
2	EA	POWER SUPPLY WIRE HARNESS	CON-XX AS REQUIRED	✓		SCH
2	EA	DOOR CONTACT	679-05HM	✓	BLK	SCE
1	EA	POWER SUPPLY	PS902 900-2RS 120/240 VAC	✓		VON

AUTO LOCK/UNLOCK THROUGH ACCESS CONTROL SYSTEM FOR PUSH/PULL OPERATION DURING NORMAL HOURS. DOOR POSITION IS MONITORED BY ACCESS CONTROL/SECURITY SYSTEM.

Hardware Group No. AL04

Provide each PR door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER	FINISH	MFR
2	EA	CONT. HINGE	112XY	628	IVE
2	EA	DUMMY PUSH BAR	350-DT-990	626	VON
2	EA	OH STOP	100S ADJ	630	GLY
2	EA	SURFACE CLOSER	4040XP EDA MC	689	LCN
2	EA	PA MOUNTING PLATE	4040XP-18PA	689	LCN
2	EA	5TH SCREW SUPPORT	4040XP-30	689	LCN
1	EA	BLADE STOP SPACER	4040XP-61	689	LCN
1	SET	PERIMETER SEALS	BY DOOR MFG/SUPPLIER		B/O
1	EA	THRESHOLD	BY DOOR MFG/SUPPLIER		B/O

Hardware Group No. AL05

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	EA	CONT. HINGE	112XY TWP CON	✓	628	IVE
1	EA	VANDL EU STOREROOM	ND96P6DEU CON RHO 12V/24V DC	✓	626	SCH
1	EA	OH STOP	100S ADJ		630	GLY
1	EA	SURFACE CLOSER	4040XP EDA MC		689	LCN
1	EA	PA MOUNTING PLATE	4040XP-18PA		689	LCN
1	EA	5TH SCREW SUPPORT	4040XP-30		689	LCN
1	EA	BLADE STOP SPACER	4040XP-61		689	LCN
1	SET	PERIMETER SEALS	BY DOOR MFG/SUPPLIER			B/O
1	EA	THRESHOLD	BY DOOR MFG/SUPPLIER			B/O
1	EA	WIRE HARNESS	CON-X (LENGTH AS REQ'D)	✓		SCH
1	EA	POWER SUPPLY WIRE HARNESS	CON-XX AS REQUIRED	✓		SCH
1	EA	MULTITECH READER (REF DIV 28)	MT11-485 / MT15-485 12 VDC	✓	BLK	SCE
1		POWER SUPPLY	BY DIV 28	✓		B/O
1		INTERCOM/REMOTE RELEASE	BY OTHERS	✓		B/O

LOCKSET MAY BE AUTO LOCK/UNLOCK THROUGH ACCESS CONTROL/SECURITY SYSTEM. WHEN LOCKED, CARD IN. USER PRESENTS CREDENTIAL, ELECTRIFIED LOCKSET LEVER RELEASES, USER DEPRESSES LEVER TO RETRACT LATCH AND OPEN DOOR. LOCKSET MAY ALSO BE REMOTELY RELEASED. LOCATION OF REMOTE SWITCH TBD.

Hardware Group No. AL06

Provide each SGL door(s) with the following:

QTY		DESCRIPTION	CATALOG NUMBER		FINISH	MFR
1	EA	CONT. HINGE	112XY TWP CON	↯	628	IVE
1	EA	VANDL EU STOREROOM	ND96P6DEU CON RHO 12V/24V DC	↯	626	SCH
1	EA	OH STOP	100S ADJ		630	GLY
1	EA	SURFACE CLOSER	4040XP EDA MC		689	LCN
1	EA	PA MOUNTING PLATE	4040XP-18PA		689	LCN
1	EA	5TH SCREW SUPPORT	4040XP-30		689	LCN
1	EA	BLADE STOP SPACER	4040XP-61		689	LCN
1	SET	PERIMETER SEALS	BY DOOR MFG/SUPPLIER			B/O
1	EA	WIRE HARNESS	CON-X (LENGTH AS REQ'D)	↯		SCH
1	EA	POWER SUPPLY WIRE HARNESS	CON-XX AS REQUIRED	↯		SCH
1	EA	MULTITECH READER (REF DIV 28)	MT11-485 / MT15-485 12 VDC	↯	BLK	SCE
1	EA	REMOTE RELEASE	B660 AS REQUIRED	↯	628	SCE
1		POWER SUPPLY	BY DIV 28	↯		B/O

LOCKSET MAY BE AUTO LOCK/UNLOCK THROUGH ACCESS CONTROL/SECURITY SYSTEM. WHEN LOCKED, CARD IN. USER PRESENTS CREDENTIAL, ELECTRIFIED LOCKSET LEVER RELEASES, USER DEPRESSES LEVER TO RETRACT LATCH AND OPEN DOOR. LOCKSET MAY ALSO BE REMOTELY RELEASED. LOCATION OF REMOTE SWITCH TBD.

END OF SECTION 087100

SECTION 088000 - GLAZING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes:

1. Glass for windows, doors, interior borrowed lites and storefront framing.
2. Glazing sealants and accessories.

B. Related Requirements:

1. Section 081213 “Hollow Metal Frames”.
2. Section 081433 “Stile and Rail Wood Doors”.
3. Section 084313 “Aluminum-Framed Entrances and Storefronts”.

1.3 DEFINITIONS

A. Glass Manufacturers: Firms that produce primary glass, fabricated glass, or both, as defined in referenced glazing publications.

B. Glass Thicknesses: Indicated by thickness designations in millimeters according to ASTM C 1036.

C. IBC: International Building Code.

D. Interspace: Space between lites of an insulating-glass unit.

1.4 COORDINATION

A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances.

1.5 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review and finalize construction schedule and verify availability of materials, Installer's personnel, equipment, and facilities needed to make progress and avoid delays.

2. Review temporary protection requirements for glazing during and after installation.

1.6 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Glass Samples: For each type of the following products; 12 inches square.

1. Insulating glass.
2. Spandrel glass.

C. Glazing Accessory Samples: For sealants and colored spacers, in 12-inch lengths. Install sealant Samples between two strips of material representative in color of the adjoining framing system.

D. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

E. Delegated-Design Submittal: For glass indicated to comply with performance requirements and design criteria, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.7 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer manufacturers of insulating-glass units with sputter-coated, low-E coatings.

B. Product Certificates: For glass.

C. Product Test Reports: For tinted glass coated glass insulating glass and glazing sealants, for tests performed by a qualified testing agency.

1. For glazing sealants, provide test reports based on testing current sealant formulations within previous 36-month period.

D. Preconstruction adhesion and compatibility test report.

E. Sample Warranties: For special warranties.

1.8 QUALITY ASSURANCE

A. Manufacturer Qualifications for Insulating-Glass Units with Sputter-Coated, Low-E Coatings: A qualified insulating-glass manufacturer who is approved and certified by coated-glass manufacturer.

B. Installer Qualifications: A qualified installer who employs glass installers for this Project who are certified under the National Glass Association's Certified Glass Installer Program.

C. Glass Testing Agency Qualifications: A qualified independent testing agency accredited according to the NFRC CAP 1 Certification Agency Program.

D. Sealant Testing Agency Qualifications: An independent testing agency qualified according to ASTM C 1021 to conduct the testing indicated.

E. Mockups: Build mockups to demonstrate aesthetic effects and to set quality standards for materials and execution.

1. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.9 PRECONSTRUCTION TESTING

A. Preconstruction Adhesion and Compatibility Testing: Test each glass product, tape sealant, gasket, glazing accessory, and glass-framing member for adhesion to and compatibility with elastomeric glazing sealants.

1. Testing is not required if data are submitted based on previous testing of current sealant products and glazing materials matching those submitted.
2. Use ASTM C 1087 to determine whether priming and other specific joint-preparation techniques are required to obtain rapid, optimum adhesion of glazing sealants to glass, tape sealants, gaskets, and glazing channel substrates.
3. Test no fewer than eight Samples of each type of material, including joint substrates, shims, sealant backings, secondary seals, and miscellaneous materials.
4. Schedule enough time for testing and analyzing results to prevent delaying the Work.
5. For materials failing tests, submit sealant manufacturer's written instructions for corrective measures including the use of specially formulated primers.

1.10 DELIVERY, STORAGE, AND HANDLING

A. Protect glazing materials according to manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.

B. Store products in manufacturer's unopened packaging until ready for installation.

C. Store and dispose of hazardous materials, and materials contaminated by hazardous materials, in accordance with requirements of local authorities having jurisdiction.

D. Comply with insulating-glass manufacturer's written instructions for venting and sealing units to avoid hermetic seal ruptures due to altitude change.

1.11 FIELD CONDITIONS

A. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommended by manufacturer for optimum results. Do not install products under environmental conditions outside manufacturer's recommended limits.

B. Environmental Limitations: Do not proceed with glazing when ambient and substrate temperature conditions are outside limits permitted by glazing material manufacturers and when glazing channel substrates are wet from rain, frost, condensation, or other causes.

1. Do not install glazing sealants when ambient and substrate temperature conditions are outside limits permitted by sealant manufacturer or are below 40 deg F.

1.12 WARRANTY

A. Manufacturer's Special Warranty for Coated-Glass Products: Manufacturer agrees to replace coated-glass units that deteriorate within specified warranty period. Deterioration of coated glass is defined as defects developed from normal use that are not attributed to glass breakage or to maintaining and cleaning coated glass contrary to manufacturer's written instructions. Defects include peeling, cracking, and other indications of deterioration in coating.

1. Warranty Period: 10 years from date of Substantial Completion.

B. Manufacturer's Special Warranty for Insulating Glass: Manufacturer agrees to replace insulating-glass units that deteriorate within specified warranty period. Deterioration of insulating glass is defined as failure of hermetic seal under normal use that is not attributed to glass breakage or to maintaining and cleaning insulating glass contrary to manufacturer's written instructions. Evidence of failure is the obstruction of vision by dust, moisture, or film on interior surfaces of glass.

1. Warranty Period: 10 years from date of Substantial Completion.

C. Manufacturers Special Warranty on Fully Tempered Glass that has been Heat Soaked: Warrants that heat-soaked tempered glass will not break spontaneously as a result of Nickel Sulfide (NiS) inclusions at a rate exceeding 0.5% (5/1000) for a period of five years from the date of manufacturer.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations for Glass: Obtain from single source from single manufacturer for each glass type.

1. Obtain tinted and coated glass from single source from single manufacturer.

B. Source Limitations for Glazing Accessories: Obtain from single source from single manufacturer for each product and installation method.

2.2 PERFORMANCE REQUIREMENTS

A. General: Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to the following: defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.

B. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design glazing.

C. Structural Performance: Glazing shall withstand the following design loads within limits and under conditions indicated determined according to the IBC and ASTM E 1300.

1. Design Wind Pressures: As indicated on Drawings.
2. Design Wind Pressures: Determine design wind pressures applicable to Project according to ASCE/SEI 7, based on heights above grade indicated on Drawings.

    a. Wind Design Data: As indicated on Drawings.
    b. Basic Wind Speed: 90 mph.
    c. Importance Factor: 1.0.
    d. Exposure Category: As indicated on Drawings.

3. Design Snow Loads: As indicated on Drawings.
4. Probability of Breakage for Sloped Glazing: For glass surfaces sloped more than 15 degrees from vertical, design glass for a probability of breakage not greater than 0.001.
5. Maximum Lateral Deflection: For glass supported on all four edges, limit center-of-glass deflection at design wind pressure to not more than 1/50 times the short-side length or 1 inch, whichever is less.
6. Differential Shading: Design glass to resist thermal stresses induced by differential shading within individual glass lites.

D. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.

E. Thermal and Optical Performance Properties: Provide glass with performance properties specified, as indicated in manufacturer's published test data, based on procedures indicated below:

1. For monolithic-glass lites, properties are based on units with lites 6 mm thick.
2. For insulating-glass units, properties are based on units of thickness indicated for overall unit and for each lite.

3. U-Factors: Center-of-glazing values, according to NFRC 100 and based on LBL's WINDOW 5.2 computer program, expressed as Btu/sq. ft. x h x deg F.
4. Solar Heat-Gain Coefficient and Visible Transmittance: Center-of-glazing values, according to NFRC 200 and based on LBL's WINDOW 5.2 computer program.
5. Visible Reflectance: Center-of-glazing values, according to NFRC 300.

2.3 GLASS PRODUCTS, GENERAL

A. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.

1. GANA Publications: "Laminated Glazing Reference Manual" and "Glazing Manual."
2. AAMA Publications: AAMA GDSG-1, "Glass Design for Sloped Glazing," and AAMA TIR A7, "Sloped Glazing Guidelines."
3. IGMA Publication for Sloped Glazing: IGMA TB-3001, "Guidelines for Sloped Glazing."
4. IGMA Publication for Insulating Glass: SIGMA TM-3000, "North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use."

B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of the SGCC or another certification agency acceptable to authorities having jurisdiction or manufacturer. Label shall indicate manufacturer's name, type of glass, thickness, and safety glazing standard with which glass complies.

C. Insulating-Glass Certification Program: Permanently marked either on spacers or on at least one component lite of units with appropriate certification label of IGCC.

D. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass that complies with performance requirements and is not less than the thickness indicated.

1. Minimum Glass Thickness for Exterior Lites: 6 mm.
2. Thickness of Tinted Glass: Provide same thickness for each tint color indicated throughout Project.

E. Strength: Where annealed float glass is indicated, provide annealed float glass, heat-strengthened float glass, or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where heat-strengthened float glass is indicated, provide heat-strengthened float glass or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where fully tempered float glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

A. Clear Annealed Float Glass: ASTM C 1036, Type I, Class 1 (clear), Quality-Q3.

B. Fully Tempered Float Glass: ASTM C 1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

a. Maximum roller wave distortion of (peak to valley) of 0.003" at the middle of the glass and 0.008" within 10.5" of the edges to limit the potential visible distortions in the glass.
b. Maximum bow/warp tolerances of half the values indicated in ASTM C1048.

C. Heat-Strengthened Float Glass: ASTM C 1048, Kind HS (heat strengthened), Type I, Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear) or Class 2 (tinted) as indicated, Quality-Q3.

1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.

2.5 INSULATING GLASS

A. Insulating-Glass Units: Factory-assembled units consisting of sealed lites of glass separated by a dehydrated interspace, qualified according to ASTM E 2190.

1. Sealing System: Dual seal, with manufacturer's standard primary and secondary sealants.
2. Spacer: Stainless steel with thermal conductivity equivalent performance value (Keff) of 0.578 Btu/h/h-ft-f or Manufacturer’s standard as required to meet thermal performance requirements.
3. Desiccant: Molecular sieve or silica gel, or a blend of both.

2.6 GLAZING SEALANTS

A. General:

1. Compatibility: Compatible with one another and with other materials they contact, including glass products, seals of insulating-glass units, and glazing channel substrates, under conditions of service and application, as demonstrated by sealant manufacturer based on testing and field experience.
2. Suitability: Comply with sealant and glass manufacturers' written instructions for selecting glazing sealants suitable for applications indicated and for conditions existing at time of installation.
3. Sealant shall have a VOC content of 250 g/L or less.
4. Colors of Exposed Glazing Sealants: As selected by Architect from manufacturer's full range.

B. Glazing Sealant: Neutral-curing silicone glazing sealant complying with ASTM C 920, Type S, Grade NS, Class 100/50, Use NT.

1. Dow Corning Corporation; 790.
2. GE Advanced Materials – Silicones; SilPruf LM SCS 2700.
3. Pecora Corporation; 890.
4. Sika Corporation, Construction Products Division; SikaSil C990.
5. Tremco Incorporated; Spectrem 1.

2.7 GLAZING TAPES

A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C 1281 and AAMA 800 for products indicated below:

1. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.
2. AAMA 807.3 tape, for glazing applications in which tape is not subject to continuous pressure.

2.8 MISCELLANEOUS GLAZING MATERIALS

A. General: Provide products of material, size, and shape complying with referenced glazing standard, with requirements of manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.

B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.

C. Setting Blocks: Elastomeric material with a Shore, Type A durometer hardness of 85, plus or minus 5.

1. Setting blocks to be minimum length 4 in. and minimum width corresponding to glass thickness or as recommended in writing by the glass manufacturer.
2. Setting blocks to be located below glass at points as recommended in writing by the glass manufacturer.

D. Spacers: Elastomeric blocks or continuous extrusions of hardness required by glass manufacturer to maintain glass lites in place for installation indicated.

E. Edge Blocks: Elastomeric material of hardness needed to limit glass lateral movement (side walking).

F. Cylindrical Glazing Sealant Backing: ASTM C 1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

2.9 FABRICATION OF GLAZING UNITS

A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product

manufacturer and referenced glazing publications, to comply with system performance requirements.

1. Allow for thermal movements from ambient and surface temperature changes acting on glass framing members and glazing components.

    a. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.

C. Grind smooth and polish exposed glass edges and corners.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:

1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
2. Presence and functioning of weep systems.
3. Minimum required face and edge clearances.
4. Effective sealing between joints of glass-framing members.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.

B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.

C. Clean surfaces thoroughly prior to installation.

D. Prepare surfaces using the methods recommended by the manufacturer for achieving the best result for the substrate under the project conditions.

E. Refer to Manufacturer's installation instructions for methods of preparation for Impact Protection Adhesive or Impact Protection Profile film attachment systems.

3.3 GLAZING, GENERAL

A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.

B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.

C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.

D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.

E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.

F. Provide spacers for glass lites where length plus width is larger than 50 inches.

1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
2. Provide 1/8-inch minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.

G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and according to requirements in referenced glazing publications.

H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.

I. Set glass lites with proper orientation so that coatings face exterior or interior as specified.

J. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.

K. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended by gasket manufacturer.

3.4 TAPE GLAZING

A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.

B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.

C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.

D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.

E. Do not remove release paper from tape until right before each glazing unit is installed.

F. Apply heel bead of elastomeric sealant.

G. Center glass lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.

H. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.5 GASKET GLAZING (DRY)

A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.

B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.

C. Installation with Drive-in Wedge Gaskets: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended by gasket manufacturer.

D. Installation with Pressure-Glazing Stops: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended by gasket manufacturer.

E. Install gaskets so they protrude past face of glazing stops.

3.6 SEALANT GLAZING (WET)

A. Install continuous spacers, or spacers combined with cylindrical sealant backing, between glass lites and glazing stops to maintain glass face clearances and to prevent sealant from extruding into glass channel and blocking weep systems until sealants cure. Secure spacers or spacers and backings in place and in position to control depth of installed sealant relative to edge clearance for optimum sealant performance.

B. Force sealants into glazing channels to eliminate voids and to ensure complete wetting or bond of sealant to glass and channel surfaces.

C. Tool exposed surfaces of sealants to provide a substantial wash away from glass.

3.7 CLEANING AND PROTECTION

A. Immediately after installation remove nonpermanent labels and clean surfaces.

B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.

1. If, despite such protection, contaminating substances do come into contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.

C. Remove and replace glass that is damaged during construction period.

D. Wash glass on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

E. Touch-up, repair or replace damaged products before Substantial Completion.

F. After application of film, wash film using common window cleaning solutions, including ammonia solutions, 30 days after application. Do not use abrasive type cleaning agents and bristle brushes to avoid scratching film. Use synthetic sponges or soft cloths.

3.8 MONOLITHIC GLASS SCHEDULE

A. Glass Type B: Fully tempered float glass.

1. Minimum Thickness: 6 mm.
2. Safety glazing required.

3.9 INSULATING GLASS SCHEDULE

A. Glass Type E: Low-E-coated, tinted insulating glass.

1. Basis-of-Design Product: PPG Solarban 70XL.
2. Overall Unit Thickness: 1 inch.
3. Minimum Thickness of Each Glass Lite: 6 mm.
4. Outdoor Lite: Tinted fully tempered float glass.
5. Tint Color: As selected by Architect from manufacturer's full range. Closest color match to existing shall be used for initial submittal.
6. Interspace Content: Argon.
7. Indoor Lite: Clear fully tempered float glass.
8. Low-E Coating: Pyrolytic or sputtered on second or third surface.
9. Winter Nighttime U-Factor: 0.24 maximum.
10. Visible Light Transmittance: 58 percent minimum.
11. Solar Heat Gain Coefficient: 0.27 maximum.

B. Glass Type S: Ceramic-coated, low-e-coated, tinted, insulating spandrel glass.

1. Basis-of-Design Product: PPG Solarban 70XL with coating on 4th surface.
2. Coating Color: As selected by Architect from manufacturer's full range.
3. Overall Unit Thickness: 1 inch.
4. Minimum Thickness of Each Glass Lite: 6 mm.
5. Outdoor Lite: Tinted fully tempered float glass.
6. Tint Color: As selected by Architect from manufacturer's full range. Closest color match to existing shall be used for initial submittal.
7. Interspace Content: Argon.
8. Indoor Lite: Clear fully tempered float glass.
9. Low-E Coating: Pyrolytic or sputtered on second or third surface.
10. Ceramic Coating Location: Fourth surface.
11. Winter Nighttime U-Factor: 0.24 maximum.

END OF SECTION 088000

SECTION 088300 - MIRRORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes the following types of silvered flat glass mirrors:

1. Tempered glass mirrors qualifying as safety glazing.

B. Related Requirements:

1. Section 088000 "Glazing" for glass with reflective coatings used for vision and spandrel lites.
2. Section 102800 "Toilet, Bath, and Laundry Accessories" for metal-framed mirrors.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Mirrors. Include description of materials and process used to produce each type of silvered flat glass mirror specified that indicates sources of glass, glass coating components, edge sealer, and quality-control provisions.

B. Shop Drawings: Include mirror elevations, edge details, mirror hardware, and attachment details.

C. Samples: For each type of the following:

1. Mirrors: 12 inches square, including edge treatment on two adjoining edges.
2. Mirror Clips: Full size.
3. Mirror Trim: 12 inches long.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: For each type of mirror and mirror mastic.

C. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For mirrors to include in maintenance manuals.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: A qualified installer who employs glass installers for this Project who are certified under the National Glass Association's Certified Glass Installer Program.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Protect mirrors according to mirror manufacturer's written instructions and as needed to prevent damage to mirrors from moisture, condensation, temperature changes, direct exposure to sun, or other causes.

B. Comply with mirror manufacturer's written instructions for shipping, storing, and handling mirrors as needed to prevent deterioration of silvering, damage to edges, and abrasion of glass surfaces and applied coatings. Store indoors.

1.8 FIELD CONDITIONS

A. Environmental Limitations: Do not install mirrors until ambient temperature and humidity conditions are maintained at levels indicated for final occupancy.

1.9 WARRANTY

A. Special Warranty: Manufacturer agrees to replace mirrors that deteriorate within specified warranty period. Deterioration of mirrors is defined as defects developed from normal use that are not attributed to mirror breakage or to maintaining and cleaning mirrors contrary to manufacturer's written instructions. Defects include discoloration, black spots, and clouding of the silver film.

1. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations for Mirrors: Obtain mirrors from single source from single manufacturer.

B. Source Limitations for Mirror Accessories: Obtain mirror glazing accessories from single source.

2.2 SILVERED FLAT GLASS MIRRORS

A. Mirrors, General: ASTM C1503; manufactured using copper-free, low-lead mirror coating process.

B. Tempered Glass Mirrors: Mirror Glazing Quality for blemish requirements and complying with ASTM C1048 for Kind FT, Condition A, tempered float glass before silver coating is applied; clear.

1. Nominal Thickness: 6.0 mm.

C. Safety Glazing Products: For tempered mirrors, provide products that comply with 16 CFR 1201, Category II.

2.3 MISCELLANEOUS MATERIALS

A. Setting Blocks: Elastomeric material with a Shore, Type A durometer hardness of 85, plus or minus 5.

B. Edge Sealer: Coating compatible with glass coating and approved by mirror manufacturer for use in protecting against silver deterioration at mirrored glass edges.

C. Mirror Mastic: An adhesive setting compound, asbestos-free, produced specifically for setting mirrors and certified by both mirror and mastic manufacturer as compatible with glass coating and substrates on which mirrors will be installed.

1. Adhesives shall meet the low-emitting material standards set forth by the South Coast Air Quality Management District Rule 1168, adopted January 2005.
2. Use adhesives that meet the testing and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

D. Film Backing for Safety Mirrors: Film backing and pressure-sensitive adhesive; both compatible with mirror backing paint as certified by mirror manufacturer.

2.4 MIRROR HARDWARE

A. Aluminum J-Channels and Cleat: Aluminum extrusions with a return deep enough to produce a glazing channel to accommodate mirrors of thickness indicated and in lengths required to cover edges of mirrors in a single piece.

1. Bottom and Side Trim: J-channels formed with front leg and back leg not less than 5/16 and 3/4 inch in height, respectively.
2. Top Trim: Formed with front leg with a height matching bottom trim and back leg designed to fit into the pocket created by wall-mounted aluminum cleat.
3. Finish: Clear bright anodized.

B. Fasteners: Fabricated of same basic metal and alloy as fastened metal and matching it in finished color and texture where fasteners are exposed.

C. Anchors and Inserts: Provide devices as required for mirror hardware installation. Provide toothed or lead-shield, expansion-bolt devices for drilled-in-place anchors. Provide galvanized anchors and inserts for applications on inside face of exterior walls and where indicated.

2.5 FABRICATION

A. Fabricate mirrors in the shop to greatest extent possible.

B. Fabricate cutouts for notches and holes in mirrors without marring visible surfaces. Locate and size cutouts so they fit closely around penetrations in mirrors.

C. Mirror Edge Treatment: Flat polished.

1. Seal edges of mirrors with edge sealer after edge treatment to prevent chemical or atmospheric penetration of glass coating.
2. Require mirror manufacturer to perform edge treatment and sealing in factory immediately after cutting to final sizes.

D. Film-Backed Safety Mirrors: Apply film backing with adhesive coating over mirror backing paint, as recommended in writing by film-backing manufacturer, to produce a surface free of bubbles, blisters, and other imperfections.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, over which mirrors are to be mounted, with Installer present, for compliance with installation tolerances, substrate preparation, and other conditions affecting performance of the Work.

B. Verify compatibility with and suitability of substrates, including compatibility of existing finishes or primers with mirror mastic.

C. Proceed with installation only after unsatisfactory conditions have been corrected and surfaces are dry.

3.2 PREPARATION

A. Comply with mastic manufacturer's written installation instructions for preparation of substrates, including coating substrates with mastic manufacturer's special bond coating where applicable.

3.3 INSTALLATION

A. General: Install mirrors to comply with mirror manufacturer's written instructions and with referenced GANA publications. Mount mirrors accurately in place in a manner that avoids distorting reflected images.

1. GANA Publications: "Glazing Manual" and "Mirrors, Handle with Extreme Care: Tips for the Professional on the Care and Handling of Mirrors."

B. Provide a minimum airspace of 1/8 inch between back of mirrors and mounting surface for air circulation between back of mirrors and face of mounting surface.

C. Install mirrors with mirror hardware. Attach mirror hardware securely to mounting surfaces with mechanical fasteners installed with anchors or inserts as applicable. Install fasteners so heads do not impose point loads on backs of mirrors.

1. Aluminum J-Channels and Cleat: Fasten J-channel directly to wall and attach top trim to continuous cleat fastened directly to wall.
2. Install mastic as follows:

a. Apply barrier coat to mirror backing where approved in writing by manufacturers of mirrors and backing material.
b. Apply mastic to comply with mastic manufacturer's written instructions for coverage and to allow air circulation between back of mirrors and face of mounting surface.
c. After mastic is applied, align mirrors and press into place while maintaining a minimum airspace of 1/8 inch between back of mirrors and mounting surface.

3.4 CLEANING AND PROTECTION

A. Protect mirrors from breakage and contaminating substances resulting from construction operations.

B. Do not permit edges of mirrors to be exposed to standing water.

C. Maintain environmental conditions that prevent mirrors from being exposed to moisture from condensation or other sources for continuous periods of time.

D. Clean exposed surface of mirrors not more than four days before date scheduled for inspections that establish date of Substantial Completion. Clean mirrors as recommended in writing by mirror manufacturer.

END OF SECTION 088300

SECTION 092216 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Non-load-bearing steel framing systems for interior partitions.
2. Suspension systems for interior ceilings and soffits.
3. Grid suspension systems for gypsum board ceilings.

B. Related Requirements:

1. Section 054000 "Cold-Formed Metal Framing" for exterior and interior load-bearing and exterior non-load-bearing wall studs; floor joists; roof rafters and ceiling joists; and roof trusses.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Studs and Runners: Provide documentation that framing members' certification is according to SIFA's "Code Compliance Certification Program for Cold-Formed Steel Structural and Non-Structural Framing Members."

1.4 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of code-compliance certification for studs and tracks.

B. Evaluation Reports: For steel studs and tracks, firestop tracks, post-installed anchors and power-actuated fasteners, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated, according to ASTM E 90 and classified according to ASTM E 413 by an independent testing agency.

B. Horizontal Deflection: For wall assemblies, limited to 1/360of the wall height based on horizontal loading of 5 lbf/sq. ft.

2.2 FRAMING SYSTEMS

A. Framing Members, General: Comply with ASTM C 754 for conditions indicated.

1. Steel Sheet Components: Comply with ASTM C 645 requirements for metal unless otherwise indicated.
2. Protective Coating: ASTM A 653/A 653M, G40, hot-dip galvanized unless otherwise indicated.

B. Studs and Runners: ASTM C 645.

1. Steel Studs and Runners:

a. Minimum Base-Metal Thickness: 20 gage minimum.
b. Depth: As indicated on Drawings.

C. Slip-Type Head Joints: Where indicated, provide one of the following:

1. Clip System: Clips designed for use in head-of-wall deflection conditions that provide a positive attachment of studs to runners while allowing 1-1/2-inch minimum vertical movement.
2. Single Long-Leg Runner System: ASTM C 645 top runner with 2-inch- deep flanges in thickness not less than indicated for studs, installed with studs friction fit into top runner and with continuous bridging located within 12 inches of the top of studs to provide lateral bracing.
3. Double-Runner System: ASTM C 645 top runners, inside runner with 2-inch- deep flanges in thickness not less than indicated for studs and fastened to studs, and outer runner sized to friction fit inside runner.
4. Deflection Track: Steel sheet top runner manufactured to prevent cracking of finishes applied to interior partition framing resulting from deflection of structure above; in thickness not less than indicated for studs and in width to accommodate depth of studs.

D. Flat Strap and Backing Plate: Steel sheet for blocking and bracing in length and width indicated.

1. Minimum Base-Metal Thickness: 0.033 inch.

E. Cold-Rolled Channel Bridging: Steel, 0.0538-inch minimum base-metal thickness, with minimum 1/2-inch- wide flanges.

1. Depth: 1-1/2 inches.
2. Clip Angle: Not less than 1-1/2 by 1-1/2 inches, 0.068-inch- thick, galvanized steel.

F. Hat-Shaped, Rigid Furring Channels: ASTM C 645.

1. Minimum Base-Metal Thickness: 0.0329 inch.
2. Depth: As indicated on Drawings.

G. Cold-Rolled Furring Channels: 0.053-inch uncoated-steel thickness, with minimum 1/2-inch- wide flanges.

1. Depth: As indicated on Drawings.
2. Furring Brackets: Adjustable, corrugated-edge-type steel sheet with minimum uncoated-steel thickness of 0.0329 inch.
3. Tie Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.062-inch- diameter wire, or double strand of 0.048-inch- diameter wire.

H. Z-Shaped Furring: With slotted or non-slotted web, face flange of 1-1/4 inches, wall attachment flange of 7/8 inch, minimum uncoated-metal thickness of 0.0179 inch, and depth required to fit insulation thickness indicated.

2.3 SUSPENSION SYSTEMS

A. Tie Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.062-inch- diameter wire, or double strand of 0.048-inch- diameter wire.

B. Wire Hangers: ASTM A 641/A 641M, Class 1 zinc coating, soft temper, 0.16 inch in diameter.

C. Carrying Channels: Cold-rolled, commercial-steel sheet with a base-metal thickness of 0.0538 inch and minimum 1/2-inch- wide flanges.

1. Depth: 2-1/2 inches.

D. Furring Channels (Furring Members):

1. Steel Studs and Runners: ASTM C 645.

a. Minimum Base-Metal Thickness: 0.0428 inch.
b. Depth: As indicated on Drawings.

2. Hat-Shaped, Rigid Furring Channels: ASTM C 645, 7/8 inch deep.

a. Minimum Base-Metal Thickness: 0.0329 inch.

E. Grid Suspension System for Gypsum Board Ceilings: ASTM C 645, direct-hung system composed of main beams and cross-furring members that interlock.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Armstrong World Industries, Inc; Drywall Grid Systems.
b. Chicago Metallic Corporation; 640/660 Drywall Ceiling Suspension.
c. United State Gypsum Company; Drywall Suspension System.

2.4 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards.

1. Fasteners for Metal Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates, with Installer present, and including welded hollow-metal frames, cast-in anchors, and structural framing, for compliance with requirements and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Suspended Assemblies: Coordinate installation of suspension systems to ensure that inserts and other provisions for anchorages to building structure have been installed to receive hangers at spacing required to support the Work and that hangers will develop their full strength.

1. Furnish concrete inserts and other devices indicated to other trades for installation in advance of time needed for coordination and construction.

B. Coordination with Sprayed Fire-Resistive Materials:

1. Before sprayed fire-resistive materials are applied, attach offset anchor plates or ceiling tracks to surfaces indicated to receive sprayed fire-resistive materials. Where offset anchor plates are required, provide continuous plates fastened to building structure not more than 24 inches o.c.
2. After sprayed fire-resistive materials are applied, remove them only to extent necessary for installation of non-load-bearing steel framing. Do not reduce thickness of fire-resistive materials below that are required for fire-resistance ratings indicated. Protect adjacent fire-resistive materials from damage.

3.3 INSTALLATION, GENERAL

A. Installation Standard: ASTM C 754.

1. Gypsum Board Assemblies: Also comply with requirements in ASTM C 840 that apply to framing installation.

B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.

C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.

D. Install bracing at terminations in assemblies.

E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

F. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

1. Single-Layer Application: 16 inches o.c. unless otherwise indicated.
2. Multilayer Application: 16 inches o.c. unless otherwise indicated.

G. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.

H. Install studs so flanges within framing system point in same direction.

I. Install tracks (runners) at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts penetrating partitions above ceiling.

J. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch from the plane formed by faces of adjacent framing.

3.4 INSTALLING FRAMED ASSEMBLIES

A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

1. Single-Layer Application: 16 inches o.c. unless otherwise indicated.
2. Multilayer Application: 16 inches o.c. unless otherwise indicated.
3. Tile Backing Panels: 16 inches o.c. unless otherwise indicated.

B. Where studs are installed directly against exterior masonry walls or dissimilar metals at exterior walls, install isolation strip between studs and exterior wall.

C. Install studs so flanges within framing system point in same direction.

D. Install tracks (runners) at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts that penetrate partitions above ceiling.

1. Slip-Type Head Joints: Where framing extends to overhead structural supports, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install runner track section (for cripple studs) at head and secure to jamb studs.

    a. Install two studs at each jamb unless otherwise indicated.
    b. Install cripple studs at head adjacent to each jamb stud, with a minimum 1/2-inch clearance from jamb stud to allow for installation of control joint in finished assembly.
    c. Extend jamb studs through suspended ceilings and attach to underside of overhead structure.

3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
4. Sound-Rated Partitions: Install framing to comply with sound-rated assembly indicated.

E. Direct Furring:

1. Screw to wood framing.
2. Attach to concrete or masonry with stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches o.c.

F. Z-Shaped Furring Members:

1. Erect insulation, specified in Section 072100 "Thermal Insulation," vertically and hold in place with Z-shaped furring members spaced 24 inches o.c..
2. Except at exterior corners, securely attach narrow flanges of furring members to wall with concrete stub nails, screws designed for masonry attachment, or powder-driven fasteners spaced 24 inches o.c.
3. At exterior corners, attach wide flange of furring members to wall with short flange extending beyond corner; on adjacent wall surface, screw-attach short flange of furring channel to web of attached channel. At interior corners, space second member no more than 12 inchesfrom corner and cut insulation to fit.

G. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch from the plane formed by faces of adjacent framing.

3.5 INSTALLING SUSPENSION SYSTEMS

A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.

1. Hangers: 48 inches o.c.
2. Carrying Channels (Main Runners): 48 inches o.c.
3. Furring Channels (Furring Members): 16 inches o.c.

B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.

C. Suspend hangers from building structure as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.

    a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.

2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.

    a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards.

3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.
4. Flat Hangers: Secure to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices and fasteners that are secure and appropriate for structure and hanger, and in a manner that will not cause hangers to deteriorate or otherwise fail.
5. Do not attach hangers to steel roof deck.
6. Do not attach hangers to permanent metal forms. Furnish cast-in-place hanger inserts that extend through forms.
7. Do not attach hangers to rolled-in hanger tabs of composite steel floor deck.
8. Do not connect or suspend steel framing from ducts, pipes, or conduit.

D. Seismic Bracing: Sway-brace suspension systems with hangers used for support.

E. Grid Suspension Systems: Attach perimeter wall track or angle where grid suspension systems meet vertical surfaces. Mechanically join main beam and cross-furring members to each other and butt-cut to fit into wall track.

F. Installation Tolerances: Install suspension systems that are level to within 1/8 inch in 12 feet measured lengthwise on each member that will receive finishes and transversely between parallel members that will receive finishes.

END OF SECTION 092216

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Interior gypsum board.
2. Tile backing panels.
3. Pre-formed gypsum board column covers.
4. Sound attenuation blankets.

B. Related Requirements:

1. Section 061600 "Sheathing" for gypsum sheathing for exterior walls.
2. Section 092216 "Non-Structural Metal Framing" for non-structural steel framing and suspension systems that support gypsum board panels.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For the following products:

1. Trim Accessories: Full-size Sample in 6-inch- long length for each trim accessory indicated.

1.4 DELIVERY, STORAGE AND HANDLING

A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.5 FIELD CONDITIONS

A. Environmental Limitations: Comply with ASTM C 840 requirements or gypsum board manufacturer's written recommendations, whichever are more stringent.

B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.

C. Do not install panels that are wet, those that are moisture damaged, and those that are mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E 119 by an independent testing agency.

B. STC-Rated Assemblies: For STC-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E 90 and classified according to ASTM E 413 by an independent testing agency.

2.2 GYPSUM BOARD, GENERAL

A. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.3 INTERIOR GYPSUM BOARD

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. American Gypsum.
2. CertainTeed Corporation.
3. Continental Building Products, LLC.
4. Georgia-Pacific Building Products.
5. National Gypsum Company.
6. PABCO Gypsum.
7. Temple-Inland Building Products by Georgia-Pacific.
8. United States Gypsum Company.

B. Gypsum Board, Type X: ASTM C 1396/C 1396M.

1. Thickness: 5/8 inch.
2. Long Edges: Tapered.

C. Gypsum Ceiling Board: ASTM C 1396/C 1396M.

1. Thickness: 1/2 inch, Type X
2. Long Edges: Tapered.

D. Moisture- and Mold-Resistant Gypsum Board: ASTM C 1396/C 1396M. With moisture- and mold-resistant core and paper surfaces.

1. Core: 5/8 inch, Type X.
2. Long Edges: Tapered.
3. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.

2.4 TILE BACKING PANELS

A. Glass-Mat, Water-Resistant Backing Board: ASTM C 1178/C 1178M, with manufacturer's standard edges for use at all locations where tile

1. Products: Subject to compliance with requirements, provide one of the following:

a. CertainTeed Corp.; GlasRoc Tile Backer.
b. Georgia-Pacific Gypsum LLC; DensShield Tile Backer.
c. USG Corp.; Fiberock Aqua-Tough Interior Panel.

2. Core: 5/8 inch, Type X.
3. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.

B. Cementitious Backer Units: ANSI A118.9 and ASTM C1288 or ASTM C1325, with manufacturer's standard edges.

1. Thickness: 5/8 inch.
2. Mold Resistance: ASTM D3273, score of 10 as rated according to ASTM D3274.

2.5 PRE-FORMED GYPSUM BOARD COLUMN COVERS

A. Preformed curved gypsum board column covers with drywall paper on the outside (convex) face and unfinished on the inside allowing finish to match that of surrounding walls.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Modern Curved Solutions; Preformed Curved Drywall Column Cover or comparable product as approved by Architect and Owner.

a. Size: 10-inch outside diameter.

b. Contact Information for Basis-of-Design Manufacturer:

1) Phone: 947.777.9020
2) Email: louie@moderncurvedsolutions.com

2.6 TRIM ACCESSORIES

A. Interior Trim: ASTM C 1047.

1. Material: Galvanized or aluminum-coated steel sheet or rolled zinc.
2. Shapes:

a. Cornerbead.
b. LC-Bead: J-shaped; exposed long flange receives joint compound.
c. Expansion (control) joint

2.7 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C 475/C 475M.

B. Joint Tape:

1. Interior Gypsum Board: Paper.
2. Tile Backing Panels: As recommended by panel manufacturer.

C. Joint Compound for Interior Gypsum Board: For each coat use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints and damaged surface areas, use setting-type taping compound.
2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use setting-type taping compound.

a. Use setting-type compound for installing paper-faced metal trim accessories.

3. Fill Coat: For second coat, use setting-type, sandable topping compound.
4. Finish Coat: For third coat, use setting-type, sandable topping compound.
5. Skim Coat: For final coat of Level 5 finish, use setting-type, sandable topping compound.

2.8 AUXILIARY MATERIALS

A. General: Provide auxiliary materials that comply with referenced installation standards and manufacturer's written recommendations.

B. Laminating Adhesive: Adhesive or joint compound recommended for directly adhering gypsum panels to continuous substrate.

1. Laminating adhesive shall have a VOC content of 50 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

C. Steel Drill Screws: ASTM C 1002 unless otherwise indicated.

1. Use screws complying with ASTM C 954 for fastening panels to steel members from 0.033 to 0.112 inch thick.
2. For fastening cementitious backer units, use screws of type and size recommended by panel manufacturer.

D. Sound-Attenuation Blankets: ASTM C 665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.

1. Thickness: see drawings.

E. Acoustical Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.

1. Sealant shall have a VOC content of 250 g/L or less.

F. Thermal Insulation: As specified in Section 072100 "Thermal Insulation."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and substrates including welded hollow-metal frames and framing, with Installer present, for compliance with requirements and other conditions affecting performance.

B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLYING AND FINISHING PANELS, GENERAL

A. Comply with ASTM C 840.

B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.

C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch of open space between panels. Do not force into place.

D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.

E. Form control and expansion joints with space between edges of adjoining gypsum panels.

F. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments, except floors. Provide 1/4- to 1/2 inch- wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.

G. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.

H. STC-Rated Assemblies: Seal construction at perimeters, behind control joints, and at openings and penetrations with a continuous bead of acoustical sealant. Install acoustical sealant at both faces of partitions at perimeters and through penetrations. Comply with ASTM C 919 and with manufacturer's written instructions for locating edge trim and closing off sound-flanking paths around or through assemblies, including sealing partitions above acoustical ceilings.

I. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.

3.3 APPLYING INTERIOR GYPSUM BOARD

A. Install interior gypsum board in the following locations:

1. Type X: Vertical surfaces unless otherwise indicated.
2. Ceiling Type: Ceiling surfaces.
3. Moisture- and Mold-Resistant Type: In any restrooms and kitchen areas.

B. Single-Layer Application:

1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.
2. On partitions/walls, apply gypsum panels horizontally (perpendicular to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.

    a. Stagger abutting end joints not less than one framing member in alternate courses of panels.

3. On Z-shaped furring members, apply gypsum panels vertically (parallel to framing) with no end joints. Locate edge joints over furring members.
4. Fastening Methods: Apply gypsum panels to supports with steel drill screws.

3.4 APPLYING TILE BACKING PANELS

A. Glass-Mat, Water-Resistant Backing Panels: Comply with manufacturer's written installation instructions and install at showers, and locations indicated to receive tile. Install with 1/4-inch gap where panels abut other construction or penetrations.

B. Where tile backing panels abut other types of panels in same plane, shim surfaces to produce a uniform plane across panel surfaces.

3.5 INSTALLING TRIM ACCESSORIES

A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.

B. Control Joints: Install control joints according to ASTM C 840 and in specific locations approved by Architect for visual effect.

C. Interior Trim: Install in the following locations:

1. Cornerbead: Use at outside corners.
2. LC-Bead: Use at exposed panel edges.
3. L-Bead: Use where required.

3.6 FINISHING GYPSUM BOARD

A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.

B. Prefill open joints and damaged surface areas.

C. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.

D. Gypsum Board Finish Levels: Finish panels to levels indicated below and according to ASTM C 840:

1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
2. Level 2: Panels that are substrate for tile; Panels that are substrate for acoustical tile.
3. Level 4: At panel surfaces that will be exposed to view unless otherwise indicated.

    a. Primer and its application to surfaces are specified in Section 099123 "Interior Painting."

E. Tile backing panels: Finish according to manufacturer’s written instructions:

1. Apply elastomeric sealant on joints and fasteners and trowel flat. Apply sufficient quantity of sealant to completely cover joints and fasteners after troweling. Seal other penetrations and openings.
2. Apply glass-fiber sheathing tape to glass-mat gypsum sheathing board joints, and apply and trowel silicone emulsion sealant to embed sealant in entire face of tape. Apply sealant to exposed fasteners with a trowel so fasteners are completely covered. Seal other penetrations and openings.

3.7 PROTECTION

A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Repair surfaces stained, marred, or otherwise damaged during drywall application.

B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.

C. Remove and replace panels that are wet, moisture damaged, and mold damaged.

1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 092900

SECTION 093013 - CERAMIC TILING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Porcelain mosaic tile.
2. Glazed wall tile.
3. Porcelain wall tile.
4. Stone thresholds.
5. Waterproof and Crack isolation membrane for thinset applications.

B. Related Requirements:

1. Section 079200 "Joint Sealants" for sealing of expansion, contraction, control, and isolation joints in tile surfaces.

1.3 DEFINITIONS

A. General: Definitions in the ANSI A108 series of tile installation standards and in ANSI A137.1 apply to Work of this Section unless otherwise specified.

B. ANSI A108 Series: ANSI A108.01, ANSI A108.02, ANSI A108.1A, ANSI A108.1B, ANSI A108.1C, ANSI A108.4, ANSI A108.5, ANSI A108.6, ANSI A108.8, ANSI A108.9, ANSI A108.10, ANSI A108.11, ANSI A108.12, ANSI A108.13, ANSI A108.14, ANSI A108.15, ANSI A108.16, and ANSI A108.17, which are contained in its "Specifications for Installation of Ceramic Tile."

C. Module Size: Actual tile size plus joint width indicated.

D. Face Size: Actual tile size, excluding spacer lugs.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review requirements in ANSI A108.01 for substrates and for preparation by other trades.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show locations of each type of tile and tile pattern. Show widths, details, and locations of expansion, contraction, control, and isolation joints in tile substrates and finished tile surfaces.

C. Samples for Initial Selection: For tile, grout, and accessories involving color selection.

D. Samples for Verification:

1. Full-size units of each type and composition of tile and for each color and finish required.
2. Full-size units of each type of trim and accessory for each color and finish required.
3. Metal edge strips in 6-inch lengths.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: For each type of product.

C. Product Test Reports: For tile-setting and -grouting products and certified porcelain tile.

1.7 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.
2. Grout: Furnish quantity of grout equal to 3 percent of amount installed for each type, composition, and color indicated.

1.8 QUALITY ASSURANCE

A. Installer Qualifications:

1. Installer is a five-star member of the National Tile Contractors Association or a Trowel of Excellence member of the Tile Contractors' Association of America.
2. Installer's supervisor for Project holds the International Masonry Institute's Foreman Certification.
3. Installer employs Ceramic Tile Education Foundation Certified Installers or installers recognized by the U.S. Department of Labor as Journeyman Tile Layers.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in ANSI A137.1 for labeling tile packages.

B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.

C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.

D. Store liquid materials in unopened containers and protected from freezing.

1.10 FIELD CONDITIONS

A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations for Tile: Obtain tile of each type and color or finish from single source or producer.

1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.

B. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar, adhesive, and grout component from single manufacturer and each aggregate from single source or producer.

1. Obtain setting and grouting materials, except for unmodified Portland cement and aggregate, from single manufacturer.
2. Obtain waterproof membrane and crack isolation membrane, except for sheet products, from manufacturer of setting and grouting materials.

C. Source Limitations for Other Products: Obtain each of the following products specified in this Section from a single manufacturer:

1. Waterproof and crack isolation membrane.
2. Cementitious backer units.
3. Metal edge strips.
4. Metal corner protection trim.

2.2 PRODUCTS, GENERAL

A. ANSI Ceramic Tile Standard: Provide tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated.

1. Provide tile complying with Standard grade requirements unless otherwise indicated.

B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.

C. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.

2.3 TILE PRODUCTS

A. Ceramic Tile Type FT1: Factory-mounted unglazed mosaic tile.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Daltile; Portfolio.
2. Composition: Porcelain.
3. Certification: Porcelain tile certified by the Porcelain Tile Certification Agency.
4. Module Size: 2 by 2 inches.
5. Thickness: 1/4 inch.
6. Face: Plain with cushion edges.
7. Surface: Smooth, without abrasive admixture.
8. Dynamic Coefficient of Friction: Not less than 0.42.
9. Finish: Mat, clear glaze.
10. Tile Color and Pattern: As indicated in Finishes Schedule.
11. Grout Color: As indicated in Finishes Schedule.

B. Ceramic Tile Type WT1, WT2, WT3: Glazed wall tile.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Daltile; Color Wheel Classic glazed ceramic wall tile.
2. Module Size: 6 by 6 inches.
3. Face Size Variation: Plain with cushion edges.
4. Thickness: 5/16 inch.
5. Face: Plain with modified square edges or cushion edges.
6. Finish: Bright, clear glaze.
7. Tile Color and Pattern: As indicated on Finishes Schedule.
8. Grout Color: As selected by Architect from manufacturer's full range.
9. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:

a. Base for Thinset Mortar Installations: Coved, module size 6 by 6 inches.
b. External Corners for Thinset Mortar Installations: See detail in Drawings.
c. Internal Corners: Field-butted square corners. For coved base and cap use angle pieces designed to fit with stretcher shapes.

C. Wall Tile Type WT4: Porcelain Tile

1. Basis-of-Design Product: Subject to compliance with requirements, provide American Olean; Neospeck colorbody porcelain tile.
2. Certification: Tile certified by the Porcelain Tile Certification Agency.
3. Face Size: 12 by 24 inches.
4. Face Size Variation: Rectified.
5. Thickness: 5/16 inch.
6. Face: Plain with square edges.
7. Dynamic Coefficient of Friction: Not less than 0.42.
8. Tile Color, Glaze, and Pattern: As indicated on Finishes Schedule.
9. Grout Color: As selected by Architect from manufacturer's full range.
10. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:
    a. Wainscot Cap: Basis-of-Design Product: Schluter; Jolly, satin anodized aluminum.
    b. External Corners: Basis-of-Design Product: Schluter; Jolly, satin anodized aluminum.
    c. Internal Corners: Field-butted square corners.
    d. Tapered Transition Tile: Shape designed to effect transition between thickness of tile floor and adjoining floor finishes of different thickness, tapered to provide reduction in thickness from 1/2 to 1/4 inch across nominal 4-inch dimension.

D. Floor Tile Type FT2: Porcelain Tile matching Tile Type WT4.
1. Trim Units: Coordinated with sizes and coursing of adjoining flat tile where applicable and matching characteristics of adjoining flat tile. Provide shapes as follows, selected from manufacturer's standard shapes:
    a. Transition Strip: Basis-of-Design Product: Schluter; Schiene, satin anodized aluminum.

2.4 THRESHOLDS

A. General: Fabricate to sizes and profiles indicated or required to provide transition between adjacent floor finishes.

1. Bevel edges at 1:2 slope, with top edge of bevel aligned with adjacent floor surface.

B. Marble Thresholds: ASTM C 503/C 503M, with a minimum abrasion resistance of 10 according to ASTM C 1353 or ASTM C 241/C 241M and with honed finish.

1. Description: Uniform white stone.
2. Description: Provide the following, or a comparable product as approved by Architect:

a. Daltile Standard Double Bevel Threshold, low profile.
b. Dimensions: 2” x 36” x 3/8”.
c. Microbevel edges.
d. Color: Carrara White Marble, M701 – polished.

2.5 WATERPROOFING/CRACK ISOLATION MEMBRANE

A. General: Manufacturer's standard product that complies with ANSI A118.12 for high performance and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.

B. Fabric-Reinforced, Modified-Bituminous Sheet: Self-adhering, modified-bituminous sheet with fabric reinforcement facing; 0.040-inch nominal thickness.

1. Products: Subject to compliance with requirements, provide one of the following:

a. Boiardi Products Corporation; a QEP company; Elastiment 340 Sound Control Sheet Membrane Waterproofing and Anti-Fracture/Crack Suppression System.
b. Bonsal American; an Oldcastle company; B 6000 Waterproof Membrane with Glass Fabric.
c. Bostik, Inc.; Hydroment Blacktop 90210.
d. Laticrete International, Inc.; Laticrete 9235 Waterproof Membrane.
e. MAPEI Corporation; Mapelastic HPG with MAPEI Fiberglass Mesh.

2.6 SETTING MATERIALS

A. Latex-Portland Cement Mortar (Thinset): ANSI A118.4.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Boiardi Products Corporation; a QEP company.
b. Bonsal American, an Oldcastle company.
c. Bostik, Inc.
d. C-Cure.
e. Custom Building Products.
f. Jamo Inc.
g. Laticrete International, Inc.
h. MAPEI Corporation.
i. Mer-Kote Products, Inc.
j. Southern Grouts & Mortars, Inc.
k. Summitville Tiles, Inc.
l. TEC; H.B. Fuller Construction Products Inc.

B. Medium-Bed, Modified Dry-Set Mortar: Comply with requirements in ANSI A118.4. Provide product that is approved by manufacturer for application thickness of 5/8 inch.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Bostik, Inc.
b. C-Cure.
c. Custom Building Products.
d. Laticrete International, Inc.
e. MAPEI Corporation.

2. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.
3. Provide prepackaged, dry-mortar mix combined with acrylic resin or styrene-butadiene-rubber liquid-latex additive at Project site.

C. Improved Modified Dry-Set Mortar (Thinset): ANSI A118.15.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Bostik, Inc.
b. C-Cure.
c. Custom Building Products.
d. Laticrete International, Inc.
e. MAPEI Corporation.

2. Provide prepackaged, dry-mortar mix containing dry, redispersible, vinyl acetate or acrylic additive to which only water must be added at Project site.
3. Provide prepackaged, dry-mortar mix combined with acrylic resin or styrene-butadiene-rubber liquid-latex additive at Project site.
4. For wall applications, provide mortar that complies with requirements for nonsagging mortar in addition to the other requirements in ANSI A118.15.

2.7 GROUT MATERIALS

A. Water-Cleanable Epoxy Grout: ANSI A118.3, with a VOC content of 65 g/L or less.

1. Provide product capable of withstanding continuous and intermittent exposure to temperatures of up to 140 and 212 deg F, respectively, and certified by manufacturer for intended use.

2.8 MISCELLANEOUS MATERIALS

A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.

B. Vapor-Retarder Membrane: Polyethylene sheeting, ASTM D 4397, 4.0 mils thick.

C. Metal Edge Strips: Angle or L-shaped, height to match tile and setting-bed thickness, metallic or combination of metal and PVC or neoprene base, designed specifically for flooring applications; stainless-steel, ASTM A 666, 300 Series exposed-edge material.

D. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.

E. Floor Sealer: Manufacturer's standard product for sealing grout joints and that does not change color or appearance of grout.

2.9 MIXING MORTARS AND GROUT

A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.

B. Add materials, water, and additives in accurate proportions.

C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

1. Verify that substrates for setting tile are firm; dry; clean; free of coatings that are incompatible with tile-setting materials, including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
2. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
3. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with thinset mortar with trowelable leveling and patching compound specifically recommended by tile-setting material manufacturer.

B. Where indicated, prepare substrates to receive waterproofing by applying a reinforced mortar bed that complies with ANSI A108.1A and is sloped 1/4 inch per foot toward drains.

C. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

3.3 CERAMIC TILE INSTALLATION

A. Comply with TCNA's "Handbook for Ceramic, Glass, and Stone Tile Installation" for TCNA installation methods specified in tile installation schedules. Comply with parts of the ANSI A108 series "Specifications for Installation of Ceramic Tile" that are referenced in TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.

1. For the following installations, follow procedures in the ANSI A108 series of tile installation standards for providing 95 percent mortar coverage:

a. Tile floors in wet areas.
b. Tile floors consisting of tiles 8 by 8 inches or larger.
c. Tile floors consisting of rib-backed tiles.

B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.

C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.

D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.

E. Where accent tile differs in thickness from field tile, vary setting-bed thickness so that tiles are flush.

F. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.

1. For tile mounted in sheets, make joints between tile sheets same width as joints within tile sheets so joints between sheets are not apparent in finished work.
2. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
3. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.

G. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:

1. Mosaic Floor Tile: Per sheet joints.
2. Glazed Wall Tile: 1/16 inch.
3. Porcelain Wall Tile: 1/16 inch.

H. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.

I. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.

1. Where joints occur in concrete substrates, locate joints in tile surfaces directly above them.

J. Metal Edge Strips: Install where exposed edge of tile flooring meets carpet, wood, or other flooring that finishes flush with top of tile at outside corners on wall tile.

K. Floor Sealer: Apply floor sealer to grout joints in tile floors according to floor-sealer manufacturer's written instructions. As soon as floor sealer has penetrated grout joints, remove excess sealer and sealer from tile faces by wiping with soft cloth.

3.4 CRACK ISOLATION MEMBRANE INSTALLATION

A. Install crack isolation membrane to comply with ANSI A108.17 and manufacturer's written instructions to produce membrane of uniform thickness that is bonded securely to substrate.

B. Allow crack isolation membrane to cure before installing tile or setting materials over it.

3.5 ADJUSTING AND CLEANING

A. Remove and replace tile that is damaged or that does not match adjoining tile. Provide new matching units, installed as specified and in a manner to eliminate evidence of replacement.

B. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.

1. Remove grout residue from tile as soon as possible.

2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.

3.6 PROTECTION

A. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.

B. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.

C. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.7 INTERIOR CERAMIC TILE INSTALLATION SCHEDULE

A. Interior Floor Installations, Concrete Subfloor:

1. Ceramic Tile Installation: TCNA F121 and ANSI A108.1A, ANSI A108.1B or ANSI A108.1C; cement mortar bed (thinset) on waterproof membrane.

    a. Ceramic Tile Type: FT1.
    b. Bond Coat for Cured-Bed Method: Latex modified mortar (equal to Mapei L.F.T.).
    c. Grout: Water-cleanable epoxy grout.

B. Interior Wall Installations, Wood or Metal Studs or Furring:

1. Ceramic Tile Installation WT1: TCNA W243; thinset mortar on gypsum board.

    a. Ceramic Tile Type: CT1, CT2.
    b. Thinset Mortar: Latex modified medium bed Portland cement mortar (equal to Mapei L.F.T).
    c. Grout: Water-cleanable epoxy grout.

END OF SECTION 093013

SECTION 095113 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes acoustical panels and exposed suspension systems for ceilings.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified, 6 inches in size.

C. Samples for Verification: For each component indicated and for each exposed finish required, prepared on Samples of size indicated below.

1. Acoustical Panel: Set of full-size samples of each type, color, pattern, and texture.
2. Exposed Suspension-System Members, Moldings, and Trim: Set of 6-inch- long Samples of each type, finish, and color.

1.5 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Suspended ceiling components.
2. Structural members to which suspension systems will be attached.
3. Size and location of initial access modules for acoustical panels.
4. Items penetrating finished ceiling including the following:

    a. Lighting fixtures.
    b. Air outlets and inlets.
    c. Speakers.

d. Sprinklers.
e. Access panels.

5. Perimeter moldings.

B. Qualification Data: For testing agency.

C. Product Test Reports: For each acoustical panel ceiling, for tests performed by manufacturer and witnessed by a qualified testing agency.

D. Evaluation Reports: For each acoustical panel ceiling suspension system and anchor and fastener type, from ICC-ES.

E. Field quality-control reports.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For finishes to include in maintenance manuals.

1.7 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Acoustical Ceiling Panels: Full-size panels equal to 2 percent of quantity installed.
2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed.
3. Hold-Down Clips: Equal to 2 percent of quantity installed.
4. Impact Clips: Equal to 2 percent of quantity installed.

1.8 QUALITY ASSURANCE

A. Testing Agency Qualifications: Qualified according to NVLAP for testing indicated.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Deliver acoustical panels, suspension-system components, and accessories to Project site in original, unopened packages and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.

B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.

C. Handle acoustical panels carefully to avoid chipping edges or damaging units in any way.

1.10 FIELD CONDITIONS

A. Environmental Limitations: Do not install acoustical panel ceilings until spaces are enclosed and weatherproof, wet work in spaces is complete and dry, work above ceilings is complete, and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

1. Pressurized Plenums: Operate ventilation system for not less than 48 hours before beginning acoustical panel ceiling installation.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Acoustical ceiling shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

B. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: Comply with ASTM E 1264 for Class A materials.
2. Smoke-Developed Index: 50 or less.

2.2 ACOUSTICAL PANELS, GENERAL

A. Source Limitations: Obtain each type of acoustical ceiling panel and supporting suspension system from single source from single manufacturer.

B. Glass-Fiber-Based Panels: Made with binder containing no urea formaldehyde.

C. Acoustical Panel Standard: Provide manufacturer's standard panels of configuration indicated that comply with ASTM E 1264 classifications as designated by types, patterns, acoustical ratings, and light reflectances unless otherwise indicated.

1. Mounting Method for Measuring NRC: Type E-400; plenum mounting in which face of test specimen is 15-3/4 inches away from test surface according to ASTM E 795.

D. Acoustical Panel Colors and Patterns: Match appearance characteristics indicated for each product type.

2.3 ACOUSTICAL PANELS – Ceiling Type A1

A. Basis-of-Design Product: Subject to compliance with requirements, provide Certainteed Adagio High CAC or comparable product by one of the following:

1. Armstrong World Industries, Inc.
2. Chicago Metallic Corporation.
3. USG Interiors, Inc. Subsidiary of USG Corporation.

B. Classification: Provide panels complying with ASTM E 1264 for type, form, and pattern as follows:

1. Type and Form: Type and Form: Type XX, high-density, ceramic- and mineral-base panels with scrubbable finish, resistant to heat, moisture, and corrosive fumes.

C. Pattern: E (lightly textured).

D. Color: White.

E. LR: Not less than 0.90.

F. NRC: Not less than 0.70.

G. CAC: Not less than 40.

H. Edge/Joint Detail: Reveal.

I. Thickness: 1/2 inch.

J. Modular Size: 24 by 24 inches.

K. Broad Spectrum Antimicrobial Fungicide and Bactericide Treatment: Provide acoustical panels treated with manufacturer's standard antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D 3273 and evaluated according to ASTM D 3274 or ASTM G 21.

2.4 ACOUSTICAL PANELS – Ceiling Type B1

A. Basis-of-Design Product: Subject to compliance with requirements, provide Certainteed, Fine-Fissured High NRC or comparable product by one of the following:

1. Armstrong World Industries, Inc.
2. Chicago Metallic Corporation.
3. USG Interiors, Inc. Subsidiary of USG Corporation.

B. Classification: Provide panels complying with ASTM E 1264 for type, form, and pattern as follows:

1. Type and Form: Type III, mineral base with painted finish; Form 2, water felted.

C. Pattern: CE (perforated, small holes and lightly textured).

D. Color: White.

E. LR: Not less than 0.83.

F. NRC: Not less than 0.70.

G. CAC: Not less than 35.

H. Edge/Joint Detail: Square.

I. Thickness: 3/4 inch.

J. Modular Size: 24 by 48 inches.

K. Broad Spectrum Antimicrobial Fungicide and Bactericide Treatment: Provide acoustical panels treated with manufacturer's standard antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D 3273 and evaluated according to ASTM D 3274 or ASTM G 21.

2.5 METAL SUSPENSION SYSTEMS, GENERAL

A. Metal Suspension-System Standard: Provide manufacturer's standard direct-hung metal suspension systems of types, structural classifications, and finishes indicated that comply with applicable requirements in ASTM C 635/C 635M.

B. Attachment Devices: Size for five times the design load indicated in ASTM C 635/C 635M, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.

C. Wire Hangers, Braces, and Ties: Provide wires complying with the following requirements:

1. Zinc-Coated, Carbon-Steel Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper.
2. Stainless-Steel Wire: ASTM A 580/A 580M, Type 304, nonmagnetic.
3. Nickel-Copper-Alloy Wire: ASTM B 164, nickel-copper-alloy UNS No. N04400.
4. Size: Select wire diameter so its stress at three times hanger design load (ASTM C 635/C 635M, Table 1, "Direct Hung") will be less than yield stress of wire, but provide not less than 0.135-inch- diameter wire.

D. Hanger Rods: Mild steel, zinc coated or protected with rust-inhibitive paint.

E. Angle Hangers: Angles with legs not less than 7/8 inch wide; formed with 0.04-inch- thick, galvanized-steel sheet complying with ASTM A 653/A 653M, G90 coating designation; with bolted connections and 5/16-inch-diameter bolts.

F. Seismic Stabilizer Bars: Manufacturer's standard perimeter stabilizers designed to accommodate seismic forces.

G. Seismic Struts: Manufacturer's standard compression struts designed to accommodate seismic forces.

H. Seismic Clips: Manufacturer's standard seismic clips designed and spaced to secure acoustical panels in place.

I. Hold-Down Clips: Where indicated, provide manufacturer's standard hold-down clips spaced 24 inches o.c. on all cross tees.

J. Impact Clips: Where indicated, provide manufacturer's standard impact-clip system designed to absorb impact forces against acoustical panels.

2.6 METAL SUSPENSION SYSTEM

A. Basis of Design Product: Subject to compliance with requirements, provide Certainteed 15/16" Classic Stab System or comparable product by one of the following:

1. Armstrong World Industries.
2. CertainTeed Corp.
3. USG Interiors Inc., Subsidiary of USG Corporation.

B. Wide-Face, Capped, Double-Web, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; pre-painted, electrolytically zinc coated, or hot-dip galvanized according to ASTM A 653/A 653M, not less than G30 coating designation; with prefinished 15/16-inch- wide metal caps on flanges.

1. Structural Classification: Heavy-duty system.
2. End Condition of Cross Runners: Override (stepped) type.
3. Face Design: Flat, flush.
4. Cap Material: Steel cold-rolled sheet.
5. Cap Finish: Painted white.

C. Provide seismic joint clips for main beams and seismic joint clips for cross tees to satisfy separation joint requirement at **Multi-Purpose Room 112 and any other ceilings that exceed 2,500 SF.**

2.7 METAL EDGE MOLDINGS AND TRIM

A. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.

1. Provide manufacturer's standard edge moldings that fit acoustical panel edge details and suspension systems indicated and that match width and configuration of exposed runners unless otherwise indicated.
2. For circular penetrations of ceiling, provide edge moldings fabricated to diameter required to fit penetration exactly.
3. Use perimeter seismic clips to stabilize perimeter of suspended ceiling grid components, in accordance with ASCE/SEI 7, in lieu of 2" perimeter wall angle.

2.8 ACOUSTICAL SEALANT

A. Acoustical Sealant: Manufacturer's standard sealant complying with ASTM C 834 and effective in reducing airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.

1. Exposed and Concealed Joints: Non-sag, paintable, non-staining latex sealant.
2. Concealed Joints: Nondrying, nonhardening, non-skinning, non-staining, gunnable, synthetic-rubber sealant.
3. Acoustical sealant shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.

B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders, and comply with layout shown on reflected ceiling plans.

3.3 INSTALLATION

A. General: Install acoustical panel ceilings to comply with ASTM C 636/C 636M and seismic design requirements indicated, according to manufacturer's written instructions and CISCA's "Ceiling Systems Handbook."

B. Suspend ceiling hangers from building's structural members and as follows:

1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
2. Splay hangers only where required and, if permitted with fire-resistance-rated ceilings, to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.

3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly either to structures or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
5. Secure flat, angle, channel, and rod hangers to structure, including intermediate framing members, by attaching to inserts, eye screws, or other devices that are secure and appropriate for both the structure to which hangers are attached and the type of hanger involved. Install hangers in a manner that will not cause them to deteriorate or fail due to age, corrosion, or elevated temperatures.
6. Do not support ceilings directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts, post-installed mechanical or adhesive anchors, or power-actuated fasteners that extend through forms into concrete.
7. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
8. Do not attach hangers to steel deck tabs.
9. Do not attach hangers to steel roof deck. Attach hangers to structural members.
10. Space hangers not more than 48 inches o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches from ends of each member.
11. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards and publications.

C. Secure bracing wires to ceiling suspension members and to supports with a minimum of four tight turns. Suspend bracing from building's structural members as required for hangers, without attaching to permanent metal forms, steel deck, or steel deck tabs. Fasten bracing wires into concrete with cast-in-place or post-installed anchors.

D. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.

1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.
2. Screw attach moldings to substrate at intervals not more than 16 inches o.c. and not more than 3 inches from ends, leveling with ceiling suspension system to a tolerance of 1/8 inch in 12 feet. Miter corners accurately and connect securely.
3. Do not use exposed fasteners, including pop rivets, on moldings and trim.

E. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.

F. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide a neat, precise fit.

1. For square-edged panels, install panels with edges fully hidden from view by flanges of suspension-system runners and moldings.
2. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
3. For reveal-edged panels on suspension-system members with box-shaped flanges, install panels with reveal surfaces in firm contact with suspension-system surfaces and panel faces flush with bottom face of runners.
4. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.
5. Install hold-down and impact clips in areas indicated, in areas required by authorities having jurisdiction, and for fire-resistance ratings; space as recommended by panel manufacturer's written instructions unless otherwise indicated.
6. Protect lighting fixtures and air ducts to comply with requirements indicated for fire-resistance-rated assembly.

3.4 FIELD QUALITY CONTROL

A. Special Inspections: Owner will engage a qualified special inspector to perform the following special inspections:

1. Compliance of seismic design.

B. Testing Agency: Owner will engage a qualified testing agency to perform tests and inspections and prepare test reports.

1. Extent of Each Test Area: When installation of ceiling suspension systems on each floor has reached 20 percent completion but no panels have been installed.

a. Within each test area, testing agency will select one of every 10 power-actuated fasteners and post-installed anchors used to attach hangers to concrete and will test them for 200 lbf of tension; it will also select one of every two post-installed anchors used to attach bracing wires to concrete and will test them for of tension.
b. When testing discovers fasteners and anchors that do not comply with requirements, testing agency will test those anchors not previously tested until 20 pass consecutively and then will resume initial testing frequency.

C. Acoustical panel ceiling hangers and anchors and fasteners will be considered defective if they do not pass tests and inspections.

3.5 CLEANING

A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095113

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Thermoset-rubber base.
2. Rubber molding accessories.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified, not less than 12 inches long.

C. Samples for Initial Selection: For each type of product indicated.

D. Samples for Verification: For each type of product indicated and for each color, texture, and pattern required in manufacturer's standard-size Samples, but not less than 12 inches long.

E. Product Schedule: For resilient base and accessory products. Use same designations indicated on Drawings.

1.4 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Furnish not less than 10 linear feet for every 500 linear feet or fraction thereof, of each type, color, pattern, and size of resilient product installed.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F or more than 90 deg F.

1.6 FIELD CONDITIONS

A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 95 deg F, in spaces to receive resilient products during the following periods:

1. 48 hours before installation.
2. During installation.
3. 48 hours after installation.

B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F or more than 95 deg F.

C. Install resilient products after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 THERMOSET-RUBBER BASE

A. Product Standard: ASTM F 1861, Type TS (rubber, vulcanized thermoset), Group I (solid, homogeneous).

1. Style and Location:

a. Style A, Straight: Provide in areas with carpet.
b. Style B, Cove: Provide in areas with resilient floor coverings.

B. Thickness: 0.125 inch.

C. Height: 4 inches.

D. Lengths: Coils in manufacturer's standard length.

E. Outside Corners: Job formed.

F. Inside Corners: Job formed.

G. Colors: As indicated on Finish Schedule.

H. Colors and Patterns: As indicated on Finish Schedule.

2.2 RUBBER MOLDING ACCESSORY

A. Description: Rubber transition strips.

B. Profile and Dimensions: Basis-of-Design: Roppe #50 Tile/Carpet joiner, 7/32-inch, or comparable product.

C. Locations: Provide rubber molding accessories in areas indicated.

D. Colors and Patterns: As indicated on Finish Schedule.

2.3 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based or blended hydraulic-cement-based formulation provided or approved by resilient-product manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by resilient-product manufacturer for resilient products and substrate conditions indicated.

1. Adhesive VOC content shall be <50 g/L.
2. Adhesives shall contain no urea formaldehyde.

C. Metal Edge Strips: Extruded aluminum with mill finish, nominal 2 inches wide, of height required to protect exposed edges of flooring, and in maximum available lengths to minimize running joints.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

1. Installation of resilient products indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.

B. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.

C. Do not install resilient products until materials are the same temperature as space where they are to be installed.

1. At least 48 hours in advance of installation, move resilient products and installation materials into spaces where they will be installed.

D. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient products.

3.3 RESILIENT BASE INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient base.

B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.

C. Install resilient base in lengths as long as practical without gaps at seams and with tops of adjacent pieces aligned.

D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.

E. Do not stretch resilient base during installation.

F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.

G. Job-Formed Corners:

1. Outside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches in length.

    a. Form without producing discoloration (whitening) at bends.

2. Inside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches in length.

    a. Miter or cope corners to minimize open joints.

3.4 RESILIENT ACCESSORY INSTALLATION

A. Comply with manufacturer's written instructions for installing resilient accessories.

B. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of floor covering that would otherwise be exposed.

3.5 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protecting resilient products.

B. Perform the following operations immediately after completing resilient-product installation:

1. Remove adhesive and other blemishes from surfaces.
2. Sweep and vacuum horizontal surfaces thoroughly.
3. Damp-mop horizontal surfaces to remove marks and soil.

C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Floor Polish: Remove soil, adhesive, and blemishes from resilient stair treads before applying liquid floor polish.

1. Apply polish as recommended by Manufacturer.

E. Cover resilient products subject to wear and foot traffic until Substantial Completion.

END OF SECTION 096513

SECTION 096519 - RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Solid vinyl floor tile.

B. Related Sections:

1. See section 096513 “Resilient Base and Accessories” for edge trim at transitions between solid vinyl and carpet flooring.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For each type of resilient floor tile.

1. Include floor tile layouts, edges, columns, doorways, enclosing partitions, built-in furniture, cabinets, and cutouts.
2. Show details of special patterns.

C. Samples for Verification: Full-size units of each color and pattern of floor tile required.

1. For heat-welding bead, manufacturer's standard-size Samples, but not less than 9 inches long, of each color required.

D. Welded-Seam Samples: For seamless-installation technique indicated and for each floor covering product, color, and pattern required; with seam running lengthwise and in center of 6-by-9-inch Sample applied to a rigid backing and prepared by Installer for this Project.

E. Product Schedule: For floor tile. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of floor tile to include in maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Floor Tile: Furnish one box for every 50 boxes or fraction thereof, of each type, color, and pattern of floor tile installed.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are competent in techniques required by manufacturer for floor tile installation and seaming method indicated.

1. Engage an installer who employs workers for this Project who are trained or certified by floor tile manufacturer for installation techniques required.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Store floor tile and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F or more than 90 deg F. Store floor tiles on flat surfaces.

1.9 FIELD CONDITIONS

A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 95 deg F, in spaces to receive floor tile during the following periods:

1. 48 hours before installation.
2. During installation.
3. 48 hours after installation.

B. After installation and until Substantial Completion, maintain ambient temperatures within range recommended by manufacturer, but not less than 55 deg F or more than 95 deg F.

C. Close spaces to traffic during floor tile installation.

D. Close spaces to traffic for 48 hours after floor tile installation.

E. Install floor tile after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Fire-Test-Response Characteristics: For resilient floor tile, as determined by testing identical products according to ASTM E648 or NFPA 253 by a qualified testing agency.

1. Critical Radiant Flux Classification: Class I, not less than 0.45 W/sq. cm.

2.2 SOLID VINYL FLOOR TILE [LV1]

A. Basis-of-Design Product: Subject to compliance with requirements, provide Shaw Contract Flooring; Coded or comparable product by one of the following:

1. Armstrong.
2. Mohawk Group.
3. Tarkett North.

B. Tile Standard: ASTM F1700.

1. Class: Class III, Printed Film Vinyl Tile.
2. Type: B, Embossed Surface.

C. Thickness: 0.197 inch.

D. Size: 6 by 48 inches.

E. Installation Method: Direct Glue.

F. Colors and Patterns: As Indicated in Finish Schedule on Drawings.

2.3 INSTALLATION MATERIALS

A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based or blended hydraulic-cement-based formulation provided or approved by floor tile manufacturer for applications indicated.

B. Adhesives: Water-resistant type recommended by floor tile and adhesive manufacturers to suit floor tile and substrate conditions indicated.

C. Floor Finish: Provide protective, liquid floor-finish products only as recommended by floor tile manufacturer.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of floor tile.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Prepare substrates according to floor tile manufacturer's written instructions to ensure adhesion of resilient products.

B. Concrete Substrates: Prepare according to ASTM F710.

1. Verify that substrates are dry and free of curing compounds, sealers, and hardeners.
2. Remove substrate coatings and other substances that are incompatible with adhesives and that contain soap, wax, oil, or silicone, using mechanical methods recommended by floor tile manufacturer. Do not use solvents.
3. Alkalinity and Adhesion Testing: Perform tests recommended by floor tile manufacturer. Proceed with installation only after substrate alkalinity falls within range on pH scale recommended by manufacturer in writing, but not less than 5 or more than 9 pH.
4. Moisture Testing: Perform tests so that each test area does not exceed 200 sq. ft., and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.

a. Anhydrous Calcium Chloride Test: ASTM F1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 3 lb of water/1000 sq. ft. in 24 hours.
b. Relative Humidity Test: Using in-situ probes, ASTM F2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level measurement.

C. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.

D. Do not install floor tiles until materials are the same temperature as space where they are to be installed.

1. At least 48 hours in advance of installation, move resilient floor tile and installation materials into spaces where they will be installed.

E. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient floor tile.

3.3 FLOOR TILE INSTALLATION

A. Comply with manufacturer's written instructions for installing floor tile.

B. Lay out floor tiles from center marks established with principal walls, discounting minor offsets, so tiles at opposite edges of room are of equal width. Adjust as necessary to avoid using cut widths that equal less than one-half tile at perimeter.

1. Lay tiles square with room axis unless indicated otherwise on Drawings.

C. Match floor tiles for color and pattern by selecting tiles from cartons in the same sequence as manufactured and packaged, if so numbered. Discard broken, cracked, chipped, or deformed tiles.

1. Lay tiles with grain running in one direction.

D. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.

E. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.

F. Maintain reference markers, holes, and openings that are in place or marked for future cutting by repeating on floor tiles as marked on substrates. Use chalk or other nonpermanent marking device.

G. Install floor tiles on covers for telephone and electrical ducts, building expansion-joint covers, and similar items in installation areas. Maintain overall continuity of color and pattern between pieces of tile installed on covers and adjoining tiles. Tightly adhere tile edges to substrates that abut covers and to cover perimeters.

H. Adhere floor tiles to substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.

3.4 CLEANING AND PROTECTION

A. Comply with manufacturer's written instructions for cleaning and protecting floor tile.

B. Perform the following operations immediately after completing floor tile installation:

1. Remove adhesive and other blemishes from surfaces.
2. Sweep and vacuum surfaces thoroughly.
3. Damp-mop surfaces to remove marks and soil.

C. Protect floor tile from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.

D. Floor Finish: Remove soil, adhesive, and blemishes from floor tile surfaces before applying liquid acrylic floor finish.

1. Apply one, two or three coat(s) as recommended by manufacturer.

E. Cover floor tile until Substantial Completion.

END OF SECTION 096519

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes surface preparation and the application of paint systems on the following interior substrates:

1. Steel and iron.
2. Gypsum board.

B. Related requirements:

1. Section 064023 “Interior Architectural Woodwork” for paint finish on MDF wayfinding panels.

1.3 DEFINITIONS

A. MPI Gloss Level 1: Not more than five units at 60 degrees and 10 units at 85 degrees, according to ASTM D 523.

B. MPI Gloss Level 2: Not more than 10 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.

C. MPI Gloss Level 3: 10 to 25 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.

D. MPI Gloss Level 4: 20 to 35 units at 60 degrees and not less than 35 units at 85 degrees, according to ASTM D 523.

E. MPI Gloss Level 5: 35 to 70 units at 60 degrees, according to ASTM D 523.

F. MPI Gloss Level 6: 70 to 85 units at 60 degrees, according to ASTM D 523.

G. MPI Gloss Level 7: More than 85 units at 60 degrees, according to ASTM D 523.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product. Include preparation requirements and application instructions.

1. Include Printout of current "MPI Approved Products List" for each product category specified, with the proposed product highlighted.
2. Indicate VOC content.

B. Samples for Verification: For each type of paint system and in each color and gloss of topcoat.

1. Submit Samples on rigid backing, 8 inches square.
2. Apply coats on Samples in steps to show each coat required for system.
3. Label each coat of each Sample.
4. Label each Sample for location and application area.

C. Product List: Cross-reference to paint system and locations of application areas. Use same designations indicated on Drawings and in schedules. Include color designations.

1.5 QUALITY ASSURANCE

A. Mockups: Apply mockups of each paint system indicated and each color and finish selected to verify preliminary selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Architect will select one surface to represent surfaces and conditions for application of each paint system.

a. Vertical and Horizontal Surfaces: Provide samples of at least 100 sq. ft..
b. Other Items: Architect will designate items or areas required.

2. Final approval of color selections will be based on mockups.

a. If preliminary color selections are not approved, apply additional mockups of additional colors selected by Architect at no added cost to Owner.

3. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.

4. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Paint: 5 percent, but not less than 1 gal. of each material and color applied.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.

1. Maintain containers in clean condition, free of foreign materials and residue.
2. Remove rags and waste from storage areas daily.

1.8 FIELD CONDITIONS

A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F.

B. Do not apply paints when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

1. Benjamin Moore & Co.
2. Kwal Paint; Comex Group.
3. Sherwin-Williams Company (The).

2.2 PAINT, GENERAL

A. MPI Standards: Products shall comply with MPI standards indicated and shall be listed in its "MPI Approved Products Lists."

B. Material Compatibility:

1. Materials for use within each paint system shall be compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
2. For each coat in a paint system, products shall be recommended in writing by topcoat manufacturers for use in paint system and on substrate indicated.

C. VOC Content: Products shall comply with VOC limits of authorities having jurisdiction.

1. Flat Paints and Coatings: 50 g/L.
2. Nonflat Paints and Coatings: 150 g/L.
3. Dry-Fog Coatings: 400 g/L.
4. Primers, Sealers, and Undercoaters: 200 g/L.

5. Anticorrosive and Antirust Paints Applied to Ferrous Metals: 250 g/L.
6. Zinc-Rich Industrial Maintenance Primers: 340 g/L.
7. Pretreatment Wash Primers: 420 g/L.
8. Floor Coatings: 100 g/L.
9. Shellacs, Clear: 730 g/L.
10. Shellacs, Pigmented: 550 g/L.

D. Colors: As indicated in a color schedule.

1. 20 percent of surface area will be painted with deep tones.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:

1. Concrete: 12 percent.
2. Masonry (Clay and CMUs): 12 percent.
3. Wood: 15 percent.
4. Gypsum Board: 12 percent.

C. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.

D. Verify suitability of substrates, including surface conditions and compatibility, with existing finishes and primers.

E. Proceed with coating application only after unsatisfactory conditions have been corrected.

1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

A. Comply with manufacturer's written instructions and recommendations in "MPI Architectural Painting Specification Manual" applicable to substrates and paint systems indicated.

B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.

1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.

C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.

1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.

D. Masonry Substrates: Remove efflorescence and chalk. Do not paint surfaces if moisture content or alkalinity of surfaces or mortar joints exceeds that permitted in manufacturer's written instructions.

E. Steel Substrates: Remove rust, loose mill scale, and shop primer, if any. Clean using methods recommended in writing by paint manufacturer.

F. Shop-Primed Steel Substrates: Clean field welds, bolted connections, and areas where shop paint is abraded. Paint exposed areas with the same material as used for shop priming to comply with SSPC-PA 1 for touching up shop-primed surfaces.

G. Aluminum Substrates: Remove loose surface oxidation.

3.3 APPLICATION

A. Apply paints according to manufacturer's written instructions and to recommendations in "MPI Manual."

1. Use applicators and techniques suited for paint and substrate indicated.
2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
3. Paint front and backsides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
4. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
5. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.

B. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.

C. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.

D. Painting Fire Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:

1. Paint the following work where exposed in occupied spaces:

a. Uninsulated metal piping.
b. Pipe hangers and supports.

c. Metal conduit.
d. Other items as directed by Architect.

3.4 CLEANING AND PROTECTION

A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.

B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.

C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.

D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.5 INTERIOR PAINTING SCHEDULE

A. Steel Substrates:

1. Institutional Low-Odor/VOC Latex System MPI INT 5.1S:

a. Prime Coat: Primer, rust inhibitive, water based MPI #107.
b. Intermediate Coat: Latex, interior, institutional low odor/VOC, matching topcoat.
c. Topcoat: Latex, interior, institutional low odor/VOC, semi-gloss (MPI Gloss Level 5), MPI #147.

B. Gypsum Board Substrates:

1. Institutional Low-Odor/VOC Latex System MPI INT 9.2M:

a. Prime Coat: Primer sealer, interior, institutional low odor/VOC, MPI #149.
b. Intermediate Coat: Latex, interior, institutional low odor/VOC, matching topcoat.
c. Topcoat: Latex, interior, institutional low odor/VOC, flat (MPI Gloss Level 1), MPI #143.
d. Topcoat: Latex, interior, institutional low odor/VOC, eggshell (MPI Gloss Level 3), MPI #145.

END OF SECTION 099123

SECTION 101100 - VISUAL DISPLAY UNITS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Glass markerboard assemblies.
2. Tackboard assemblies.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, finishes, and accessories for visual display units.

B. Shop Drawings: For visual display units.

1. Include plans, elevations, sections, details, and attachment to other work.
2. Show locations of panel joints.
3. Include sections of typical trim members.

C. Samples for Verification: For each type of visual display unit indicated.

1. Visual Display Panel: Not less than 8-1/2 by 11 inches, with facing, core, and backing indicated for final Work. Include one panel for each type, color, and texture required.
2. Trim: 6-inch- long sections of each trim profile.
3. Accessories: Full-size Sample of each type of accessory.

D. Product Schedule: For visual display units. Use same designations indicated on Drawings.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified Installer.

B. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for surface-burning characteristics of tackboards.

C. Sample Warranties: For special warranties.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For visual display units to include in maintenance manuals.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver factory-fabricated visual display units completely assembled in one piece. If dimensions exceed maximum manufactured unit size, or if unit size is impracticable to ship in one piece, provide two or more pieces with joints in locations indicated on approved Shop Drawings.

1.9 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install visual display units until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, work above ceilings is complete, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

B. Field Measurements: Verify actual dimensions of construction contiguous with visual display units by field measurements before fabrication.

1. Allow for trimming and fitting where taking field measurements before fabrication might delay the Work.

1.10 WARRANTY

A. Special Warranty for Porcelain-Enamel Face Sheets: Manufacturer agrees to repair or replace porcelain-enamel face sheets that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Surfaces lose original writing and erasing qualities.
b. Surfaces exhibit crazing, cracking, or flaking.

2. Warranty Period: 50 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain each type of visual display unit from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 25 or less.
2. Smoke-Developed Index: 50 or less.

2.3 VISUAL DISPLAY BOARD ASSEMBLY

A. Visual Display Board Assembly: Factory fabricated.

1. Assembly 1:
   a. Markerboard, where indicated on Drawings.
   b. Glass magnetic markerboard, where indicated on Drawings.
   c. Tackboard, where indicated on Drawings.
2. Corners: Square.
3. Width: As indicated on Drawings.
4. Height: As indicated on Drawings.
5. Mounting Method: Direct to wall.

B. Markerboard Panel: Porcelain-enamel-faced markerboard panel on core indicated.

1. Color: White.

C. Magnetic Glass: Fabricated of 6-mm tempered glass.

D. Tackboard Panel: Nylon-fabric-faced tackboard panel on core indicated.

1. Fabric Wrapped Edge: Wrap edge of tackboard panel with fabric facing.
2. Color and Pattern: As indicated on Finish Schedule.

E. Aluminum Frames and Trim: Fabricated from not less than 0.062-inch- thick, extruded aluminum; 1 inch.

1. Field-Applied Trim: Manufacturer's standard, snap-on trim with no visible screws or exposed joints.
2. Aluminum Finish: Clear anodic finish.

F. Joints: Make joints only where total length exceeds maximum manufactured length. Fabricate with minimum number of joints, as indicated on approved Shop Drawings.

G. Chalktray: Manufacturer's standard; continuous for markerboards only.

1. Box Type: Extruded aluminum with slanted front, grooved tray, and cast-aluminum end closures.

2.1 GLASS MAGNETIC MARKERBOARDS PANEL ASSEMBLY

A. Basis-of-Design: Subject to compliance with requirements, provide Clarus Glassboards, LLC “Float” glass magnetic markerboard, or comparable product by one of the following:

1. Egan Visual Inc.
2. Claridge Products and Equipment, Inc.
3. Quartet.

B. Glass Magnetic Markerboards: Fabricated of 6-mm tempered glass.

1. Edge Treatment: Smooth polished edge with eased corners.
2. Frame: Aluminum trim in profile indicated.
3. Surface: Glossy.
4. Color: CBC-100.
5. Provide twelve magnets for each board.

C. Mounting: Manufacturer's standard concealed mounting bracket hardware.

D. Marker Tray: Manufacturer’s standard “Box” marker and eraser holder.

E. Size: 48 by 48 inches and 48 by 96 inches, as indicated on Drawings.

2.2 TACKBOARD PANEL ASSEMBLY

A. Basis-of-Design: Subject to compliance with requirements, provide Ghent 059 Series Aluminum-framed Premium Bulletin Board, or comparable product by one of the following:

1. Egan Visual, Inc.
2. Claridge Products and Equipment, Inc.
3. Quartet.

B. Tackboards:

1. Surface: 1/8-inch-thick fine-grained natural cork laminated to 3/8-inch-thick fiberboard.
2. Backing: Aluminum-plated polyester film.

3. Frame: Satin anodized 6063-T5 aluminum extrusion.
4. Mounting: Manufacturer's standard board hangers.
5. Size: 48 by 96 inches, as indicated on Drawings.

2.3 MATERIALS

A. Hardboard: ANSI A135.4, tempered.

B. Particleboard: ANSI A208.1, Grade M-1.

C. Medium-Density Fiberboard: ANSI A208.2, Grade 130.

D. Fiberboard: ASTM C 208 cellulosic fiber insulating board.

E. Extruded Aluminum: ASTM B 221, Alloy 6063.

F. Adhesives for Field Application: Mildew-resistant, nonstaining adhesive for use with specific type of panels, sheets, or assemblies; and for substrate application; as recommended in writing by visual display unit manufacturer.

1. Adhesive VOC content to be less than 50 g/L.
2. Adhesives shall contain no urea formaldehyde.

G. Primer/Sealer: Mildew-resistant primer/sealer complying with requirements in Section 099123 "Interior Painting" and recommended in writing by visual display unit manufacturer for intended substrate.

2.4 GENERAL FINISH REQUIREMENTS

A. Comply with NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes.

B. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

C. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.5 ALUMINUM FINISHES

A. Clear Anodic Finish: AAMA 611, AA-M12C22A31, Class II, 0.010 mm or thicker.

B. Color Anodic Finish: AAMA 611, AA-M12C22A32/A34, Class II, 0.010 mm or thicker.

C. Baked-Enamel or Powder-Coat Finish: AAMA 2603, except with a minimum dry film thickness of 1.5 mils. Comply with coating manufacturer's written instructions for cleaning, conversion coating, and applying and baking finish.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances, surface conditions of wall, and other conditions affecting performance of the Work.

B. Examine walls and partitions for proper preparation and backing for visual display units.

C. Examine walls and partitions for suitable framing depth where sliding visual display units will be installed.

D. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Comply with manufacturer's written instructions for surface preparation.

B. Clean substrates of substances, such as dirt, mold, and mildew, that could impair the performance of and affect the smooth, finished surfaces of visual display boards.

C. Prepare surfaces to achieve a smooth, dry, clean surface free of flaking, unsound coatings, cracks, defects, projections, depressions, and substances that will impair bond between visual display units and wall surfaces.

D. Prime wall surfaces indicated to receive visual display units and as recommended in writing by primer/sealer manufacturer and visual display unit manufacturer.

3.3 INSTALLATION

A. General: Install visual display surfaces in locations and at mounting heights indicated on Drawings, or if not indicated, at heights indicated below. Keep perimeter lines straight, level, and plumb. Provide grounds, clips, backing materials, adhesives, brackets, anchors, trim, and accessories necessary for complete installation.

B. Factory-Fabricated Visual Display Board Assemblies: Attach concealed clips, hangers, and grounds to wall surfaces and to visual display board assemblies with fasteners at not more than 16 inches o.c. Secure tops and bottoms of boards to walls.

C. Visual Display Board Assembly Mounting Heights: Install visual display units at mounting heights indicated on Drawings.

3.4 CLEANING AND PROTECTION

A. Clean visual display units according to manufacturer's written instructions. Attach one removable cleaning instructions label to visual display unit in each room.

B. Touch up factory-applied finishes to restore damaged or soiled areas.

C. Cover and protect visual display units after installation and cleaning.

END OF SECTION 101100

SECTION 101423 - PANEL SIGNAGE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Panel signs.
2. Field-applied, printed, vinyl wall graphics.

B. Related Requirements:

1. Section 015000 "Temporary Facilities and Controls" for temporary Project identification signs and for temporary informational and directional signs.

1.3 DEFINITIONS

A. Accessible: In accordance with the accessibility standard.

B. Illuminated: Illuminated by lighting source integrally constructed as part of the sign unit.

1.4 COORDINATION

A. Furnish templates for placement of sign-anchorage devices embedded in permanent construction by other installers.

B. Furnish templates for placement of electrical service embedded in permanent construction by other installers.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Sustainable Design Submittals:

1. Adhesive to contain no urea formaldehyde and have VOC content less than 50 g/L.

C. Shop Drawings: For panel signs.

1. Include fabrication and installation details and attachments to other work.
2. Show sign mounting heights, locations of supplementary supports to be provided by other installers, and accessories.
3. Show message list, typestyles, graphic elements, including raised characters and Braille, and layout for each sign at least half size.

D. Samples for Initial Selection: For each type of sign assembly, exposed component, and exposed finish.

1. Include representative Samples of available typestyles and graphic symbols.

E. Samples for Verification: For each type of sign assembly showing all components and with the required finish(es), in manufacturer's standard size unless otherwise indicated and as follows:

1. Panel Signs: Full-size Sample.
2. Field-Applied, Printed Vinyl Wall Graphics: Full-size Sample of characters on substrate.
3. Variable Component Materials: Full-size Sample of each base material, character (letter and graphic element) in each exposed color and finish not included in Samples above.
4. Full-size Samples, if approved, will be returned to Contractor for use in Project.

F. Product Schedule: For panel signs. Use same designations indicated on Drawings or specified.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and manufacturer.

B. Evaluation Reports: For post-installed anchors and power-actuated fasteners, from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

C. Sample Warranty: For special warranty.

1.7 CLOSEOUT SUBMITTALS

A. Maintenance Data: For signs to include in maintenance manuals.

1.8 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Variable Component Materials: 12 replaceable text inserts and interchangeable characters (letters, numbers, and graphic elements) of each type.
2. Tools: One set(s) of specialty tools for assembling signs and replacing variable sign components.

1.9 QUALITY ASSURANCE

A. Installer Qualifications: Manufacturer of products.

1.10 FIELD CONDITIONS

A. Field Measurements: Verify locations of anchorage devices embedded in permanent construction by other installers by field measurements before fabrication, and indicate measurements on Shop Drawings.

1.11 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of signs that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Deterioration of finishes beyond normal weathering.
b. Deterioration of embedded graphic image.
c. Separation or delamination of sheet materials and components.

2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Accessibility Standard: Comply with applicable provisions in the USDOJ's "2010 ADA Standards for Accessible Design", the ABA standards of the Federal agency having jurisdiction and ICC A117.1.

B. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 PANEL SIGNS

A. Room Identification Signage (S1, S2, and S3 on Drawings):

1. Provide wall mounted signs at locations indicated on Drawings. See enlarged floor plans and signage schedule.

B. Panel Sign: Sign with smooth, uniform surfaces; with message and characters having uniform faces, sharp corners, and precisely formed lines and profiles; and as follows:

1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

a. Allotech.
b. APCO Graphics, Inc.
c. ASI Sign Systems, Inc.
d. SignPro.

2. Solid-Sheet Sign, Returns, and Back: Acrylic sheet with finish specified in "Surface Finish and Applied Graphics" Subparagraph and as follows:

a. Thickness: 0.25 inch.
b. Surface-Applied, Raised Graphics: Applied polymer characters and Braille.

3. Sign-Panel Perimeter: Finish edges smooth.

a. Edge Condition at Vertical Edges and at Horizontal Edges: Square cut.
b. Corner Condition in Elevation: Rounded to radius indicated.

4. Frame: Entire perimeter to hold changeable sign panel.

a. Material: Match existing.
b. Material Thickness: 1/4 inch (match existing).
c. Frame Depth: 1/4 inch (match existing).
d. Profile: Rounded.
e. Corner Condition in Elevation: Rounded to radius indicated.
f. Finish and Color: Match existing.

5. Mounting: Manufacturer's standard method for substrates indicated; Surface mounted to wall with concealed anchors, countersunk flathead through fasteners, adhesive, two-face tape, hook-and-loop tape or magnetic tape.
6. Surface Finish and Applied Graphics:

a. Integral Acrylic Sheet Color: As selected by Architect from full range of industry colors.

7. Text and Typeface: Accessible raised characters and Braille typeface matching existing. Finish raised characters to contrast with background color, and finish Braille to match background color.
8. Flatness Tolerance: Sign shall remain flat or uniformly curved under installed conditions as indicated on Drawings and within a tolerance of plus or minus 1/16 inch measured diagonally from corner to corner.

2.3 FIELD-APPLIED, PRINTED GRAPHIC VINYL WALLCOVERING

A. Field-Applied, Printed Vinyl Wall Graphics [EG1 - Panels 1, 2, and 3]: 3- to 3.5-mil thick, weather-resistant vinyl film with release liner on the back and carrier film on the front for on-site alignment and application.

1. Basis-of-Design Product: Subject to compliance with requirements, provide 3M film product as indicated on Drawings, or comparable product as approved by Architect during bidding period.

2. Size: As indicated on Drawings.
3. Substrate: Gypsum board wall, as indicated on Drawings.
4. Text, Font and Graphic Design: As indicated on Drawings.
    a. Architect will provide native art file.

2.4 PANEL-SIGN MATERIALS

A. Aluminum Sheet and Plate: ASTM B 209, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.

B. Aluminum Extrusions: ASTM B 221, alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated.

C. Acrylic Sheet: ASTM D 4802, category as standard with manufacturer for each sign, Type UVF (UV filtering).

2.5 ACCESSORIES

A. Fasteners and Anchors: Manufacturer's standard as required for secure anchorage of signs, noncorrosive and compatible with each material joined, and complying with the following unless otherwise indicated:

1. Use concealed fasteners and anchors unless indicated to be exposed.

B. Adhesive: As recommended by sign manufacturer.

1. Adhesive VOC content to be less than 50 g/L.
2. Adhesives to contain no urea formaldehyde.

C. Two-Face Tape: Manufacturer's standard high-bond, foam-core tape, 0.045 inch thick, with adhesive on both sides.

D. Hook-and-Loop Tape: Manufacturer's standard two-part tape consisting of hooked part on sign back and looped side on mounting surface.

E. Magnetic Tape: Manufacturer's standard magnetic tape with adhesive on one side.

2.6 FABRICATION

A. General: Provide manufacturer's standard sign assemblies according to requirements indicated.

1. Preassemble signs in the shop to greatest extent possible. Disassemble signs and assemblies only as necessary for shipping and handling limitations. Clearly mark units for reassembly and installation; apply markings in locations concealed from view after final assembly.

2. Mill joints to a tight, hairline fit. Form assemblies and joints exposed to weather to resist water penetration and retention.
3. Comply with AWS for recommended practices in welding and brazing. Provide welds and brazes behind finished surfaces without distorting or discoloring exposed side. Clean exposed welded and brazed connections of flux, and dress exposed and contact surfaces.
4. Conceal connections if possible; otherwise, locate connections where they are inconspicuous.
5. Internally brace signs for stability, to meet structural performance loading without oil-canning or other surface deformation, and for securing fasteners.
6. Provide rabbets, lugs, and tabs necessary to assemble components and to attach to existing work. Drill and tap for required fasteners. Use concealed fasteners where possible; use exposed fasteners that match sign finish.

B. Shop- and Subsurface-Applied Vinyl: Align vinyl film in final position and apply to surface. Firmly press film from the middle outward to obtain good bond without blisters or fishmouths.

C. Signs with Changeable Message Capability: Fabricate signs to allow insertion of changeable messages as follows:

1. For slide-in changeable inserts, fabricate slot without burrs or constrictions that inhibit function. Furnish initial changeable insert. Subsequent changeable inserts are by Owner. Provide computer software for owner's use.
2. For frame to hold changeable sign panel, fabricate frame without burrs or constrictions that inhibit function. Furnish initial sign panel. Subsequent changeable sign panels are by Owner.

2.7 GENERAL FINISH REQUIREMENTS

A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

C. Directional Finishes: Run grain with long dimension of each piece and perpendicular to long dimension of finished trim or border surface unless otherwise indicated.

D. Organic, Anodic, and Chemically Produced Finishes: Apply to formed metal after fabrication but before applying contrasting polished finishes on raised features unless otherwise indicated.

2.8 ALUMINUM FINISHES

A. Clear Anodic Finish: AAMA 611, Class II, 0.010 mm or thicker.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Verify that sign-support surfaces are within tolerances to accommodate signs without gaps or irregularities between backs of signs and support surfaces unless otherwise indicated.

C. Verify that anchorage devices embedded in permanent construction are correctly sized and located to accommodate signs.

D. Verify that electrical service is correctly sized and located to accommodate signs.

E. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Install signs using mounting methods indicated and according to manufacturer's written instructions.

1. Install signs level, plumb, true to line, and at locations and heights indicated, with sign surfaces free of distortion and other defects in appearance.
2. Install signs so they do not protrude or obstruct according to the accessibility standard.
3. Before installation, verify that sign surfaces are clean and free of materials or debris that would impair installation.
4. Corrosion Protection: Coat concealed surfaces of exterior aluminum in contact with grout, concrete, masonry, wood, or dissimilar metals, with a heavy coat of bituminous paint.

B. Accessible Signage: Install in locations on walls as indicated on Drawings and according to the accessibility standard.

C. Mounting Methods:

1. Brackets: Remove loose debris from substrate surface and install backbar or bracket supports in position so that signage is correctly located and aligned.
2. Adhesive: Clean bond-breaking materials from substrate surface and remove loose debris. Apply linear beads or spots of adhesive symmetrically to back of sign and of suitable quantity to support weight of sign after cure without slippage. Keep adhesive away from edges to prevent adhesive extrusion as sign is applied and to prevent visibility of cured adhesive at sign edges. Place sign in position, and push to engage adhesive. Temporarily support sign in position until adhesive fully sets.
3. Two-Face Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage. Keep strips away from edges to prevent visibility at sign edges. Place sign in position, and push to engage tape adhesive.

4. Hook-and-Loop Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply sign component of two-part tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage; push to engage tape adhesive. Keep tape strips 0.250 inch away from edges to prevent visibility at sign edges when sign is initially installed or reinstalled. Apply substrate component of tape to substrate in locations aligning with tape on back of sign; push and rub well to fully engage tape adhesive to substrate.
5. Magnetic Tape: Clean bond-breaking materials from substrate surface and remove loose debris. Apply tape strips symmetrically to back of sign and of suitable quantity to support weight of sign without slippage. Keep strips away from edges to prevent visibility at sign edges. Place sign in position.

D. Signs Mounted on Glass: Provide opaque sheet matching sign material and finish onto opposite side of glass to conceal back of sign.

E. Field-Applied, Vinyl Wall Graphics: Clean and dry substrate. Align sign characters in final position before removing release liner. Remove release liner in stages, and apply and firmly press characters into final position. Press from the middle outward to obtain good bond without blisters or fishmouths. Remove carrier film without disturbing applied vinyl film.

3.3 ADJUSTING AND CLEANING

A. Remove and replace damaged or deformed signs and signs that do not comply with specified requirements. Replace signs with damaged or deteriorated finishes or components that cannot be successfully repaired by finish touchup or similar minor repair procedures.

B. Remove temporary protective coverings and strippable films as signs are installed.

C. On completion of installation, clean exposed surfaces of signs according to manufacturer's written instructions, and touch up minor nicks and abrasions in finish. Maintain signs in a clean condition during construction and protect from damage until acceptance by Owner.

END OF SECTION 101423

SECTION 102113.17 - PHENOLIC-CORE TOILET COMPARTMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Phenolic-core toilet compartments configured as toilet enclosures and urinal screens.

B. Related Requirements:

1. Section 12300 “Alternates” for a description of Alternate No. 4.
2. Section 102800 "Toilet, Bath, and Laundry Accessories" for toilet tissue dispensers, grab bars, purse shelves, and similar accessories mounted on toilet compartments.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for toilet compartments.

B. Shop Drawings: For toilet compartments.

1. Include plans, elevations, sections, details, and attachment details.
2. Show locations of cutouts for compartment-mounted toilet accessories.
3. Show locations of centerlines of toilet fixtures.
4. Show locations of floor drains.
5. Show ceiling grid, ceiling-mounted items, and overhead support or bracing locations.

C. Samples for Initial Selection: For each type of toilet compartment material indicated.

1. Include Samples of hardware and accessories involving material and color selection.

D. Samples for Verification: For the following products, in manufacturer's standard sizes unless otherwise indicated:

1. Each type of material, color, and finish required for toilet compartments, prepared on 6-inch- square Samples of same thickness and material indicated for Work.
2. Each type of hardware and accessory.

E. Product Schedule: For toilet compartments, prepared by or under the supervision of supplier, detailing location and selected colors for toilet compartment material.

1.4 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of toilet compartment.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For toilet compartments to include in maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Door Hinges: One hinge(s) with associated fasteners.
2. Latch and Keeper: One latch(es) and keeper(s) with associated fasteners.
3. Door Bumper: One door bumper(s) with associated fasteners.
4. Door Pull: One door pull(s) with associated fasteners.
5. Fasteners: Ten fasteners of each size and type.

1.7 PROJECT CONDITIONS

A. Field Measurements: Verify actual locations of toilet fixtures, walls, columns, ceilings, and other construction contiguous with toilet compartments by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 75 or less.
2. Smoke-Developed Index: 450 or less.

B. Regulatory Requirements: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines for Buildings and Facilities and ICC A117.1 for toilet compartments designated as accessible.

2.2 PHENOLIC-CORE TOILET COMPARMENTS

A. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include but are not limited to the following:

1. Accurate Partitions Corp.
2. American Accessories, Inc.
3. Bobrick Washroom Equipment, Inc.
4. Columbia Partitions as manufactured by PSISC.
5. DesignRite.
6. Global Partitions.
7. Knickerbocker Partition Corporation.
8. Metpar Corp.

B. Toilet-Enclosure Style: Overhead braced and Floor anchored.

C. Urinal-Screen Style: Wall hung with end post that extends from floor to ceiling.

D. Door, Panel, and Pilaster Construction: Solid phenolic-core panel material with melamine facing on both sides fused to substrate during panel manufacture (not separately laminated), and with eased and polished edges. Provide minimum 3/4-inch- thick doors and pilasters and minimum 1/2-inch- thick panels.

E. Pilaster Shoes and Sleeves (Caps): Formed from stainless-steel sheet, not less than 0.031-inch nominal thickness and 3 inches high, finished to match hardware.

F. Urinal-Screen Post: Manufacturer's standard post design of material matching the thickness and construction of pilasters; with shoe and sleeve (cap) matching that on the pilaster.

G. Brackets (Fittings):

1. Full-Height (Continuous) Type: Manufacturer's standard design; stainless steel.

H. Phenolic-Panel Finish:

1. Facing Sheet Finish: One color and pattern in each room.
2. Color and Pattern: As selected by Architect from manufacturer's full range, with manufacturer's standard dark color core or through-color core matching face sheet.
3. Edge Color: Through-color matching facing sheet color.

2.3 HARDWARE AND ACCESSORIES

A. Hardware and Accessories: Manufacturer's heavy-duty operating hardware and accessories.

1. Hinges: Manufacturer's minimum 0.062-inch- thick stainless-steel paired, self-closing type that can be adjusted to hold doors open at any angle up to 90 degrees, allowing emergency access by lifting door. Mount with through-bolts.

a. Full-height Piano Type hinges.
b. Knuckles shall have nylon separators.
c. Pivot Pin shall be ¼” Type 304 stainless steel.

d. Hinges shall be pre-drilled for stainless steel tamper proof bolts, space 8” on center maximum.
e. Provide snap-on covers over fasteners, attached at top and bottom with theft proof fasteners.
f. Hinges at accessible stalls shall be designed for emergency access. Doors shall lift off pins.

2. Latch and Keeper: Manufacturer's heavy-duty surface-mounted cast-stainless-steel latch unit designed to resist damage due to slamming, with combination rubber-faced door strike and keeper, and with provision for emergency access. Provide units that comply with regulatory requirements for accessibility at compartments designated as accessible. Mount with through-bolts.
3. Coat Hook: Manufacturer's heavy-duty combination cast-stainless-steel hook and rubber-tipped bumper, sized to prevent in-swinging door from hitting compartment-mounted accessories. Mount with through-bolts.
4. Door Bumper: Manufacturer's heavy-duty rubber-tipped cast-stainless-steel bumper at out-swinging doors. Mount with through-bolts.
5. Door Pull: Manufacturer's heavy-duty cast-stainless-steel pull at out-swinging doors that complies with regulatory requirements for accessibility. Provide units on both sides of doors at compartments designated as accessible. Mount with through-bolts.

B. Overhead Bracing: Manufacturer's standard continuous, extruded-aluminum head rail with antigrip profile and in manufacturer's standard finish.

C. Anchorages and Fasteners: Manufacturer's standard exposed fasteners of stainless steel, finished to match the items they are securing, with theft-resistant-type heads. Provide sex-type bolts for through-bolt applications. For concealed anchors, use stainless-steel, hot-dip galvanized-steel, or other rust-resistant, protective-coated steel compatible with related materials.

2.4 MATERIALS

A. Aluminum Castings: ASTM B 26/B 26M.

B. Aluminum Extrusions: ASTM B 221.

C. Stainless-Steel Sheet: ASTM A 666, Type 304, stretcher-leveled standard of flatness.

D. Stainless-Steel Castings: ASTM A 743/A 743M.

E. Zamac: ASTM B 86, commercial zinc-alloy die castings.

2.5 FABRICATION

A. Fabrication, General: Fabricate toilet compartment components to sizes indicated. Coordinate requirements and provide cutouts for through-partition toilet accessories where required for attachment of toilet accessories.

B. Overhead-Braced Units: Provide manufacturer's standard corrosion-resistant supports, leveling mechanism, and anchors at pilasters to suit floor conditions. Provide shoes at pilasters to conceal supports and leveling mechanism.

C. Floor-and-Ceiling-Anchored Units: Provide manufacturer's standard corrosion-resistant anchoring assemblies with leveling adjustment nuts at tops and bottoms of pilasters. Provide shoes and sleeves (caps) at pilasters to conceal anchorage.

D. Urinal-Screen Posts: Provide manufacturer's standard corrosion-resistant anchoring assemblies with leveling adjustment nuts at tops and bottoms of posts. Provide shoes and sleeves (caps) at posts to conceal anchorage.

E. Door Size and Swings: Unless otherwise indicated, provide 24-inch- wide in-swinging doors for standard toilet compartments and 36-inch- wide out-swinging doors with a minimum 32-inch-wide clear opening for compartments designated as accessible.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions, with Installer present, for compliance with requirements for fastening, support, alignment, operating clearances, and other conditions affecting performance of the Work.

1. Confirm location and adequacy of blocking and supports required for installation.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Comply with manufacturer's written installation instructions. Install units rigid, straight, level, and plumb. Secure units in position with manufacturer's recommended anchoring devices.

1. Maximum Clearances:

a. Pilasters and Panels: 1/2 inch.
b. Panels and Walls: 1 inch.

2. Full-Height (Continuous) Brackets: Secure panels to walls and to pilasters with full-height brackets.

a. Locate bracket fasteners so holes for wall anchors occur in masonry or tile joints.
b. Align brackets at pilasters with brackets at walls.

B. Overhead-Braced Units: Secure pilasters to floor and level, plumb, and tighten. Set pilasters with anchors penetrating not less than 1-3/4 inches into structural floor unless otherwise indicated in manufacturer's written instructions. Secure continuous head rail to each pilaster with no fewer than two fasteners. Hang doors to align tops of doors with tops of panels, and adjust so tops of doors are parallel with overhead brace when doors are in closed position.

C. Floor-and-Ceiling-Anchored Units: Secure pilasters to supporting construction and level, plumb, and tighten. Hang doors and adjust so doors are level and aligned with panels when doors are in closed position.

D. Urinal Screens: Attach with anchoring devices to suit supporting structure. Set units level and plumb, rigid, and secured to resist lateral impact.

3.3 ADJUSTING

A. Hardware Adjustment: Adjust and lubricate hardware according to hardware manufacturer's written instructions for proper operation. Set hinges on in-swinging doors to hold doors open approximately 30 degrees from closed position when unlatched. Set hinges on out-swinging doors to return doors to fully closed position.

END OF SECTION 102113.17

SECTION 102239 - FOLDING PANEL PARTITIONS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Electrically operated, acoustical panel partitions.

B. Related Requirements:

1. Section 012300 “Alternates” for a description of Alternate No.1 and related procedures.
2. Section 055000 "Metal Fabrications" for supports that attach supporting tracks to overhead structural system.
3. Division 9 sections for wall and ceiling construction at head and jambs
4. Electrical and communications Sections for electrical service and connections for motor operators, controls, and limit switches and for system disconnect switches.

1.3 DEFINITIONS

A. NIC: Noise Isolation Class.

B. NRC: Noise Reduction Coefficient.

C. STC: Sound Transmission Class.

1.4 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.5 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: For operable panel partitions.

1. Include plans, elevations, sections, details, numbered panel installation sequence, and attachments to other work.

2. Indicate stacking and operating clearances. Indicate location and installation requirements for hardware and track, blocking, and direction of travel.
3. Include diagrams for power, signal, and control wiring.

C. Samples for Initial Selection: For each type of exposed material, finish, covering, or facing.

1. Include Samples of accessories involving color selection.

D. Samples for Verification: For each type of exposed material, finish, covering, or facing, prepared on Samples of size indicated below:

1. Textile Facing Material: Full width by not less than 36-inch- long section of carpet from dye lot to be used for the Work, with specified treatments applied. Show complete pattern repeat.
2. Panel Facing Material: Manufacturer's standard-size unit, not less than 3 inches square.
3. Panel Edge Material: Not less than 3 inches long.
4. Hardware: One of each exposed door-operating device.

E. Delegated-Design Submittal: For operable panel partitions.

1. Include design calculations for seismic restraints.

1.6 INFORMATIONAL SUBMITTALS

A. Coordination Drawings: Reflected ceiling plans, drawn to scale, on which the following items are shown and coordinated with each other, using input from installers of the items involved:

1. Partition track, track supports and bracing, switches, turning space, and storage layout.
2. Suspended ceiling components.
3. Structural members to which suspension systems are attached.
4. Size and location of initial access modules for acoustical tile.
5. Items penetrating finished ceiling, including the following:

a. Lighting fixtures.
b. HVAC ductwork, outlets, and inlets.
c. Speakers.
d. Sprinklers.
e. Smoke detectors.
f. Access panels.

B. Setting Drawings: For embedded items and cutouts required in other work, including support-beam, mounting-hole template.

C. Qualification Data: For qualified Installer.

D. Seismic Qualification Certificates: For operable panel partitions, tracks, accessories, and components, from manufacturer. Include seismic capacity of partition assemblies to remain in vertical position during a seismic event and the following:

1. Basis for Certification: Indicate whether certification is based on analysis, testing, or experience data, according to ASCE/SEI 7.
2. Detailed description of partition anchorage devices on which the certification is based and their installation requirements.

E. Product Certificates: For each type of operable panel partition.

1. Include approval letter signed by manufacturer acknowledging Owner-furnished panel facing material complies with requirements.

F. Product Test Reports: For each operable panel partition, for tests performed by a qualified testing agency.

G. Field quality-control reports.

H. Sample Warranty: For manufacturer's special warranty.

1.7 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For operable panel partitions to include in maintenance manuals.

1. In addition to items specified in Section 017823 "Operation and Maintenance Data," include the following:

a. Panel finish facings and finishes for exposed trim and accessories. Include precautions for cleaning materials and methods that could be detrimental to finishes and performance.
b. Seals, hardware, track, track switches, carriers, and other operating components.
c. Electric operator and controls.

1.8 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same production run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Panel Finish-Facing Material: Furnish full width in quantity to cover both sides of two panels when installed.

1.9 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

1.10 DELIVERY, STORAGE, AND HANDLING

A. Protectively package and sequence panels in order for installation. Clearly mark packages and panels with numbering system used on Shop Drawings. Do not use permanent markings on panels.

1.11 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of operable panel partitions that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Faulty operation of operable panel partitions.
b. Deterioration of metals, metal finishes, and other materials beyond normal use.

2. Warranty Period: Ten years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014000 "Quality Requirements," to design seismic bracing of tracks to structure above.

B. Seismic Performance: Operable panel partitions shall withstand the effects of earthquake motions determined according to ASCE/SEI 7.

1. The term "withstand" means "the partition panels will remain in place without separation of any parts from the system when subjected to the seismic forces specified."

C. Acoustical Performance: Provide operable panel partitions tested by a qualified testing agency for the following acoustical properties according to test methods indicated:

1. Sound-Transmission Requirements: Operable panel partition assembly tested for laboratory sound-transmission loss performance according to ASTM E 90, determined by ASTM E 413, and rated for not less than the STC indicated.
2. Noise-Reduction Requirements: Operable panel partition assembly, identical to partition tested for STC, tested for sound-absorption performance according to ASTM C 423, and rated for not less than the NRC indicated.

D. Fire-Test-Response Characteristics: Provide panels with finishes complying with one of the following as determined by testing identical products by UL or another testing and inspecting agency acceptable to authorities having jurisdiction:

1. Surface-Burning Characteristics: Comply with ASTM E 84 or UL 723; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

a. Flame-Spread Index: 25 or less.
b. Smoke-Developed Index: 450 or less.

2. Fire Growth Contribution: Complying with acceptance criteria of local code and authorities having jurisdiction when tested according to NFPA 265 Method B Protocol or NFPA 286.

E. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

2.2 OPERABLE ACOUSTICAL PANELS

A. Operable Acoustical Panels: Partition system, including panels, seals, finish facing, suspension system, operators, and accessories.

1. Basis-of-Design Product: Subject to compliance to requirements, provide Modernfold, Inc. a Dorma Company, Acousti-Seal Model 933E or a comparable product by one of the following:

a. Hufcor, Inc.
b. Panelfold, Inc.

B. Panel Operation: Electrically operated, continuously hinged panels.

C. Panel Construction: As required to support panel from suspension components and with reinforcement for hardware attachment. Fabricate panels with tight hairline joints and concealed fasteners. Fabricate panels so finished in-place partition is rigid; level; plumb; aligned, with tight joints and uniform appearance; and free of bow, warp, twist, deformation, and surface and finish irregularities.

D. Dimensions: Fabricate operable acoustical panel partitions to form an assembled system of dimensions indicated and verified by field measurements.

1. Panel Width: Standard 48-inch widths.

E. STC: Not less than 41.

F. Panel Weight: 6 1/2 lb/sq. ft. maximum.

G. Panel Thickness: Not less than 3 inches.

H. Panel Materials:

1. Steel Frame: Roll formed and welded, minimum 18 gage.
2. Steel Face/Liner Sheets: Roll-formed steel wrapping around panel edge, with panel skins lock-formed and welded directly to the frame for unitized construction.

I. Panel Closure: Manufacturer's standard unless otherwise indicated.

1. Initial Closure: Flexible, resilient PVC, bulb-shaped acoustical seal.
2. Final Closure: Flexible resilient PVC bulb-shaped acoustical seal.

J. Hardware: Manufacturer's standard as required to operate operable panel partition and accessories; with decorative, protective finish.

1. Hinges: Full leaf butt hinges, attached directly to the panel frame with welded hinge anchor plates within panel to further
support hinge mounting to frame.

K. Finish Facing: Carpet wall covering.

2.3 SEALS

A. General: Provide seals that produce operable panel partitions complying with performance requirements and the following:

1. Manufacturer's standard seals unless otherwise indicated.
2. Seals made from materials and in profiles that minimize sound leakage.
3. Seals fitting tight at contact surfaces and sealing continuously between adjacent panels and between operable panel partition perimeter and adjacent surfaces, when operable panel partition is extended and closed.

B. Vertical Seals: Deep-nesting, interlocking astragals mounted on each edge of panel, with continuous PVC acoustical seal.

C. Horizontal Top Seals: Continuous-contact, extruded-PVC bulb shape with pairs of non-contacting vinyl fingers to prevent distortion without the need for mechanically operated parts.

D. Horizontal Bottom Seals: PVC-faced, mechanical, retractable, constant-force-contact seal exerting uniform constant pressure on floor when extended, ensuring horizontal and vertical sealing and resisting panel movement.

1. Automatically Operated for Acoustical Panels: Extension and retraction of bottom seal automatically operated by movement of partition, with operating range not less than 2 inches between retracted seal and floor finish.

2.4 PANEL FINISH FACINGS

A. General: Provide finish facings for panels that comply with indicated fire-test-response characteristics and that are factory applied to operable panel partitions with appropriate backing, using mildew-resistant nonstaining adhesive as recommended by facing manufacturer's written instructions.

1. Apply one-piece, seamless facings free of air bubbles, wrinkles, blisters, and other defects, with edges tightly butted, and with no gaps or overlaps. Horizontal seams are not permitted. Tightly secure and conceal raw and selvage edges of facing for finished appearance.
2. Where facings with directional or repeating patterns or directional weave are indicated, mark facing top and attach facing in same direction.
3. Match facing pattern 72 inches above finished floor.

B. Carpet Wall Covering: Manufacturer's standard nonwoven, needle-punched carpet with fibers fused to backing, from same dye lot, treated to resist stains.

1. Color/Pattern: As selected by Architect from manufacturer's full range.

C. Cap-Trimmed Edges: Protective perimeter-edge trim with tight hairline joints concealing edges of panel and finish facing, finished as follows:

1. Steel, Painted: Finished with manufacturer's color as selected by Architect from manufacturer's full range.

2.5 SUSPENSION SYSTEMS

A. Tracks: Field verify existing conditions of current operable partition to be replaced. Steel or aluminum with adjustable steel hanger rods for overhead support, designed for operation, size, and weight of operable panel partition indicated. Size track to support partition operation and storage without damage to suspension system, operable panel partitions, or adjacent construction. Limit track deflection to no more than 0.10 inch between bracket supports. Provide a continuous system of track sections and accessories to accommodate configuration and layout indicated for partition operation and storage.

1. Panel Guide: Aluminum guide on both sides of the track to facilitate straightening of the panels; finished with factory-applied, decorative, protective finish.
2. Head Closure Trim: As required for acoustical performance; with factory-applied, decorative, protective finish.

B. Carriers: Trolley system as required for configuration type, size, and weight of partition and for easy operation; with ball-bearing wheels.

C. Track Intersections, Switches, and Accessories: As required for operation, storage, track configuration, and layout indicated for operable panel partitions, and compatible with partition assembly specified. Fabricate track intersections and switches from steel or aluminum.

D. Aluminum Finish: Mill finish or manufacturer's standard, factory-applied, decorative finish unless otherwise indicated.

E. Steel Finish: Manufacturer's standard, factory-applied, corrosion-resistant, protective coating unless otherwise indicated.

2.6 ELECTRIC OPERATORS

A. General: Factory-assembled electric operation system of size and capacity recommended and provided by operable panel partition manufacturer for partition specified; with electric motor and factory-prewired motor controls, speed reducer, chain drive, control stations, control devices, and accessories required for operation. Include wiring from control stations to motor. Coordinate operator wiring requirements and electrical characteristics with building electrical system.

B. Comply with NFPA 70.

C. Control Equipment: Comply with NEMA ICS 1, NEMA ICS 2, and NEMA ICS 6.

D. Motor Electrical Characteristics:

1. Horsepower: Manufacturer's standard.
2. Volts: 208.
3. Phase: 3-phase.

E. Control Stations: Two single-key-operated, constant-pressure control stations located remotely from each other on opposite sides and opposite ends of partition run. Wire in series to require simultaneous activation of both key stations to operate partition. Each three-position control station labeled "Open," "Close," and " Stop." Furnish two keys per station.

F. Obstruction-Detection Devices: Equip each motorized operable panel partition with indicated automatic safety sensor that causes operator to immediately shut off motor.

1. Sensor Edge: Contact-pressure-sensitive safety edge along partition's leading edge.

G. Limit Switches: Adjustable switches, interlocked with motor controls and set to automatically stop operable panel partition at fully extended and fully stacked positions.

H. Emergency Release Mechanism: Quick disconnect-release of electric-motor drive system, permitting manual operation in event of operating failure.

I. Electric Interlock: Equip each motorized operable panel partition with electric interlocks at locations indicated, to prevent operation of operable panel partition under the following conditions:

1. On partitions at location of convergence by another partition, to prevent operation if merging partitions are in place.

2.7 ACCESSORIES

A. Pass Doors: Swinging doors built into and matching panel materials, construction, acoustical qualities, fire rating, finish and thickness, complete with frames and operating hardware. Hinges finished to match other exposed hardware.

1. Accessibility Standard: Fabricate doors to comply with applicable provisions in ICC A117.1 and the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines for Buildings and Facilities.
2. Single Pass Door: 36 by 84 inches. Provide two as indicated on Drawings.
3. Pass-Door Hardware: Equip each pass door with the following:

    a. Door Seals: Mechanically operated floor seal on panels containing pass doors.
    b. Panic hardware.
    c. Concealed door closer.
    d. Exit Sign: Recessed, self-illuminated.
    e. Latchset: Passage set.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine flooring, structural support, and opening, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of operable panel partitions.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Comply with ASTM E 557 except as otherwise required by operable panel partition manufacturer's written installation instructions.

B. Install operable panel partitions and accessories after other finishing operations, including painting, have been completed in area of partition installation.

C. Install panels from marked packages in numbered sequence indicated on Shop Drawings.

D. Broken, cracked, chipped, deformed, or unmatched panels are not acceptable.

E. Broken, cracked, deformed, or unmatched gasketing or gasketing with gaps at butted ends is not acceptable.

F. Light-Leakage Test: Illuminate one side of partition installation and observe vertical joints and top and bottom seals for voids. Adjust partitions for alignment and full closure of vertical joints and full closure along top and bottom seals.

G. An operable panel partition installation will be considered defective if it does not pass tests and inspections.

H. Prepare test and inspection reports.

3.3 ADJUSTING

A. Adjust operable panel partitions, hardware, and other moving parts to function smoothly, and lubricate as recommended by manufacturer.

B. Adjust pass doors to operate smoothly and easily, without binding or warping.

C. Verify that safety devices are properly functioning.

3.4 MAINTENANCE SERVICE

A. Maintenance Service: Beginning at Substantial Completion, maintenance service shall include 12 months' full maintenance by manufacturer's authorized service representative. Include quarterly preventive maintenance, repair or replacement of worn or defective components, lubrication, cleaning, and adjusting as required for proper operable-partition operation. Parts and supplies shall be manufacturer's authorized replacement parts and supplies.

3.5 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain operable panel partitions.

END OF SECTION 102239

SECTION 102600 - WALL AND DOOR PROTECTION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Corner guards.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, impact strength, dimensions of individual components and profiles, and finishes.
2. Include fire ratings of units recessed in fire-rated walls and listings for door-protection items attached to fire-rated doors.

B. Shop Drawings: For each type of wall and door protection showing locations and extent.

1. Include plans, elevations, sections, and attachment details.

C. Samples for Verification: For each type of exposed finish on the following products, prepared on Samples of size indicated below:

1. Corner Guards: 12 inches long. Include example top caps.

1.4 INFORMATIONAL SUBMITTALS

A. Product Certificates: For each type of handrail.

B. Material Certificates: For each type of exposed plastic material.

C. Sample Warranty: For special warranty.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For each type of wall and door protection product to include in maintenance manuals.

1. Include recommended methods and frequency of maintenance for maintaining best condition of plastic covers under anticipated traffic and use conditions. Include precautions against using cleaning materials and methods that may be detrimental to finishes and performance.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Corner-Guard Covers: Full-size plastic covers of maximum length equal to 2 percent of each type, color, and texture of cover installed, but no fewer than two, 48-inch- long units.
2. Mounting and Accessory Components: Amounts proportional to the quantities of extra materials. Package mounting and accessory components with each extra material.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store wall and door protection in original undamaged packages and containers inside well-ventilated area protected from weather, moisture, soiling, extreme temperatures, and humidity.

1. Maintain room temperature within storage area at not less than 70 deg F during the period plastic materials are stored.
2. Keep plastic materials out of direct sunlight.
3. Store plastic wall- and door-protection components for a minimum of 72 hours, or until plastic material attains a minimum room temperature of 70 deg F.

a. Store corner-guard covers in a vertical position.

1.8 WARRANTY

A. Special Warranty: Manufacturer agrees to repair or replace components of wall- and door-protection units that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:

a. Structural failures including detachment of components from each other or from the substrates, delamination, and permanent deformation beyond normal use.
b. Deterioration of metals, metal finishes, plastics, and other materials beyond normal use.

2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain wall- and door-protection products of each type from single source from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Surface Burning Characteristics: Comply with ASTM E 84 or UL 723; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

1. Flame-Spread Index: 25 or less.
2. Smoke-Developed Index: 450 or less.

B. Regulatory Requirements: Comply with applicable provisions in the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines for Buildings and Facilities and ICC A117.1.

2.3 CORNER GUARDS

A. Surface-Mounted, Metal Corner Guards (CG1 on Drawings): Fabricated as one piece from formed or extruded metal with formed edges; with 90- or 135-degree turn to match wall condition.

1. Material: Stainless-steel sheet, Type 304.

a. Thickness: Minimum 0.0625 inch.
b. Finish: Directional satin, No. 4.

2. Wing Size: Nominal 2-1/2 by 2-1/2 inches.
3. Corner Radius: 1/8 inch.
4. Mounting: Adhesive.
5. Location: Walls as indicated in drawings

B. Surface-Mounted, Transparent-Plastic Corner Guards at corners of Wayfinding Portals and where indicated: Fabricated as one piece from clear polycarbonate plastic sheet; with formed edges; fabricated with 90- or 135-degree turn to match wall condition.
1. Wing Size: Nominal 2-1/2 by 2-1/2 inches.
2. Thickness: Minimum 0.075 inch.
3. Mounting: Countersunk screws through factory-drilled mounting holes, Corner clips, or adhesive as recommended by Manufacturer for cleanest aesthetic.

2.4 MATERIALS

A. Fasteners: Aluminum, nonmagnetic stainless-steel, or other noncorrosive metal screws, bolts, and other fasteners compatible with items being fastened. Use security-type fasteners where exposed to view.

B. Adhesive: As recommended by protection product manufacturer.

2.5 FABRICATION

A. Fabricate wall and door protection according to requirements indicated for design, performance, dimensions, and member sizes, including thicknesses of components.

B. Factory Assembly: Assemble components in factory to greatest extent possible to minimize field assembly. Disassemble only as necessary for shipping and handling.

C. Quality: Fabricate components with uniformly tight seams and joints and with exposed edges rolled. Provide surfaces free of wrinkles, chips, dents, uneven coloration, and other imperfections. Fabricate members and fittings to produce flush, smooth, and rigid hairline joints.

2.6 FINISHES

A. Protect finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates and wall areas, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.

B. Examine walls to which wall and door protection will be attached for blocking, grounds, and other solid backing that have been installed in the locations required for secure attachment of support fasteners.

1. For wall and door protection attached with adhesive, verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Complete finishing operations, including painting, before installing wall and door protection.

B. Before installation, clean substrate to remove dust, debris, and loose particles.

3.3 INSTALLATION

A. Installation Quality: Install wall and door protection according to manufacturer's written instructions, level, plumb, and true to line without distortions. Do not use materials with chips, cracks, voids, stains, or other defects that might be visible in the finished Work.

B. Mounting Heights: Install wall and door protection in locations and at mounting heights indicated on Drawings.

C. Accessories: Provide splices, mounting hardware, anchors, trim, joint moldings, and other accessories required for a complete installation.

1. Provide anchoring devices and suitable locations to withstand imposed loads.

3.4 CLEANING

A. Immediately after completion of installation, clean plastic covers and accessories using a standard ammonia-based household cleaning agent.

B. Remove excess adhesive using methods and materials recommended in writing by manufacturer.

END OF SECTION 102600

SECTION 102800 - TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Public-use washroom accessories.
2. Mirror units.
3. Underlavatory guards.

B. Related Requirements:

1. Section 088300 “Mirrors” for silvered flat glass mirrors.
2. Section 093013 "Ceramic Tiling" for ceramic toilet and bath accessories.

1.3 COORDINATION

A. Coordinate accessory locations with other work to prevent interference with clearances required for access by people with disabilities, and for proper installation, adjustment, operation, cleaning, and servicing of accessories.

B. Deliver inserts and anchoring devices set into concrete or masonry as required to prevent delaying the Work.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes.
2. Include anchoring and mounting requirements, including requirements for cutouts in other work and substrate preparation.
3. Include electrical characteristics.

B. Samples: Full size, for each exposed product and for each finish specified.

1. Approved full-size Samples will be returned and may be used in the Work.

C. Setting Drawings: For cutouts required in other work; include templates, substrate preparation instructions, and directions for preparing cutouts and installing anchoring devices.

D. Product Schedule: Indicating types, quantities, sizes, and installation locations by room of each accessory required.

1. Identify locations using room designations indicated.

1.5 INFORMATIONAL SUBMITTALS

A. Sample Warranty: For manufacturer's special warranty.

1.6 CLOSEOUT SUBMITTALS

A. Maintenance Data: For accessories to include in maintenance manuals. Provide lists of replacement parts and service recommendations.

1.7 WARRANTY

A. Manufacturer's Special Warranty for Mirrors: Manufacturer agrees to repair or replace mirrors that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, visible silver spoilage defects.
2. Warranty Period: 15 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 OWNER-FURNISHED MATERIALS

A. Owner-Furnished Materials: The following materials will be furnished by the Owner and installed by the Contractor (OFCI):

1. Toilet tissue dispensers.
2. Towel Dispensers.
3. Soap Dispensers.
4. Sanitary Napkin Disposal Units.

2.2 PUBLIC-USE WASHROOM ACCESSORIES

A. Source Limitations: Obtain public-use washroom accessories from single source from single manufacturer.

B. Grab Bar (TA1 on Drawings):

1. Basis-of-Design: Subject to compliance with requirements, provide Bobrick B-6806 Series or an equivalent product.
2. Mounting: Flanges with concealed fasteners.
3. Material: Stainless steel, 0.05 inch thick.

    a. Finish: Smooth, No. 4 finish (satin) on ends and slip-resistant texture in grip area.

4. Outside Diameter: 1-1/2 inches.
5. Configuration and Length: As indicated on Drawings.
6. Lockset: Tumbler type.

C. Seat-Cover Dispenser (TA7 on Drawings):

1. Basis-of-Design Product: Subject to compliance with requirements, provide Bobrick Washroom Equipment, Inc; B-221 or a comparable product by one of the following:

    a. ASI-American Specialties, Inc.
    b. Bradley Corporation.

2. Mounting: Surface mounted.
3. Minimum Capacity: 250 seat covers.
4. Exposed Material and Finish: Stainless steel, ASTM A480/A480M No. 4 finish (satin).
5. Lockset: Tumbler type.

D. Mirror Unit (TA4 on Drawings):

1. Basis-of-Design: Subject to compliance with requirements, provide Bobrick B-165 Series or equivalent product.
2. Frame: Stainless-steel channel.

    a. Corners: Mitered to hairline joints and mechanically interlocked.

3. Hangers: Produce rigid, tamper- and theft-resistant installation, using method indicated below.

    a. One-piece, galvanized-steel, wall-hanger device with spring-action locking mechanism to hold mirror unit in position with no exposed screws or bolts.
    b. Wall bracket of galvanized steel, equipped with concealed locking devices requiring a special tool to remove.

4. Size: 24-inch x 36-inch or As indicated on Drawings.

2.3 UNDERLAVATORY GUARDS

A. Underlavatory Guard:

1. Description: Insulating pipe covering for supply and drain piping assemblies that prevents direct contact with and burns from piping; allow service access without removing coverings.
2. Material and Finish: Antimicrobial, molded plastic, white.

2.4 MATERIALS

A. Stainless Steel: ASTM A 666, Type 304, 0.031-inch minimum nominal thickness unless otherwise indicated.

B. Steel Sheet: ASTM A 1008/A 1008M, Designation CS (cold rolled, commercial steel), 0.036-inch minimum nominal thickness.

C. Galvanized-Steel Sheet: ASTM A 653/A 653M, with G60 hot-dip zinc coating.

D. Galvanized-Steel Mounting Devices: ASTM A 153/A 153M, hot-dip galvanized after fabrication.

E. Fasteners: Screws, bolts, and other devices of same material as accessory unit and tamper-and-theft resistant where exposed, and of galvanized steel where concealed.

F. Chrome Plating: ASTM B 456, Service Condition Number SC 2 (moderate service).

G. Mirrors: ASTM C 1503, Mirror Glazing Quality, clear-glass mirrors, nominal 6.0 mm thick.

2.5 FABRICATION

A. General: Fabricate units with tight seams and joints, and exposed edges rolled. Hang doors and access panels with full-length, continuous hinges. Equip units for concealed anchorage and with corrosion-resistant backing plates.

B. Keys: Provide universal keys for internal access to accessories for servicing and resupplying. Provide minimum of six keys to Owner's representative.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install accessories according to manufacturers' written instructions, using fasteners appropriate to substrate indicated and recommended by unit manufacturer. Install units level, plumb, and firmly anchored in locations and at heights indicated.

B. Grab Bars: Install to withstand a downward load of at least 250 lbf, when tested according to ASTM F 446.

3.2 ADJUSTING AND CLEANING

A. Adjust accessories for unencumbered, smooth operation. Replace damaged or defective items.

B. Remove temporary labels and protective coatings.

C. Clean and polish exposed surfaces according to manufacturer's written instructions.

END OF SECTION 102800

SECTION 113013 - RESIDENTIAL APPLIANCES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Cooking appliances.
2. Refrigeration appliances.

B. Related Requirements:

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include installation details, material descriptions, dimensions of individual components, and finishes for each appliance.
2. Include rated capacities, operating characteristics, electrical characteristics, and furnished accessories.

B. Product Schedule: For appliances. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For manufacturer.

B. Product Certificates: For each type of appliance.

C. Field quality-control reports.

D. Sample Warranties: For manufacturers' special warranties.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For each residential appliance to include in operation and maintenance manuals.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications: Maintains, within 50 miles of Project site, a service center capable of providing training, parts, and emergency maintenance repairs.

1.7 WARRANTY

A. Special Warranties: Manufacturer agrees to repair or replace residential appliances or components that fail in materials or workmanship within specified warranty period.

1. Warranty Period: Five years from date of Substantial Completion.

B. Microwave Oven: Full warranty, including parts and labor, for on-site service on the magnetron tube.

1. Warranty Period: Five years from date of Substantial Completion.

C. Refrigerator/Freezer, Sealed System: Full warranty, including parts and labor, for on-site service on the product.

1. Warranty Period for Sealed Refrigeration System: Five years from date of Substantial Completion.
2. Warranty Period for Other Components: Two years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain residential appliances from single source and each type of residential appliance from single manufacturer.

2.2 PERFORMANCE REQUIREMENTS

A. Electrical Appliances: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

B. Accessibility: Where residential appliances are indicated to comply with accessibility requirements, comply with applicable provisions in the DOJ's 2010 ADA Standards for Accessible Design and ICC A117.1.

2.3 MICROWAVE OVENS

A. Microwave Oven:

1. Basis-of-Design Product: Subject to compliance with requirements, provide LG; 1.5 Cu. Ft. Countertop Microwave or a comparable product by one of the following:

    a. Toshiba.
    b. Panasonic.
    c. Black + Decker.

2. Mounting: Countertop.
3. Type: Conventional; ADA compliant
4. Dimensions:

    a. Width: 21.5 inches maximum.
    b. Depth: 17 inches maximum.
    c. Height: 12 inches maximum.

5. Capacity: 1.5 cu. ft.
6. Oven Door: Door with observation window and pull handle or pushbutton latch release.
7. Microwave Power Rating: Manufacturer's standard.

8. Electric Power Supply: 120 V, 60 Hz, 1 phase, 15 A.
9. Controls: Digital panel controls and timer display.
10. Other Features: Turntable, temperature probe and lock-out feature.
11. Material: Stainless steel.

    a. Color/Finish: Stainless Steel/Black.

2.4 REFRIGERATOR/FREEZER

A. Refrigerator/Freezer: Two-door refrigerator/freezer complying with AHAM HRF-1.

1. Basis-of-Design Product: Subject to compliance with requirements, provide Frigidaire; 20 cu. ft. Top Freezer Refrigerator or a comparable product by one of the following:

    a. GE Appliances.
    b. Amana.

2. Type: Freezer on top.

3. Dimensions:

    a. Width: 30 inches maximum.
    b. Depth: 32 inches maximum.
    c. Height: 66 inches maximum.

4. Storage Capacity:

    a. Capacity: 3.0 cu. ft. minimum.
    b. Shelf Area: Two adjustable wire or glass shelves.

5. General Features:

    a. Door Configuration: Overlay.
    b. Dual refrigeration systems.

6. Refrigerator Features:

    a. Interior light in refrigeration compartment.

7. Freezer Features: One freezer compartment(s) with door(s).

    a. Manual defrost.
    b. Interior light in freezer compartment.
    c. Automatic icemaker and storage bin.

8. ENERGY STAR: Provide appliances that qualify for the EPA/DOE ENERGY STAR product-labeling program.
9. Front Panel(s): Stainless steel.
10. Appliance Color/Finish: Stainless steel.

2.5 GENERAL FINISH REQUIREMENTS

A. Protect mechanical finishes on exposed surfaces from damage by applying a strippable, temporary protective covering before shipping.

B. Appearance of Finished Work: Noticeable variations in same piece are not acceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, power connections, and other conditions affecting installation and performance of residential appliances.

B. Prepare written report, endorsed by Installer, listing conditions detrimental to performance of the Work.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install appliances according to manufacturer's written instructions.

B. Built-in Equipment: Securely anchor units to supporting cabinets or countertops with concealed fasteners. Verify that clearances are adequate for proper functioning and that rough openings are completely concealed.

C. Freestanding Equipment: Place units in final locations after finishes have been completed in each area. Verify that clearances are adequate to properly operate equipment.

3.3 FIELD QUALITY CONTROL

A. Perform the following tests and inspections:

1. Perform visual, mechanical, and electrical inspection and testing for each appliance according to manufacturers' written recommendations. Certify compliance with each manufacturer's appliance-performance parameters.
2. Leak Test: After installation, test for leaks. Repair leaks and retest until no leaks exist.
3. Operational Test: After installation, start units to confirm proper operation.
4. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and components.

B. An appliance will be considered defective if it does not pass tests and inspections.

C. Prepare test and inspection reports.

3.4 DEMONSTRATION

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain residential appliances.

END OF SECTION 113013

SECTION 122413 - ROLLER WINDOW SHADES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Manually operated roller shades with single rollers.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

1. Include construction details, material descriptions, dimensions of individual components and profiles, features, finishes, and operating instructions for roller shades.

B. Shop Drawings: Show fabrication and installation details for roller shades, including shadeband materials, their orientation to rollers, and their seam and batten locations.

C. Samples: For each exposed product and for each color and texture specified, 10 inches long.

D. Samples for Initial Selection: For each type and color of shadeband material.

1. Include Samples of accessories involving color selection.

E. Samples for Verification: For each type of roller shade.

1. Shadeband Material: Not less than 3 inches square. Mark interior face of material if applicable.
2. Roller Shade: Full-size operating unit, not less than 16 inches wide by 36 inches long for each type of roller shade indicated.
3. Installation Accessories: Full-size unit, not less than 10 inches long.

F. Product Schedule: For roller shades. Use same designations indicated on Drawings.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: For each type of shadeband material.

C. Product Test Reports: For each type of shadeband material, for tests performed by manufacturer and witnessed by a qualified testing agency.

1.5 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For roller shades to include in maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Roller Shades: Full-size units equal to 5 percent of quantity installed for each size, color, and shadeband material indicated, but no fewer than two units.

1.7 QUALITY ASSURANCE

A. Installer Qualifications: Fabricator of products.

B. Mockups: Build mockups to verify selections made under Sample submittals, to demonstrate aesthetic effects, and to set quality standards for fabrication and installation.

1. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.8 DELIVERY, STORAGE, AND HANDLING

A. Deliver roller shades in factory packages, marked with manufacturer, product name, and location of installation using same designations indicated on Drawings.

1.9 FIELD CONDITIONS

A. Environmental Limitations: Do not install roller shades until construction and finish work in spaces, including painting, is complete and dry and ambient temperature and humidity conditions are maintained at the levels indicated for Project when occupied for its intended use.

B. Field Measurements: Where roller shades are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Allow clearances for operating hardware of operable glazed units through entire operating range. Notify Architect of installation conditions that vary from

Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Source Limitations: Obtain roller shades from single source from single manufacturer.

2.2 MANUALLY OPERATED SHADES WITH SINGLE ROLLERS

A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to the following:

1. Draper Inc.
2. Hunter Douglas Contract.
3. MechoShade Systems, Inc.
4. Veri.

B. Chain-and-Clutch Operating Mechanisms: With continuous-loop bead chain and clutch that stops shade movement when bead chain is released; permanently adjusted and lubricated.

1. Bead Chains: Manufacturer's standard.

a. Loop Length: Full length of roller shade.
b. Limit Stops: Provide upper and lower ball stops.
c. Chain-Retainer Type: Clip, jamb mount.

2. Spring Lift-Assist Mechanisms: Manufacturer's standard for balancing roller shade weight and for lifting heavy roller shades.

a. Provide for shadebands that weigh more than 10 lb or for shades as recommended by manufacturer, whichever criterion is more stringent.

C. Rollers: Corrosion-resistant steel or extruded-aluminum tubes of diameters and wall thicknesses required to accommodate operating mechanisms and weights and widths of shadebands indicated without deflection. Provide with permanently lubricated drive-end assemblies and idle-end assemblies designed to facilitate removal of shadebands for service.

1. Roller Drive-End Location: Right side of interior face of shade.
2. Direction of Shadeband Roll: Regular, from back (exterior face) of roller.
3. Shadeband-to-Roller Attachment: Manufacturer's standard method.

D. Mounting Hardware: Brackets or endcaps, corrosion resistant and compatible with roller assembly, operating mechanism, installation accessories, and mounting location and conditions indicated.

E. Roller-Coupling Assemblies: Coordinated with operating mechanism and designed to join up to three inline rollers into a multiband shade that is operated by one roller drive-end assembly.

F. Shadebands:

1. Shadeband Material: Light-filtering fabric.
2. Shadeband Bottom (Hem) Bar: Steel or extruded aluminum.

a. Type: Enclosed in sealed pocket of shadeband material.
b. Color and Finish: As selected by Architect from manufacturer's full range.

G. Installation Accessories:

1. Front Fascia: Aluminum extrusion that conceals front and underside of roller and operating mechanism and attaches to roller endcaps without exposed fasteners.

a. Shape: L-shaped.
b. Height: Manufacturer's standard height required to conceal roller and shadeband assembly when shade is fully open, but not less than 4 inches.

2. Exposed Headbox: Rectangular, extruded-aluminum enclosure including front fascia, top and back covers, endcaps, and removable bottom closure.

a. Height: Manufacturer's standard height required to enclose roller and shadeband assembly when shade is fully open, but not less than 4 inches.

3. Endcap Covers: To cover exposed endcaps.
4. Installation Accessories Color and Finish: As selected from manufacturer's full range.

2.3 SHADEBAND MATERIALS

A. Shadeband Material Flame-Resistance Rating: Comply with NFPA 701. Testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.

B. Light-Filtering Fabric: Woven fabric, stain and fade resistant.

1. Source: Roller shade manufacturer.
2. Type: PVC-coated fiberglass with silver backing.
3. Weave: Mesh.
4. Thickness: 0.02”.
5. Weight: 11.8 oz./sq. yd..
6. Roll Width: As necessary to fill openings indicated.
7. Orientation on Shadeband: Up the bolt.
8. Openness Factor: 3 percent.
9. Color: As selected by Architect from manufacturer's full range.

2.4 ROLLER SHADE FABRICATION

A. Product Safety Standard: Fabricate roller shades to comply with WCMA A 100.1, including requirements for flexible, chain-loop devices; lead content of components; and warning labels.

B. Unit Sizes: Fabricate units in sizes to fill window and other openings as follows, measured at 74 deg F:

1. Between (Inside) Jamb Installation (at Classrooms): Width equal to jamb-to-jamb dimension of opening in which shade is installed less 1/4 inch per side or 1/2-inch total, plus or minus 1/8 inch. Length equal to head-to-sill or -floor dimension of opening in which shade is installed less 1/4 inch, plus or minus 1/8 inch.
2. Outside of Jamb Installation (at Office): Width and length as indicated, with terminations between shades of end-to-end installations at centerlines of mullion or other defined vertical separations between openings.

C. Shadeband Fabrication: Fabricate shadebands without battens or seams to extent possible, except as follows:

1. Vertical Shades: Where width-to-length ratio of shadeband is equal to or greater than 1:4, provide battens and seams at uniform spacings along shadeband length to ensure shadeband tracking and alignment through its full range of movement without distortion of the material.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, operational clearances, locations of connections to building electrical system, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 ROLLER SHADE INSTALLATION

A. Install roller shades level, plumb, and aligned with adjacent units according to manufacturer's written instructions.

B. Roller Shade Locations: As indicated on Drawings.

3.3 ADJUSTING

A. Adjust and balance roller shades to operate smoothly, easily, safely, and free from binding or malfunction throughout entire operational range.

3.4 CLEANING AND PROTECTION

A. Clean roller shade surfaces, after installation, according to manufacturer's written instructions.

B. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, that ensure that roller shades are without damage or deterioration at time of Substantial Completion.

C. Replace damaged roller shades that cannot be repaired, in a manner approved by Architect, before time of Substantial Completion.

END OF SECTION 122413

SECTION 123623.13 - PLASTIC-LAMINATE-CLAD COUNTERTOPS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes plastic-laminate countertops and windowsills.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Shop Drawings: Show location of each item, dimensioned plans and elevations, large-scale details, attachment devices, and other components.

1. Show locations and sizes of cutouts and holes for plumbing fixtures, faucets, soap dispensers, electrical switches, and outlets and other items installed in plastic-laminate countertops. Include a seaming diagram for plastic laminate countertops with a surface longer than 12 feet or wider than 4 feet, including “L” shaped millwork.
2. Apply AWI Quality Certification Program label to Shop Drawings.

C. Samples for Verification:

1. Plastic laminates, 8 by 10 inches, for each type, color, pattern, and surface finish, with one sample applied to core material and specified edge material applied to one edge.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer and fabricator.

B. Product Certificates: For each type of product.

C. Woodwork Quality Standard Compliance Certificates: Submit statement from Fabricator that woodwork fabrication complies with quality grades and other requirements indicated. .

1.5 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom fabricate products similar to those required for this Project and whose products have a record of successful in-service performance.

B. Installer Qualifications: Fabricator of products.

C. AWS Quality Standard: Comply with applicable requirements of Architectural Woodwork Standards (AWS) – 1s Edition, October 1, 2009, except as otherwise indicated.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Do not deliver countertops until painting and similar operations that could damage countertops have been completed in installation areas. If countertops must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Field Conditions" Article.

1.7 FIELD CONDITIONS

A. Environmental Limitations: Do not deliver or install countertops until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.

B. Field Measurements: Where countertops are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication, and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.

C. Established Dimensions: Where countertops are indicated to fit to other construction, establish dimensions for areas where countertops are to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

PART 2 - PRODUCTS

2.1 PLASTIC-LAMINATE COUNTERTOPS

A. Quality Standard: Unless otherwise indicated, comply with the "Architectural Woodwork Standards" for grades indicated for construction, installation, and other requirements.

1. The Contract Documents contain selections chosen from options in the quality standard and additional requirements beyond those of the quality standard. Comply with those selections and requirements in addition to the quality standard.

B. Grade: Premium.

C. High-Pressure Decorative Laminate: NEMA LD 3, Grade HGP.

D. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces complying with the following requirements:

1. As indicated on Finish Schedule.
2. Grain Direction: Parallel to cabinet fronts.

E. Edge Treatment: 3.0-mm PVC edging.

F. Core Material: Particleboard or MDF with 45-pound density or better. Use exterior grade plywood at countertops with sinks.

G. Core Thickness: 3/4 inch.

1. Build up countertop thickness to 1-1/2 inches at front, back, and ends with additional layers of core material laminated to top.

H. Backer Sheet: Provide plastic-laminate backer sheet, NEMA LD 3, Grade BKL, on underside of countertop substrate.

2.2 WOOD MATERIALS

A. Wood Products: Provide materials that comply with requirements of referenced quality standard unless otherwise indicated.

B. Composite Wood and Agrifiber Products: Provide materials that comply with requirements of referenced quality standard for each type of woodwork and quality grade specified unless otherwise indicated.

1. MDF: Medium-density fiberboard, ANSI A208.2, Grade 130.
2. Particleboard: ANSI A208.1, Grade M-2 or Grade M-2-Exterior Glue.

2.3 ACCESSORIES

A. Grommets for Cable Passage through Countertops: 2-inch OD, grey, molded-plastic grommets and matching plastic caps with slot for wire passage.

2.4 MISCELLANEOUS MATERIALS

A. Countertop Support Brackets: Where indicated or otherwise required for support of plastic laminate countertops.

1. Basis-of-Design: Subject to compliance with requirements, provide Iron Supports; HD Front Mount Countertop L Bracket or comparable product as approved by Architect and Owner.
   a. Carrying Capacity: 350 pounds per bracket, minimum.

b. Size: 20-inches deep by 12-inches tall
c. Color: White

B. Adhesive for Bonding Plastic Laminate: As recommended by laminate manufacturer for conditions indicated. Do not use products containing Urea formaldehyde.

C. Seal penetrations with silicone.

2.5 FABRICATION

A. Fabricate countertops to dimensions, profiles, and details indicated. Provide front and end overhang of 1-1/2 inch over base cabinets. Ease edges to radius as indicated.

B. Wrap laminate the full radius of edge and return beyond cabinet face so no gaps visible between edge of wrapped laminate and face of cabinet.

C. Complete fabrication, including assembly, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.

1. Notify Architect seven days in advance of the dates and times woodwork fabrication will be complete.
2. Trial fit assemblies at fabrication shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.

D. Shop cut openings to maximum extent possible to receive appliances, plumbing fixtures, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

1. Seal edges of openings in countertops with a coat of varnish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Before installation, condition countertops to average prevailing humidity conditions in installation areas.

B. Before installing countertops, examine shop-fabricated work for completion and complete work as required, including removal of packing and back-priming.

3.2 INSTALLATION

A. Grade: Install countertops to comply with same grade as item to be installed.

B. Assemble countertops and complete fabrication at Project site to the extent that it was not completed in the shop.

1. Provide cutouts for appliances, plumbing fixtures, electrical work, and similar items.
2. Seal edges of cutouts by saturating with varnish.

C. Field Jointing: Where possible, make in the same manner as shop jointing, using dowels, splines, adhesives, and fasteners recommended by manufacturer. Prepare edges to be joined in shop so Project-site processing of top and edge surfaces is not required. Locate field joints where shown on Shop Drawings.

1. Secure field joints in plastic-laminate countertops with concealed clamping devices located within 6 inches of front and back edges and at intervals not exceeding 24 inches. Tighten according to manufacturer's written instructions to exert a constant, heavy-clamping pressure at joints.

D. Install countertops level, plumb, true, and straight. Shim as required with concealed shims. Install level and plumb to a tolerance of 1/8 inch in 96 inches.

E. Scribe and cut countertops to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.

F. Countertops: Anchor securely by screwing through corner blocks of base cabinets or other supports into underside of countertop.

1. Install countertops with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
2. Secure backsplashes to tops with concealed metal brackets at 16 inches o.c. and to walls with adhesive.
3. Seal junctures of tops, splashes, and walls with mildew-resistant silicone sealant or another permanently elastic sealing compound recommended by countertop material manufacturer.

3.3 ADJUSTING AND CLEANING

A. Repair damaged and defective countertops, where possible, to eliminate functional and visual defects; where not possible to repair, replace woodwork. Adjust joinery for uniform appearance.

B. Clean countertops on exposed and semi-exposed surfaces. Touch up shop-applied finishes to restore damaged or soiled areas.

END OF SECTION 123623.13

SECTION 123661.16 - SOLID SURFACING COUNTERTOPS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Solid surface material countertops.
2. Solid surface material backsplashes.
3. Solid surface material end splashes.
4. Solid surface material windowsills.

1.2 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

1.3 CLOSEOUT SUBMITTALS

A. Maintenance Data: For solid surface material countertops to include in maintenance manuals. Include Product Data for care products used or recommended by Installer and names, addresses, and telephone numbers of local sources for products.

1.4 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom-fabricate countertops similar to that required for this Project, and whose products have a record of successful in-service performance.

B. Installer Qualifications: Fabricator of countertops.

C. Mockups: Build mockups to demonstrate aesthetic effects and to set quality standards for fabrication and execution.

1. Build mockup of typical countertop as indicated on Drawings.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.5 FIELD CONDITIONS

A. Field Measurements: Verify dimensions of countertops by field measurements after base cabinets are installed but before countertop fabrication is complete.

1.6 COORDINATION

A. Coordinate locations of utilities that will penetrate countertops or backsplashes.

PART 2 - PRODUCTS

2.1 SOLID SURFACE COUNTERTOP MATERIALS

A. Solid Surface Material: Homogeneous-filled plastic resin complying with ISFA 2-01.

1. Basis-of-Design Product: Subject to compliance with requirements, provide products indicated in Finishes Schedule on Drawings or comparable products submitted in compliance with Section 002600 “Procurement Substitution Procedures.”

2. Type: Provide Standard type unless Special Purpose type is indicated.
3. Colors and Patterns: As indicated in Finish Schedule on Drawings.

B. Particleboard: ANSI A208.1, Grade M-2 exterior glue.

C. Plywood: Exterior softwood plywood complying with DOC PS 1, Grade C-C Plugged, touch sanded.

2.2 FABRICATION

A. Fabricate countertops according to solid surface material manufacturer's written instructions and to the AWI/AWMAC/WI's "Architectural Woodwork Standards."

1. Grade: Custom.

B. Configuration:

1. Front: Straight, slightly eased at top.
2. Backsplash: Straight, slightly eased at corner.
3. End Splash: Matching backsplash.
4. Windowsill: Straight, slightly eased at top.

C. Countertops:

1. 1/2-inch- thick, solid surface material with front edge built up with same material.

D. Backsplashes: 1/2-inch- thick, solid surface material.

E. Windowsills: 1/2-inch- thick, solid surface material.

F. Fabricate tops with shop-applied edges unless otherwise indicated. Comply with solid surface material manufacturer's written instructions for adhesives, sealers, fabrication, and finishing.

1. Fabricate with loose backsplashes for field assembly.

G. Joints:

1. Fabricate countertops without joints.
2. Fabricate countertops in sections for joining in field.

a. Joint Locations: Not within 18 inches of a sink or cooktop and not where a countertop section less than 36 inches long would result, unless unavoidable.
b. Splined Joints: Accurately cut kerfs in edges at joints for insertion of metal splines to maintain alignment of surfaces at joints. Make width of cuts slightly more than thickness of splines to provide snug fit. Provide at least three splines in each joint.

3. Fabricate windowsill without joints.

H. Cutouts and Holes:

1. Undercounter Plumbing Fixtures: Make cutouts for fixtures in shop using template or pattern furnished by fixture manufacturer. Form cutouts to smooth, even curves.

a. Provide vertical edges, slightly eased at juncture of cutout edges with top and bottom surfaces of countertop and projecting 3/16 inch into fixture opening.

2. Fittings: Drill countertops in shop for plumbing fittings, undercounter soap dispensers, and similar items.

2.3 INSTALLATION MATERIALS

A. Countertop Support Brackets: Where indicated or otherwise required for support of solid surface countertops.

1. Basis-of-Design: Subject to compliance with requirements, provide Iron Supports; HD Front Mount Countertop L Bracket or comparable product as approved by Architect and Owner.
a. Carrying Capacity: 350 pounds per bracket, minimum.
b. Size: 20-inches deep by 12-inches tall
c. Color: White

B. Adhesive: Product recommended by solid surface material manufacturer.

C. Sealant for Countertops: Comply with applicable requirements in Section 079200 "Joint Sealants."

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates to receive solid surface material countertops and conditions under which countertops will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of countertops.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install countertops level to a tolerance of 1/8 inch in 8 feet, 1/4 inch maximum. Do not exceed 1/64-inch difference between planes of adjacent units.

B. Fasten countertops by screwing through corner blocks of base units into underside of countertop. Predrill holes for screws as recommended by manufacturer. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

C. Fasten subtops to cabinets by screwing through subtops into cornerblocks of base cabinets. Shim as needed to align subtops in a level plane.

D. Secure countertops to subtops with adhesive according to solid surface material manufacturer's written instructions. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

E. Bond joints with adhesive and draw tight as countertops are set. Mask areas of countertops adjacent to joints to prevent adhesive smears.

1. Install metal splines in kerfs in countertop edges at joints. Fill kerfs with adhesive before inserting splines and remove excess immediately after adjoining units are drawn into position.
2. Clamp units to temporary bracing, supports, or each other to ensure that countertops are properly aligned and joints are of specified width.

F. Install backsplashes and end splashes by adhering to wall and countertops with adhesive. Mask areas of countertops and splashes adjacent to joints to prevent adhesive smears.

G. Install aprons to backing and countertops with adhesive. Mask areas of countertops and splashes adjacent to joints to prevent adhesive smears. Fasten by screwing through backing. Predrill holes for screws as recommended by manufacturer.

H. Complete cutouts not finished in shop. Mask areas of countertops adjacent to cutouts to prevent damage while cutting. Make cutouts to accurately fit items to be installed, and at right angles to

finished surfaces unless beveling is required for clearance. Ease edges slightly to prevent snipping.

1. Seal edges of cutouts in particleboard subtops by saturating with varnish.

I. Apply sealant to gaps at walls; comply with Section 079200 "Joint Sealants."

END OF SECTION 123661.16

SECTION 123661.19 - QUARTZ AGGLOMERATE COUNTERTOPS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Quartz agglomerate countertops.
2. Quartz agglomerate backsplashes.
3. Quartz agglomerate end splashes.
4. Quartz agglomerate apron fronts.

B. Related Requirements:

1. Section 224400 "Plumbing Fixtures" for sinks and plumbing fittings.

1.3 ACTION SUBMITTALS

A. Product Data: For countertop materials.

B. Shop Drawings: For countertops. Show materials, finishes, edge and backsplash profiles, methods of joining, and cutouts for plumbing fixtures.

1. Show locations and details of joints.
2. Show direction of directional pattern, if any.

C. Samples for Verification: For the following products:

1. Countertop material, 6 inches square.
2. One full-size quartz agglomerate countertop, with front edge and backsplash, 8 by 10 inches, of construction and in configuration specified.

1.4 INFORMATIONAL SUBMITTALS

A. Qualification Data: For fabricator.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For quartz agglomerate countertops to include in maintenance manuals. Include Product Data for care products used or recommended by Installer and names, addresses, and telephone numbers of local sources for products.

1.6 QUALITY ASSURANCE

A. Fabricator Qualifications: Shop that employs skilled workers who custom-fabricate countertops similar to that required for this Project, and whose products have a record of successful in-service performance.

B. Installer Qualifications: Fabricator of countertops.

C. Mockups: Build mockups to demonstrate aesthetic effects and to set quality standards for fabrication and execution.

1. Build mockup of typical countertop as shown on Drawings.
2. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 FIELD CONDITIONS

A. Field Measurements: Verify dimensions of countertops by field measurements after base cabinets are installed but before countertop fabrication is complete.

1.8 COORDINATION

A. Coordinate locations of utilities that will penetrate countertops or backsplashes.

PART 2 - PRODUCTS

2.1 QUARTZ AGGLOMERATE COUNTERTOP MATERIALS

A. Quartz Agglomerate: Solid sheets consisting of quartz aggregates bound together with a matrix of filled plastic resin and complying with ICPA SS-1, except for composition.

1. Basis-of-Design Product: Subject to compliance with requirements, provide products indicated in Finishes Schedule on Drawings or comparable products submitted in compliance with Section 002600 “Procurement Substitution Procedures.”

2. Colors and Patterns: As indicated on Drawings.

B. Particleboard: ANSI A208.1, Grade M-2-Exterior Glue.

C. Plywood: Exterior softwood plywood complying with DOC PS 1, Grade C-C Plugged, touch sanded.

2.2 COUNTERTOP FABRICATION

A. Fabricate countertops according to quartz agglomerate manufacturer's written instructions and the AWI/AWMAC/WI's "Architectural Woodwork Standards."

1. Grade: Premium.

B. Configuration:

1. Front: Straight, slightly eased at top unless otherwise indicated on Drawings.
2. Backsplash: Straight, slightly eased at corner.
3. End Splash: Matching backsplash.

C. Countertops: 3/4-inch- thick, quartz agglomerate with front edge built up with same material.

D. Backsplashes: 1/2-inch- thick, quartz agglomerate.

E. Fabricate tops with shop-applied edges unless otherwise indicated. Comply with quartz agglomerate manufacturer's written instructions for adhesives, sealers, fabrication, and finishing.

1. Fabricate with loose backsplashes for field assembly.

F. Joints: Fabricate countertops without joints.

G. Joints: Fabricate countertops in sections for joining in field, with joints at locations indicated.

1. Joint Locations: Not within 18 inches of a sink or cooktop and not where a countertop section less than 36 inches long would result, unless unavoidable.
2. Joint Type: Bonded, 1/32 inch or less in width.

H. Cutouts and Holes:

1. Undercounter Plumbing Fixtures: Make cutouts for fixtures in shop using template or pattern furnished by fixture manufacturer. Form cutouts to smooth, even curves.

a. Provide vertical edges, slightly eased at juncture of cutout edges with top and bottom surfaces of countertop and projecting 3/16 inch into fixture opening.

2. Counter-Mounted Plumbing Fixtures: Prepare countertops in shop for field cutting openings for counter-mounted fixtures. Mark tops for cutouts and drill holes at corners of cutout locations. Make corner holes of largest radius practical.
3. Fittings: Drill countertops in shop for plumbing fittings, undercounter soap dispensers, and similar items.

2.3 INSTALLATION MATERIALS

A. Adhesive: Product recommended by quartz agglomerate manufacturer.

1. Adhesives shall have a VOC content of 70 g/L or less.
2. Adhesive shall comply with test and product requirements of the California Department of Public Health's "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers."

B. Sealant for Countertops: Comply with applicable requirements in Section 079200 "Joint Sealants."

C. Countertop Support Brackets: Where indicated or otherwise required for support of quartz agglomerate countertops.

1. Basis-of-Design: Subject to compliance with requirements, provide Iron Supports; HD Front Mount Countertop L Bracket or comparable product as approved by Architect and Owner.
   a. Carrying Capacity: 350 pounds per bracket, minimum.
   b. Size: 20-inches deep by 12-inches tall
   c. Color: White

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates to receive quartz agglomerate countertops and conditions under which countertops will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of countertops.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Install countertops level to a tolerance of 1/8 inch in 8 feet, 1/4 inch maximum. Do not exceed 1/64-inch difference between planes of adjacent units.

B. Fasten countertops by screwing through corner blocks of base units into underside of countertop. Predrill holes for screws as recommended by manufacturer. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with quartz agglomerate manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

C. Fasten subtops to cabinets by screwing through subtops into cornerblocks of base cabinets. Shim as needed to align subtops in a level plane.

D. Secure countertops to subtops with adhesive according to quartz agglomerate manufacturer's written instructions. Align adjacent surfaces and, using adhesive in color to match countertop, form seams to comply with quartz agglomerate manufacturer's written instructions. Carefully dress joints smooth, remove surface scratches, and clean entire surface.

E. Bond joints with adhesive and draw tight as countertops are set. Mask areas of countertops adjacent to joints to prevent adhesive smears.

1. Clamp units to temporary bracing, supports, or each other to ensure that countertops are properly aligned and joints are of specified width.

F. Install backsplashes and end splashes by adhering to wall and countertops with adhesive. Mask areas of countertops and splashes adjacent to joints to prevent adhesive smears.

G. Install aprons to backing and countertops with adhesive. Mask areas of countertops and splashes adjacent to joints to prevent adhesive smears. Fasten by screwing through backing. Predrill holes for screws as recommended by manufacturer.

H. Complete cutouts not finished in shop. Mask areas of countertops adjacent to cutouts to prevent damage while cutting. Make cutouts to accurately fit items to be installed, and at right angles to finished surfaces unless beveling is required for clearance. Ease edges slightly to prevent snipping.

1. Seal edges of cutouts in particleboard subtops by saturating with varnish.

I. Apply sealant to gaps at walls; comply with Section 079200 "Joint Sealants."

END OF SECTION 123661.19

SECTION 21 0000 - FIRE PROTECTION

PART 1 – GENERAL

1.1 GENERAL CONDITIONS

A. The requirements of Section 220000, 230000, 230100, 230501, 230800, 230900, and 251000 shall govern the work in Section 210000, where applicable, and where not in conflict with governing codes and ordinances. Division 1 is a part of this and all other sections of these specifications.

1.2 SCOPE

A. The work required includes the designing, hydraulically calculating pipe sizes, flows, and pressure, furnishing and installation of fire protection systems in accordance with the drawings, specifications, latest standards and codes for complete systems for the building.

B. The work specified in this section shall be installed by none other than an approved fire sprinkler contractor. All fire protection system piping shall be hydraulically calculated. All systems shall be subject to the inspection and approval of the local fire authority or his representative for compliance of applicable standards.

C. Installation of system is for an existing structure.

D. **Preferred contractors shall be Kimco Fire Protection, Chaparral Fire Protection, Fire Engineering Co., Paradise Fire Protection Inc. Delta Fire Protection Systems, Fire Services Inc., State Fire DC, Preferred Fire Protection and Firetrol Protection Systems.**

F. All work shall be coordinated with other subcontractors. The sprinkler system shall consist of the required number of sprinkler heads, piping, hangers, drains, test pipes, alarms, valves, gauges, fire department connections, anti-freeze loop, and all other parts to assure a complete system to meet the requirements of the owner's insurance underwriter, local authority having jurisdiction, and in accordance with nationally recognized standards.

G. Codes & Standards:

1. Water Supply: National Fire Code #24 - 2021 International Building Code.
2. Wet Sprinkler System & Combined Systems: N.F.C. #13 and #14 - I.B.C.
3. Alarm Equipment: N.F.C. #70 & 72A
4. Standpipe & Hose Systems: N.F.C. #14 - I.B.C.
5. Supervision: N.F.C. #13 and #14 - I.B.C.
6. Temporary Fire Protection: N.F.C. #14 - I.B.C.
7. Sprinkler Heads: N.F.C. #13
8. Sleeves and Location: N.F.C. #13
9. Upgrade of existing fire risers: N.F.C. #13

H. Work Included Elsewhere:

1. Concrete Work - By General Contractor
2. Access Doors - By General Contractor.
3. Painting of sprinkler piping - By Painting Contractor.
4. Color coding or pipe identification - By Mechanical Contractor.
5. Wiring of flow switches and gate valve supervisory switches - By Electrical Contractor.

1.3 WORK BY FIRE PROTECTION CONTRACTOR

A. This contractor shall furnish and install all labor, material, and equipment to make a complete and working fire protection system fully tested and approved in accordance with the drawings, standards of this specification for the new building.

B. Work generally consists of the following:

1. Re-build of existing fire risers to existing codes and standards.
2. Replacement of existing fire heads at areas of ceiling replacement.
3. Re-pipe and new heads at remodeled areas.

1.4 UPGRADE OF EXSTING FIRE RISERS

A. This contractor shall upgrade existing fire risers as detailed on documents, and as required by NFPA.

1.5 UNDERGROUND WATER SUPPLY

A. Connect fire sprinkler mains to connections provided by others as shown on the drawings and install U.L. labeled pipes into building at locations shown. Coordinate testing and flushing of this portion of the main in accordance with N.F.C. #24 and furnish test certificates to the Owner's representative.

B. Sprinkler System:

1. This system shall conform to N.F.C. #13 and #14 and I.B.C. Sprinkler systems are to be light, ordinary, or extra hazard, as required by NFC-13 and the Utah State Fire Marshall's office.
2. System shall be hydraulically calculated. Sprinkler systems shall be light hazard, except for casual ordinary and extra hazard group 1 in storage and service areas. Density for light hazard areas shall be 0.10 gpm per sq. ft. over 1500 sq. ft. Remote area with a maximum head spacing of 225 sq. ft. Service area shall be density of 0.15 over 2000 sq. ft. with maximum spacing of 130 sq. ft.

1.6 QUALIFICATION OF DESIGNER

A. Designer shall be an engineering technician or Senior Engineering Technician (Level III or Level IV), NICET certification for fire sprinkler system design.

1.7 QUALIFICATION OF INSTALLER

A. It is intended that the system be designed and installed by a firm regularly engaged in the design and installation business of Fire Sprinkler contracting. The Owner's representative may require evidence to support the ability of the contractor to perform work in the scope and volume as specified. A contractor who cannot verify such experience may be found not suitable to perform the work.

PART 2 – PRODUCTS

2.1 UPGRADE OF RISERS

A. Risers shall be upgraded at the locations shown and shall include a U.L. approved control valve, check valve, flow switch, pressure gauges, water motor gong, or electric bell, standard fire department connection, gate valve supervisory switch, test connections, and drains as required.

2.2 HANGERS

A. All hangers to be in accordance with NFPA Pamphlet No. 13.

2.3 SPRINKLER HEADS

A. Sprinkler heads shall be U.L. approved. "K" factors shall be the same on each system and/or floor. See plans for head types. Extended coverage heads will be allowed per NFPA.

B. Sprinklers shall be of the proper temperature rating. Locations of sprinkler head wherever reasonably possible shall be symmetrical and coordinated with the ceiling pattern.

C. Number and location of sprinkler heads shown on the drawings are schematic. Exact number and location of heads shall be determined by the system design, and architectural coordination.

D. Provide dry pendent heads in areas subject to freezing, only where wet piping can be run in heated space. Otherwise, provide antifreeze loops.

E. Provide spare head cabinets in accordance with NFPA No. 13 and equip same with at least ten (10) concealed type heads, three (3) upright white heads, six (6) upright brass heads, and appropriate wrenches.

F. Provide head guards in all areas where heads are subject to physical abuse.

2.4 VALVES

A. All valves and fittings shall be listed by Underwriters Laboratories or approved by Factory Mutual for fire protection duty and shall be installed in accordance with their listing and/or approval. Control valve shall have alarm supervisory switches with two sets of contacts and normally open/normally closed.

B. All indicating valves will be of the listed and/or approved type with an electric tamper switch approved for use with that valve.

C. Water hammer arrestors shall be provided ahead of all automatic valves to eliminate water hammer and shall be installed vertically in an accessible location.

2.5 PIPING

A. All piping above ground shall be Schedule 40 domestic steel pipe and fittings.

B. All fire sprinkler piping shall be schedule 40 black steel. All piping and fittings shall be U.S. manufacture. Thin wall and schedule 40 equivalent piping will not be allowed.

2.6 PIPING SUPPORT

A. Steel roof deck shall not be used to support loads from fire piping or equipment of any kind, unless specifically noted otherwise.

B. Bracing of miscellaneous items (fire, mechanical, electrical, plumbing, etc.) to the bottom chord of joists or girders will not be allowed in any instance. All lateral braces must connect to the top flange/top chord of the framing member above unless noted otherwise on the structural drawing.

C. It is essential that all piping be supported from roof structure at joist within 6” of panel point location and from top or bottom chord of floor or roof joist.

2.7 FLEXIBLE FIRE HEAD PIPE SYSTEMS

A. Approved flexible fire head connection systems are allowed for connection to new fire heads.

B. System shall be provided with shop drawings for review and approval.

2.8 EARTHQUAKE BRACING

A. Install earthquake bracing in accordance with NFPA #13 Standards and Utah State Fire Marshall's Office.

2.9 SLEEVES

A. Sleeves shall be furnished, together with their location and elevations to the construction manager, timely with required schedule or concrete pours. If sleeves are missed by this contractor, he shall be responsible for core drilling thru concrete at his own expense, and he shall be responsible for his cutting and patching. Sleeves shall be of the size, type, and length required by N.F.P.A. codes. See Section 230900 for "Sleeves".

B. Sleeves shall be placed in structural members only where approved by the Owner's representative.

C. Sleeves thru Finished Surfaces:
For pipes passing thru finished partitions or ceilings, provide galvanized sheet iron sleeves of suitable size. The sleeves shall be fastened to construction to prevent creep along pipe and the sleeve ends shall be flush with finished surfaces. Provide escutcheon plates at each side of finish wall or floor or ceiling for all pipes passing thru same.

1. Sleeves thru Fire-rated Surfaces:
All pipe sleeves and ductwork penetrating fire walls and surfaces shall be packed inside after pipes have been placed with a U.L. listed fire safing system. The contractor shall submit to the Owner's representative for review and approval specific installation diagrams showing exact method(s) to be used.

2. Sleeves thru Sound Rated Surfaces:
All pipe sleeves and ductwork penetrating sound rated walls or surfaces shall be packed with dense fiberglass, sealed with duct sealer and fitted with metal cover flanges on both sides.

D. All penetrations must be sleeved, or core drilled/cut. Hammer drill is not an acceptable means.

PART 3 – EXECUTION

3.1 TEMPORARY FIRE PROTECTION DURING COURSE OF CONSTRUCTION

A. This contractor shall provide fire protection as required by N.F.C. #14 - Chapter 8 and shall be coordinated with the local fire department.

3.2 SHOP DRAWINGS

A. Shop drawings, submittals, and hydraulic calculations, as necessary and required, shall be submitted to the Owner's representative for approval prior to incorporating materials or equipment into the work. Shop drawings shall be complete and in accordance with N.F.C. #13, #14, #20, and all applicable standards, submittals, and equipment, valves, flow switches, controls, and other important items shall be complete, showing details, description, and characteristics; hydraulic calculations shall be based on the water system fire flow capacities shown on the drawings and shall show flows, pressures, velocities, pipe size, and equivalent lengths as required for the system.

B. Calculations shall be arranged in an orderly manner with sufficient reference points for the approving authority to review and approve.

C. Testing shall be accomplished by this contractor for all required systems, equipment, and appurtenances, as required by the various standards and codes. The Owner's representative shall witness and sign off each item required. This contractor shall furnish all required forms.

3.3 TESTS

A. Install all test pipes and valves as required by NFPA No. 13. Locate inspector's test valves and auxiliary drain valves above ceilings in areas approved by the Architect and provide hose bibb connections. Conduct all tests as required by NFPA Standards and Insurance Services Office and submit copies of completed test forms to the building owner.

B. All fire sprinkler related tests requiring witnessing by local authorities will be the responsibility of this contractor. If tests are not run or do not have the proper witness or documentation, then they will be run late and all damage caused by the system or caused in uncovering the system for such tests will be borne by this contractor.

C. The Utah State Fire Marshall and building owner shall be notified (in writing) at least three days in advance of the following:

1. Hydrostatic test and final inspection of overhead, prior to the installation of the ceilings.

3.4 GENERAL REQUIREMENTS

A. This contractor shall submit complete drawings, hydraulic calculations, and proper documentation to the local authority having jurisdiction and receive their approval before submitting such material to the Owner's representative for final approval. The contractor will be required to show proof of submittal to the Owner's insurance underwriter and local building authorities before installation may begin.

B. All work of this contractor will be coordinated with other trades to insure minimal changes to the sprinkler system from the designs. Careful coordination of mechanical and electrical ducts, pipe and conduit shall be required. The ceiling cavity must be carefully reviewed and coordinated with all trades. In the event of conflict, the installation of the mechanical equipment and piping shall be in the following order: plumbing waste, rainwater, and soil lines' supply, return, and exhaust ductwork; water piping; fire protection piping; and pneumatic control piping.

C. Every effort shall be required to ensure that the heads form a symmetrical pattern in the ceiling with the ceiling grid, the lights, and diffusers and grilles and as shown on the Architect's reflected ceiling plan. Offsets shall be made in piping to accommodate ductwork in ceiling. Heads should be symmetrical, and all piping run parallel or perpendicular to building lines. In no case shall sprinkler heads be installed closer than 6" from ceiling grids or closer than approved distances from ceiling obstructions.

D. All sprinkler piping shall run concealed unless approved by the Owner's representative. All lines will be run as high as possible so as to not interfere with future changes to ceiling heights or other mechanical equipment. This contractor will be responsible for all sleeves, core drills, and sealing of penetrations in walls, floors, and structural members to facilitate the installation of the system, however, no holes in, or attachments to structural members will be allowed unless approved by the Owner's representative.

E. All required drains and test pipes will be installed and finished in a workmanlike manner, terminating at a proper location to accommodate the required outflow without damaging the building or landscaping. Drain and test pipe locations shall be approved by the owner's representative.

F. No piping or valve assemblies shall be run exposed in a finished area without the prior approval of the owner's representative.

G. Installation of new sprinkler systems above existing ceiling systems to remain may require ceiling access doors, or removal and re-installation of existing ceiling systems. All access doors and ceiling work is the responsibility of this contractor. Ceiling access doors shall be 30” x 30” hinged type and painted to match ceilings where installed.

H. **All heads located in specialty ceiling systems shall be coordinated with Architect prior to any installation.**

3.5 JOB CLOSEOUT

A. This contractor shall assure that all placards, signs, and instruction manuals are in place, and all tests are run before any consideration for final payment will be considered. This includes maintenance manuals, hydraulic calculations placards, spare head cabinets and the proper number of spare heads, and instruction to on-site personnel.

B. This contractor shall, in addition to the above, furnish the owner one (1) set of reproducible documents of the sprinkler system "record drawings" for Owner’s project files.

End of section 210000

SECTION 22 0000 – PLUMBING

PART 1 – GENERAL

1.1 SCOPE OF WORK

A. Piping diagrams are schematic and indicate preferred pipe routing. It is the intent that the installation be complete. Where fixtures are not shown connected to any required services, they shall be connected properly and completely. Connect all fixtures to various services, i.e., hot water, cold water, waste, and vent, etc., as required.

B. The work shall include furnishing of all materials and labor required for the job as described, together with all accessories and trim implied or required to finish the work, and generally as follows:

1. Demolition of existing systems.
2. Plumbing fixtures and piping.
3. Sanitary sewer systems.
4. Rain removal system, including piping and roof drains.
5. Backflow prevention systems.
6. Removal and addition of sensor flush valves at existing urinals.
7. Replacement of existing lavatories under alternate #4.

1.2 STANDARDS

A. Plumbing installation shall be done in accordance with the 2021 International Plumbing Code, City Code, and all other governing codes.

B. In the event drawings violate the codes as being locally enforced, the contractor shall base his estimate on the enforced code requirements.

1.3 DISINFECTING

A. After flushing the mains, introduce a water and chlorine solution concentrated to 300 PPM to disinfect the system and oxidize piping contaminates. Retain treated water and chlorine for a period of not less than three hours or more than six hours before final flushing out of system.

B. All valves should be opened periodically during the process and the residual chlorine checked to ensure that at least 50 percent of the initial concentration is present to complete the disinfection. If there is less than 50 percent, the valves should be allowed to drain water until the 50 percent or greater level is obtained. A make-up chlorine solution of a concentration equal to the initial concentration must be added as needed during the withdrawal of the spent solution.

C. A warning sign shall be conspicuously posted at each water outlet and faucet during the disinfecting process to prevent occupants from drinking the water.

D. Flushing: Following disinfection, all treated water shall be flushed from the system through its extremities. Flushing shall continue until samples show that the quality of the water delivered is comparable with the quality of the public water supply and satisfactory to the public health authority having jurisdiction. Flushing shall be repeated if samples taken daily over a period of three days show the water quality is not being maintained. Samples shall be taken only from taps located and installed in such a manner that they will not contribute any contamination. Samples shall not be drawn from hydrants or through unsterilized hose. Test samples shall be certified by a recognized and approved testing laboratory, and a certificate of acceptability shall be submitted.

E. Written certification of the disinfecting process and purity of water samples shall be forwarded to the Owner's representative.

1.4 VERIFICATION OF GRADE

A. The contractor shall verify with the site utilities contractor the connection of water, and waste piping systems to the mains, and shall verify the actual job site elevation and location prior to the installation of the building footings.

PART 2 – PRODUCTS

2.1 CLEANOUTS

A. Approved cleanouts shall be installed in the base of each vertical drainage line, and in the horizontal line at each change in direction. In addition, there shall be cleanouts spaced at a maximum of 50' in all horizontal lines. All cleanouts shall be extended to accessible surfaces. All cleanouts to grade shall be capable of cleaning in both directions.

2.2 WATER HAMMER

A. Provide and install stainless steel bellows type shock absorbers in the ends of all multiple fixture water lines and in piping ahead of snap-acting automatic valves.

B. Absorbers shall be sized and located in compliance with manufacturer's recommendations for the specific application. Absorbers shall be Zurn, Watts, Wade, or Smith.

C. Absorbers shall not be installed in inaccessible areas. Extend piping to accessible locations.

2.3 FLASHINGS

A. All pipes passing thru the roof shall be neatly flashed. Flashing shall be provided under Division 7.

2.4 FIXTURE STOPS

A. All stops for plumbing fixtures shall be McDonald 1/4 turn ball valves.

2.5 PLUMBING FIXTURES

A. This contractor shall furnish and install all fixtures shown on the architectural or mechanical drawings or specified hereinafter, clean and adjust all fixtures and replace any damaged fixtures at the contractor's expense.

B. The fixtures shall be all new and complete as shown and described in manufacturer's catalog, and as required for the work, including accessible loose key 1/4 turn ball valve stops above the floor in supplies to all fixtures, and cast brass P-traps, unless otherwise shown. Trim for all fixtures shall be chrome-plated, and all trim shall match in design. Supply faucets shall have renewable seats and barrels. Fixtures shall be Kohler, Sloan, American Standard, or approved equal.

C. Approved Fixtures:

Water closets & lavatories:	Kohler, American Standard, Sloan, or approved equal.
Flush valves:	Zurn, Sloan, or approved equal.
Sinks:	Just, Elkay, or approved equal.
Faucets:	Moen, T&S Brass, Chicago, American Standard, or approved equal.
Drinking fountains:	Murdock, Acorn, Elkay, or approved equal.
Hose bibbs:	Watts, Zurn, JR Smith, Woodford, Sioux Chief or approved equal.
Tempering valves:	Bradley, Symmons, Acorn, Powers, Watts, or approved equal.
Floor drains:	Zurn, JR Smith, Watts, Josam, or approved equal.
Roof Drains & Downspouts	Zurn, Wade, J.R. Smith or approved equal.

PLUMBING FIXTURES

WC-1	Water Closet: (ADA)	American Standard "Madera" siphon jet, 1.6 gpf, floor mounted, elongated lip bowl, 1-1/2" top spud, vitreous china, Sloan 'Regal' 111-XL 1.6 gpf chrome plated, piston type exposed flush valves; K-4666-C Bemis 1955C extra heavy solid plastic white open front seat with stainless steel check hinge, 431310-100 bolt caps.
FV-1	Flush Valve: (Existing Urinal)	Sloan Regal 186 1.5 gpf, exposed battery powered sensor operated chrome plated flush valve with vacuum breaker
L-1	Lavatory: (ADA) Alternate #4	Kohler K-22210-N "Caxton" 19-1/4" oval undercounter mount with overflow, Moen 8210SM 4" center set faucet for counter mounting with grid strainer, Watts USG-B ASSE 1070 thermostatic mixing valve. Tailpiece and flexible supplies w/stops and brass P-trap.
L-2	Lavatory: (ADA)	American Standard "Lucerne" 035.028" 20" x 18" 4" center set vitreous china, front overflow, anti-splash rim, center basin, wall hanger, punched for concealed arm carrier, Chicago 802-1000-PRJKCP, 2.2 gpm, 4" center set vandal resistant manual faucet with integral cast brass spout. Provide grid strainer. Tailpiece and flexible supplies w/stops and brass P-trap. Support lavatory with Zurn ZN1231 concealed arm carrier with foot support. Lavatory shall have both tempered water and cold-water connections.
S-1	Sink: (Health)	Just USADA1824A55-J – 23-1/2" x 18-1/4" x 5-3/8", 18 ga. single compartment 304 stainless steel, drilled for 3-hole 8" center set faucet, undermount, sound dampening, cup strainer, Chicago 786-E29-369ABCP faucet with swing spout, ADA levers, and aerator, flexible supplies, brass P-trap.
DF-1	Drinking Fountain: (Replacement of existing)	Elkay LZSTLG8W5 bi-level, wheelchair access, double bowl, wall mounted, air cooled, refrigerated type with bottle filler located at low side to cool 8 gal/hr. from 80 deg. F. EAT. 1/5 HP hermetic compressor, 120/160. 304 stainless steel top w/chrome plated bubbler and "Light Touch' wrap and self-closing press bar operable from front of fountain. Cabinet color shall be stainless steel #4 satin finish. Note: Cut electrical cord at time of installation to suit electrical outlet provided.
HB-1	Hose Bibb:	Chicago Faucet No. 952 (No. 998 where connected to exposed piping) 3/4" chrome plated hose bibb with No. 293-6 handle and 3/4" threaded outlet with integral vacuum breaker.
TV-1	Tempering Valve:	Watts Model USG-B ASSE 1070 single lavatory mixing valve with integral strainer.

FD-1	Floor Drain:	Zurn #Z-415-4 2" cast iron drain with nickel bronze top. Drain to have deep seal P-trap with Provent “trap guard”.
RD-1	Roof Drain:	J.R. Smith #1010-ARC, roof drain cast iron type with flashing collar, C.I. dome, gravel guard, extension, sump receiver, and underdeck clamp. See plans for sizes.
DN-1	Downspout Nozzle	J.R. #1770 brass downspout nozzle. Provide 1/4" mesh aluminized, slip fit bird screen. See plans for sizes.

2.6 LEAD PANS AND WATERPROOF MEMBRANES

A. All floor drains shall be fitted with clamping collar and waterproof membrane.

B. Drains shall have a clamping device which clamps drain to pans. There shall be a mastic seal between floor drain bottom and lead or membrane so when clamping device is tightened, there is a complete watertight seal.

C. Furnish a 30" square 4# lead flashing with each roof drain.

D. Care should be taken not to clog weep holes. All pans will be tested by placing test plug in drain and filling with water overnight.

2.7 CONDENSATE DRAIN

A. All refrigerated air conditioning and/or cold storage cases which have cooling coil condensate drip pans with pipe connections shall be piped to the nearest drain by this contractor.

B. Pipe location and routing shall be approved by the owner's representative.

C. Piping shall be the same size as the drain pan connection and shall be trapped to prevent forced air flow thru the pipe.

2.8 VACUUM BREAKERS, DOUBLE CHECK VALVE ASSEMBLIES, & BACKFLOW PREVENTERS

A. Vacuum breakers and backflow preventers shall comply with the requirements of the 2021 International Plumbing Code for the actual installed duty.

B. Vacuum breakers and backflow preventers shall be of the type, style, and arrangement approved by the Code.

C. All vacuum breakers and backflow preventers shall be installed with the necessary isolation valves and test cocks.

D. Backflow preventers shall be located at a maximum of 4' - 0" A.F.F. and shall be accessible for service. Backflow preventers shall have a water filter with a replaceable cartridge.

PART 3 – EXECUTION

3.1 PRODUCT HANDLING

A. Protection:

B. Use all means necessary to protect plumbing materials before, during, and after installation and to protect the installed work and materials of all other trades.

C. Replacements:

D. In the event of damage, immediately make all repairs and replacements necessary to the approval of the Owner and at no additional cost to the Owner.

3.2 TESTING

A. Furnish all required personnel and equipment and make all tests required to receive the approval of the Owner and all agencies having jurisdiction.

3.3 CLEANING UP

A. Prior to acceptance of the building, thoroughly clean all exposed portions of the plumbing installation, removing all labels and all traces of foreign substance, using only a cleaning solution approved by the manufacturer of the plumbing item and being careful to avoid all damage to finished surfaces.

3.4 ROOF DRAIN LOCATIONS

A. This contractor shall review the architectural and structural drawings, and shall field verify from actual job site conditions that the roof drains are located at the low points of the roof systems. Locations shown on the plumbing drawings are approximate. All low points on the roof shall have primary and secondary roof drains installed in them unless otherwise noted.

3.5 WATER CLOSET INSTALLATION

A. General: Install water closets as shown on the drawing and as follows:

1. Supply pipe extending from wall shall be covered by chrome plated sleeve and wall flange.
2. Additional wall plates shall be provided where each pipe extends through finished wall.
3. Two rubber or plastic seat bumpers with metal holders shall be provided and secured to the wainscot behind the fixture.
4. The centerline of the flush valve shall be on the centerline of the fixture, 39 inches above the finished floor and a minimum of 2-1/4 inches from the wall.
5. Chrome plated pipe support shall be provided on the long flush pipe outlet and shall be secured rigidly to the wall with suitable anchors.
6. The backflow preventer for the flush valve shall be installed at the discharge of the valves.
7. The flush valve water piping concealed in the partition shall be rigidly supported; piping between flush valve and wall shall be provided with a factory fabricated chromium plated spacer sleeve and wall flange.

3.6 LAVATORY INSTALLATION

A. General: Install lavatories as shown on the drawings and as follows:

1. Lavatories for use by wheelchair handicapped shall be installed with a minimum rim height of 34", a minimum vertical clearance of 29" from floor, and a minimum clear knee recess of 30" in width and 20" in depth.
2. Trap on lavatory for use by wheelchair handicapped shall be installed so as to provide maximum clearance under bowl. Exposed waste, trap and hot water supply under lavatory shall be insulated in accordance with the requirements for domestic hot water piping.
3. All lavatories shall be installed with a rim height of 34".

3.7 FIXTURE CONNECTIONS

A. Floor Mounted Water Closets and Service Sinks: Provide connections between soil pipes and floor connected water closets and service sinks made with cast-iron floor flanges.

B. Connection sizes shall be 4-inch for water closets and 3-inch for service sinks.

C. Floor flanges shall be slipped over the ends of the pipes and caulked in position.

D. Special short radius fittings shall be used where space does not permit the use of standard fittings below the flanges.

E. Setting Compounds and Gaskets: Provide watertight and gas tight seals between flanges and fixtures with plumbing-fixture-setting compound or manufacturer's standard non-asbestos gaskets.

F. Neither rubber gaskets nor putty shall be used in sealing connections.

3.8 FIXTURE SUPPORTS

A. Lavatory Support: Provide lavatory chair carriers consisting of a pair of cast-iron feet bolted to or imbedded into the floor together with 1.66- inch (minimum) steel tubular upright members, a horizontally adjustable alignment truss or tie rod at bottom and another at the top connected to cast-iron or steel adjustment sleeves and painted cast-iron or steel adjustment sleeves, and painted cast-iron concealed arms.

3.9 BACKFLOW PROTECTION VALVE INSTALLATION

A. General: The entire water distribution system shall be protected against contamination due to backflow from non-potable sources. Each connection to a fixture or an item of equipment shall be protected in accordance with the requirements of the National Plumbing Code.

B. Reduced Pressure Zone Backflow Preventer: Install a reduced pressure zone backflow preventer in the building water supply main to expansion tanks, condenser water systems, and boilers as shown on the drawings and/or as required by the local codes.

3.10 INSTALLATION OF PIPE SLEEVES

A. Basic Requirements: Install pipe sleeves as follows:

1. Pipe sleeves shall be provided for all pipes passing through walls, slabs on grade and floors. Sleeves may be omitted where pipes pass through exterior walls above ground to lawn faucets, wall hydrants and downspout nozzles.
2. Sleeves for pipes passing through exterior walls and slabs on grade which do not have membrane waterproofing shall be of cast-iron or galvanized steel pipe or black steel pipe, Schedule 40.

3. Sleeves for pipes passing through exterior walls, slabs on grade and floors which are provided with membrane waterproofing shall be of threaded galvanized steel pipe fitted with companion flanges and arranged to secure membrane. Companion flanges shall be drilled and tapped in such a manner that bolting is affected from the outer (or upper) face only.

4. Sleeves for pipes passing through potentially wet floors that do not have membrane waterproofing such as in toilet rooms, cafeteria kitchens, serving areas, dishwashing rooms, utility cores, mechanical equipment rooms, and areas that are provided with fire protection sprinkler systems, shall be galvanized steel pipe, shall project 2 inches above the finished floors, and shall be caulked watertight.
5. Sleeves for pipes passing through all other floors and walls shall be constructed of galvanized or black steel pipe, standard weight.

3.11 INSTALLATION OF CLEANOUTS AND FERRULES

A. Riser Connection to Sewer or Drain: Where soil, waste, or roof drainage risers connect to a sewer or drain extending from the building above the lowest floor, the fitting at the base of each stack or downspout shall be a sanitary tee or a combination Y and 1/8 bend with cleanout plug in the end of the run of the main.

B. Test Tees: Each vertical soil, waste, and vent pipe and each downspout and roof drainage pipe which connects to horizontal drain piping below ground shall be fitted with a test tee above the lowest floor or ground. Where accessible, test tee may be installed in the horizontal pipe at the base of the riser.

C. Cover Plates: Where cleanouts or test tees occur on concealed pipes in finished rooms, they shall be provided with a 1/8-inch thick, machine finished, brass cover plate of sufficient diameter to cover the opening in the finished wall or partition. The cleanout plug shall have a solid head, tapped for a 1/4-inch brass screw to secure the cover plate. Where cleanout plugs extend beyond the wall finish, the cover plates shall be of machine finished brass and shall be only of sufficient depth to fit against the wall to cover plug. Cleanout cover plates shall be painted to match adjacent wall finish.

D. Cleanouts Plugs for Threaded Fittings: Cleanout plugs for threaded fittings shall be in accordance with ANSI B16.12. Except for test openings, where size must be sufficient to admit test plug, bushings will be permitted on pipes 5-inches and larger to reduce plug size to 4 inches; cleanout plugs for piping 4 inches and smaller shall be the same size as the pipe.

E. Cleanout Plugs for Hub-and-Spigot Fittings: Cleanout plugs for hub-and-spigot fittings shall be screwed into ferrules caulked into the fitting. Ferrules and plugs shall be in accordance with ANSI B16.12, except that plugs required to be flush with the floor shall have square countersunk heads in lieu of raised heads.

F. Cleanout Plugs for Copper Drainage Lines: Cleanout plugs on copper drainage lines shall be installed in solder-joint fittings having threaded openings provided for the cleanout, or in solder-joint fittings with threaded adapters.

3.12 WATER PIPING INSTALLATION

A. General: Water piping shall be complete from service connection to all fixtures and equipment outlets. Sizes of pipes shall be as shown or specified.

B. Reaming: Ends of pipes and tubes shall be reamed before being made up.

C. Threaded Joints: Threaded joints shall be made up metal-to-metal, with a noncorrosive lubricant applied to the male thread only. Lampwick or other packing material shall not be used in making up threaded joints.

D. Chromium Plated Piping: Chromium plated piping shall be threaded and made up carefully, and not more than one full turn of thread shall be exposed beyond any fittings.

E. Long Screws and Bushings: Long screws and bushings (other than bushings cast in the sand) shall not be used on water piping.

F. Soldering: Ends of tubing and recesses of fittings to be soldered shall be thoroughly cleaned. Joints shall be assembled without binding. Solder shall penetrate fully and shall fill the joint completely. Joints shall be made using lead-free solder, as specified.

G. Joint Materials: All joint materials shall be free from oil, tar, and greasy substances, and shall be dry when placed in the joint. The material shall be handled with care to prevent contamination.

H. Copper Tubing: All copper tubing shall be free from cuts, dents or other surface damage at the time of final inspection. Damaged tubing shall be removed and replaced with new.

I. Copper Tube Anchoring: Horizontal runs of copper tubing over 50 feet in length shall be anchored to wall or floor construction. Anchors shall be located near the midpoints of the runs so as to force the expansion equally to the ends or in a direction where expansion can take place without excessive strain.

J. Dielectric Couplings: Where non-ferrous metal piping and zinc-coated metal piping are joined, brass couplings, fittings or unions shall be provided.

K. Reducing Fittings: Where pipe sizes shown or specified differ from the connection sizes of meters, pumps, fixtures, outlets, and the like, reducing fittings shall be installed close to them.

L. Pipe Branches: Branches from water supply mains shall be taken from the top, bottom or side, using crossover fittings where required by structural or operating conditions.

M. Up feed Hot Water Return: On up feed hot water distribution systems for which return circulation piping is shown, a 1/2" circulation connection shall be made at a point on each riser just below the highest outlet connection. Provide branch circulation lines with gate valves near the valves on corresponding supply lines.

N. Down feed Hot Water Supply: Each down feed main for a hot water supply system shall be graded upward to the first branch connection, which shall be taken from the top of the main. Beyond the first connection the main shall grade downward, and all branch connections shall be taken from the bottom of the main. Connect a 1/2-inch circulating line to the bottom of each down feed riser. Provide branch circuiting lines with gate valves in locations corresponding to the supply branch valve locations.

O. Grading: Hot water supply and hot water circulating lines shall be accurately and uniformly graded to avoid traps which might impede or destroy circulation. All lines shall be graded so as to facilitate drainage.

P. Unions: Unions shall be installed near points of connection to each piece of equipment, and elsewhere as required for installation of piping, removal and replacement of regulating and control equipment and the like. Right and left couplings or nipples are prohibited.

Q. Water Hammer Arresters: Water hammer arresters shall be provided where indicated on the drawings. Water hammer arresters shall be approved and installed in accordance with the requirements of PDI-WH201 and shall bear the PDI seal of approval.

End of section 220000

SECTION 22 0700 – INSULATION

PART 1 – GENERAL

1.1 WORK INCLUDED

A. It is the intent of this section of the specifications that all hot (above 105 deg. F.) and cold (below 55 deg. F) surfaces of all piping and mechanical system components be insulated, unless specifically excluded herein.

B. Systems to be insulated:

1. Supply air ductwork
2. Culinary hot, hot re-circulating and cold-water piping systems
3. Heating hot water system
4. Water, tempering valve and pipe, and waste lines below ADA lavatories and ADA sinks
5. Roof drain piping systems.

C. The providing of all materials, supplies, equipment, tools, transportation, and facilities and performing all labor and service necessary to provide the work outlined above and as shown on the working drawings.

PART 2 – PRODUCTS

2.1 COMPLIANCE

A. All insulation shall (as a minimum) conform to the requirements of the building code an have a flame spread rating of less than 25 and smoke developed less than 50.

B. Insulation shall be as manufactured by Johns-Manville, Owens-Corning, Knauf, Armstrong, or Certainteed.

C. **Duct insulation, pipe Insulation & vapor barrier shall be run continuous thru all wall and floors.**

2.2 HEATING WATER PIPING, DOMESTIC HOT & COLD-WATER PIPING

A. All piping shall be insulated with 2-piece heavy density pipe insulation having an average thermal resistivity in the range of 4.0 to 4.6 Hr Deg. F. Ft2/BTU per inch of thickness on a flat surface at a mean temperature of 75 deg. F. Thickness of insulation shall be as follows:

MINIMUM PIPE INSULATION

INSULATION THICKNESS IN INCHES FOR PIPE SIZES**

PIPING SYSTEM TYPES	FLUID TEMP. RANGE, (deg. F)	CONDUCTIVITY (Btu-in./(h-ft^2-deg F))	<1"	1" TO <1 1/2"	1 1/2" TO <4"	4" TO <8"	8" TO >8"
HEATING HOT WATER	141-200	0.25-0.29	1.5	1.5	2.0	2.0	2.0
DOMESTIC HOT WATER (120 deg F)	105-140	0.21-0.28	1.0	1.0	1.5	1.5	1.5
DOMESTIC HOT WATER (140 deg F)	141-200	0.25-0.29	1.5	1.5	2.0	2.0	2.0
DOMESTIC COLD WATER	40-60	0.21-0.27	0.5	0.5	1.0	1.0	1.0
a.	Piping in conditioned partitions may have insulation reduced by 1" to a minimum insulation of 1" if piping diameter is less than 1 1/2" See IECC 2018 403.11. Reduced insulation length must be less than 12 ft.						
b.	For piping exposed to outdoor air, increase thickness by 1/2"						
c.	Direct buried Hot water may have insulation reduced by 1 1/2" to a minimum insulation of 1", see IECC 2018 403.11.						

* Runouts not exceeding 12 feet in length to individual terminal units.
** For piping exposed to outdoor air, increase thickness by 1/2".

2.3 MEDIUM PRESSURE DUCTS

A. Medium pressure ducts shall be externally insulated with 1 1/2" thick 1.0 lb. density mineral fiberglass insulation. Insulation shall be furnished with an integral FSK vapor barrier jacket. Insulation shall be applied with edges tightly butted and secured by impaling on pins welded to the duct or on metal clips, previously adhered to the ducts with manufacturer's adhesive. Pins or clips shall be spaced to hold insulated firmly against the duct surface. Where required, insulation on the underside of all horizontal ducts and sloping ducts shall be additionally secured by applying an adhesive. All penetrations shall be sealed with vapor barrier adhesive. All seams shall be covered with 2" wide strips of same insulation facing material adhered with adhesive.

B. All rectangular medium pressure supply air ducts shall be lined per 233000-8.2.35 requirements.

C. All round return air ducts shall be wrapped per 220700-4.2.13.

D. Round exhaust ducts are not required to be wrapped.

E. Round spiral ductwork exposed at occupied areas are not required to be wrapped.

2.4 LOW PRESSURE ROUND DUCTS

A. All round metal ducts shall be wrapped with 1" thick fiberglass duct wrap with factory-applied vapor barrier. All joints shall be sealed with mastic and taped to form a neat and complete insulation system.

2.5 WATER & WASTE PIPING EXPOSED BELOW ADA LAVATORIES AND ADA SINKS

A. Insulate all exposed surfaces with an approved ADA insulation kit as required by lavatory or sink manufacturer. Insulation shall cover tempered water and tempering valve TV-1 at lavatories.

2.6 ROOF DRAIN PIPING

A. Roof drain receivers and roof drain piping (both primary and secondary) except in masonry wall and where buried in the ground, shall be insulated as specified for domestic cold water. Insulation thickness shall be 1".

PART 3 – EXECUTION

3.1 GENERAL

A. The contractor shall provide a complete installation which is neat in appearance and functional.

B. Remove all excess materials and packaging from job site.

C. All insulation shall be continuous thru wall and ceiling openings and thru sleeves.

D. Insulation on all cold surfaces where vapor barrier jackets are used will be applied with a continuous, unbroken vapor seal. Hangers, supports, anchors, etc., that are secured directly to cold surfaces must be adequately insulated and vapor-sealed to prevent condensation.

E. Valves and fittings inside the building shall be insulated as specified for the piping systems and covered with high temperature P.V.C. insulation fitting covers.

F. Fittings and valves for pipe size smaller than 4" shall be insulated and finished with Insulating and Finishing Cement to a thickness equal to the adjoining pipe insulation. Fittings and valves for pipe sizes 4" and larger shall be insulated with segments of the molded insulation secured with No. 20 gage galvanized annealed steel wire finished with a smoothing coat of finishing cement. Vapor seal with a layer of glass fabric embedded between two 1/16" coats of vapor seal adhesive. Lap seal outer jacket at least 1" on itself adjoining insulation.

G. All terminations of insulation ends shall be tapered and covered with finishing cement.

H. In exposed areas, all fittings shall be additionally finished with FSK wrap smoothly adhered. Overlap the FSK wrap on itself and adjoining pipe insulation. Overlap to be at least 1" on pipe insulation below 4" and 2" on sizes 4" and above.

I. Insulation inserts and shields for cold surface piping such as domestic cold-water piping shall be installed at all pipe hangers. Inserts between the pipe and pipe hangers shall consist of calcium silicate block insulation of equal thickness to the adjoining insulation and shall be provided with vapor barrier where required. Insulation inserts shall not be less than the following lengths:

1/2" to 2-1/2" pipe size	6" long
3" to 6" pipe size	9" long
8" to 10" pipe size	12" long

J. Rigid metal shields shall be applied between hangers or supports and the pipe insulation. Shields shall be formed to fit the insulation and shall extend up to the centerline of the pipe and length specified for the insulation hanger inserts.

K. Vapor barrier wrap shall be sealed tight and not penetrated by the hanger or shield.

L. Adhesives, mastics, and coatings shall be applied at the manufacturer's recommended minimum coverage per gallon.

M. Where insulation pipes pass thru sound or fire-rated walls, floors, or ceilings, the insulation sleeves shall be sound or fire-rated to match rating of surface penetrated.

3.2 INSULATION WORKMANSHIP

A. All insulation shall be applied by specialists experienced in the field and shall be neat in appearance. Neatness in appearance shall be equated to proper insulation application procedures, and sloppy workmanship will not be tolerated. Work which is deemed unacceptable shall be condemned, removed, and replaced at the contractor's expense.

B. Protect floors, valve handle, accessories, etc., to keep paste off areas not being insulated.

C. Do not install insulation on pipes which require heat taping without coordinating with mechanical contractor.

3.3 CLEAN-UP

A. The piping shall be cleaned and tested prior to installation of insulation.

B. Fittings shall be cleaned after insulation is installed.

End of section 220700

SECTION 23 0100 - GENERAL PROVISIONS

PART 1 – GENERAL PROVISIONS

1.1 GENERAL CONDITIONS

A. The contractor shall carefully read the General Conditions of the Contract and all information to bidders which, with the following specifications for heating, cooling, plumbing, exhaust ventilation, and temperature control are a part of the Contract.

1.2 BASIC BID

A. Shall include all labor and materials specified in this division. The term "furnish" and/or "install" or similar implication shall mean "furnish and install complete."

1.3 SCOPE OF WORK

A. The work to be done under this section includes the furnishing of all labor, materials, equipment, controls and accessories required to complete all heating, air conditioning, ventilating, plumbing, drainage, heat recovery, and other mechanical systems as shown on plans and/or described in these specifications, including miscellaneous items required to provide a complete and functional facility.

B. Work shall include, but shall not be necessarily limited to, the following:

1. System commissioning
2. Testing
3. Balancing
4. Insulation systems
5. Air distribution system
6. Exhaust systems
7. Automatic control systems
8. Heating Systems
9. Air conditioning systems
10. Plumbing systems
11. Roof drain systems
12. Fire protection systems
13. Automatic temperature control systems
14. Special systems
15. Alternate #2
16. Alternate #3
17. Alternate #4

C. The mechanical contractor shall provide all miscellaneous electrical work and control wiring for special systems where the wiring requirements are provided by the equipment manufacturers and/or suppliers, unless all of the required wiring is clearly shown on the electrical drawings to be provided by the electrical contractor.

1.4 CODES AND ORDINANCES

A. All work shall be installed in accordance with the city, state, and local plumbing codes, and all other codes, ordinances, and regulations which govern the type of work covered by these specifications.

B. Should the drawings conflict with the code, the code shall govern the proper installation of the work, and no extra charge shall be made for such change.

C. Should the contractor perform any work that does not comply with the requirements of the applicable building codes, state laws, local ordinances, industry standards, or utility company regulations, he shall bear all costs arising in correcting the deficiencies.

D. Where the work required by the drawings and specifications exceeds the minimum code requirements, the work shall be done as shown or specified.

E. NOTE: Code compliance, or similar terminology, shall be interpreted to mean "the interpretation of the code as enforced by the local building authority".

1.5 DRAWINGS AND SPECIFICATIONS

A. These specifications are intended to cover all labor, material, and standards of mechanical workmanship to be employed in the work shown on the drawings, called for in these specifications, or reasonably implied by terms of same. The drawings and specifications are intended to supplement one another, and any part of the work that may be mentioned in the one and not represented in the other shall be done the same as if it had been mentioned or represented in both.

B. Large scale drawings shall take precedence over layouts and small-scale details.

C. The mechanical drawings are schematic in nature, and show the general arrangement of all piping, ductwork, mechanical equipment, and appurtenances. They shall be followed as closely as the actual building construction and the work of other trades will permit.

D. ACAD or Revit drawing files will not be provided to contractor for use. PDF's of sheets may be provided by request for coordination purposes.

E. Due to tight structural conditions and space limitations in selected areas the contractor should anticipate structural and space conflicts and shall make allowances for them in his bid. Until the steel fabrication shop drawings are submitted for review, the mechanical coordination cannot be completed.

F. The architectural and structural drawings shall be considered part of the mechanical work insofar as these drawings furnish this Division with information relating to design and construction of the building. Architectural and structural drawings take precedence over the general building layouts and details shown on the mechanical drawings.

G. The structural engineer and architect shall approve all attachments to or modifications of any structural members in the building required for installation of the mechanical systems.

H. Because of the small scale of the mechanical drawings, it is not possible to indicate all offsets, fittings, and accessories which will be required. This contractor shall investigate the structural and finish conditions affecting the work and provide all necessary offsets, fittings, valves, trim, and accessories required to meet actual job-site conditions.

1. Dimensions -
   Verify dimensions governing mechanical work at the building. No extra compensation shall be claimed or allowed on account of differences between the actual job-site dimensions and those indicated on the drawings.

2. Adjoining work -
   Examine all adjoining work on which the mechanical work is dependent and report any work which must be corrected. No waiver of responsibility shall be claimed or allowed due to failure to report unfavorable conditions affecting the mechanical work.

1.6 INTERPRETATION OF DRAWINGS AND DOCUMENTS

A. If any person contemplating submitting a bid for the proposed contract is in doubt as to the true meaning of any part of the plans, specifications, or other proposed contract documents, or finds discrepancies in or omissions from the drawings or specifications, he may submit to the Owner's representative, a written request for an interpretation or correction thereof. The person submitting the request will be responsible for its prompt delivery. Any interpretation or correction of the proposed documents will be made only by addenda duly issued, and a copy of such addenda will be mailed or delivered to each person receiving a set of such documents. The Owner will not be responsible for any other explanations or interpretations of the proposed documents. All questions shall be submitted at least seven days in advance of bidding.

B. The Owner's representative will interpret the meaning of any part of the drawings and specifications about which any misunderstanding may arise, and his decisions will be final. Should there appear to be any error or discrepancy in or between the drawings and specifications, the contractor shall refer the matter to the Owner's representative for adjustment before proceeding with the work. Should the contractor proceed with the work without so referring the matter, he does so on his own responsibility.

1.7 WORKMANSHIP

A. Workmanship shall be the best quality of its kind for the respective industries, trades, crafts, and practices, and shall be acceptable in every respect to the Owner's representative.

1.8 SUBSTITUTIONS

A. See Special Conditions pertaining to Substitutions.

B. Requests for prior approval must be submitted to the owner’s representative a minimum of five working days prior to bid date.

1.9 FEES & PERMITS

A. This contractor shall obtain all necessary permits and pay all fees required in connection with the work.

B. Requirements of the local utility companies shall apply at the time of bidding. Contractor shall have checked with the local utility companies, and shall determine from them all valves, boxes, meter boxes, and meters which they will require to be installed, and shall figure cost of same in his bid. Utility connection fees will be paid by the Jordan School District.

C. Division 22 & 23 contractor shall be responsible for fees, permits.

1.10 SITE INSPECTION AND EXAMINATION OF DRAWINGS

A. The contractor shall carefully study all drawings and specifications pertaining to the work. If any of the work as laid out, indicated, or specified is contrary to or conflicts with any governing ordinances or regulations, the same shall be reported to the Owner's representative before submitting a bid. The Owner's representative will then issue instructions as to procedure.

B. The contractor shall carefully examine the building site and compare the drawings with existing conditions. By the act of submitting a bid, the contractor shall be deemed to have made such examination, to have accepted such conditions, and to have made allowance therefore in preparing his bid.

1.11 VERIFICATION OF DIMENSIONS

A. Before proceeding with any work, the contractor shall carefully check and verify all dimensions, sizes, etc., and shall assume full responsibility for the rigging and fitting-in of his ductwork, piping, and equipment. Where apparatus and equipment has been indicated on the drawings, dimensions have been taken from typical equipment of the class indicated. The contractor shall carefully check the drawings to see that the equipment he is required to install will fit into the spaces provided and will allow for proper maintenance and service of the equipment.

1.12 COORDINATION

A. This contractor shall coordinate his work with other specification divisions and shall provide all necessary specialty items, trim, and incidental 115 volt and 24-volt power and control wiring (which is not shown or specified under other divisions) required to provide a complete functional acceptable system.

B. The Division 22 & 23 contractor shall coordinate his work such that all slots and openings through floors, walls, ceilings, and roofs are properly located and shall do any cutting and patching caused by neglecting to do so.

1. Furnish sleeves, inserts, supports, and equipment that are to be installed by others in sufficient time to be incorporated into the construction as the work proceeds.
2. It is the responsibility of Division 22 & 23 to locate these items and see that they are properly installed.

C. The locations of all piping, ducts, apparatus, and equipment indicated on the drawings are approximate only, and shall be changed as required to meet the actual architectural and structural conditions at the job site. All changes shall be approved by the Owner's representative. Any change in work which has not been installed shall be made by the contractor without additional compensation, except changes which are caused by architectural and structural changes which substantially increase the size of any of the mains, or which substantially increase the number of fixtures or length of pipe runs. Any and all changes shall be made only upon approval of a written change order.

1. Right of way - Lines which pitch shall have the right of way over those which do not pitch. For example, plumbing drains shall normally have right of way. Lines whose elevations cannot be changed shall have right of way over lines whose elevations can be changed.
2. Offsets, transitions, and changes in direction in pipes and ducts shall be made as required to avoid conflicts with building footings and foundations or other buried ducts or utilities, and to maintain proper head room and pitch of sloping lines whether or not indicated on the drawings. Furnish and install all traps, air vents, sanitary vents, and devices as required to affect these offsets, transitions and changes in direction.

D. It shall be each contractor's responsibility to verify exact location, elevation, and/or route of the various mechanical system components with architectural details and with Owner's representative's personnel on job.

E. Where deviations from locations and/or arrangements described are necessary to meet actual job conditions, the changes shall be made without cost to the Owner.

F. The Owner's representative reserves the right to make any reasonable change in location of any outlet, piping, or equipment, before installation, without additional cost.

1.13 LOCATION OF CEILING OUTLETS:

A. This contractor shall assist the Owner's representative, General Contractor, Electrical Contractor and other interested parties in the establishment of room centerlines, axis of rooms and all walls.

B. All grilles, registers, ceiling diffusers, etc. shall be located with reference to these established data points.

C. These outlets shall be referenced to such features as room centerlines, walls and ceiling furrings, balanced border widths, etc.

D. Outlets in acoustical tiles, panels, etc. shall occur in joints or centers of whole pieces, etc.

E. The final determination of the exact location of all outlets shall be subject to the direction and approval of the Owner's representative.

1.14 RECORD DRAWINGS

A. The contractor shall maintain one set of record drawings. These prints shall show the location, elevations and details of all items of work installed under this contract. Buried piping shall be located by dimensions from foundation walls and depths of bury shall be indicated. These shall be marked in red. The completed set of record drawings must be submitted to the Owner's representative before the contractor is eligible to receive the final payment. An up-to-date record set of drawings shall be maintained during the progress of the project and be available to the Owner's representative upon request.

1.15 COORDINATION DRAWINGS

A. The contractor shall provide coordination drawings, when requested by the Owner's representative, to ensure that the various mechanical system components are coordinated with each other, and with other building systems.

B. The coordination drawings shall be drawn to scale (usually 1/4" = 1'-0") and shall show all systems as they relate to each other, especially in areas of potential conflict.

C. This set of foundation coordination drawings shall be maintained in the construction trailer and shall be marked up daily to indicate exact location and elevation of all buried piping and conduit systems.

D. Coordination drawings shall be professionally drafted and shall be clear and concise in their presentation and clarity.

E. All coordination drawings shall be prepared in digital format – Latest Version of Revit. Material shall be submitted in digital format.

F. All ductwork and piping attachments to the building structure shall be detailed and shall be coordinated with the Owner's representative.

1.16 COOPERATION WITH OTHERS

A. The contractor shall so organize the work that progress will harmonize with the work of all trades, so that all work may proceed as expeditiously as possible. The contractor shall be held responsible for any delays which might be caused by his negligence or failure to cooperate with other contractors or crafts.

1.17 FOREMAN

A. A full-time foreman shall be designated by the contractor to the Owner's representative and shall be available on site for consultation. This individual, when appointed, will not be replaced without prior approval from the Owner's representative. The foreman shall be responsible for the coordination and correct placing of the work.

1.18 GUARANTEE

A. By the acceptance of the contract award for the work herein described, the contractor assumes the full responsibility imposed by the guarantee as set forth herein and should protect himself through proper guarantee from equipment and specialty manufacturers and subcontractors as their interests may appear.

B. All materials and equipment provided and installed under this division of the specifications shall be guaranteed for a period of one (1) year from the date of substantial completion and acceptance by the Owner, unless specifically noted elsewhere in the specification. Should any trouble develop during this period due to defective materials or workmanship, the contractor agrees to correct the trouble without any cost to the Owner, any defect noticed at the time of installation and/or during the guarantee period shall be corrected immediately to the satisfaction of the Owner.

1.19 SCHEDULES, MATERIALS AND EQUIPMENT

A. As soon as practicable, and within 30 days after date of award of contract, and before commencement of work, a complete schedule of equipment and materials proposed for installation shall be submitted to the Owner's representative. The schedule shall include catalogs, cuts, drawings, and such other descriptive data or samples that are requested by the Owner's representative. Schedules shall include all items of equipment used. No partial submittals will be accepted.

B. Provide corrected copies of each required shop drawing or similar submittal to the Owner's representative for review and approvals. DO NOT SUBMIT without general contractor's signed stamp, indicating the general contractor has reviewed the submittal for completeness and conformance to the Contract Documents.

C. Inform the Owner's representative by notation, or in the letter of transmittal, of any proposed deviation from the requirements of the Contract Documents.

D. Provide required shop drawings or other submittals within time stipulated on approved progress schedule.

E. Do not commence work requiring a shop drawing or other submittal until approval of the required submittal has been received. Such approval will be based upon a review only for conformance with the design concept of the project and with the information given in the Contract Documents and does not relieve the contractor from responsibility for errors or omissions in the shop drawings.

F. Schedules shall be neatly bound in digital format. Schedules shall be completely indexed, and shall include the following items:

1. Valves
2. Piping systems
3. Pipe supports & restraints
4. Plumbing fixtures
5. VAV re-heat boxes
6. Exhaust air fans
7. Low pressure flexible ducts

8. Grilles & registers
9. Diffusers
10. Insulation systems
11. Automatic temperature controls
12. Air balance contractor qualifications
13. Fire safing system with installation diagrams
14. Other schedule items

G. Submittals received which do not contain all of the above items will be returned unchecked.

H. Purpose and Contractor's Responsibility:

I. The purpose of the final submittal is to "assist the contractor selecting the equipment." The contractor shall review the submittals prior to submission to the Owner's representative to make sure that the submittals are complete in all details including the following items:

1. Manufacturers' names shall be mentioned in specifications as accepted by Owner at time of bidding.
2. Equipment dimensions shall be verified to fit the spaces provided with sufficient clearances, as may be required by the equipment or indicated on the drawings.
3. Equipment shall be reviewed with respect to schedules, specifications, plans and details.
4. Equipment submittal sheets shall be clearly marked indicating equipment symbol and exact selection of proposed equipment.

J. Review:

1. Review and acceptance of submittal does not relieve the contractor of his responsibility to fulfill the contract requirements. Review and acceptance of the submittal will not be used as a means of changing the contract requirements. Items not covered in the accepted submittal, or items incorrectly covered but not recognized or identified, shall not be used when contrary to the requirements of the contract documents.

K. Acceptance of Substitute Equipment:

1. If the proposed installation is approved, this contractor shall make all incidental changes in piping, ductwork, supports, installation, wiring, heaters, panel boards, and as otherwise necessary. Provide any additional motors, valves, controllers, fittings, and other additional equipment required for the proper operation of the system resulting from the contractor's selection of alternate equipment, including all required changes in the effected trades.

L. Owner's Refusal Right:

1. In the event that items submitted are substitutions for specified items and are found to be not acceptable, the right shall be reserved to require the specified items.

1.20 OPERATING INSTRUCTIONS AND CATALOG INFORMATION

A. This prime Division 23 contractor shall compile in digital format, catalogs of every product used by him and subcontractors in the completion of the work. The catalogs shall also include copies of the test data (Section 230501), balancing reports (Section 230593), and system commissioning data (Section 230800). Before final acceptance by the Owner's representative, he shall turn over to the Owner this compilation of catalog data. A double index shall be provided, one giving an alphabetical list of products for which catalogs are included, and one giving their addresses, whose products are included in the work. Provide data for each item of equipment listed in SCHEDULES, MATERIALS & EQUIPMENT, as shown in Section 230100. Provide copy of submittal data. All products shall be assembled by Division.

B. (1) digital copy shall be delivered to the Owner's representative for his approval.

C. Provide warranty schedule and schedule of overload protection as required in Section 230800.

D. Manuals not in compliance will not be reviewed and will be rejected.

E. Catalog shall be identified as listed.

JSD RIVERTON ELEMENTARY SCHOOL REMODEL
JORDAN SCHOOL DISTRICT
OPERATING & MAINTENANCE MANUAL
2024
SET #

PART 2 – PRODUCTS

2.1 MATERIALS, EQUIPMENT AND ACCESSORIES

A. Unless otherwise specified, all equipment, accessories, and materials shall be new and undamaged, and the workmanship shall be of the best quality for the use intended and shall be acceptable to the Owner's Representative.

B. Equipment, accessories, and materials shall be essentially the standard products of the manufacturer, or as specified herein. Where two or more units of the same class of new equipment are required, these units shall be products of a single manufacturer.

C. Should mechanical equipment other than that used in the design be furnished, it shall be the responsibility of the mechanical subcontractor to provide large scale (1/2" = 1'-0") installation drawings, as required, showing service and maintenance points with proper clearance allowances for service.

D. All equipment shall be selected to deliver full rated capacity at the job site elevation.

PART 3 – EXECUTION

3.1 FUNCTIONING AND OPERATION OF EQUIPMENT

A. Contractor's Responsibility:

Installation and startup shall be so made that its several component parts will function together as a workable system and shall be left with all equipment properly adjusted and in working order.

3.2 CLEANING AND PATCHING BY MECHANICAL CONTRACTOR

A. The contractor shall remove all stains or grease marks on walls, floors, glass, hardware, fixtures, or elsewhere, caused by his workman or for which he is responsible. He shall remove all stickers on plumbing fixtures, do all required patching up and repair all work of others damaged by this division of the work, and leave the premises in a clean and orderly condition.

3.3 INSTRUCTIONS TO OWNER'S REPRESENTATIVES

A. The mechanical contractor shall provide, without expense to the Owner, competent instructors to train the Owner's representatives in the care, adjustment, maintenance, and operation of all parts on the heating, air conditioning, ventilating, plumbing, and automatic temperature control systems and equipment. Training shall be a minimum of 8 hours with no less than 2 hours for ATC training.

B. An additional 4 hours shall be provided by all mechanical sub-contractors to walk thru building with Jordan School District representative to verify operation of all Division 22, 23, & 25 items and control sequencing.

C. Instruction date shall be scheduled with the owner at the time of final inspection. A written report specifying times, dates, and name of personnel instructed shall be forwarded to the Owner's representative.

D. No training shall begin until system commissioning is complete and accepted by the owner.

3.4 PROTECTION AGAINST THE ELEMENTS

A. The contractor shall, at all times, take reasonable and adequate precautions to protect his work and all stored materials and equipment from damage by the elements, including flooding, windstorms, etc., and shall not expose the work of any other contractor to such damage.

B. In addition to requirements specified in Division 01, stored material shall be readily accessible for inspection by the Owner's representative until installed.

C. All items subject to moisture damage, such as controls, shall be stored in dry, heated spaces.

D. Protect all bearings during installation, and thoroughly grease steel shafts to prevent corrosion.

3.5 REMOVAL OF DEBRIS, ETC.

A. Upon completion of this division of the work, remove all surplus material and rubbish resulting from the work, and leave the premises in a clean and orderly condition.

3.6 MOTORS & STARTERS

A. This contractor shall furnish all motors required and necessary to operate equipment furnished by him. The voltage, phase, and horsepower of each motor shall be coordinated with the electrical contractor prior to ordering.

3.7 OPENINGS FOR MECHANICAL SYSTEMS

A. All openings required for installation of mechanical systems shall be provided by the mechanical contractor. Any piece of equipment which is to be installed in any space of the building and which is too large to permit access through stairways, doorways or shafts shall be brought to the job by the Contractor involved and placed in the space before the enclosing structure is completed. Materials shall be delivered at such stages of the work as will expedite the work as a whole.

3.8 SAFETY REGULATION

A. The contractor shall comply with all local and OSHA safety requirements in performance with this work. (See General Conditions). This contractor shall be required to provide equipment, supervision, construction, procedures, and all other necessary items to assure safety to life and property.

3.9 OWNER FURNISHED EQUIPMENT

A. This contractor shall include in his bid the necessary labor and material to properly coordinate and install the required piping, trim, specialties, controls, ductwork, and other necessary utilities and services to equipment furnished by the Owner.

B. This contractor shall relocate (where noted), rough-in and make final connections to owner furnished equipment.

C. See bid documents for a list of owner furnished equipment which is not otherwise identified on the mechanical drawings or in the mechanical division of the specifications.

End of section 230100

SECTION 23 0501 – TESTING

PART 1 – GENERAL

1.1 DESCRIPTION

A. The work outlined in this section shall be performed by the several trades involved.

B. The mechanical contractor shall provide all supervision, labor, materials, tools, scaffolding, and equipment required to complete all system testing.

C. The mechanical contractor shall remove and repair any defective component as indicated by the system tests and retest.

D. The mechanical contractor shall test the operation of all safety and high limit controls to insure proper installation and operation. Any defective devices shall be replaced.

1.2 TESTS AND ADJUSTMENTS

A. Before any piping is covered, tests shall be made in the presence of the Owner's Representative, and any leaks or defective work corrected. No caulking of threaded work will be permitted.

B. Before application of insulation covering, and as far as practical before concealing any piping, all piping shall be hydrostatically tested and proved tight.

C. Stubs shall be capped, and all control valves shall be removed during the test.

D. System may be tested in sections, providing connections to last section tested are included in each succeeding test.

E. Following minimum pressures shall be used for testing:

1. Domestic hot, re-circulating and cold-water piping at 150 psig for six hours.
2. Plumbing waste and vent piping at 10 ft. head for six hours.
3. Rainwater piping at 10 ft. head for six hours.
4. Medium pressure air ducts in accordance with SMACNA standards.
5. Low pressure air ducts in accordance with SMACNA standards
6. Heating hot water system piping at 150 psig for six hours.
7. Natural gas piping at 150 psig for six hours.
8. Fire protection system piping at 150 psig for six hours

F. All valves and equipment which may be damaged shall not be subjected to the test pressure.

G. 230501 contractor shall perform all duct pressure tests per specifications and owner requirements.

PART 2 – PRODUCTS

2.1 EQUIPMENT

A. The contractor shall furnish all necessary gauges, plugs, test fans, pumps, etc., as required to conduct the tests.

2.2 REPORTS

A. The contractor shall give the Owner's Representative one week notice prior to performing the tests. All tests shall be recorded, and copies of reports bound in the O & M manuals and given to the Owner.

PART 3 – EXECUTION

3.1 PROCEDURE

A. The contractor shall be responsible to conduct all tests in a safe manner, protecting the work of other trades from water or physical damage.

B. The tests, as indicated, shall be in addition to any test, as required, by any governing agency. Submit all approved tests, as required, by any governing agency to the Owner's representative.

C. Each test and any necessary repairs and retest shall be performed by the contractor which installed the system.

D. Upon completion, a test shall demonstrate that the culinary hot water system is circulating, that all traps are properly vented, that there is an ample supply of hot and cold water to fixtures, that no fixture or equipment can be back siphoned, and that there are no back-flow connections.

End of section 230501

SECTION 23 0593 – BALANCING

PART 1 – GENERAL

1.1 SCOPE OF WORK

A. The mechanical contractor shall employ an independent technical firm to perform the checking, adjusting, and balancing (CAB) of the HVAC systems. This firm shall be one whose operations are limited to the field of professional CAB, and this firm shall meet the following qualifications:

1. The firm shall be a member of AABC and/or NEBB.
2. The firm shall be one which is organized to provide professional services of this specific type.
3. The firm shall have completed projects of similar scope within the past 12 months and shall be capable of performing the services specified at the location of the facility described within the time frame specified and following up the basic work as may be required.
4. All personnel used on the job site shall be engineering technicians, who shall have been permanent, full-time employees of the firm for a minimum of six (6) months prior to the start of the work for this project.
5. **Preferred contractors shall be Certified Test & Balance, Diamond Test & Balance, Independent Test & Balance, BTC Services, RSAnalysis and Bonneville test & Balance.**

B. As a part of this contract, the mechanical contractor shall make all changes in the sheaves, belts, and dampers, including the addition of dampers required for correct balance as required by the CAB firm, at no additional cost to the Owner.

C. The mechanical contractor shall provide, and coordinate services of qualified, responsible subcontractors, suppliers, and personnel as required to correct, repair, or replace any and all deficient items or conditions found during the testing, adjusting, and balancing period.

D. In order that all systems may be properly checked, balanced, and adjusted as required by these specifications, the mechanical contractor shall operate said systems at his expense for the length of the time necessary to properly verify their completion and readiness for the CAB and shall further pay all costs of operation during the CAB period.

E. The project completion schedule shall be coordinated with the CAB work to provide sufficient times to permit the completion of CAB services prior to Owner occupancy.

1.2 DOCUMENTS

A. The Owner's representative will furnish, without charge to the CAB firm, one set of mechanical specifications, all pertinent change orders, and the following:

1. One complete set of plans less structural sheets.
2. One set of mechanical floor plans of the conditioned spaces.

B. All documentation shall be provided in digital format for review and incorporated into O&M Manuals.

C. Approved submittal data on equipment installed to accomplish the test procedures outlined in paragraph "Services of the CAB Firm" of this specification will be provided by the mechanical contractor.

D. The Owner's representative will transmit one copy of the following "Records for Owner" to the CAB firm for review and comments:

1. Record drawings
2. Approved fixture brochures, wiring diagrams, and control diagrams.
3. Shop drawings
4. Instructions
5. Motor and valve charts
6. Operating and Maintenance Manuals

1.3 SERVICES OF MECHANICAL CONTRACTOR

A. The mechanical contractor shall have all systems complete, calibrated, and in operational readiness prior to notifying the CAB firm that the project is ready for their services. The mechanical contractor shall coordinate system readiness with the system commissioning contractor and shall certify in writing to the Owner's representative that the system is complete and ready to balance.

1.4 SERVICES OF THE CAB FIRM

A. The technical CAB firm shall submit biographical data on the individual proposed to directly supervise the CAB work. It shall also submit their record of specialized experience in the field of air and hydronic system balancing.

B. Act as liaison between the Owner's representative and contractor and periodically inspect the installation of mechanical piping systems, sheet metal work, temperature controls and other component parts of the heating, air conditioning and ventilating systems as the installation progresses. The inspection will cover only those parts of the systems relating to the checking and balancing.

C. To check, adjust, and balance system components to obtain optimum conditions in each conditioned space in the building.

D. Re-balance of existing equipment and air systems.

E. Prepare and submit to the Owner's representative, complete reports on the balance and operations of the systems.

F. The CAB firm shall be responsible for inspecting, adjusting, balancing, and logging the data on the performance of the following general systems, including all components.

1. Heating water systems, including coils, controls, etc.
2. Exhaust air systems
3. New kitchen make-up air system.
4. New air distribution systems.
5. Existing air distribution systems as noted.
6. New VAV re-heat boxes. Air flow, water flow and controls.
7. Existing VAV re-heat boxes. Air flow as noted.
8. Freon compressor systems, including coils, controls, etc.
9. Temperature control system in its entirety includes the verification of all control sequences and safety devices.

G. Before any adjustments are made, the air systems are to be checked for such items as dirty filter, duct leakage, damper leakage, equipment vibrations, correct damper operations, etc.

H. Before any adjustments are made to water systems, the strainers shall be cleaned, temperature control valve operation shall be checked, pump rotation shall be checked, pressure reducing valves shall be adjusted, etc.

I. It shall be the responsibility of the CAB personnel to check, adjust, and balance the components of the various systems as listed above using an applicable "proportionate balance procedure" in order that each of them will operate under optimum noise, temperature and air flow conditions in the conditioned spaces in the building "while simultaneously operating at the most energy efficient condition."

J. During the balancing process, if abnormalities or malfunctions of equipment or components are discovered by the CAB personnel, the owner's representative shall be advised promptly so that the condition may be corrected by the project contractor. Data from malfunctioning equipment or components shall not be recorded in the final CAB report.

PART 2 – PRODUCTS

2.1 EQUIPMENT AND INSTRUMENTS

A. This contractor shall provide all necessary labor, equipment, scaffolding, instruments, and materials required to adjust, balance, and check all systems.

PART 3 – EXECUTION

3.1 REPORT

A. The activities, as described hereinbefore, will culminate in a report to be provided to the Owner's representative. This report shall be furnished in six (6) copies. One copy shall be bound in each O & M manual. The intent of the final report is to provide a reference of actual operating conditions for the building operating personnel.

B. The CAB report shall include the following as a minimum:

1. Preface:

   A general discussion of the systems, any idiosyncrasies, any problems encountered, an outline of normal sequence of operation for the HVAC system cycles, any un-corrected noise problem.

2. Pitot Tube Traverses:

   For use in future trouble-shooting by maintenance personnel, all exhaust ducts, main supply ducts and return ducts will have air velocity and volume measured and recorded by the traverse method. Locations of these traverse test stations will be described on the sheet containing the data.

3. Temperature Tabulation:

   Of all conditioned spaces on a room-by-room basis, a total of at least three readings will be taken of each room on successive days. Record outside ambient temperature at two-hour intervals. The total variation in conditioned space temperatures shall not exceed 2 deg. variance from the thermostat settings.

4. Air Volumes and Velocities:

   As measured at each supply grille, return air grille, and exhaust air grille or air handling device. In all fan systems, the air quantities indicated on the plans may be varied as required to secure a maximum temperature variation of two degrees within each separately controlled space, but the total air quantity indicated for each zone must be obtained. It shall be the obligation of the contractor to furnish or revise fan drive and/or motors, if necessary, without cost to the Owner, to attain the specified air volumes.

5. Air Pressure:

   As measured across each supply fan, cooling coil, heating coil, air handling unit filter and exhaust fan. Relate these readings to the particular fan curve in terms of CFM handled at the various static pressures, and their relationship to fan power and fan instability.

6. Electrical Current/Voltage:

   Measurements to be taken at the drive motor on each piece of equipment.

7. Fan Speeds:

   To be measured in RPM.

8. Instrumentation List:

   A list of instruments by type and make used in gathering the CAB data.

9. Drawings:

   The CAB contractor's working drawings shall have the VAV, and supply air openings numbered and/or lettered to correspond to the numbers and letters used on the report data sheets so that data in the report can be correlated with each specific supply air opening in the building. If room numbers actually used in the building differ from those on the plans, the building room numbers shall be marked on these plans. Only one such marked-up set of drawings need be provided with the six copies of the CAB report.

C. Before final acceptance of the CAB report, the report data, at the discretion of the Owner's representative, shall be verified one time on the job site, by selection of check points (not to exceed 10 percent of total) at random, in the presence of the Owner's representative. Representatives of the testing firm doing the work shall be present and provide the necessary equipment for test data verification.

D. The firm shall be responsible for inspecting, adjusting, balancing, and logging the data on the performance of fans, all dampers in the duct system, all air distribution devices, the flows of freon or water thru all coils, and the power consumption of all motors.

E. During the CAB work, the temperature regulation will be adjusted for proper relationship between controlling instruments. The Owner's representative will be advised of any instruments out of calibration so that the controls subcontractor may come in and recalibrate, using data supplied by the balancing firm.

F. Make a total of two inspections within ninety (90) days after occupancy of the building to ensure that satisfactory conditions are being maintained throughout and to satisfy any unusual conditions.

G. An additional inspection in the building shall be made by the firm during the season opposite that in which the initial adjustments were made. At that time, any necessary modifications to the initial adjustment required to produce optimum operation of the system components shall be made to produce the proper seasonal conditions in each conditioned space.

H. At the time of opposite season checkout, the Owner's representative shall be given timely notification before any readings or adjustments are made so that they may participate in the checkout.

End of section 230593

SECTION 23 0900 - BASIC MATERIALS AND METHODS

PART 1 – GENERAL

1.1 DESCRIPTION

A. This section specifies the basic materials and methods to be used in Division 21, 22, 23 & 25 work.

1.2 MATERIALS & EQUIPMENT

A. All materials shall be new and undamaged. Protect all stored materials and equipment from damage by the elements, including exposure to excessive heat, flooding and rain, windstorms, etc.

B. All materials and equipment shall be installed in strict compliance with the manufacturer's recommendations.

1.3 CUTTING AND PATCHING

A. Any cutting, patching, or filling necessary for the proper execution of this work, except as noted on drawings, shall be done by this contractor.

B. No rough or unsightly work will be allowed. Cutting of structural members shall be done only on approval of the Owner's representative.

C. The attention of the contractor is directed to the requirements of running pipes thru concrete slabs, walls, and beams. These conditions are to be anticipated and sleeves installed as provided for under "Sleeves".

1.4 INSERTS

A. Furnish and set, in all necessary locations, before or during construction, Unistrut inserts for use in connection with the support and seismic restraint of piping, ductwork, and equipment furnished under this division of the work.

1.5 SLEEVES

A. Sleeves for Concrete or Masonry Surfaces:

1. For pipes passing thru masonry or concrete construction, provide sleeves at least two pipe sizes larger than the pipe passing thru and made from sections of steel pipe.

B. Provide galvanized iron sleeves with collar on each side of wall for all ducts passing thru masonry or concrete construction.

C. Provide 22-gauge sheet metal collars on each side of wall for all ducts passing thru gypsum wall construction or similar construction.

D. Sleeves shall be placed in structural members only where approved by the Owner's representative.

E. Sleeves through foundation walls below grade shall be mechanical seal type with watertight sealing grommets and pressure rings. Sealing grommets shall be non-melting at temperatures incurred. Foundation wall sleeves shall be "O.Z. Type WSK".

F. Sleeves thru Finished Surfaces:

For pipes passing thru finished partitions or ceilings, provide galvanized sheet iron sleeves of suitable size. The sleeves shall be fastened to construction to prevent creep along pipe and the sleeve ends shall be flush with finished surfaces. Provide escutcheon plates at each side of finish wall or floor or ceiling for all pipes passing thru same.

1. Sleeves thru Fire-rated Surfaces:

All pipe sleeves and ductwork penetrating fire walls and surfaces shall be packed inside after pipes and/or ducts have been placed with a U.L. listed fire safing system. Contractor shall submit to the Owner's representative for review and approval specific installation diagrams showing exact method(s) to be used.

2. Sleeves thru Sound Rated Surfaces:

All pipe sleeves and ductwork penetrating sound rated walls or surfaces shall be packed with dense fiberglass, sealed with duct sealer and fitted with metal cover flanges on both sides.

3. Sleeves thru Floors:

Sleeves thru floors above grade shall extend 1" above the floor and shall be sealed watertight with waterproof silicone caulking.

G. **All penetrations must be sleeved, or core drilled/cut. Hammer drill is not an acceptable means.**

1.6 PIPING & DUCTWORK SUPPORT

A. Steel roof deck shall not be used to support loads from plumbing, HVAC ducts, light fixtures, architectural elements or equipment of any kind, unless specifically noted otherwise. Lightweight suspended acoustical ceilings with a total weight per wire not exceeding 50# may be hung from the steel roof deck. The hangers should be staggered to distribute the load over multiple deck flutes.

B. Bracing of miscellaneous items (mechanical, electrical, plumbing, etc.) to the bottom chord of joists or girders will not be allowed in any instance. All lateral braces must connect to the top flange/top chord of the framing member above unless noted otherwise on the structural drawing.

C. It is essential that all piping be supported from roof structure at joist within 6” of panel point location and from top or bottom chord of floor or roof joist.

1.7 PIPE LOCATION AND ARRANGEMENT:

A. All piping shall be properly racked and supported to run straight and true.

B. All changes in direction shall be made with approved fittings. Pipes shall not be bent to change direction.

C. All piping shall be racked and run to facilitate maintenance work. Under no circumstances shall valves, shock absorbers, drip traps, or piping specialties be installed in a "closed space" without proper access provided for future maintenance. See "Access Doors" section of specifications.

D. NOTE: All piping shall be capped or plugged at the end of each work shift and when not being extended, to prevent the entry of rocks and debris.

E. Any timelines are broken or disconnected, they shall be capped immediately after flushing to remove rock and debris from pipes. If rocks or other foreign materials are found in the system after it has been closed, the contractor shall stand the expense of their removal.

F. All valves, piping, and equipment to be installed to permit disassembly for maintenance purposes.

G. Provide drain valves at all low points in piping systems. Run to floor drain where possible, otherwise

1.8 VERIFICATION OF INSTALLATION

A. At time of final inspection contractor shall provide a color video tape of all new 3" and larger buried storm sewer and sanitary sewer lines both inside and outside to 5'-0" beyond the building line as well as lines 5'-0" beyond the sampling manhole.

B. Video must be taken after installation is complete to ensure that line is installed properly with no low spots, separations, etc. Video shall also ensure that all connections have been made properly and that no debris remains in piping system. Building owner shall be notified to witness video.

C. Provide a final digital video. Video quality must be able to allow to distinguish all pipe joints, turns, fittings, etc. to assure pipe system is clean, connected properly and no low spots.

D. All areas shall be clearly identified on video to directly relate to project 'Record Drawings'

1.9 PIPE JOINING

A. **All steel pipe under 2" in size shall be joined by screwed connections. Heating hot water piping <u>shall</u> <u>be</u> welded if pipe size is over 2" in size.**

B. Welded ends shall be plain beveled. Welding fittings must be employed if welding is used. Small (1-1/2" and smaller) branch connections may be made with Weldolets or Thredolets provided the main is at least 2" dia., and not less than two pipe sizes larger than the branch. Where these connections are used, the pipe opening in the main shall be cut to insure a full inside pipe diameter at the branch connection. Slag and spelter resulting from the hole cutting shall be removed from the main piping.

C. All joinings shall be made to maintain the full metal strength of the pipe, with neat and workmanlike appearance.

D. All piping must be perfectly clean before the system is filled.

E. Copper Piping in Domestic Water Service: Piping shall be cut (with a pipe cutter) so ends are square and will "bottom" in fittings. There must be no gaps left thru which solder can run into the line. If a hack saw must be used, it shall be guided with a miter box to ensure a square, even cut. Tubing shall be reamed to remove burrs, being careful not to expand tubing while reaming.

F. The outside of the copper pipe and the inside of the fittings, where solder will be applied, shall be burnished with fine crocus cloth or fittings brushes until all dirt and oxide is removed.

G. A light coat of soldering flux shall be applied to both pipe and fittings. Acid flux shall not be used.

H. Joints in copper pipe shall be uniformly heated to proper soldering temperature to ensure that solder will flow to all parts of the joint. The solder shall be fed to the joint until a uniform line of solder appears around the pipe at the end of the fittings.

I. Copper piping used in domestic water service shall be joined with 'Stay-Safe-50' or 'Silvabrite-100' no lead solder.

J. When valves are being installed in copper piping, the non-metallic parts shall be removed to prevent the heat of soldering from damaging the valves. No heat shall be applied near where an excessive temperature may cause damage.

K. All domestic copper piping 3" and larger shall be brazed.

L. All HVAC copper piping 3" and larger shall be brazed.

M. Qualification of Welders: Welders performing work under this Contract shall be certified and qualified in accordance with tests prescribed by the National Certified Welding Bureau (NCWB) or by other approved test procedures using methodology and procedures covered in the ASME Boiler and Pressure Vessel Code, Section IX, "Qualification Standard for Welding and Brazing Procedures, Welders, Brazers, and Welding and Brazing Operators."

N. Submit for approval the names, identification, and welder's assigned number, letter or symbol of welders assigned to this project.

O. The assigned identification symbol shall be used to identify the work of each welder and shall be indelibly stamped immediately upon completion of each weld.

P. Welders shall be tested and certified for all positions.

Q. Submit identifying stenciled test coupons made by each operator.

R. Any or all welders may be required to retake welding certification tests without additional expense. When so requested, a welder shall not be permitted to work as a welder on this project until he has been recertified in accordance with NCWB.

S. Recertification of the welder shall be made after the welder has taken and passed the required tests.

T. Where piping 1-1/2 inches and smaller is to be butt or socket welded, submit 3 samples of test welds for approval.

1.10 SCREWED CONNECTIONS

A. All pipe shall be reamed at the ends and free of all inside scale or burrs. Threads shall be cut clean and sharp, and to a length equal to 1-l/8 the length of the female thread receiving the pipe. The pipe shall be screwed in the full length of the female thread.

B. Pipe shall be made tight with teflon thread tape or thread lubricant worked into male thread only. Surplus material shall be wiped off and the joint left neat and clean. Lubricant shall be powdered graphite and linseed oil, or plumbage and linseed oil.

1.11 PIPE GRADING

A. Piping shall be uniformly graded in direction of flow as noted below:

PIPING	FALL/RISE	DIRECTION	PER/RUN
Water	1"	Up	40'
Waste - 4" & smaller	1"	Down	4'
Vent	1"	Up	4'
Rainwater	1”	Down	8’
Heating Water Glycol	1”	Up	40’
Natural Gas	1”	Down	40’
Condensate Drip	1"	Down	4'

1.12 EQUIPMENT BASES

A. Roof curbs shall provide a free height from the roof membrane to the top of the curb of at least 12" minimum. All roof curbs and platforms shall have a wood nailer strip around the top perimeter for securing the roof membrane and attaching roof flashings. All equipment mounted on roof curbs shall be installed level. Flashings by Division 7.

B. Roof curbs shall be attached to building structure as required by the IMC and local codes.

PART 2 – PRODUCTS

2.1 PIPING SYSTEMS

A. All piping shall be in accordance with the American Society for Testing and Materials, ASTM A-53. No foreign made piping or connectors will be accepted in this construction.

B. Culinary cold, hot, and recirculating hot water above grade shall be Type "L" copper with soldered wrought copper fittings. Pull-T type fittings on copper piping are not allowed.

C. All rainwater piping at canopy shall be standard weight DWV schedule 40, solid core PVC ASTM F 1488 piping.

D. All buried waste and vent piping below slabs shall be standard weight DWV schedule 40, solid core PVC ASTM F 1488 piping.

E. Rainwater, waste and vent piping above grade shall be standard weight cast iron pipe with no-hub, tyseal, M-G, or A.B.I. 'Best' gasketed fittings for sizes 2" and larger; and galvanized Schedule 40 with tarred Durham drainage fittings for 1-1/2".

F. All cast iron pipe and fittings, below and above ground, shall bear the collective trademark of the Cast Iron Soil Pipe Institute, or have prior approval of the engineer.

G. Heating hot water piping system above grade shall be Schedule 40 black steel pipe. All piping 2-1/2" and larger shall be welded.

H. All fire sprinkler piping shall be schedule 40 black steel. All piping and fittings shall be U.S. manufacture. Thin wall and schedule 40 equivalent piping will not be allowed.

I. Gas lines shall be Schedule 40 black steel pipe. Fittings shall be standard black malleable screwed, or standard welding fittings where welding is required. All gas lines shall be installed in strict compliance with the local fuel supply company requirements. Buried piping shall be coated or wrapped.

2.2 HANGERS AND SUPPORTS

A. Vertical Piping:

Attachment - Vertical piping shall be secured at sufficiently close intervals to keep the pipe in alignment and to carry the weight of the pipe and contents. Stacks shall be supported at their bases, and if over two (2) stories in height at each floor by approved metal floor clamps.

B. Cast iron soil pipe shall be supported at not less than each story height and at its base.

C. Screwed pipe (IPS) shall be supported at not less than every other story height.

D. Copper tubing shall be supported at each story for piping one and one-half (1-1/2) inches in diameter and at not more than six (6) foot intervals for piping one and one-quarter (1-1/4) inches in diameter and smaller. Piping shall be wrapped with three wraps of vinyl tape to isolate pipe from ferrous pipe supports.

E. Horizontal Piping:

Under no circumstances shall piping be supported from the roof deck.

F. It is essential that all piping be supported from top chord of roof structure at joist panel point locations. Coordinate with structural requirements.

G. Supports - Horizontal piping shall be supported at sufficiently close intervals to keep it in alignment and prevent sagging.

H. Cast Iron Soil Pipe - Where joints occur, soil pipe shall be supported at not more than 5-foot intervals, except that where 10-foot pipe lengths are used, supports at 10-foot intervals are acceptable. Supports shall be placed within eighteen (18) inches of the hub or joint. No-hub joints and fittings shall be restrained with rods and clamps per manufacturer's recommendations.

I. Screwed pipe (IPS) shall be supported at approximately 12-foot intervals.

J. Copper tubing shall be supported at approximately 6-foot intervals for piping one and one-half inches and smaller in diameter and at 10-foot intervals for piping two inches and larger in diameter.

K. Piping placed underground shall be laid on a firm bed for its entire length.

L. Where piping is run adjacent to walls or steel columns, it shall be supported from steel brackets or vertical channel hangers. Brackets shall be Grinnell Figure PS 732 or PS 3282 as directed, or approved substitute. Channel systems shall be approved for each condition on an individual basis.

M. Furnish all hangers, inserts, brackets, anchors, guides, sliding supports, etc., and all auxiliary steel necessary for the installation. All supports shall be designed in accordance with the AISC Steel Handbook and painted with one shop coat of primer paint.

N. Insulation inserts and shields for cold surface piping will be provided under Section 220700 of these specifications.

O. All copper, fiberglass, or plastic piping shall be securely supported from the building structure at intervals specified and/or as recommended by the pipe manufacturer. Hanger shields for suspended piping shall be functionally similar to isolators with Grinnell Fib. 97. Non-ferrous piping shall be isolated from contact with ferrous supports with three wraps of vinyl tape.

P. Plumbers' tape, chain, or wire will not be permitted for pipe support.

2.3 VALVES AND STRAINERS

A. All valves and strainers shall be by one manufacturer. Approved valve manufacturers are Crane, Stockham, W. C. Norris, Grinnell, or Powell. Crane numbers are used for convenience.

B. Heating, Domestic Hot and Cold Water:

C. Gate Valves:

Valves 2" and smaller shall be Crane No. 428, bronze, screwed, 200# WOG gate valve with solid wedge disc and rising stem.

D. NOTE: If unable to use a rising stem valve because of insufficient clearance, use a Crane No. 438 non-rising stem valve.

E. Globe Valves:

Valves 1-1/2" and smaller shall be Crane No. 37, bronze, screwed, 200# WOG globe valve with a replaceable teflon disc and teflon packing. The disc shall be suitable for hot water up to 360 deg. F. at 150 psi.

F. Check Valves:

Valves 1-1/2" and smaller shall be Crane No. 37, bronze, screwed, Y-pattern 200# WOG swing check valve. Valves 2" and larger shall be Crane No. 373.

G. Ball Valves:

For hot and cold domestic water service: Valves 2" and smaller shall be Crane No. 2190H bronze, screwed, 200# WOG, Gem ball valve with Buna-N rubber capsule. Watts B6000 or Apollo 70-100.

H. Strainers:

Strainers 1-1/2" and smaller shall be Crane No. 988-1/2, iron body, screwed Y-pattern, 200# WOG, sediment separators with a 20-mesh Monel screen.

I. All strainers shall be installed with fine mesh supplementary "construction screens" which shall remain in place while the system is flushed and chemically cleaned. The "construction strainer" basket shall be removed just prior to balancing the water systems.

J. Provide blow-down ball valve on all strainers same size as strainer tapping.

K. Gas Service:

1. Ball Valves:
   Valves 2" and smaller shall be Crane No. 2330-TF, bronze, screwed, 400# WOG Accesso ball valve with teflon seats, and shall have Underwriters' approval for LP gases up to the pressure limit of 250 psi set by that agency.

2. Gate Valves:
   Valves 3" and smaller shall be Crane No. 424, bronze, screwed, 400# WOG gate valve with Exelloy seats and shall have Underwriters' approval for LP gases up to the pressure limit of 250 psi set by that agency.

3. Globe Valves:
   Valves 2" and smaller shall be Crane No. 130, bronze, screwed, 400# WOG globe valve with a No. 6 replaceable composition disc and shall have Underwriters' approval for LP gases up to the pressure limit of 250 psi set by that agency.

4. Check Valves:
   Valves 2" and smaller shall be Crane No. 132, bronze, screwed, 400# WOG horizontal lift check valve with a No. 6 replaceable composition disc and shall have Underwriters' approval for LP gases up to 250 psi set by that agency.

5. Pressure Regulators:
   Furnish and install approval type gas pressure regulators in gas piping ahead of each appliance and piece of equipment, to which is connected. Regulators located outside the building shall have weatherproof vent with bugproof screen. Regulators located inside of the building shall be vented to the outside with weatherproof vent and bugproof screen.

2.4 NON-SLAMMING OR SPRING-LOADED CHECK VALVES

A. Types: Provide valves of the fully guided or cone-and-diaphragm types.

B. Bodies: Provide flanged or wafer type bodies constructed of cast iron ASTM A 126, Class B; cast steel ASTM A 216/A 216M, Class WCB; stainless steel, Type 304 or cast bronze ASTM B 61.

C. Trim: Seats, discs and springs shall be constructed of 18-8 stainless steel or bronze complying with ASTM B 62. Seats may be of elastomers suitable for 250 degrees F. minimum continuous working temperature or not less than 50 degrees F. above the operating temperature of the system, whichever is higher.

D. Mating Surfaces: Mating surfaces of closure faces shall be bronze or Type 316 or 17-4PH stainless steel or elastomer approved for the particular service and materials must be compatible to prevent electrolytic action.

E. Pressure Loss: Pressure loss through the valves, measured in feet of water, shall not exceed 6/10 of the water velocity in feet per second.

F. Bubble-Tight: Non-slamming and spring-loaded check valves shall provide bubble-tight shut-off when handling water up to 250 degrees F. and 125 pounds per square inch differential pressure. Design shall prevent rubbing of seat materials when opening and closing. Poppet valves shall have conical springs.

2.5 GENERAL DUTY VALVES & SPECIALTY COCKS

A. Cocks:

1. Balancing cocks 1-1/2" and smaller shall be Crane No. 80E, bronze, screwed, 200# WOG.
2. Balancing cocks 2" and larger shall be Crane No. 325, all iron, flanged 125# WOG.
3. Gage cocks shall be Crane No. 744, 1/4", bronze, screwed.
4. Petcocks shall be Crane No. 702, 1/4", bronze, screwed with lever handle.
5. Trycocks shall be Crane No. 734, 3/8", bronze, screwed, 250# rated with stuffing box.
6. Provide two complete sets of wrenches for all cocks and stops.

2.6 BACKFLOW PREVENTERS

A. Backflow preventers shall comply with requirements of the State Plumbing Code as to type, style, size, location, and arrangement for the actual installed duty.

B. Where backflow preventers are installed which release water thru the valve to the atmosphere, these units shall be provided with drip pans which collect the free water. The drip pans shall be piped to the nearest drain.

C. All backflow preventers shall be installed with all necessary isolation valves and test cocks.

2.7 AUTOMATIC VALVES AND WELLS

A. The mechanical subcontractor shall install the automatic temperature control valves, temperature sensing wells, and flow switches, as directed by the automatic temperature control subcontractor.

2.8 UNIONS

A. Ground joint unions shall be installed on pipe 2-1/2" and under where indicated on drawings. Whenever piping is connected to a major piece of apparatus, unions shall be provided as near as practical on each side of the apparatus.

2.9 ISOLATION FITTINGS

A. Approved isolation fittings shall be installed at the junction of all copper and steel piping to prevent electrolytic action. Fittings shall be NZR Brass unions or fittings.

B. This shall be a coordinated system with individual Venturi Flow Stations supplied by one manufacturer and each individual calibrated orifice supplied by one manufacturer.

C. On pipe sizes 3/4-inch diameter and smaller, provide calibrated balancing valves on runouts to fan coil units, fin tube radiation, convectors and reheat coils.

D. Fittings shall be of the combination balancing and shut-off type with the balancing device positioned by an Allen set screw or other approved method which permits closing of the valves without disturbing its balanced position.

E. Bodies may be of the globe or "Y" type with contour flow plug or approved equivalent.

F. Provide a graduated dial or other device to indicate the valve setting.

G. Gland shall permit packing under pressure.

H. Materials and construction shall be as specified for water valves sizes 1-1/2-inch and smaller.

I. On sizes 3/4-inch and smaller ends may be sweat or compression type.

2.10 PRESSURE & TEMPERATURE TEST PLUGS

A. Plugs shall be brass body type with Neoprene, Nordel, or Vitron self-closing valve (to suit temperatures of fluid in pipe). Test plugs shall be Pete's Plug or approved substitute. Furnish six pressure and six temperature instruments to Owner to permit reading pressures and temperatures.

2.11 FLOW MEASURING AND BALANCING SYSTEMS

A. Furnish and install complete the Venturi and calibrated orifice Flow Metering Systems as shown on the drawings.

B. This shall be a coordinated system with individual Venturi Flow Stations supplied by one manufacturer and each individual calibrated orifice supplied by one manufacturer.

C. On pipe sizes 3/4-inch diameter and smaller, provide calibrated balancing valves on runouts to fan coil units, fin tube radiation, convectors and reheat coils.

D. Fittings shall be of the combination balancing and shut-off type with the balancing device positioned by an Allen set screw or other approved method which permits closing of the valves without disturbing its balanced position.

E. Bodies may be of the globe or "Y" type with contour flow plug or approved equivalent.

F. Provide a graduated dial or other device to indicate the valve setting.

G. Gland shall permit packing under pressure.

H. Materials and construction shall be as specified for water valves sizes 1-1/2-inch and smaller.

I. On sizes 3/4-inch and smaller ends may be sweat or compression type.

J. Each station shall be complete with quick disconnect valves and safety shut-off valves, metal identification tag on chain giving pipe size, meter series, station identification, and meter reading at specified flow rate. Metering stations shall be selected so that design flow rate shall be between 10 and 40 inches of water pressure differential with permanent pressure loss of not more than 25% of indicated flow rate differential pressure.

K. The calibrated flow metering valves shall be selected to deliver the rated flows at the mid-point of their set-point range.

L. A master meter shall be furnished to the owner for maintenance purposes.

M. Venturi Flow Metering System shall be by Barco Engineering Company or Robertson. Calibrated orifice system shall be Bell & Gossett or Armstrong.

2.12 HEATING CABLE

A. Furnish and install complete electrical heating cable on all pipe and fittings which may be exposed to freezing. Heat cable shall be of the self-regulating low temperature type with a heat output of 8 watts/ft. (27 BTUH/ft), and a weather-proof PVC sheath. The heating cable shall automatically adjust heat output to correspond with the heat loss rate. Cable shall be UL and FM approved for use in rainwater downspout ice melting applications, and for freeze Protection on exterior piping systems.

B. Cable system shall be furnished with power termination, end seal kits, splice and tee fittings, and all accessories required for a complete installation.

C. Thermon, Raychem, or prior approved equal.

2.13 SEISMIC RESTRAINTS

A. All Division 21, 22 & 23 equipment, piping, and ductwork shall be anchored and seismically restrained as required by the IBC for Seismic Zone D, NFPA 90A (current edition), UL Standard 181, Tri-services Manual Fagel Et Al 1973, and the SMACNA Guidelines for seismic restraints of mechanical systems.

B. The Division 21, 22 & 23 contractor shall be responsible for supplying and installing equipment, vibration isolators, flexible connections, rigid steel frames, anchors, inserts, hangers and attachments, supports, seismic snubbers and bracing to comply with Seismic Zone D of the International Building Code.

C. All supports, hangers, bases, anchorage and bracing for all isolated equipment shall be designed by a professional engineer employed by the restraint manufacturer, qualified with seismic experience in bracing for mechanical equipment.

D. Shop drawings submitted for earthquake bracing and anchors shall bear the Engineer's signed professional seal.

E. The above qualified seismic engineer shall determine specific requirements on equipment anchorage and restraints, locations and sizes based on shop drawings for the mechanical equipment which have been submitted, reviewed and accepted by the Owner's representative for this project.

F. The Division 21, 22 & 23 contractor shall require all equipment suppliers to furnish equipment that meets the seismic code, with bases designed to receive seismic bracing and/or anchorage. All isolated mechanical equipment bracing to be used in the project shall be designed for the equipment shop drawings and certified correct by the equipment manufacturer for Seismic Zone D with direct anchorage capability.

G. Submit shop drawings, calculations, and printed data for the following items under provisions of the General Conditions of the Contract:

1. Complete engineering calculations and shop drawings for all vibration and seismic requirements for all equipment to be isolated and restrained.
2. The professional seal of the engineer who is responsible for the design of the Vibration and Seismic restraint System for isolated equipment.
3. Details for all the isolators and seismic bracing with snubbers proposed for items in this specification and on the drawings.
4. Details for steel frames, concrete inertia bases, and anchors to be used in conjunction with the isolation of the items in this specification and drawings.
5. Clearly outlined procedures for installing and adjusting the isolators, seismic bracing anchors and snubbers.
6. The location of all restraints of pipes and ducts with the locations shown on a floor plan noting the size and type of anchorage and restraint to be used.

H. Snubbers:

1. Snubbers shall be double acting and consist of interlocking steel members restrained by replaceable shock absorbent elastomeric materials a minimum of 3/4 inch thick.
2. Snubbers shall be manufactured with an air gap between hard and resilient material of not less than 1/8 inch nor more than 1/4 inch.
3. A one "g" minimum vertical and lateral level shall be used in the design of all snubbers restraining isolated equipment.

I. All mechanical equipment, piping and ductwork shall be braced, anchored, snubbed or supported to withstand seismic disturbances and remain operational. Provide all engineering, labor, materials and equipment for protection against seismic disturbances as specified herein.

J. All equipment not anchored directly to the floors shall be restrained by cables as designed and furnished by the Restraint Manufacturer.

K. Isolated Equipment: All vibration isolated equipment shall be mounted on rigid steel frames or concrete bases as described in the vibration control specifications unless the equipment manufacturer certified direct attachment capability. Each spring mounted base shall have a minimum of four all-directional seismic snubbers that are double acting and located as close to the vibration isolators as possible to facilitate attachment both to the base and the structure. Snubbers shall be installed with factory set clearances.

L. Piping: All isolated and non-isolated piping 2-1/2" I.D. and larger shall be protected in all planes by restraints to accommodate thermal movement as well as restrain seismic motion. Where necessary the piping restraints shall be resiliently attached to the piping with vibration dampening inserts to prevent the transmission of vibration to the building structure. Locations shall be as scheduled and shall include but not be limited to:

1. At all drops to equipment and at flexible connections.
2. At all 45 deg. or greater changes in direction of pipe.
3. At horizontal runs of pipe, not to exceed 30 ft. O.C. spacing.
4. Piping shall be restrained by a cable restraining system using a minimum of two cables at all restraint points.

M. Piping in mechanical rooms shall have additional restraints as scheduled.

N. Non-Isolated Equipment: The restraint systems for all non-isolated equipment are to be installed to resist stresses produced by lateral forces according to Sec. 2312 of the Uniform Building Code with an Occupancy Importance Factor of 1.5, a Seismic Zone Factor of Z = 0.75 for Zone D and a Horizontal Force Factor for Elements of Structures and Nonstructural Components of Cp = 0.3. In addition, the vertical forces restraint requirement shall be half the value of the horizontal forces. All equipment not anchored directly to floors shall be restrained by cables as designed and furnished by the Restraint Manufacturer.

O. Acceptable Manufacturers and Suppliers for Non-Isolated Systems:

1. Mason Industries, Inc.
2. Korfund
3. Amber/Booth Company
4. Vibration Mountings and Control Company

P. Manufacture and design of restraints and anchors for internally isolated equipment shall be the responsibility of the manufacturer of the vibration isolators furnished with the equipment.

Q. Piping, ductwork, and equipment without moving parts shall be restrained as shown and noted on the drawings. Locations shown are approximate and shall be coordinated with other trades and with the structural engineer at the job site.

R. Field Services:

The seismic restraint manufacturer's engineer shall inspect the final installation and shall certify that all seismic restraints have been installed per manufacturer's instructions and applicable codes and standards.

2.14 CHEMICAL CLEANING

A. Prior to operating any heating system, all piping systems and components shall be chemically cleaned and flushed by an experienced chemical cleaning service approved by the Engineer.

B. Pipe Exterior: Wash and wipe pipe exterior to remove construction dirt, loose scale and flux.

C. Pipe Interior: Flush pipe interior with clean water. Continue flushing until the piping system runs clean. After flushing inspect strainer screens, refrigeration machine water boxes, piping low points, and tank drains to determine the presence of construction debris. If debris is found, disassemble equipment and remove debris. Re-flush the system and re-inspect.

D. Do not operate centrifugal pumps until system has been cleaned and flushed.

2.15 EXISTING HEATING WATER GLYCOL

A. It is the responsibility of this contractor to drain, store and re-install existing glycol as required for demolition and installation of all work required.

B. It is the responsibility of this contractor to ensure that heating water system is full and all air is bled from system prior to Test & Balance.

2.16 GLYCOL FILL

A. This contractor shall furnish all propylene glycol solution for the heating water system to provide a 30% volumetric concentration. Glycol solution shall be Dowfrost HD or Jeffcool HD low toxicity polypropylene with extra strength corrosion inhibitors and colored dye for identification. This contractor shall provide 100 gallons of 30% glycol solution in addition to the 30% solution initial fill, for use in maintaining the system.

B. Contractor shall provide to the Engineer a complete system analysis at the time of final inspection. Analysis shall be included in the building O&M Manuals.

C. Fill water used for mixing glycol shall be of an approved level of chlorides and sulfates as allowed by Glycol manufacturer. Soft water shall not be used to mix glycol.

2.17 VALVE TAGGING

A. All valves shall be designated by distinguishing numbers and letters on required charts and diagrams. The contractor shall furnish and install approved brass tags for all designated items, which numbers and letters on the tags corresponding to those on the charts and diagrams.

B. Brass tags shall be not less than 1-1/2" diameter with depressed black filled numbers not less than 1/2" high and black filled letters not less than 1/4" high. Tags shall be securely fastened to valves with approved brass "S" hooks, or brass jack chain, in a manner to permit easy reading. Zips ties are not acceptable. Do not attach to valve wheel. Brass tags shall be as manufactured by Seton Name Plate Company, New Haven, Connecticut, or approved equal.

C. Each valve shall have an identifying number identifying the unit. Standard identifications may be used for identifying type of service or fluid in pipe. The contractor shall submit his system of identification to the Owner's representative for approval prior to ordering. Any work done without this approval is done at the contractor's risk.

D. Charts of all valves shall be furnished to the Owner's representative by the contractor.

E. A chart to be mounted in a frame with clear glass front and secured on the wall in the main Mechanical Equipment Room.

F. Second chart shall be prepared for use outside of the equipment room, and to be provided with an approved heavy transparent plastic closure for permanent protection. Two (2) holes to be punched at top of plastic closure to allow for affixing approximately an 8" length of nickel-plated bead chain. Each hole to be reinforced by means of a small brass or nickel grommet. Plastic closure shall be as manufactured by Seton Name Plate Company, New Haven, Conn., or approved equal.

G. Identify all valves. A sample identification shall be as follows:

VALVE IDENTIFICATION CHART

NUMBER	DESCRIPTION	LOCATION	NORMAL POSITION
1.	Cold Water Supply to Water Heater	Mech. Room #121	Open
2.	Cold Water Supply to Hose	Room #13	Open
3.	Cold Water Supply to Equip. in Room #12	Room #18	Open
4.	Hot Water Supply to Toilet Room #212	Chase #210	Open
5.	Air Vents - Cooling Coil #12 (2 required)	Fan Room 3122	Closed
6.	Heating Hot Water Balancing Valve (Southwest Zone)	Above Ceiling Room #412	Marked On Valve

H. The above room numbers shall be the room numbers used.

I. Mechanical Equipment & Ductwork:

All mechanical equipment, including meters, fans, pumps, and other devices shall be identified with signs made of laminated plastic 1/8" or larger engraved letters. Signs shall be securely attached by rustproof screws or some other permanent means (no adhesives).

J. Information on sign shall include name of equipment, rating, maintenance instructions, and any other important data not included on factory attached nameplate.

K. Signs shall be attached to equipment so they can be easily read.

L. Identify all ducts exposed in mechanical equipment rooms and in ducts and pipe chases. Sample duct identification shall be as follows:

1. "Cold Duct - High Pressure - To Second Floor System"
2. "Exhaust Duct - Toilet Room - To EF-3"
3. "Ventilation Air Duct - To Utility Room #228"

M. Ducts shall be labeled at all wall penetrations and at connections to equipment.

2.18 PAINTING

A. Mechanical Contractor: All equipment which is to be furnished in factory prefinished conditions by the mechanical contractor shall be left without mark, scratch, or impairment to finish upon completion of job. Any necessary refinishing to match original shall be done. Do not paint over nameplates, serial numbers, or other identifying marks.

B. Mechanical Contractor: Spot painting for application of pipe and equipment identification markers. All piping exposed to weather.

C. Painting Contractor: All insulated piping and all piping in equipment rooms of finished areas shall be painted, as required by the painting specifications. Colors to be selected by owner.

D. Coding, Pipe Identification & Painting:

E. All pipes are to be labeled and color coded with contents clearly identified and arrows indicating direction of flow. Pipes shall be identified at the following locations:

1. Adjacent to each valve.
2. At every point of entry and exit where piping passes thru wall or floor.
3. Every 50 feet on long continuous lines.
4. On each riser and junction.
5. Adjacent to all special fittings or devices (regulating valves, etc.)
6. Connection to equipment.

F. Apply markers to they can be read from floor.

G. Labels and markers shall be of the self-sticking, all temperature permanent type as manufactured by W. H. Brady Co., 727 West Glendale Avenue, Milwaukee, Wisconsin, or Seton Name Plate Corp., 592 Boulevard, New Haven, Connecticut.

H. Pipe color coding shall be uniform throughout.

I. Background colors shall be as follows:

Yellow:	Dangerous Materials (natural gas condensate, etc.)
Bright Blue:	Protective Materials (filtered water)
Green:	Safe Materials (chilled water, cold water, instrument air, sanitary sewer, etc.)

J. Letters of identification legend shall be 2" high for pipes 3" and larger, and 1" high for pipes 2-1/2" and under.

K. Markers shall be installed in strict accordance with the manufacturer’s instructions.

L. On chalky and loose insulation, soft, porous, fiber-filled or fiberglass coverings, a spiral wrap of pipe banding tape shall be made around the circumference of the pipe. Sufficient spiral wraps shall be made to accommodate the horizontal dimension of the pipe marker.

M. On bare pipes, painted pipes, and pipes insulated with a firm covering, pipe banding tape matching the background color of the marker shall be used for 360 deg. color coding. After applying pipe markers, wrap pipe banding tape around pipe at each end of marker. Tape should cover 1/4" to 1/2" of each end of marker and should overlap approximately 1/2" to 1" on itself. Be sure pipe surface is dry and free of dirt or grease before applying markers or banding tape.

N. Stenciling may be used in lieu of the above labels and markers if finished application gives the same overall appearance, that is that stenciling is applied over a background color. If stenciling is used, letter heights, background colors, banding, and arrow shall be as specified above. Submit sample to Owner's representative before proceeding with work.

O. Plastic Marking Tape:

Provide and install a continuous plastic tape over the top of all underground utilities. Tape shall be placed 1/2 way between finished grade and top of utility line.

P. Plastic marking tape for underground utilities shall be acid and alkali-resistant Polyethylene film, 6 inches wide with minimum thickness of 0.004 inch. Tape shall have a minimum strength of 1750 psi lengthwise and 1500 psi crosswise. The tape shall be manufactured with integral wires, foil backing or other means to enable detection by a metal detector when the tape is buried up to 3 feet deep. The tape shall be of a type specifically manufactured for marking and locating underground utilities. The metallic core of the tape shall be encased in a protective jacket or provided with other means to protect it from corrosion. Tape color shall be as specified in Table 1 and shall bear a continuous printed inscription describing the specific utility.

TABLE 1 - TAPE COLOR

Yellow	Gas, Oil, Dangerous
Blue	Water systems
Green	Sewer Systems

Q. Ceiling Markers:

Use stick on ceiling markers on all accessible ceiling grid to indicate location of VAV boxes, valves, and dampers.

R. Color code as follows:

Yellow	HVAC
Green	Plumbing
Blue	Air
White	Duct valves
Orange	Electrical devices
Red	Fire

PART 3 – EXECUTION

3.1 COORDINATION

A. All equipment and piping shall be arranged to allow for easy maintenance and access to service valves.

B. Provide valves and unions or flanges at all pieces of equipment to allow maintenance.

C. Install all automatic valves, sensor well, flow switches, etc., as directed by the control contractor.

3.2 TESTING

A. All piping shall be tested in accordance with Section 230501 prior to applying insulation or concealing in partitions, wall, etc.

3.3 ACCESS

A. All valves and equipment shall be located to allow easy access for inspection, service and maintenance, test and balance, and operation. If valves are installed in inaccessible locations, it shall be this contractor's responsibility to furnish and install access doors of a type approved by the owner's representative.

B. Locate piping, valves, etc., to allow easy access to and maintenance of equipment. Do not block walkways, filter access, maintenance access, or tube-pull space in equipment rooms.

3.4 LOCATIONS & ARRANGEMENTS

A. All pressure gages shall be so installed as to be easily readable from an eye level 5' -6" above the floor.

B. Test plugs on flow measuring stations shall be unobstructed and shall be arranged in the piping per manufacturer's recommendations.

C. All equipment and accessories shall be installed to facilitate proper service and maintenance in compliance with the manufacturer's recommendations.

3.5 WIRING BY THE ELECTRICAL CONTRACTOR

A. It is the intent of these specifications that all line voltage electrical power wiring and power connections to equipment be furnished and installed by the electrical contractor, unless otherwise specified or shown on the drawings.

B. The mechanical contractor shall coordinate actual job-site power requirements with the electrical contractor prior to installation of power wiring and electrical equipment.

C. The electrical contractor shall provide necessary wiring to electric heat tape as required and shall coordinate with the mechanical contractor the location and capacity of required circuits.

D. When mechanical system components are furnished with remote mounted control panels, alarm bells, alternators, etc. the electrical contractor shall run all required line voltage power wiring as directed by the mechanical contractor. It shall be the mechanical contractor's responsibility to coordinate the work and provide the necessary wiring diagrams.

E. When exhaust fans are provided which are not controlled by the ATC contractor, they shall be wired to local line voltage wall switches. The wall switch locations shall be coordinated with the owner's representative.

F. Line and low voltage control wiring will be furnished and installed by the ATC contractor in accordance with NEC and Division 26. Minimum 3/4" conduit.

3.6 INSTALLATION OF ABOVE GROUND PIPING

A. Provide piping systems of sizes indicated on the drawings. Systems shall be installed complete.

B. Install piping systems in conformance with ANSI B31.

C. Install piping to allow for expansion and contraction of the piping systems. Provide offsets and swing joint connections at coils, pumps and other equipment to eliminate undue strain to the equipment connections.

1. Perform welding in conformance with ANSI B31.1.
2. Perform welding in ambient temperatures above 0 degrees F.
3. Ream and clean ends of piping.
4. Support piping align and tack weld making allowance for pipe pitch and insulation. Temporarily block piping at hangers.
5. Use welding pipe clamps on piping 4-inch diameter and larger and verify alignment before welding.
6. Connect flanges and tack weld piping systems in place before full circumferential welds are made.
7. Springing of piping at equipment connections will not be permitted.
8. The use of "cold-spring" is not permitted.

D. Branch connections to up feed systems shall be made at the top or at a 45-degree angle above the centerline. Branch connections for down feed systems shall be made at the bottom or at a 45-degree angle below the centerline.

E. Install water piping with a pitch or slope of not less than 1-inch in 40 feet.

F. All installed pipelines shall be straight, free from dents, scars and burrs, with ends reamed smooth and shall remain straight against strains tending to cause distortion during system operation. The Contractor shall make proper allowance for pipeline expansion and contraction so that no unsightly distortion, noise, damage or improper operation will occur.

G. Piping shall be run in a neat and efficient manner and shall be neatly organized. Piping shall be run parallel or at right angles to the building walls or construction. The Contractor shall study the general, electrical, and other drawings to eliminate conflict of piping with structure, sheet metal, lighting, or other services. Unless specified otherwise, no piping shall be exposed in a finished room, all changes in direction shall be made with fittings.

H. All piping shall be clean and free from acids and loose dirt when installed.

I. Temporary pipe plugs of rags, wool, cottons, waste or similar materials shall not be used.

J. All piping shall be so arranged to not interfere with removal of other equipment or devices and shall not block access openings, etc.

K. Piping shall be arranged to facilitate equipment maintenance.

L. Flanges or unions shall be provided in the piping at connections to all items of equipment.

M. All piping shall be so installed to insure noiseless circulation.

N. All valves and specialties shall be so placed to permit easy operation and access, and all valves shall be regulated and adjusted at the completion of the work.

3.7 VALVE INSTALLATION

A. After piping system has been tested and put into service, but before final testing, adjusting and balance, inspect each valve for possible leak. Open and close each valve to verify proper operation.

3.8 INSTALLATION OF UNDERGROUND PIPING

A. Coordinate the routing and location of all underground piping with building footings & all existing utilities. See structural drawings.

B. Outside pipe placed underground shall be buried deep enough to protect against freezing.

C. Depth of bury of services shall be:

	Minimum	Preferred
Sewer	48”	48”

D. Services shall be buried at the "preferred" depth unless site conditions require the "minimum" depth as listed above.

E. Handling: Pipe and accessories shall be handled so as to insure delivery to the trench in sound, undamaged condition. Care shall be taken not to injure the pipe coating. If the coating or lining of any pipe or fitting is damaged, the repair shall be made by the Contractor at his expense in a satisfactory manner. No other pipe or material of any kind shall be placed inside a pipe or fitting after the coating has been applied. Pipe shall be carried into position and not dragged. Use of pinch bars and tongs for aligning or turning pipe will be permitted only on the bare ends of the pipe. The interior of pipe and accessories shall be thoroughly cleaned of foreign matter before being lowered into the trench and shall be kept clean during laying operations by plugging or other approved method. Before installation, the pipe shall be inspected for defects. Material found to be defective before or after laying shall be replaced with sound material without additional expense to the owner. Rubber gaskets that are not to be installed immediately shall be stored in a cool dark place.

F. Coated and wrapped steel pipe shall be handled in conformance with AWWA Standard C203.

G. Cutting of pipe shall be done in a neat and workmanlike manner without damage to the pipe. Unless otherwise recommended by the manufacturer and authorized by the Contractor Officer, cutting shall be done with an approved type mechanical cutter. Wheel cutters shall be used when practicable.

H. Copper tubing shall be cut square and all burrs shall be removed.

I. Locating: Where the location of the water pipe is not clearly defined by dimensions on the drawings, the water pipe shall not be laid closer horizontally than 10 feet from a sewer except where the bottom of the water pipe will be at least 12 inches above the top of the sewer pipe, in which case the water pipe shall not be laid closer horizontally than 6 feet from the sewer. Where water lines cross under gravity-flow sewer lines, the sewer pipe for a distance of at least 10 feet each side of the crossing shall be fully encased in concrete or shall be made of pressure pipe with no joint located within 3 feet horizontally of the crossing. Water lines shall, in all cases, cross above sewage force mains or inverted siphons and shall be not less than 2 feet above the sewer main. Joints in the sewer main, closer horizontally than 3 feet to the crossing, shall be encased in concrete.

J. Water lines shall not be laid in the same trench with sewer lines, gas lines, fuel lines, or electric wiring.

K. Copper tubing shall not be installed in the same trench with ferrous piping materials.

L. Nonferrous metallic pipe: Where nonferrous metallic pipe, e.g., copper tubing, crosses any ferrous piping material, a minimum vertical separation of 12 inches must be maintained between pipes.

M. Plastic pipe shall be insulated against heat from steam lines, water lines, or other heat sources.

N. Placing and Laying: Pipe and accessories shall be carefully lowered into the trench. Under no circumstances shall any of the materials be dropped or dumped into the trench. Care shall be taken to avoid abrasion of the pipe coating. Pipe shall be laid with the bells facing in the direction of laying. The full length of each section of pipe shall rest solidly upon a compacted sand bed, with recessed excavated to accommodate bells, couplings, and joints. Pipe that has the grade or joint disturbed after laying shall be taken up and re-laid. Pipe shall not be laid in water or when trench conditions are unsuitable for the work. Water shall be kept out of the trench until jointing is completed. When work is not in progress, open ends of pipe, fittings, and valves shall be securely closed so that no trench water, earth, or other substance will enter the pipes or fittings. Where any part of the coating or lining is damaged, the repair shall be made by the Contractor at his expense in a satisfactory manner. Pipe ends left for future connections shall be valved, plugged, or capped, and anchored, as required.

O. Pipe shall be protected during handling against impact shocks and free fall and the pipe interior shall be free of extraneous material.

P. Laying of gravity drain shall proceed upgrade with the spigot ends of bell-and-spigot pipe and tongue-and-groove pipe pointing in the direction of the flow. Each pipe shall be laid accurately to the line and grade shown on the drawings. Pipe shall be laid and centered so that the pipe has a uniform invert. As the work progresses, the interior of the pipe shall be cleared of all superfluous materials.

Q. Before making pipe joints, all surfaces of the portions of the pipe to be joined shall be clean and dry. Lubricants, primers, and adhesives shall be used as recommended by the pipe manufacturer. The joints in gravity drain lines shall then be placed, fitted, joined, and adjusted so as to obtain the degree of water tightness required.

3.9 EXCAVATION

A. Excavation of every description and of whatever substances encountered shall be performed to the lines and grades indicated. During excavation, material satisfactory for backfilling shall be stockpiled in an orderly manner at a distance from the banks of the trench sufficient to avoid overloading and to prevent slides or cave-ins. Adequate drainage shall be provided for the stockpiles and surrounding areas by means of ditches, dikes, or other approved methods. The stockpiles shall also be protected from contamination with unsatisfactory excavated material or other material that may destroy the quality and fitness of the suitable stockpiled material. If the Contractor fails to protect the stockpiles and any material becomes unsatisfactory as a result, such material, if directed, shall be removed and replaced with satisfactory on-site or imported material from approved sources at no additional cost to the owner. Excavated material not required or not satisfactory for backfill shall be removed from the site. Grading shall be done as may be necessary to prevent surface water from flowing into the excavation, and any water accumulating therein shall be removed so that the stability of the bottom and sides of the excavation is maintained. Sheeting and shoring for the work and for the safety of personnel shall be in compliance with applicable safety standards.

B. Trench Excavation: The trench shall be excavated as recommended by the manufacturer of the pipe to be installed. Trench walls below and above the top of the pipe shall be sloped, or made vertical, as recommended in the manufacturer's installation manual. The trench width below the top of the pipe shall not exceed that recommended in the installation manual. Where no manufacturer's installation manuals are available, trench walls below the top of the pipe shall be vertical, and trench walls above the top of the pipe shall be sloped as required to properly complete the work. Trench width below the top of the pipe shall not exceed 24 inches plus pipe outside diameter (O.D.). Where recommended trench widths are exceeded, redesign shall be performed by the Contractor using stronger pipe or special installation procedures. The cost of this redesign and the increased cost of the pipe or installation procedures shall be borne by the Contractor without additional cost to the Owner.

C. Bottom Preparation: The bottoms of trenches shall be accurately graded to provide uniform bearing and support for the bottom quadrant of each section of the pipe. Bell holes shall be excavated to the necessary size at each joint or coupling to eliminate point bearing. Stones of 3 inches or greater in any dimension, or as recommended by the pipe manufacturer, whichever is smaller, shall be removed to avoid point bearing.

D. Removal of Unyielding Material: Where over depth is not indicated and unyielding material is encountered in the bottom of the trench, such material shall be removed 4 inches below the required grade and replaced with suitable materials.

E. Removal of Unstable Material: Where unstable material is encountered in the bottom of the trench, such material shall be removed to the depth directed and replaced to the proper grade with select granular material. When removal of unstable material is required due to the fault or neglect of the Contractor in his performance of the work, the resulting material shall be excavated and replaced by the Contractor without additional cost to the Owner.

F. Excavation for Appurtenances: Excavation for manholes, catch basins, inlets, or similar structures

3.10 BACKFILLING

A. Backfill material shall consist of satisfactory material. Backfill shall be placed in layers not exceeding 4 inches loose thickness for compaction by hand operated machine compactors, and 8 inches loose thickness for other than hand operated machines, unless otherwise specified. Each layer shall be compacted to at least 95 percent maximum density unless otherwise specified.

B. Trenches shall be backfilled to the grade shown. The trench shall be backfilled to 2 feet above the top of the pipe prior to performing the required pressure tests. The joints and couplings shall be left uncovered during the pressure test.

C. Replacement of Material: Material removed from the bottom of the trench shall be replaced with 6” sand base prior to the installation of piping. Piping shall be encased in sand with a 6” top layer over the top of the piping.

D. Initial backfill material shall be placed in layers of a maximum of 4 inches loose thickness and compacted with approved tampers to the density of the adjacent soil and to a height of at least 1 foot above the utility pipe or conduit. The backfill shall be brought up evenly on both sides of pipe for full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe. Backfill material in this portion of the trench shall consist of satisfactory material at a moisture content that will facilitate compaction free from stones of such size as recommended by the pipe manufacturer, or larger than 2 inches in any dimension, whichever is smaller, except that where the pipe is coated or wrapped for protection against corrosion, the backfill material shall be free of stones larger than 1 inch in any dimension, or as recommended by the pipe manufacturer, whichever is smaller.

E. The remainder of the trench, except for special materials for roadways, shall be backfilled with satisfactory material. Backfill material shall be deposited ad compacted as follows:

F. Degree of Compaction: Degree of compaction required is expressed as a percentage of the maximum density obtained by the test procedure presented in ASTM D 1557, Method B or D.

End of section 230900

SECTION 23 3000 - AIR DISTRIBUTION

PART 1 – GENERAL

1.1 SCOPE

A. Work shall include the air distribution, ventilation, and exhaust duct systems, and all materials, equipment, and labor required to complete the systems shown on plans and specified herein.

PART 2 – PRODUCTS

2.1 GENERAL

A. Construct all ducts, plenums, etc., of the gauges specified in the latest editions of the applicable SMACNA manuals, unless otherwise shown. Sheets shall be free from blisters, slivers, pits, and imperfectly galvanized spots.

B. Duct construction and installation details shall comply with the latest edition of the SMACNA Duct Construction Standards.

C. Ducts from the fan unit discharge to VAV terminal boxes shall be constructed to meet the requirements of a +4-inch pressure class. All other supply air ducts shall be designed to meet the requirements for +2-inch pressurized ducts. All exhaust ducts shall be -2-inch suction ducts.

D. All supply air ducts shall be designed to meet the requirements for +2-inch pressurized ducts. All exhaust ducts shall be -2-inch suction ducts.

2.2 +4" PRESSURE CLASS DUCTWORK

A. All ductwork on the discharge side of Air Conditioning units to the terminal boxes shall be +4" pressure class duct. It is the essence of the duct system to have a minimum pressure loss. Therefore, ducts shall be run in a straight line and shall be run so that the lowest beam or obstruction shall generally determine the centerline of the straight run. Eccentric reducing transition shall be avoided but may be used where space is a determining factor. Bends and elbows other than those shown on the drawings shall have the approval of the Owner's representative before installation. No pipes, conduits, or any other obstructions shall be run through +4" P.C. ductwork.

2.3 ROUND DUCTWORK +4" PRESSURE CLASS

A. The round +4" P.C. HVAC ductwork, fittings, and accessories shall be factory fabricated, spiral conduit. Ductwork may, when approved by the owner's representative, be fabricated in a 26 ga. standing rib configuration. The ducts shall be constructed of rust-resistant zinc-coated steel and shall be of the sizes called for on the drawings.

B. All fittings in the round ducts shall be factory fabricated to match the spiral ducts and shall be of the same manufacturer.

C. Round duct joints in diameters through 50 inches shall be sealed as follows:

D. Approved sealer equal to "Hard Cast" shall be applied to the coupling and fittings. Sealer is applied to the outside of the joint, extending 1 inch on each side of the joint bead and covering all screw heads. Plastic backed tape is immediately applied over the wet sealer.

E. The duct sealer must be specifically formulated for the job sealing the field joints for high-pressure systems. The sealer shall be compatible with plastic-backed duct tape so the two shall cure and bond together. Samples of sealer and tape and the specification data sheets shall be submitted to the Owner's representative for approval.

F. Flanged joints shall be sealed by Neoprene Rubber Gaskets.

2.4 ACCESS DOORS AND PANELS

A. Location: Provide access doors in casings, plenums, and ducts where shown on the drawings and where specified for ready access to operating parts including fire dampers, smoke dampers, valves, and concealed coils.

B. Pressure Clarification: Construct and install access doors in accordance with SMACNA Standards to suit the static pressure classifications and the locations where installed.

C. Access Doors in Ducts: Provide and size doors as follows:

1. Minimum 24-inch by 24-inch clear opening.
2. When field conditions require an access opening smaller than 16-inch by 12-inch, provide a 24-inch long removable section of casing or duct, secured with quick acting locking devices, 6 inches on centers, to permit ready access without dismantling other equipment.

D. Door Requirements: Provide doors in casings and duct as follows:

1. Arrange doors so that system air pressure will assist closure and prevent opening when the system is in operation.
2. Coordinate doors and equipment to provide unrestricted passage through clear door opening, without removal of any equipment.
3. Where pressure regulating dampers are installed in ducts or plenums, provide access doors with a clear wire glass observation port, 6-inch by 6-inch minimum size. Anchor port with structural metal frame, resilient gaskets and stainless-steel bolts.
4. Hinges for doors in zinc coated or aluminum construction shall be steel or iron, zinc coated with brass pins.
5. Hinges for doors in copper, copper nickel alloy construction shall be all brass.

2.5 CLOSURE COLLARS

A. A duct ending at a wall or partition shall have the edge turned back to form a closure collar and flanged tight to the wall or partition so that no sharp or ragged edge appears.

2.6 FLASHING

A. Where ducts pierce roof construction, the flashing shall be provided as part of Division 7.

B. The equipment bases and duct opening bases on the roof shall be constructed by this Contractor as shown on the drawings. The base shall be constructed to fit the equipment approved for construction. This Contractor shall construct and install a weatherproof inverted pan over the wood bases to act as a counterflashing and weatherproof hood for the base. All openings through the pan for equipment mounting shall be sealed weathertight with lead washers.

2.7 TEST HOLES IN DUCTWORK

A. Test holes for testing air quantities in ducts shall be installed at locations to be specified by the Balancing Contractor. Rubber stoppers shall be provided for closing the test holes. Where these holes are installed in insulated ductwork, a removable plug of approved insulation material shall be provided. An instrument port shall be provided in the following locations for each fan system.

1. Return air shaft and/or duct upstream of sound traps:

a. Return air fan plenum
b. Main return air duct upstream of fresh air dampers
c. Mixed air plenum
d. Supply fan plenum

B. Additional ports are to be installed in locations determined by the Owner's representative.

C. Instrument ports shall be die cast with screwed cover for the insulation thickness specified. Ports shall be located outside of the plenum with 20-gauge sheet metal sleeve of the same size as the port opening, passing through insulation where ducts have interior insulation.

2.8 CLEANOUT OPENINGS

A. Duct systems shall have cleanout openings equipped with tight fitting sheet metal doors. Doors shall be tightly latched without the use of tools.

2.9 FIRE-RESISTIVE ACCESS OPENING

A. When cleanout openings are located in ducts within a fire-resistive shaft or enclosure, access openings shall be provided in the shaft or enclosure at each cleanout point.

B. These access openings shall be equipped with tight-fitting sliding or hinged doors which are equal in fire-resistive protection to that of the shaft or enclosure.

2.10 CLEARANCES

A. Duct systems shall have a clearance from combustible construction of not less than 18 inches. This clearance may be reduced to not less than three inches, provided the combustible material is protected with materials approved for one-hour fire-resistive construction on the duct side.

2.11 EXHAUST OUTLETS

A. Exhaust outlets shall extend thru the roof, unless otherwise noted. Such extension shall be at least two feet above the roof surface, at least 10 feet from any adjacent building, property line, or air intake opening into any building, and shall be located at least 10 feet above the adjoining grade level.

2.12 BRANCH TAKEOFFS

A. Branch takeoffs shall be as shown on the drawings, and shall be fitted with adjustable lock balancing dampers, complete with locking quadrants. Where dampers are not accessible for adjustment from above, concealed ceiling regulators with adjustable chrome-plated covers shall be provided.

2.13 WALL PENETRATIONS

A. All ducts penetrating structural or architectural walls shall be sealed air and sound tight.

2.14 FIRE RATED SURFACE PENETRATIONS

A. All ducts penetrating fire rated surfaces shall be sealed as directed in 230900.

2.15 DUCTWORK

A. All duct work shall be fabricated and installed in compliance with the latest SMACNA duct manuals.

B. Sheet metal ducts shall be properly braced and reinforced with and, where they protrude above roof, they shall be properly flashed.

2.16 DUCT JOINTS

A. All duct joints must be sealed airtight as required by Table 1-2 "SEAL CLASSIFICATION" of the "HVAC Duct Construction Manual". The term "seal" or "sealed" means use of mastic or mastic plus tape or gasketing as appropriate.

2.17 DIMENSIONS

A. Ducts, unless otherwise approved, shall conform accurately to the dimensions indicated on the drawings, and shall be straight and smooth on the inside with joints neatly finished. All duct sizes shown on the drawings are free area inside dimensions. Acoustically-lined ducts shall have outside dimensions increased as required to accommodate the acoustic lining specified and still maintain the free area inside dimensions shown on the drawings.

B. Under no circumstances shall the cross section of any duct be decreased by dents, pipes, or hanger rods running through it unless otherwise indicated on the drawings. Neither shall the shape be changed without approval. No abrupt transitions that restrict the area shall be used. Where necessary to gain clearance, the duct seams may be turned inside. Structural and Architectural drawings shall be consulted for areas with restrictive clearances.

2.18 FIELD VERIFICATION

A. No ductwork shall be fabricated without first field verifying that the available space (under actual job conditions) will permit installation of the ductwork without structural or other conflicts.

2.19 PRE-MANUFACTURED DUCTS

A. Runouts above ceiling from primary supply air ducts to VAV terminal boxes shall be rigid conduit.

B. Runouts above ceiling from the terminal boxes to the ceiling diffusers shall be similar to "Genflex - Type IL". Maximum allowance length is 5'-0" in any given duct run. Duct to be factory fabricated with spring steel wire helix and 1" thick glass fiber insulation covered with external vapor barrier and lined with continuous non-perforated inner sleeve.

C. Material shall comply with IMC Standard 10-1.

2.20 AIR FLOW MEASURING DEVICES

A. The sheet metal contractor shall install the air flow measuring devices as specified in Section 251000. The devices will be furnished by the control contractor.

2.21 RECTANGULAR DUCT LINING

A. The interior surface of all rectangular supply, return, fresh, relief, and exhaust air ducts (except where noted otherwise), shall be lined with 1" thick fiberglass dual density duct liner, having an average "K" factor of .24 BTU at 75 deg. F mean. The liner shall meet standards NFPA No. 90A and No. 90B and shall have the Underwriters' Laboratories, Inc., label.

B. Duct liner shall be applied to the flat sheet with a 100% coverage of duct adhesive. The duct liner shall be cut to assure snug corner joints. The black surface of the liner shall face the air stream. On horizontal runs, tops of ducts over 12" in width and sides over 16" in height shall be additionally secured with welded pins and speed clips on a maximum of 15" centers. On vertical runs, gripnails or welded pins and speed clips shall be spaced on a maximum of 15" centers on all width dimensions over 12". Pins shall start within 2" of all cross joints within the duct section.

C. Welded pins shall be cut virtually flush with the liner surface. Clips should be drawn down flush only and not so as to compress the liner and cause the leading edge of raise. All exposed edges and the leading edge of all cross joints of the liner shall be coated with adhesive.

D. Material shall comply with IMC Standard 10-1.

2.22 REGISTERS, GRILLES AND DIFFUSERS

A. All registers, grilles, and diffusers located in toilet room areas shall be all aluminum construction.

B. Supply Air Registers:

Furnish and install all supply air registers shown and specified on the drawings. All units to have opposed blade balancing dampers. Registers to have 4-way air deflection. All register cores shall be removable, or plaster frames shall be furnished with units. Registers shall be of steel, or anodized aluminum construction. Finish shall be bright white unless otherwise noted. Registers shall be Titus, Tuttle & Bailey, Metalaire, Nailor, Carnes or Price.

C. Return, Exhaust & Transfer Air Registers:

Furnish and install all ceiling and sidewall return, exhaust, and transfer air registers shown and specified on the drawings. All units to be painted steel, or aluminum construction (where permitted by fire code) with bright white finish and opposed blade balancing dampers. All cores shall be removable, or plaster frames shall be furnished with units. Registers located near the floor shall be heavy duty gymnasium type. Registers shall be Titus, Tuttle & Bailey, Metalaire, Nailor, Carnes or Price.

D. Ceiling Diffusers:

1. All ceiling diffusers shall be of the round, square, or rectangular type with louvered face and 1, 2, 3, or 4-way air pattern as indicated on the drawings. Units shall be painted steel, or aluminum construction (where permitted by fire code) with bright white finish and inner assembly shall be easily removable from outer frame without special tools. Louvers shall be spaced on 1-1/2" centers maximum.

2. All diffusers shall be furnished with round or square opposed blade volume control and air extractor. Diffusers shall be Titus, Tuttle & Bailey, Price, Metalaire, Nailor, or Carnes.

E. General:

1. All registers, grilles, and diffusers located in locker/shower area shall be all aluminum construction.
2. Color and finish of all grilles, registers, and diffusers shall match ceiling grid. Coordinate with the Owner's representative.

2.23 PACKAGED AIR CONDITIONER (AC-1)

A. Furnish and install complete the air-to-air split system packaged air conditioner shown and specified on the drawings.

B. Evaporator section shall be ceiling mounted type with pre-charged refrigerant system, packaged controls, swing flow outlet air louvers, and packaged, integral, concealed drain pump. Unit shall be complete with filter section, hard wired, wall mounted thermostat, and all controls for automatic operation.

C. Condensing unit section shall be complete with high performance hermetic compressor with high- and low-pressure safety controls, air cooled condenser with modulating fan controls for operation at outdoor air temperatures as cold as 0 deg. F.

D. Unit shall be EMI, Carrier, Mitsubishi or approved equal.

2.24 PACKAGED ROOFTOP HEATING AND AIR CONDITIONING MAKE-UP AIR UNIT **ALTERNATE #2.**

A. QUALITY ASSURANCE

1. All models shall be ETL listed and comply to safety standards UL 1995, the Standard for Safety for Heating and Cooling Equipment. The Engineer of Record shall take responsibility for the approval of any modifications or additions to the unit, including aftermarket UV or ionization filtration devices.

2. All models shall be ETL listed and comply to safety standards CSA Std. C22.2, No. 236-11.

3. Units outfitted with indirect fired heaters shall also comply with ANSI Z83.8-2013, and CSA 2.6-2013.

4. This unit has been tested in accordance to the following standards:

a. ANSI/AHRI Standard 340/360

b. ANSI/ASHRAE Standard 37

c. AHRI Standard 270/370

B. WARRANTY

C. All units shall be provided with the following standard warranties:

1. 10-Year (non-prorated) parts warranty covering the entire unit when accompanied by a company provided service plan. 5-Year (non-prorated) parts warranty covering the entire unit otherwise.

2. 25-year (non-prorated) parts warranty for SS heat exchanger on indirect fired units.

D. GENERAL PRODUCTS

1. Supply single zone one-piece packaged units that are complete as per the following specification, deliver all capacities scheduled, and conform to design indicated herein. Alternate layouts or dimensional changes will not be accepted.
2. CABINET

a. Size 1 unit cabinets shall be constructed of minimum 24-gauge. Sizes 2, 3, or 4 cabinets shall be 20-gauge G-90 galvanized steel riveted together via structural pop-rivets. All metal shall be CNC bent for precise assembly.

b. Rigging Provisions: The unit shall have a structural base constructed of minimum 18-gauge in cabinet size 1 and 14-gauge in cabinet sizes 2, 3 & 4 G-90 galvanized steel, and include full sized fork pockets and lifting points on all four sides.

c. Roof Construction: The lids shall be fabricated by forming a double-standing, self-locking seam that requires no additional support. Roof shall be pitched to allow for proper drainage.

d. Exterior Wall Construction: All exterior walls shall consist of a double wall, G-90 galvanized steel construction. Cabinet size 1 shall be insulated with 1-inch thick, R4.3 fiber glass duct board insulation. Cabinet sizes 2, 3 & 4 shall be insulated with 2-inch thick, R13 closed cell foam.

e. Service Access Doors: All door jambs shall be gasketed around their perimeter, and allow for doors to be mounted via removable, spring actuated, stainless steel hinges with stainless steel rivets, and self-compressing latches. Each compartment shall have removable access panels to allow for ease of service and maintainability. Electrical cabinet access doors shall have a door hold installed to prop doors open. All doors shall have stainless steel latches which are pad lockable. Electrical cabinet doors shall be outfitted with schematic/manual pouches formed into the door, along with wiring diagram attached to the indoor of the door from the factory.

3. Entire interior and exterior casing shall be constructed of minimum G90 galvanized steel. Unit shall have undergone a salt spray corrosion test as per ASTM B 117.

E. AIRFLOW CONFIGURATIONS

1. Discharge: Unit shall be configurable for Down discharge through the unit's base.

2. Return: Unit shall also be configurable for Vertical Return through the unit’s base.

3. Intake Airflow: Unit configuration shall be through use of a fresh/outdoor and return air damper.

a. Damper: Shall exceed AMCA Class 1A standard for low leakage. Damper assembly shall be a single assembly and outfitted with an integral bird screen and louver/gutter system to divert any drainage through the base of the unit – intake air hood is required.

b. Actuator: A single direct drive damper actuator shall be used with spring return to ensure that the outdoor air section closes when not powered.

F. SUPPLY AIR BLOWER AND MOTOR

1. All supply fans shall be direct drive (belt-drive not acceptable) variable speed plenum fans.

2. Blower Motor: Motor shall be a premium efficiency motor available as:

    a. Open Drip Proof (ODP) or Totally Enclosed Fan Cooled (TEFC) motor driven by a Variable Frequency Drive.

3. Fans to be selected at or near efficiency peak.

4. Blower and motor assembly shall be dynamically balanced. The entire blower and motor assembly shall be mounted on rubber vibration isolators. Wheels balanced as per AMCA 204-96, Balance Quality and Vibration Levels for fans.

G. REFRIGERATION SYSTEM

1. Unit shall utilize a variable speed inverter duty scroll compressor with the following features:

    a. Modulation: Compressor shall be capable of compressor speed modulation from 15%-100% on 5, 6, 7.5, 8, 10, & 12.5 Ton units. Compressor shall be capable of compressor speed modulation from 25%-100% on 15, 20, 22, 25, 30, 40, and 50 Ton units.

    b. Refrigerant: Unit shall be factory charged with R410A refrigerant.

    c. Vibration Isolation: Compressor as well as blower assembly shall each be mounted on rubber vibration isolators to reduce transmission of vibration to the building structure.

    d. Internal Overload Protection: Compressor shall include internal thermal overload production to protect against excessive motor temperatures.

    e. Crankcase Heater: Compressor shall include a crankcase heater to protect against liquid flood-back and elimination of oil foaming on startup. The crankcase heater must remain powered when the compressor is not in operation.

    f. Oil Management: Unit shall utilize both passive and active oil return management using Oil Level Sensor and scheduled oil boosts.

    g. Monitored Envelope: Unit shall monitor all critical refrigeration points to ensure compressor does not operate outside of safe operating envelope.

    h. Throttling Logic: Unit shall allow for high head pressure monitoring throttle mode for high ambient operation, and low suction pressure throttle mode for low-capacity operation or any conditions resulting in low suction pressure.

    i. Pump-Down: Active pump-down mode with discharge line check valve to protect against liquid migration into compressor during idle times.

j. Defrost mode in optional Heat Pump: When outdoor coils are deemed at risk of freezing, the unit shall simultaneously turn on auxiliary heat while running the heat pump in "cooling" mode to help defrost outdoor coils as needed while still maintaining desired leaving air temperatures.

H. The unit shall be outfitted with the following:

1. Indoor Coil: Indoor coil shall be a high efficiency 4-10 row coil design with aluminum fins mechanically bonded to copper tubes. Coil is staggered to increase turbulence, reduce the coil bypass factor, and ultimately increase the time the air stays within the coil. Includes two probe sensors to read average coil face temperature.

2. Electronic Expansion Valve: Each refrigeration circuit will be outfitted with an electronic expansion valve metering device which can be throttled from 0-100% open to allow for precise superheat control.

3. Indoor Coil Drain Pan: The indoor coil shall be outfitted with a sloped stainless steel drain pan. This pan shall be insulated along the entire base to prevent condensation and outfitted with a safety overflow switch which will automatically shut down cooling operation prior to water overflowing the drain pan in the event of a drain clog. The entire drain pan shall be 20 GA Stainless Steel construction and wrap beneath the entire coil with flashing on entering side of coil to ensure capture of all condensate. Drain pan discharge pipe shall also be stainless steel construction. Drain pan shall be pitched to exceed ASHRAE 62.1 standard.

4. Base of the condensing coil cabinet shall be pitched away from the unit as a safety to ensure all draining exits away from the curb.

5. Optional Hot Gas Reheat Coil: The unit shall include an optional copper tube and aluminum fin hot gas reheat coil mounted downstream of the indoor coil. This coil shall be controlled via fully modulating hot gas reheat valve to provide precise reheat temperature control. This coil shall include the addition of an evaporative coil leaving condition sensor to maintain a coil dew point. This also prevents operation of a dehumidification call when intake dew point conditions are found to be below space dew point conditions, preventing wasted energy.

6. Outdoor (Condenser) Coil: Outdoor coil shall be a high efficiency coil design with aluminum fins mechanically bonded to copper tubes. The coil shall be downward sloped to protect coil from hail damage. Optional hail guards may also be outfitted to the outdoor coil for added protection from hail bouncing off the unit's roof up the coil.

7. Outdoor Fans: The outdoor coil shall have a vertical discharge outfitted with quiet, efficient, fully modulating Electronically Commutated Motor (ECM) condensing fans. These fans shall modulate to maintain a temperature differential between outside air and the outdoor coil.

I. To help mitigate any long-term potential for leaks or hardware failures, the unit shall be outfitted with the following protection measures:

1. Suction line accumulator for added protection against liquid entering suction line of compressor.

2. Bi-flow, low pressure drop filter drier.

3. Electronic Expansion Valve (EEV) for precise superheat control. EEV shall open partially allowing system pressure equalization prior to activation of the compressor.

4. Protective rubber sleeves installed on all distribution lines of indoor coil to prevent wear from rubbing.

5. All refrigeration ports shall be short-stub assembly and any access port with a transducer or switch is mounted vertically to mitigate risk of bent/cracked stub joints.
6. Refrigeration circuit shall be mechanically CNC pre-bent tubing wherever possible with minimal brazed joints to minimize points for potential refrigeration leaks.

7. Factory tested for leaks via high pressure nitrogen decay and helium tracer gas testing.

8. Suction line temperature sensor failure detection.

9. Preventative failure alerts through a manufacturer provided, cloud based, cellular remote monitoring system.

J. HEATING SYSTEM

1. The gas burner shall be an indirect-fired, push-through type, using natural gas. The inlet-supply pressure to the unit for natural gas must be 7" w.c. minimum.

2. Burner shall be a tubular in-shot fired design capable of using natural gas. Each burner ignition shall be of the direct-spark design with remote flame sensing at inlet of the last firing tube of the gas manifold.

3. Direct-sparking sequence shall last through the complete duration of the trial for ignition period for guaranteed light-off. Burner shall always be lit at maximum gas flow and combustion airflow for guaranteed light-off. Each burner ignition module shall have LED indicators for troubleshooting and a set of exposed prongs for testing flame indication signal.

4. All furnaces shall be controlled by an electronic Vernier-type fully modulating control system capable of achieving 81% combustion efficiency over the entire gas firing range of the unit.

5. Each furnace shall have:

    a. A minimum turndown ratio of 6:1 for natural gas while maintaining a constant 81% efficiency (90% for high efficiency furnace option). No cold air bypass of the heat exchanger.

    b. Each furnace heat exchanger shall be a bent-tube style design made entirely of stainless steel.

    c. Stainless steel Quick Seal Connection for gas connection.

    d. Manifold and Input gas pressure gauges.

    e. Factory piped condensate drain to exterior of cabinet.

    f. A combustion flue to be installed on adjacent side as combustion intake with integrated high velocity wind cap.

    g. A blocked vent safety airflow switch with high temperature silicone tubing operating off of absolute pressure measured inside of the power-vent blower housing.

    h. A high temperature auto-recycling limit with a maximum non-adjustable set point.

    i. A manual reset high temperature flame roll out switch with a non-adjustable set point.

    j. Each furnace compartment shall have a removable post and panel that allows the furnace to be easily removed for service and maintainability.

    k. A power-vent assembly for exhausting flue gases with a PSC or ECM type motor that is securely mounted and easily accessible/removable for service.

    l. A 0-10" w.c. gas pressure gauge installed on the gas manifold.

K. FILTERS

1. Provide filters as part of unit. All filters shall be furnished and installed to meet the performance requirements set forth in the schedule and as specified under another section of this work.

2. All filters shall be installed on tracks for easy removal from the unit.

3. Mixed air shall have MERV-13 filters.

L. ELECTRICAL

1. All controls shall be pre-wired and housed in an insulated electrical cabinet within the unit to protect against risk of condensation.

2. Units shall be provided with single point electrical connection.

3. Unit shall be provided with a door safety switch that de-energizes the supply fan when the door is opened.

4. Unit shall be provided with a factory mounted averaging supply air temperature sensor to allow for accurate discharge temperature readings within unit when a downstream sensor is not installed. Field mounted and wired discharge air sensors will not be accepted.

5. Unit shall be provided with a factory mounted averaging intake air temperature sensor to allow for accurate intake temperature reading regardless of how the OA/RA dampers are positioned.

6. The electrical cabinet shall be outfitted with the following:

    a. LED electrical cabinet service light with automatic activation upon door switch.

    b. Color wiring schematics, laminated to the interior wall of the cabinet doors.

    c. Factory mounted disconnect with unit bottom knockouts.

    d. A LED backlit, LCD Human-Machine Interface (HMI) shall be mounted within the unit's control cabinet to allow for all set points configuration and refrigeration system monitoring at the unit.

    e. Provide 120V, 15A unit unpowered convenience outlet.

7. All sensors shall be wired back to the main control board that continuously monitors all critical components and makes decisions based on pre-determined logic to accurately control the following:

    a. PID logic to control heater modulation ensuring precise discharge/space temperature control.

    b. PID logic to control compressor speed to provide precise control over evaporative coil temperatures, leaving dew point, and discharge/space temperatures.

    c. PID logic for Outdoor fan modulation to maintain an optimal outdoor coil temperature.

    d. PID logic for Electronic Expansion Valve (EEV) position to maintain a precise superheat temperature.

    e. PID logic for Modulating Reheat valve to limit supply air temperature and relative humidity based off of space or discharge conditions.

M. CONTROLS

1. Unit shall be outfitted with a control board to allow for full control of the entire unit.

2. Provide air flow switch on the supply fan system to sense air flow with available set of contacts for connection to BMS for airflow alerts.

3. All unit controls shall be compatible with BACnet and LonWorks based building management systems as required for interface with the existing BMS.

4. Temperature Control System

    a. Low-Ambient Cooling: Unit is factory outfitted with logic allowing for low-ambient operation of the DX system
        1) Standard low-ambient operation: Unit(s) with a DX system may operate down to 0°F outdoor temperatures purely through software utilizing the standard factory modulating components.

    b. Discharge Temp Control (Heating)
        1) Unit modulates the burner flame (current supply in the case of electric heating) to accurately maintain the desired discharge temperature set point and compensate for fluctuations in entering air temperature, air volume and % of OA using heating PID controls designed specifically for the DOAS.

    c. Discharge Temp Control (Cooling)
        1) Unit modulates the compressor frequency to accurately maintain the desired discharge temperature set point and compensate for fluctuations in entering air temperature, air volume and % of OA using proprietary cooling PID controls designed specifically for the DOAS.

    d. Space Temp Control (Heating)
        1) Unit modulates the burner flame (current supply in the case of electric heating) to accurately maintain the desired space temperature set point and compensate for fluctuations in entering air temperature, air volume and % of OA using heating PID controls designed specifically for the DOAS. Minimum and maximum discharge set points can be set to limit the temperature entering the space. An optional additional HMI or room thermostat can be used to determine the space temperature. In the case that no temperature sensor is available in the space, the unit will use an internal return temperature sensor.

    e. Space Temp Control (Cooling)
        1) Unit modulates the compressor frequency to accurately maintain the desired space temperature set point and compensate for fluctuations in entering air temperature, air volume and % of OA using cooling (heating when in heat pump mode) PID controls designed specifically for the DOAS. Minimum and maximum discharge set points can be set to limit the temperature entering the space. An optional additional HMI or room thermostat can be used to determine the space temperature. In the case that no temperature sensor is available in the space, the unit will use an internal return temperature sensor.

f. Advanced Total Unit Economizer: The control system is outfitted standard, without need for any additional hardware, with an Advanced Total Unit Economizer which will take maximum advantage of as much energy available in the outdoor air conditions in order to run the compressor the minimum amount required at any given incoming air conditions. If the outdoor enthalpy (temperature and relative humidity) permits, the unit will be capable of completely modulating and shutting off compressor to provide "free" cooling and dehumidification as the outdoor air conditions allow.

N. Activation Controls:

1. Activate Based on Both (Heating)
    a. Unit will activate heating when the space AND intake temperature drop below the desired set point.

2. Activate Based on Both (Cooling)
    a. Unit will activate cooling when the space AND intake temperature rise above the desired set point.

O. Control panel shall provide choice of heating, ventilating, or cooling function. Unit shall have all internal wiring, including motor and motor controls, factory wired and pre-tested.

1. Control panel shall provide choice of heating, ventilating, or cooling function. Unit shall have all internal wiring, including motor and motor controls, factory wired and pre-tested.

P. VARIABLE FREQUENCY DRIVES

1. Provide Variable Frequency Drive for the compressor as part of the AC unit. VFD shall be furnished and installed to meet the performance set forth in the schedule and as specified under another section of this work.

    a. Accessories to be furnished and mounted by the drive manufacturer and contained in a single enclosure. (The use of more than one enclosure is not acceptable).
2. Provide Variable Frequency Drive for speed control on all non-ECM direct drive supply fans.

3. All VFDs shall provide the following inherent protections:

    a. Phase protection.

    b. Brownout protection.

    c. Overload/Overheat protection.

    d. Soft starts to protect bearings/hardware.
    e. Low & High voltage & over-torque protections.

Q. ROOF CURB

1. Unit shall be factory assembled, and constructed of 18GA galvanized steel, with optional 16GA available.

2. Curb shall be fully insulated with 1" acoustical and thermal insulation.

R. SYSTEM START-UP

1. System start-up is performed by a factory trained Service Technician.

S. Each unit shall be shipped completely assembled in a single packaged unit and shall be factory fire tested before shipment.

T. UNIT OPTIONS

1. Provide factory hail guards.

2. Provide a factory mounted weather-proof non- powererd120-volt GFI outlet.

3. Unit shall be furnished with factory curb, intake hood with bird screen, magnetic starter containing all necessary auxiliary contacts for interlocking the make-up air units with the exhaust fans. Coordinate with Division 251000 contractor.

U. Units shall be Econ-Aire or equal of Greenheck, Trane or Captive Air.

2.25 AIR FILTERS

A. Provide one complete set of spare filter media (in addition to the new filters installed at time of acceptance) for each unit filter bank and store on site as directed by the owner.

B. Air filter banks shall be Cambridge, AAF, or Eco-Air.

2.26 EXHAUST FANS

A. Ceiling Type:

1. Furnish and install complete the ceiling mounted exhaust fans shown and specified on the drawings.
2. Fan shall have acoustically insulated housing for quiet operation. Air deliveries shall be as indicated on the drawings and shall be certified by AMCA performance tests.
3. Fan shall have centrifugal wheel direct connected to motor. Ceiling grille shall be all aluminum construction with satin finish. Entire fan, motor, and wheel assembly shall be removable without disturbing the housing. Fan speeds shall not exceed 1100 RPM. Unit shall be complete with backdraft damper.
4. Fan shall be Greenheck, Twin City, Cook or Penn.

2.27 ELECTRIC RADIANT CEILING PANELS

A. Furnish and install complete the electric radiant heating panels shown and specified on the drawings. Heating panels shall be constructed of insulated Solid-State Heating element. The element shall be backed with one-inch thick, high density, odorless fiberglass board, faced with a white finely textured aluminum face and framed in aluminum. Panels shall reach the full surface temperature in five minutes. Radiant output shall be 95% of input energy. Panels shall be listed under UL Standard 2021.

B. Panels shall be factory stenciled to match architectural lay-in ceiling tile pattern. Coordinate with project architect.

C. Panels shall be Enerjoy I or approved equal.

2.28 DAMPERS - GENERAL

A. Damper frames shall be of not less than 18-gauge galvanized steel, formed for extra strength, with mounting holes for enclosed duct mounting.

B. All damper blades shall be of not less than 16-gauge galvanized steel formed for strength and high velocity performance. Blades on all dampers must be of not over 6" in width. Blades shall be secured to 1/2" diameter zinc-plated axles by zinc-plated bolts and nuts. All blade bearings shall be nylon. Blade side edges shall seal off against spring stainless steel seals. Teflon-coated thrust bearings shall be provided at each end of every blade to minimize torque requirements and insure smooth operation. All blades linkage hardware shall be constructed of corrosion-resistant, zinc-plated steel and brass.

2.29 AUTOMATIC DAMPERS

A. The ATC contractor shall furnish all automatic control dampers. The sheet metal contractor shall install all dampers and transition all ductwork to the dampers.

2.30 VARIABLE AIR VOLUME RE-HEAT BOXES:

A. Casings shall be 26 gauge galvanized with flange rectangular discharge duct connection. A one-piece aluminum backdraft damper shall be provided on the fan discharge. The damper shall be factory set and aligned to insure a precise seal. Leakage rate shall not exceed 2 percent of rated capacity at 0.5" static pressure.

B. Automatic damper operators and controllers shall be furnished by the ATC contractor and installed by the VAV box manufacturer. Boxes to be c/w paint tie-in for interface with room occupancy sensors. Provide sheet metal enclosure around damper operator/controller.

C. The VAV box manufacturer shall furnish and install an approved cross flow sensor with a gain factor of not less than three (3).

D. VAV boxes shall be provided with a pressure independent 3-position volume regulator which operates thru a thermostatically reset velocity controller to provide constant air delivery within plus or minus 5 percent of rated flow, and down to 25 percent of the VAV box rated CFM. Factory calibrated field adjustable setpoints shall be provided to set maximum and minimum CFM.

E. The hot water heating coil shall be a single or multiple row unit as specified with plate-type aluminum fins and mechanically bonded to a copper tube carrier pipe.

F. Control enclosure shall be on same side of coil connections

G. Contactor is responsible to coordinate coil and control LH or RH with supplier prior to ordering of boxes.

H. 30" minimum shall be kept clear at valve and control side of box from all piping, lighting, structure, etc. for ease of service.

I. The entire unit shall be serviceable from a single ceiling access door.

J. Units shall be Price, Nailor or Titus.

2.31 CROSS FLOW PRESSURE SENSORS FOR VAV BOXES

A. Sensors shall be aluminum corrosion resistant of the crossflow type with ported tubes and baffle mounted to a center manifold. The center manifold shall have 1/4" barb fittings for FRPE tubing and shall provide a differential pressure proportional to the average velocity of air moving through duct.

B. The sensors shall have an amplification factor (gain) of at least three and flow coefficient as follows:

Size	Cv
4	209
5	315
6	462
7	612
8	817
10	1250
12	1792

PART 3 – EXECUTION

3.1 JOB SITE CONDITIONS

A. Inspection:

1. Prior to all work of this section, carefully inspect the installed work of all other trades and verify that all such work is complete to the point where this installation may properly commence.
2. Verify that the work of this section may be installed in accordance with all pertinent codes and regulations in the approved shop drawings.

B. Discrepancies:

1. In the event of discrepancy, immediately notify the Architect.
2. Do not proceed with installation in areas of discrepancy, until all such discrepancies have been fully resolved.

3.2 INSTALLATION OF EQUIPMENT

A. Install all equipment with adequate space for service and maintenance. **Minimum of 24" clearance for all service and control access.**

B. VAV boxes, fan coil units, and similar equipment which requires periodic service and maintenance shall be installed in plenum space within 2 ft. of finished ceilings, or within 2 ft. of the bottom chord of the structure.

C. VAV box service areas shall be clear of all light fixtures and piping.

D. All visible surfaces behind grilles and registers shall be painted flat black.

E. Care shall be taken to avoid interference with structure and the work of other trades. Do not cut into load carrying members without the approval of the Owner's representative.

3.3 INSTALLATION OF DUCTS

A. All ducts shall be installed in compliance with the latest editions of the SMACNA manuals.

B. All necessary allowance and provisions shall be made in the installation of sheet metal ducts for the structural conditions of the building, and ducts shall be transformed or divided as may be required. Whenever this is necessary, the required area shall be maintained. All changes, however, must be approved and installed as directed.

C. Pre-manufactured ducts shall be connected to rigid ducts and equipment with the solid wraps of fabric duct tape and tyton bands drawn tight to form an airtight joint.

D. During the installation, the open ends of all ducts shall be protected by covering with plastic sheet tied in place to prevent debris and dirt from entering.

E. Install this work in cooperation with other trades so that there will be no delay in progress of construction work. It is extremely important that the duct system be clean before connections are made to the VAV boxes.

F. The contractor shall take special care when running exposed ductwork to ensure that the final installation is neat in appearance.

G. Under no circumstances shall ductwork be supported from the metal roof deck. (See general requirements 230100 & 230900)

H. Ceiling outlets shall be rigidly supported from the overhead structure with G.I. wires or straps, or from rigid galvanized iron ductwork. Outlets shall not be supported from T-bar ceilings or metal roof deck.

I. Hanger and Supports:

1. Hangers for ducts up to 18" in width shall be placed on not more than 8'-0" centers. Ducts 19" and over in width shall be supported on not more than 4'-0" centers. Hangers shall be placed plumb and present a near appearance. Construct hangers from galvanized band iron 1" x 1/8" for duct up to 36" wide. Hangers shall extend down the sides of the ducts not less than 9". On ducts less than 9" in depth, hangers shall extend the full depth of the ducts. Attach hangers to ducts using not less than three rivets or parker screws of appropriate sizes. It is essential that all ducts be rigidly supported. Where vertical ducts pass thru floors or roofs, supporting angles shall be rigidly attached to ducts and to the structure. Angles shall be galvanized and of sufficient size to support the ductwork rigidly. Place supporting angles on at least two sides of the duct. For round ducts, strap hangers shall extend completely around ducts.
2. Ceiling outlets shall be rigidly supported from the overhead structure with G.I. wires on straps, or from rigid galvanized iron ductwork. Outlets shall not be supported from T-bar ceilings unless approved by the owner's representative.

J. Ducts at Masonry:

1. Where ducts are shown connecting to masonry openings and along edges of all plenums at floors and walls, provide a continuous 2" x 2" x 3/8" galvanized angle iron which shall be bolted to the construction and made airtight to the same by applying caulking compound. Sheet metal at these locations shall be bolted to the angle irons.

3.4 STORAGE OF DUCTS

A. Ductwork shall be stored in a protected area to prevent physical damage to the duct liner, and to ensure that the duct liner is not exposed to excessive heat or moisture which would deteriorate the air side surface.

B. Ductwork which has been improperly stored and/or sustained physical damage will be rejected and shall be removed from the job site as directed by the Owner's representative.

3.5 CLEANING OF DUCTS

A. Before ducts are insulated and before the ceiling is installed and final connections made to the terminal boxes, the fans shall be operated at full capacity to blow out any dirt and debris from ducts. If it is not practical to use the main supply blower for this cleaning, the ducts may be blown out in sections by a portable fan. After the ducts have been cleaned and initially pressure tested, the final connection shall be made to the terminal boxes.

3.6 TESTING OF DUCTS

A. Supply, return, and exhaust ducts, plenums, and casings operating at duct pressures from +2" to -2" shall be tested and made substantially airtight at static pressure indicated for the system before covering with insulation or concealing in masonry. Substantially airtight shall be construed to mean a leakage rate less than 5% of the rated airflow.

B. Supply air ducts operating at pressures above +2" shall be tested and made substantially airtight. Leakage shall be less than 1% of the rated air flow.

C. Ducts including all flexible runouts shall be tested in accordance with SMACNA Duct Construction Standards.

D. After the vertical duct risers or branch ducts have all been tested and tied into the mains, and after the central station air handling apparatus has been installed, the mains shall be tested in accordance with SMACNA Duct Construction Standards.

End of section 233000

SECTION 25 1000 - AUTOMATIC TEMPERATURE CONTROLS

PART 1 – GENERAL

1.1 GENERAL CONDITIONS

A. The General Conditions, Supplementary General Conditions, alternates and addenda, applicable drawings and the technical specifications, shall all apply to all work under this division.

1.2 SCOPE OF WORK

A. The scope of work shall include all labor, material, and equipment necessary to expand the existing automatic temperature control system for the facility. The Contractor under this heading shall furnish and install a complete direct digital control system as specified.

B. Interface with existing DDC system and communication.

C. Contractor shall provide at time of bid a statement of compliance including, but not limited to:

1. Detailed points list.
2. Any deviations from base specification with listed costs.

D. Install a new complete, fully programmable, customized Direct Digital Control (DDC) system for control of the systems. This DDC control system shall be configured to operate over the district wide network.

E. Provide the following:

1. Local DDC Control Panels
2. ATC Interface Panels
3. Local Area Network Wiring & Setup
4. Interface with Existing Systems
5. Room Temperature Control
6. VAV re-heat control
7. Building Fire Alarm Interlocks
8. New Make-Up Air Unit
9. Exhaust Fan Control
10. Relocation of existing thermostats as noted
11. New zone thermostats
12. Alarming as specified here in.
13. Connectivity and Interface with all VFD’s
14. Replacement of the Existing Kitchen Make-Up Air Unit – Alternate #2
15. Interface with new MAU & Existing Hood EF Systems - Alternate #2
16. Upgrade of Existing ATC Systems – Alternate #3

1.3 SYSTEM DESCRIPTION:

A. BASE BID SYSTEM

1. A web based, password protected DDC automatic temperature controls shall be furnished and installed as a part of this contract to give the owner a completely operable system.

2. Acceptable manufacturer and installer:

a. **Struxureware, as supplied and installed by UTAH YAMAS Controls, as an extension of the existing building system.**

B. ALTERNATE #3

1. Upgrade existing INET controllers to the latest version of EcoStrucure Building Operation BACnet/IP Controllers.

a. Scope shall include the following:
1) VAV box controllers (total of 75) replacement MPV-7 BACnet/IP controllers, blank thermostats, new DA sensors.
2) Existing AHU controllers (total of 12) replacement MPC-24A controllers, new DA, RA, MA sensors.
3) Existing CUH controllers (total of 6) MPC 15, blank thermostats.
4) Existing exhaust fan controllers (total of 8)
5) Space temperature alarms (6 – for the General Building)
6) Space temperature alarms (4 – for the riser rooms & server rooms)
7) Space temperature alarms (2 – for the kitchen frezzer & cooler)
8) The existing listed shall be replaced with new controllers, associated wall temperature sensors and cat5 communication wiring.
9) The existing building automation server shall remain.

b. All work under Alternate 03 shall be provided and installed by Utah-Yamas Controls, SLC as an extension/upgrade of the existing BAS.

c. Contractor shall include separate line-item pricing for the following:
1) Space temperature sensor/thermostat.
2) VAV controller.
3) Valve or damper controller.

C. A detailed points list shall be provided by base bid contractor.

D. DDC system shall be configured and connected to the district Ethernet/Network. System shall be accessible from any remote site through an Ethernet or internet connection. All functions, programs and control system parameters shall be accessible and fully functional through the district network. The ATC contractor shall supply and install all required hardware and software to permit full access to the DDC system at the new school as well as every same manufacture system throughout the district. All controllers shall be LON or open Native BACnet and freely programmable. Controllers with canned programming are not permitted.

E. The entire building automation system shall tie into JSD Lan Network. The ATC contractor shall include all software and hardware to permit district wide network and complete intranet access to the DDC system. This includes graphic pages, per Jordan's District standards, monitoring, alarming, trending, programming, database modifications, setpoint changes, DDC programming. All aspects and elements of the DDC control system shall be available across the entire district network. The use of PC anywhere, or similar remote software, or lick portal packages is not acceptable.

F. The system shall be as indicated on the drawings and specified herein. Building HVAC systems and unitary heating devices shall be entirely controlled by the DDC system.

G. The latest technology DDC/Energy Management systems will be furnished and installed. As a standard, these systems will include graphics and data files for each building at the Jordan's School District maintenance office.

H. The DDC/Energy Management system will have a graphic and/or text page for each major mechanical piece of equipment or system (I.E.: boilers, chillers, fans, etc.). added to the existing system. From these pages, there will be "live" readouts of temperatures, pressures, RH levels, on/off status, valve and damper positions, outside air temperature, etc. It shall be possible from this screen to perform setpoint changes, equipment on/off overrides, implement "test" status and values, without additional screen or program manipulation. Functions such as equipment schedules and reset schedules shall be accessed from editing screens. All functions shall be protected with different levels and passwords.

I. Update existing floor plan(s) to show modifications of rooms,

J. All system and unitary controls shall be of the direct digital type (DDC). Self-tuning PID (Proportional, Integral, Derivative) control algorithms shall be applied where applicable on all applications. The control system shall be a networked, distributed intelligence system, with the control loops for each system being capable of stand-alone operation.

K. The system shall include all control devices, valves and damper parts as called for hereinafter.

L. All heating valves shall be normally open. No exceptions.

M. **The ATC contractor is required to supply and install a 3/4" EMT conduit system for the DDC control system in all areas. This includes all wall areas, hard ceiling areas, exposed ceiling areas and mechanical rooms.**

N. Wireless devices or systems **WILL NOT** be accepted.

1.4 WORK TO BE PERFORMED BY OTHERS

A. Division 26 shall also provide 120 VAC, 20 Ampere power sources to each group of ATC panels as shown. The ATC contractor shall be responsible for all step-down transformers and 24 VAC wiring to ATC equipment.

B. The sheet metal contractor shall install all dampers supplied by the ATC contractor. Each damper shall be installed so that it will operate freely and without binding. To ensure that the damper both opens and closes completely with less than 7#/sq. ft. torque applied at the operating shaft, each damper shall be checked after its installation, but before the damper actuators are attached. Dampers not properly installed or meeting this torque requirement shall be replaced and/or reinstalled without additional cost to the ATC contractor or the Jordan's School District.

C. The mechanical contractor shall install all valves, immersion wells and pressure taps supplied him by the ATC contractor.

1.5 INSTALLATION BY AUTOMATIC TEMPERATURE CONTROL (ATC) CONTRACTOR

A. The successful control contractor shall furnish and install all necessary electrical control wiring and conduit for the complete temperature control system, heating and ventilating equipment motor starting circuit controls and all electrical control interlocks for same, and for control wiring for miscellaneous HVAC equipment furnished by the Owner.

B. The ATC contractor shall be a licensed Electrical Contractor in the State of Utah with full time Master, Journeyman and apprentice electricians. If the ATC subcontracts the installation, it shall be to a licensed Electrical Contractor in the State of Utah. Full time Master, Journeyman and apprentice electricians shall be utilized for the installation.

C. The ATC contractor shall furnish & install all necessary electrical control wiring and conduit of all temperature controls, heating and ventilating equipment motor starting circuit controls, all electrical control interlocks for same and for miscellaneous packaged equipment as defined within this specification. Full time Master, Journeyman and apprentice electricians shall be utilized for the installation.

D. All line and low voltage electrical and control wiring shall be installed **in conduit, 3/4" minimum EMT as per 251000/1.3. Q.** The ATC system will be installed in 100% 3/4" EMT conduit & in accordance with the National Electrical Code and applicable local codes and in accordance with Division 26 of this specification. 3/4" nominal trade conduit shall be installed. When connecting to controllers, valves etc. that have no provisions for EMT connections, EMT may terminate in a junction box located within 36" of the controller or control valve. When making a transition between EMT and plenum cable, protect cable from abrasion by installing an insulating connector or equivalent on the exposed end of the EMT. Full time employees holding Master, Journeyman and apprentice electrician licenses in the State of Utah shall be utilized for the installation.

E. Installation of plenum wire in return air plenums <u>will not be accepted.</u>

F. All ATC rough-in boxes shall be identified with the letters "ATC" written across the <u>inside of the box</u> with permanent marker. In addition, each ATC cover plate shall be painted white with the letters "ATC" stenciled in black.

1.6 QUALITY ASSURANCE

A. Provide an unconditional TWO-YEAR parts and service warranty. This warranty shall commence at the time of substantial completion of the various portions of the system.

B. All parts and material and their installation methods shall be in accordance with the manufacturer's recommendations and specifications. All parts and material shall be new.

C. The Contractor or firm executing the work of this section shall have at least 10 years' experience in completing work of similar scope and nature to that specified.

D. Provide an unconditional **TWO-YEAR** parts and service warranty. This warranty shall commence at the time of demonstration of system completion of all portions of the ATC system.

E. Emergency response by contractor shall be available 24 hrs/day 7 days/week 365 days/yr. Response time shall not be greater than 12 hours from time of call.

1.7 SUBMITTAL AND TECHNICAL INFORMATION

A. Submit shop drawings and manufacturer's data for the following items to the mechanical engineer:

1. Wiring and installation diagrams.
2. ATC device specification sheets
3. Complete and detailed point list
4. Control flow diagrams, complete with all control schematics and sequences of operation.
5. Documentation of all software and hardware. These manuals shall be complete with installation procedures as well as startup and programming instructions. They should also contain any testing or maintenance procedures required to operate system on a continuing basis.

1.8 PROJECT COMPLETION REQUIREMENTS

A. Upon completion of the project, the ATC contractor shall spend a minimum of **4 hours** with the Jordan's School District maintenance personnel to adequately instruct them on the operation and maintenance of the system. These training sessions shall be scheduled at times convenient to the

B. School District and shall be conducted at the project. One on one, live, local hands-on training will be provided.

C. The ATC contractor shall provide as part of his contract the on-site services of a technician familiar with the system to assist the air & water balance contractor in completing his portion of the project. The technician shall be available for a minimum of an additional **4 hours** for this assistance.

D. The ATC contractor shall provide as part of his contract the on-site services of a programmer familiar with the system for an additional **2 hours** which the Engineer and/or the School District may use as they see fit to fine-tune or add features to the system.

E. At 6 months after the completion date of the project, the ATC contractor will provide **2 hours** of onsite training with the owner. This training is part of this scope of work and costs shall be inclusive. The hours can be allotted in separate training sessions as determined by the owner. One on one, live, local hands-on training will be provided.

F. Provide a complete digital copy of the project operating and maintenance instruction manuals for use during the training sessions. Each manual shall contain all system components and DDC system programming.

G. Operation & Maintenance Manuals: Provide a digital copy as specified above. These manuals shall provide descriptions of maintenance procedures for all system components, including sensors and controlled devices. They shall cover inspection, periodic preventative maintenance, fault diagnosis, and repair or replacement of defective components. They shall include complete as-built ATC installation drawings with sequences of operation for all mechanical systems controlled by the ATC contractor. They shall each include all as-built system programming.

PART 2 – EQUIPMENT

2.1 CONTROLLERS

A. Open BACNet controls with freely programmable controllers, including VAV controllers, shall be utilized as indicated and specified elsewhere in this specification. Proprietary control system communication protocols will not be accepted.

B. All main level controller inputs shall have at least 12-bit A/D converters for input accuracy. Less resolution is unacceptable for main level controllers or any controllers using an air monitoring station or monitoring building pressure. All main level controller outputs shall have board mounted hand-off-auto switches for local output override capability.

C. The contractor shall utilize and employ only the following controllers for any central plant systems and air handling units. A single controller shall be designated with all programming and I/O for each system. This will allow standalone equipment operation in the event of communications failure. Connection of multiple small controllers or combined operation with other programmable controllers on air handlers and central plant equipment is not permitted. All controllers shall be freely programmable; controllers with canned programming are not acceptable.

D. The only Variable Air Volume box controllers allowed for VAV applications shall be freely programmable. No substitutions, no canned application programming will be accepted.

E. All controllers and devices shall be identified.

2.2 DDC INPUT DEVICES

A. All DDC input devices shall provide industry standard signals and shall be compatible with the DDC controllers used.

B. All temperature input devices shall have a rated accuracy of 1% or better.

C. All pressure input devices shall have a rated accuracy of 2% or better. Pressure transmitters shall be selected to match the application and shall not be damaged by pressures at five times the maximum measurable pressure.

D. Miscellaneous input devices shall have accuracies as individually specified. All miscellaneous devices shall be specifically identified (with specifications) with submittals.

2.3 DDC OUTPUTS

A. Modulating outputs shall be in accordance with industry standards and shall be compatible with the driven DDC devices.

B. Outputs shall be 0-10 VAC/VOC or 0.5 sec - 5.0 sec. 4-20 MA, or a pneumatic signal 0-20 PSI.

C. DDC digital outputs shall be either relay contact closures or Triacs rated for the application.

2.4 MANUFACTURERS

A. Provide a new Direct Digital Control (DDC) system manufactured by Schneider Electric for the facility mechanical equipment. The new system shall be installed, programmed and commissioned by the ATC contractor.

2.5 AUTOMATIC VALVES

A. ATC valve bodies 2" and smaller shall be screwed with union; larger valve bodies shall be flanged. Screwed valves shall be rated at 125 psi or greater and shall have brass bodies. Flanged valves shall be rated at 125 psi or greater and have cast iron or steel bodies. All automatic valves shall be for DDC control application.

B. All ATC valves, DDC and pneumatic including all 3-way valves shall fail Normally Open (N.O.)

C. All heating valves shall fail Normally Open (N.O.) VAV Re-Heat valves will not be required to fail open.

D. All valves shall be disc/plug and seat or ball valve construction.

E. **Heating water valves for VAV re-heat coils shall be floating type, 3-wire valves.**

F. Shut-off pressure ratings of each valve shall be as required by the application.

G. Valves shall be Belimo or Honeywell, M640001, M7400 series. (No substitutions)

2.6 MOTORIZED ATC DAMPERS

A. Motorized control dampers that are not supplied with the air handling units shall be furnished by the Automatic Temperature Control Contractor. Dampers shall be factory-built, low leakage units such as Ruskin CD-50 or approved equal. Blades shall be 6" maximum width, 6063-T5 extruded aluminum width, 1/2" axles, and Oilite or Cycoloy bearings. No round shafts will be accepted.

B. All blade-to-blade linkages shall be external and accessible. No linkage within the damper frame channel will be accepted.

C. Frames shall be 5" x 1", 6063-T5 extruded aluminum hat channel design, 0.125" minimum thickness with corner braces to assure squareness.

D. Dampers shall be low leakage type with compressible end seals and neoprene or extruded vinyl blade and jamb seals. Leakage shall not exceed 6.2 cfm/sq. ft. at 4" W.G. Dampers shall require less than 7#-in/sq. ft. torque at the operating shaft for proper operation.

E. Outdoor & return air dampers shall be parallel blade with blade direction oriented to assist mixing of air streams with spring return to fail closed. Relief air and other volume control dampers shall be opposed blade.

2.7 DAMPER AND VALVE ACTUATORS

A. Damper and valve actuators shall be of the gear-train type. All moving parts shall be permanently lubricated and not require addition or replacement of oil. Actuators shall meet the NEMA 2 rating and shall have an ambient temperature operating rating of -40°F to 140°F, without the addition of extra equipment.

B. Damper and valve actuators shall accept the appropriate Ma, VDC or digital output signals provided by the DDC controllers.

C. Damper actuators shall be mounted outside the air stream whenever possible and be of sufficient size to operate the connected damper. Mount damper actuator on firm baseplate.

D. Damper actuators linked to outdoor air and relief air dampers shall close their attached dampers upon power failure or fan shutdown by means of a mechanical spring return.

2.8 Actuator manufacturers shall be Belimo or Honeywell. No substitutions.

2.9 ROOM THERMOSTATS

A. Wall-mounted space temperature thermostat. No visible readout or adjustment at thermostat. Setpoint range shall be adjustable by owner via building control system. Flat plate, stainless steel plate sensors will not be accepted. Thermostats shall match existing building thermostats and be approved by owner.

B. Thermostats shall be located on interior stud walls wherever possible.

C. Standardized locations and mounting heights shall be predetermined with owner prior to rough-in.

D. New thermostats shall match existing thermostats installed.

2.10 USER INTERFACE

A. The School District facility management and control system includes an existing Centralized Host computer currently located at the District offices. If the control system provided for this project will not seamlessly connect to the existing centralized computer, the ATC contractor shall provide as specified to provide all programming, monitoring, alarming and configuration functions within this specification. Networking, lines, and software shall be furnished and installed by Division 25. Communication shall be completed to the Jordan's School District office by Division 25. This includes complete control system access from the District office in addition to complete control system access at the school.

B. The most current versions of all necessary controlling & monitoring software & graphic displays shall be installed on the District Centralized Host computer. Copies of all software disks, operation manuals, along with installation instruction shall be provided to owner.

C. All new software releases available within one year of the substantial completion date shall be provided to the owner and installed at no additional cost to the School District.

D. The controlling software data base shall be constructed by the ATC contractor to Jordan's School District requirements. Contractor shall consult with Jordan's School District to verify these requirements as a part of this contract. Contractor shall provide a fully operational DDC control system that may be monitored, controlled & modified from the District Centralized Host computer. All control schedules, algorithms, and control logic shall be in place within each DDC controller and stored as back-up copies on both Host computers hard disks which may be downloaded to individual DDC controllers as necessary. Documentation provided shall include block software flowchart showing the interconnection between each of the control algorithms and sequences. A hard copy paper printout of points for each device shall be provided. Digital copies shall be provided in the O&M manual..

E. The building revisions shall be represented by complete graphical floor plans, with accurate locations of each major piece of HVAC equipment. A zoom feature shall allow the operator to select any of the main fan systems and see a graphical representation of the system with dynamic representation of all appropriate DDC input & output devices. Each major piece of HVAC equipment shall be graphically represented at each Host computer with all appropriate DDC points dynamically represented.

2.11 LOCAL DDC CONTROL PANELS

A. Local DDC control panels shall be located near mechanical systems as necessary to provide both digital and analog input and output points as specified and/or required to achieve specified system performance.

B. Each local DDC control panel shall provide all control functions for the mechanical equipment specified to be controlled from that panel.

C. Every input and output point shall be well labeled, and every digital output shall have a LED indication of the position of the output relay.

D. ATC contractor shall provide documentation of the software application program for each digital controller.

E. Documentation provided shall include block software flowchart showing the interconnection between each of the control algorithms and sequences. Complete ATC drawings including terminal connections shall be available at each local panel.

F. System acceptance shall not be completed until this documentation is provided and located in each ATC interface panel.

G. Systems providing modulating outputs via pulse width modulation techniques, shall provide within each ATC interface panel all the components required to implement the functions equivalent to an analog output.

2.12 LABELING

A. All ATC supplied panels and devices shall be permanently labeled with engraved plastic laminate labels indicating device name, system identifier and function within the system.

PART 3 – SEQUENCE OF OPERATION

3.1 VAV RE-HEAT BOXES

A. The VAV fan systems consist of as existing fan system.

B. Existing VAV re-heat boxes shall be re-balanced and re-commissioned as noted.

C. New VAV re-heat boxes shall be controlled as specified, and as per JSD standards.

D. Room space temperature sensing shall be from wall-mounted temperature sensing elements with no adjustment or visible temperature indication. Any adjustments will be made remotely by JSD District personnel. points. A duct style temperature sensor shall be installed at each VAV box air discharge.

E. A VAV box mounted DDC controller shall be provided for control and operation of each VAV box and reheat coil. Sensor shall modulate the box primary air damper between minimum ventilation position and maximum designed airflow and position the reheat coil valve in sequence to maintain the desired space temperature. Heating and cooling set points shall be individually adjustable from the man-machine interface device (Host computer) or the District offices.

F. Each VAV box shall be configured for central plant heat mode which shall reverse the operation of the VAV damper to open for heating instead of cooling whenever the air handler is in the warm-up mode.

G. Each VAV box shall be configured and programmed for CFM set point modulation based on system variable such as CO2. The ATC contractor shall demonstrate the program and the freely programmable VAV DDC controller.

H. Each VAV box DDC controller shall have a 24-volt power connection with all 24-volt control wiring by the ATC contractor. 24-volt transformers shall be located in the DDC controller of the air handler serving the VAV box for ease of maintenance.

3.2 ELECTRIC RADIANT CEILING PANELS

1. During occupied mode, space temperature sensors acting thru the DDC controllers shall activate the associated panels to maintain space temperature setpoint.

3.2 TOILET ROOM EXHAUST FANS

A. Ceiling type, toilet room exhaust fans shall be individually operated by pre-determined schedules from the building DDC system.

3.3 DATA ROOM COOLING CONTROL

A. Packaged cooling unit shall be cycled by an electric, cooling type, wall thermostat.

B. Room shall be added to the District temperature alarm.

3.4 EXISTING KITCHEN EF & NEW MAKE-UP AIR UNIT CONTROL - ALTERNATE #2

A. Install duct thermostat and remote-control panel furnished by make-up air unit manufacturer in custom panel as indicated on plans. Interlock new make-up air unit with existing kitchen exhaust hood fan and wire to stop upon kitchen hood fire sprinkler activation.

B. The ATC contractor shall provide a recessed ATC panel for control of the kitchen exhaust hood systems. This panel shall incorporate the make-up air unit control panels, and in addition shall have fan switches and pilot lights for control of kitchen hood fan. In addition, a DDC interface to the District shall be provided to indicate operational status and discharge temperature of each makeup unit.

C. Provide a heat sensor and control in each hood section. When activated, the sensor shall energize new make-up air units and existing hood exhaust fan.

3.5 FREEZER AND COLD STORAGE TEMPERATURE ALARMS – ALTERNATE #3

A. Provide an analog DDC temperature sensor for each existing freezer and existing cold storage area. Coordinate alarm to the District remote security facility with Division 26. Alarm shall be generated to the District security whenever temperatures **drop below or above** the owner determined limits via a status contact closure to the security system. Division 25 contractor shall run line to building security dam for tie into building security system. System must be configured to follow the alarm requirements defined within this specification. Coordinate line to security panel with Division 26.

3.6 FIRE RISER ROOM SPACE TEMPERATURE ALARM – ALTERNATE #3

A. Provide an analog DDC temperature sensors for the (2) existing fire riser rooms. Coordinate alarm to the District remote security facility with Division 26. Alarm shall be generated to the District security whenever temperatures **drop below** the owner determined limits via a status contact closure to the security system. Division 25 contractor shall run line to building security dam for tie into building security system. System must be configured to follow the alarm requirements defined within this specification. Coordinate line to security panel with Division 26.

3.7 AREA SECURITY TEMPERATURE ALARMS – ALTERNATE #3

A. Temperature sensors located in an area served by each fan system shall continuously monitor the space temperature and alarm the District security system anytime the space temperature drops below or rises above preset set points. Division 25 contractor shall run line to building security dam for tie into building security system.

B. Upon receiving an alarm from the District security system, the Host computer at the school and at the District Offices shall indicate which area(s) of the building are in alarm through a graphic floor plan display of the building(s). Current space temperatures shall also be displayed at the Host computer.

C. Division 25 contractor shall run line to building security dam for tie into building security system. Provide status contact closure to the security system. Coordinate line to security panel with Division 26.

D. It is the intent that Division 251000 provide all wiring, etc. as required to tie listed systems into the JSD security alarm system in partner with Division 260000.

3.8 HOST COMPUTER & BUILDING GRAPHIC DISPLAY

A. Graphics pages shall be created to remain consistent with the existing graphics on the districts host computer. Floor plans, air handler summaries, and alarm pages, equipment pages, summary pages, etc. shall all be included. In addition to this section, the ATC contractor shall refer to section 2.13 and other sections within this specification for user interface, alarming, programming and configuration requirements from the graphical user interface (Host Computer).

End of section 251000

SECTION 260500 - ELECTRICAL GENERAL PROVISIONS

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Architectural, Structural, Mechanical and other applicable documents are considered a part of the electrical documents insofar as they apply as if referred to in full. Contractor must review the entire set of plans and specifications. Reviewing only the electrical set is not acceptable.

1.2 DESCRIPTION OF WORK:

A. The extent of electrical work is indicated on drawings and/or specified in Divisions 26, 27 and 28 sections of the specification. Provide all labor, materials, equipment, supervision and service necessary for a complete electrical system. Work includes, but is not necessarily limited to, the following items.

	ITEM	SECTION
1.	Electrical General Provisions	260500
2.	Electrical Submittals and Spare Parts	260503
3.	Electrical Connections for Equipment	260507
4.	Conductors and Cables	260519
5.	Grounding	260526
6.	Supporting Devices	260529
7.	Conduit Raceway	260532
8.	Electrical Boxes and Fittings	260533
9.	Electrical Identification	260553
10.	Occupancy Sensors	260923
11.	Lighting Control Equipment	260943
12.	Panelboards	262416
13.	Wiring Devices	262726
14.	Demolition	264119
15.	Interior and Exterior Building Lighting	265100
16.	Telephone/Data Systems	271500
17.	Audiovisual Systems	274100
18.	Intercommunication Systems	275123
19.	Access Control System	282200
20.	Fire Alarm and Detection System	283111

B. Use of standard industry symbols together with the special symbols, notes, and instructions indicated on the drawings describe the work, materials, apparatus and systems required as a portion of this work.

C. Visit the site during the bidding period to determine existing conditions affecting electrical and other work. All costs arising from site conditions and/or preparation shall be included in the base bid. No additional charges will be allowed due to inadequate site inspection.

1.3 DEFINITION OF TERMS

A. The following terms used in Divisions 26, 27 and 28 documents are defined as follows:

1. "Provide": Means furnish, install and connect, unless otherwise indicated.
2. "Furnish": Means purchase and deliver to project site.
3. "Install": Means to physically install the items in-place.
4. "Connect": Means make final electrical connections for a complete operating piece of equipment.

1.4 RELATED SECTIONS:

A. Consult all other sections, determine the extent and character of related work and properly coordinate work specified herein with that specified elsewhere to produce a complete installation.

B. General and Supplementary Conditions: Drawings and general provisions of contract and Division 1 of the Specifications, apply to all Division 26, 27 and 28 sections.

C. Earthwork:

1. Provide trenching, backfilling, boring and soil compaction as required for the installation of underground conduit, buried cable, in-grade pull boxes, manholes, lighting pole foundations, etc. See Division 31, Sitework, and other portions of Divisions 26, 27 and 28, for material and installation requirements.

D. Concrete Work:

1. All concrete work is the responsibility of Division 3. Coordinate concrete work required for Division 26 applications with general contractor.

E. Miscellaneous Metal Work:

1. Provide fittings, brackets, backing, supports, rods, welding and pipe as required for support and bracing of raceways, lighting fixtures, panelboards, distribution boards, switchboards, motor controls centers, etc. See Division 5, Metals for material and installation requirements.

F. Miscellaneous Lumber and Framing Work:

1. Provide wood grounds, nailers, blocking, fasteners, and anchorage for support of electrical materials and equipment. See Division 6, Rough Carpentry for material and installation requirements.

G. Moisture Protection:

1. Provide membrane clamps, sheet metal flashing, counter flashing, caulking and sealants as required for waterproofing of conduit penetrations and sealing penetrations in or through fire walls, floors and ceiling slabs and foundation walls. All penetrations through vapor barriers at slabs on grade shall be taped and made vapor tight. See Division 7, Thermal and Moisture Protection for material and installation requirements.

H. Access panels and doors:

1. Provide in walls, ceiling, and floors for access to electrical devices and equipment. See Division 8, Doors and Windows for material and installation requirements.

I. Painting:

1. Provide surface preparation, priming and finish coating as required for electrical cabinets, exposed conduit, pull and junction boxes, poles, surface metal raceways, etc. See Division 9, Finishes for material and installation requirements.

1.5 WORK FURNISHED AND INSTALLED UNDER ANOTHER SECTION REQUIRING CONNECTIONS UNDER THIS SECTION:

A. Provide electrical service, make requisite connections and perform operational test. Items furnished and installed under other sections and connected under this section, include but are not limited to the following:

1. Electric motors.
2. Package mechanical equipment: fans, fan coil units, pumps, boilers, duplex compressors, etc.
3. Flow switches and valve monitors.
4. Motorized dampers.
5. Fire and smoke dampers
6. Duct mounted smoke detectors.
7. Elevator/Escalator Controllers.
8. Irrigation controllers.
9. Door hold-open/release devices.
10. Motorized projection screens.
11. Wheelchair lifts.
12. Roll down doors.
13. Electric hardware.
14. Laboratory equipment including hoods, cold rooms, autoclaves, drying ovens, glassware washers and dryers, refrigerators, freezers, etc.
15. Shop equipment including saw dust collectors, saws, lathes, grinders, welders, planers, presses, etc.
16. Temperature control panels.
17. Variable frequency controllers.
18. Chiller starters.
19. Motorized Chalkboards/Markerboards/Whiteboards.

20. Display cases.
21. Water coolers.
22. Kitchen equipment including ovens, fryers, mixers, disposers, dishwashers, etc.
23. Paint spray booths.
24. Fire sprinkler alarm bells.
25. Electric heat trace cable for domestic and industrial hot water piping systems.
26. Electric heat trace cable for guttering, drain lines, etc.
27. Anti-sweat heaters, fan coils, etc. for walk-in coolers and freezers.
28. Hand dryers, hair dryers.
29. Dock levelers.
30. Systems/Open Office Furniture

1.6 ITEMS FURNISHED UNDER ANOTHER DIVISION, BUT INSTALLED AND CONNECTED UNDER THIS DIVISION:

A. Items furnished under other Divisions, but turned over to Division 26 for installation and final connection include, but are not necessarily limited to, the following:

1. Wall mounted control stations for motorized roll-up doors/grills.
2. Wall mounted control stations for motorized projection screens.
3. Wall mounted control stations for handicap lift.
4. Lighting fixtures for paint spray booths.
5. Lighting fixtures, receptacles, and switches for fume hoods.
6. Lighting fixtures for kitchen hoods.
7. Lighting fixtures for walk-in freezers and coolers.
8. Audio Enhancement/Lightspeed System components and teaching space cameras are supplied by Owner and installed by Division 26 and 27 contractor.

1.7 WORK NOT INCLUDED IN THIS DIVISION:

A. Items of work provided under another contract include, but are not necessarily limited to, the following:

1. Telephone cables and electronic equipment.
2. Data system cables, fittings, cover plates and electronic equipment.
3. Control wires for irrigation control valves.
4. Energy management/temperature control system; both line and low voltage including conductors and conduit.
5. Television monitors and projection equipment.
6. Security system equipment, cables, fittings, and coverplates.
7. CCTV cabling and electronic equipment.
8. MATV cabling and electronic equipment

1.8 INTERPRETATION OF DRAWINGS AND SPECIFICATIONS:

A. Before bidding, Contractor shall familiarize himself with the drawings, specifications and

project site. Submit requests for clarification to Architect/Engineer in writing prior to issuance of final addendum. After signing the contract, the Contractor shall meet the intent, purpose, and function of the Contract Documents. Any costs of materials, labor and equipment arising therefrom, to make each system complete and operable, is the responsibility of the Contractor.

1.9 QUALITY ASSURANCE:

A. Reference to codes, standards, specifications and recommendations of technical societies, trade organizations and governmental agencies refers to the latest edition of such publications adopted and published prior to submittal of the bid proposed, unless noted otherwise herein. Such codes or standards are considered a part of this specification as though fully repeated herein.

B. When codes, standards, regulations, etc. allow work of lesser quality or extent than is specified under this Division, nothing in said codes shall be construed or inferred as reducing the quality, requirements or extent of the Drawings and Specifications. Perform work in accordance with applicable requirements of all governing codes, rules and regulations including the following minimum standards, whether statutory or not:

1. National Electric Code (NEC).
2. International Building Code (IBC).
3. International Fire Code (IFC).
4. International Mechanical Code (IMC).

C. Standards: Comply with the following standards where applicable for equipment and materials specified under this Division.

1.	UL	Underwriters' Laboratories
2.	ASTM	American Society for Testing Materials
3.	CBN	Certified Ballast Manufacturers
4.	IPCEA	Insulated Power Cable Engineers Association
5.	NEMA	National Electrical Manufacturer's Association
6.	ANSI	American National Standards Institute
7.	ETL	Electrical Testing Laboratories

D. All electrical apparatus furnished under this Section shall conform to (NEMA) standards and the NEC and bear the Underwriters' Laboratories (UL) label where such label is applicable.

E. Comply with requirements of State and Local Ordinances. If a conflict occurs between these requirements and the Contract Documents, the most stringent requirements shall govern. The Contractor accepts this responsibility upon submitting his bid, and no extra charge will be allowed after the contract is awarded. This shall not be construed as relieving the Contractor from complying with any requirements of the Contract Documents that may be in excess of the aforementioned requirements, and not contrary to same.

F. Obtain all permits, inspections, etc. required by authority having jurisdiction. Include all fees in bid. Furnish a certificate of approval to the Owner's Representative from the Inspection Authority at completion of the work.

G. Employ only qualified craftsmen with at least three years of experience. Workmanship shall be neat, have a good mechanical appearance and conform to best electrical construction practices. Any person found incompetent shall be discharged from the project and replaced by satisfactory personnel.

H. Contractor shall have a current state contracting license applicable to type of work to be performed under this contract.

I. A full-time competent Project Foreman shall be designated by the contractor to the Owner's Representative and shall be available, on site, for consultation to direct the work at all times. This individual, when appointed, will not be replaced without prior approval from the Owner's Representative. The Foreman shall be responsible for coordination and correct placing of the of work included in Divisions 26, 27 and 28.

J. Required Pre-Electrical Construction Meeting with Electrical Engineer: Electrical contractor/representative will be required to attend a pre-electrical construction meeting (approximately 30-60 minutes) with engineering representative in the electrical engineer's office prior to electrical construction commencement. This meeting will address any questions on the part of the contractor and the expectations of the Engineer with regard to specifications, plans and site visits for both rough and finish electrical work.

1.10 CONSTRUCTION CHANGE ORDER PROPOSALS

A. In the event that a submission of a change order is issued by the contractor, the following information will be required to be submitted by the contractor, prior to any consideration by the owner/architect.

1. Where project manager or project engineer work is required, the labor cost shall not exceed 2% of the electrical portion of the change order.
2. All equipment, including conduit and wire, shall be itemized, identifying unit costs and quantities of equipment. Distributor quotes shall accompany all change order requests. The distributor quotes shall include costs for all equipment including conduit and wire. Lot pricing for equipment is not acceptable.
3. The general contractor shall review and confirm that the quantity and costs of materials submitted appear reasonable for the scope proposed.
4. Labor units shall not exceed base NECA #1 standards. No adjustment factors shall be approved.
5. Any research and labeling time shall be the responsibility of the electrical contractor and shall not be included in the change order request.
6. Any costs associated with the purchase of tools or transportation shall be fully itemized for review by architect/owner.
7. Overtime rates shall only be approved where additional manpower cannot achieve the same result.

    a. Change order form shall follow the following format:

        1) PCO number
        2) Detailed description of work being performed.

3) Location on project where work is performed.
4) Chosen NECA column.
5) Identified material:

a) QTY
b) Unit cost
c) Mark up
d) Material total

1) Identified labor:

1. QTY
2. Unit cost
3. Composite labor rate
4. Labor total

1.11 SUBMITTALS:

A. Shop drawings and product data:

1. After the Contract is awarded but prior to manufacture or installation of any equipment, prepare complete Shop Drawings and Brochures for materials and equipment as required by each section of the specification. Submit 8 complete sets for review. All sets of shop drawing material shall be bound. Prior to submission of the Shop Drawings and Project Data, review and certify that they are in compliance with the Contract Documents. Verify all dimensional information to ensure proper clearance for installation of equipment. Check all materials and equipment after arrival on the job site and verify compliance with the Contract Documents. A minimum period of two weeks, exclusive of transmittal time, will be required each time Shop Drawing and/or Brochure is submitted or resubmitted for review. This time period shall be considered by the Contractor when scheduling submittal data. If the shop drawings are rejected twice, the contractor shall reimburse the engineer the sum of $200.00 for the third review and any additional reviews required.
2. Shop drawings requiring the use of electronic documents (floor plans, Lighting plans, fire alarm plans, etc.) shall be requested via a request for information (RFI) through the general contractor. Electronic documents will be provided to the Architect for distribution. No direct vendor requests will be accepted.
3. Review of Shop Drawings and Brochures shall not relieve the Contractor of responsibility for dimensions and/or errors that may be contained therein, or deviations from the Contract Document's requirements. It shall be clearly understood that the noting of some errors but overlooking others does not grant the Contractor permission to proceed in error. Regardless of any information contained in the Shop Drawings and Brochures, the requirements of the Contract Document's shall govern and are not waived, or superseded in any way by the review of the Shop Drawings and Brochures.
4. Certifications shall be written or in the form of rubber stamp impressions as follows:

a. I hereby certify that this Shop Drawing and/or Brochure has been checked prior to submittal and that it complies in all respects with the requirements of the Contract Drawings and Specifications for this Project.

(Name of Electrical Subcontractor)

Signed_____.
Position_____Date_____

5. Observe the following rules when submitting the Shop Drawings and Brochures.

   a. Each Shop Drawing shall indicate in the lower right hand corner, and each Brochure shall indicate on the front cover the following: Title of the sheet or brochure, name and location of the building; names of the Architect and Electrical Engineer, Contractor, Subcontractors, Manufacturer, Supplier/Vendor, etc., date of submittal, and the date of correction and revision. Unless the above information is included the submittal will be returned for resubmittal.
   b. Shop Drawings shall be done in an easily legible scale and shall contain sufficient plans, elevations, sections, and isometrics to clearly describe the equipment or apparatus, and its location. Drawings shall be prepared by an Engineer/Draftsmen skilled in this type of work. Shop Drawings shall be drawn to at least 1/4" = 1'0" scale.
   c. Brochures to be submitted shall be published by the Manufacturers and shall contain complete and detailed engineering and dimensional information. Brochures submitted shall contain only information relevant to the particular equipment or materials to be furnished. The Contractor shall not submit catalogs that describe several different items in addition to those items to be used, unless all irrelevant information is marked out, or unless relevant information is clearly marked. Brochures from each manufacturer shall be identified and submitted separately.

1.12 ELECTRONIC SUBMITTAL REQUIREMENTS:

A. Provide submittals in Portable Document Format (PDF).

B. Documents must be electronically bookmarked and keyword searchable using Adobe Acrobat (http://www.adobe.com/acrobat) or Bluebeam Revu (http://www.bluebeam.com) for each relevant section. For example, include electronic bookmarks separating “Light Fixtures” from “Panelboards”.

C. Electronically highlight all options for light fixtures, electrical equipment, etc. Manual highlighting and scanning of the documents is NOT acceptable and will NOT be reviewed.

D. Provide only completed cutsheets for all fixture and equipment types. Blank cutsheets submitted with a schedule are NOT acceptable and will NOT be reviewed.

E. A maximum of one submittal per specification section is allowed. It is NOT acceptable to provide a product by product submittal. Single product by product submittals will NOT be reviewed.

1.13 OPERATION AND MAINTENANCE MANUALS:

A. Provide operating instruction and maintenance data books for all equipment and materials furnished under this Division.

B. Submit four copies of operating and maintenance data books for review at least four weeks before final review of the project. Assemble all data in a completely indexed volume or volumes and identify the size, model, and features indicated for each item. The binder (sized to the material) shall be a 2" slide lock unit (Wilson-Jones WLJ36544B). The cover shall be engraved with the job title in 1/2" high letters and the name and address of the Contractor in 1/4" high letters. Provide the same information in 1/8" letters on the spine.

C. Include complete cleaning and servicing data compiled in clearly and easily understandable form. Show serial numbers of each piece of equipment, complete lists of replacement parts, motor ratings, etc. Each unit shall have its own individual sheet. (Example: If two items of equipment A and D appear on the same sheet, an individual sheet shall be provided for each unit specified).

D. Include the following information where applicable.

1. Identifying name and mark number.
2. Certified outline Drawings and Shop Drawings.
3. Parts lists.
4. Performance curves and data.
5. Wiring diagrams.
6. Light fixture schedule with the lamps and ballast data used on the project for all fixtures.
7. Manufacturer's recommended operating and maintenance instructions.
8. Vendor's name and address for each item.

E. The engineer shall review the manuals and when approved, will forward the manuals on to the architect. If the manuals are rejected twice, the contractor shall reimburse the engineer the sum of $200.00 for each review afterwards.

1.14 RECORD DRAWINGS:

A. Maintain, on a daily basis, a complete set of “Record Drawings”, reflecting an accurate record of work in accordance with the following:

1. Show the complete routing and location of all feeders rated 100 amps and larger. Locate work buried below grade or under slab, work concealed above ceilings, and work in concealed spaces, dimensionally from fixed structural elements (not partition walls, etc.)
2. Show the complete routing and location of all telecommunications conduits, systems raceways, and empty raceways, 1-1/4" and larger. Locate work buried below grade or under slab, work concealed above ceilings, and work in concealed spaces, dimensionally from fixed structural elements (not partition walls, etc.).
3. Show all changes, deviations, addendum items, change orders, job instructions, etc., that change the work from that shown on the contract documents, including wall relocations, fixtures and device changes, branch circuiting changes, etc. Where locations of boxes, raceways, equipment, etc. are adjusted in the field to fit conditions, but such new locations may not be obvious by referring to the contract document, show new locations on the record drawings.

B. At the discretion of the Architect/Engineer, the drawings will be reviewed on a periodic basis and used as a pre-requisite for progress payments. This requirement shall not be construed as authorization for the Contractor to make changes in the layout, or work without written authorization for such changes. The “Record Drawings” for daily recording shall consist of a set of blue line prints of the Contract Drawings.

C. Upon completion of the work, purchase a complete set of electronic drawings. Transfer all “Record” information from the blue line prints to the drawings via the current CAD program that it was written. The Architect/Engineer shall review the drawings and the Contractor shall incorporate the resulting comments into the final record drawings. The Contractor shall make two complete copies of the drawings electronically and forward this to the Engineer.

D. Certify the “Record Drawings” for correctness by placing and signing the following certifications of the first sheet of the drawings:

"CERTIFIED CORRECT (3/8" high letters)

(Name of General Contractor)

By: _____ Date: _____

(Name of Electrical Contractor)

By: _____ Date: _____

1.15 GUARANTEE:

A. Ensure that electrical system installed under this contract is in proper working order and in compliance with drawings, specifications, and/or authorized changes. Without additional charge, replace any work or materials that develop defect, except from ordinary wear and tear, within one year from the date of substantial completion. Exception: Incandescent and fluorescent lamps shall be guaranteed for a period of two months from the date of substantial completion.

PART 2 – PRODUCTS

2.1 GENERAL:

A. Products are specified by manufacturer name, description, and/or catalog number. Discrepancies between equipment specified and the intended function of equipment shall be brought to the attention of the Architect/Engineer in writing prior to bidding. Failure to report any conflict, including catalog numbers, discontinued products, etc., does not relieve the Contractor from meeting the intent of the contract documents nor shall it change the contract cost. If the Contractor is unable to interpret any part of the plans and/or specifications, or should he find discrepancies therein, he shall bring this to the attention of the Architect/Engineer who will issue interpretation and/or additional instructions to Bidders before the project is bid.

2.2 MANUFACTURERS:

A. Provide products of manufacturers specified. Manufacturers catalog numbers and descriptions establish the quality of product required. Substitutions will be considered if a duplicate written application (2-copies) is at the office of the Architect/Engineer eight (8) working days prior to the day of the bidding. The application shall include the following: 1) A statement certifying that the equipment proposed is equal to that specified; that it has the same electrical and physical characteristics, compatible dimensions, and meets the functional intent of the contract documents; 2) The specified and submittal catalog numbers of the equipment under consideration; 3) A pictorial and specification brochure.

B. Any conflict arising from the use of substituted equipment shall be the responsibility of the Contractor, who shall bear all costs required to make the equipment comply with the intent of the contract documents.

C. Samples may be required for non-standard or substituted items before installation during construction. Provide all samples as required.

D. No materials or apparatus may be substituted after the bid opening except where the equipment specified has been discontinued.

E. Provide only equipment specified in the Contract Documents or approved by addendum.

2.3 SPARE PARTS:

A. Provide spare parts (fuses, diffusers, lamps, etc.) as specified. Transmit all spare parts to Owner's Representative prior to substantial completion.

PART 3 – EXECUTION

3.1 INSTALLATION:

A. Layout electrical work in advance of construction to eliminate unnecessary cutting, drilling, channeling, etc. Where such cutting, drilling, or channeling becomes necessary for proper installation; perform with care. Use skilled mechanics of the trades involved. Repair damage to building and equipment at no additional cost to the contract. Cutting work of other Contractors shall be done only with the consent of that Contractor. Cutting structural members shall not be permitted.

B. Provide equipment enclosures appropriate to the environment to which they are installed. For example, provide NEMA 3R for exterior enclosures and NEMA 1 for interior enclosures unless otherwise noted.

C. Since the drawings of floor, wall, and ceiling installation are made at small scale; outlets, devices, equipment, etc., are indicated only in their approximate location unless dimensioned. Locate outlets and apparatus symmetrically on floors, walls and ceilings where not

dimensioned, and coordinate such locations with work of other trades to prevent interferences. Verify all dimensions on the job. Do not scale the electrical drawings, but refer to the architectural and mechanical shop drawings and project drawings for dimensions as applicable.

D. Perform for other trades, the electrical wiring and connection for all devices, equipment or apparatus. Consult Architectural, Mechanical, and other applicable drawings, and all applicable shop drawings to avoid switches, outlets, and other equipment from being hidden behind doors, cabinets, counters, heating equipment, etc., or from being located in chalkboards, tackboards, glass panels, etc. Relocate buried electrical devices and/or connections as directed at no additional cost.

E. Coordinate the location of outlets, devices, connections, and equipment with the supplier of the systems furniture prior to rough-in.

F. Where conduit, outlets or apparatus are to be encased in concrete, it must be located and secured by a journeyman or foreman present at the point of installation. Check locations of the electrical items before and after concrete and/or masonry installation and relocate displaced items.

G. Provide block-outs, sleeves, demolition work, etc., required for installation of work specified in this division.

3.2 CLEAN:

A. Clean up all equipment, conduit, fittings, packing cartons and other debris that is a direct result of the installation of the work of this Division.

B. Clean fixtures, interiors and exteriors of all equipment, and raceways. Replace all filters in electrical equipment upon request for Substantial Completion.

3.3 POWER OUTAGES:

A. All power outages required for execution of this work shall occur during non-standard working hours and at the convenience of the Owner. Include all costs for overtime work in bid.

B. Submit written request at least 7 days in advance of scheduled outage and proceed with outage only after receiving authorization from the Owner's Representative.

C. Keep all outages to an absolute minimum.

3.4 STORAGE AND PROTECTION OF MATERIALS:

A. Provide storage space for storage of materials and apparatus and assume complete responsibility for all losses due to any cause whatsoever. In no case shall storage interfere with traffic conditions in any public thoroughfare or constitute a hazard to persons in the vicinity. Protect completed work, work underway, and apparatus against loss or damage.

3.5 EXCAVATING FOR ELECTRICAL WORK:

A. General: Locate and protect existing utilities and other underground work in manner that will ensure that no damage or service interruption will result from excavating and backfilling. Perform excavation in a manner that protects walls, footings, and other structural members from being disturbed or damaged in any way. Burial depths must comply with NEC Section 300-5 (or State of Utah requirement, whichever is more stringent), unless noted otherwise on drawings.

B. Protect persons from injury at excavations, by barricades, warnings and illumination.

C. Coordinate excavations with weather conditions, to minimize possibility of washouts, settlements and other damages and hazards.

D. Provide temporary covering or enclosure and temporary heat as necessary to protect bottoms of excavations from freezing and frost action. Do not install electrical work on frozen excavation bases or sub-bases.

E. Do not excavate for electrical work until the work is ready to proceed without delay, so that total time lapse from excavation to completion of backfilling will be minimum. See other sections of specification for additional requirements for excavating.

F. Store excavated material (temporarily) near excavation, in a manner that will not interfere with or damage excavation or other work. Do not store under trees (within drip line).

G. Retain excavated material that complies with requirements for backfill material. Dispose of excavated material that is either in excess of quantity needed for backfilling or does not comply with requirements for backfill material. Remove unused material from project site, and dispose of in lawful manner.

3.6 BACKFILL MATERIALS:

A. For buried conduit or cable (other than below slab-on-grade, or concrete encased) - 2" thickness of well graded sand on all side of conduit or cable.

B. For trench backfill to within 6" of final grade - soil material suitable for compacting to required densities.

C. For top 6" of excavation - Top soil.

D. Backfill excavations in 8" high courses of backfill material, uniformly compacted to the following densities (percent of maximum density, ASTM D 1557), using power-driven hand-operated compaction equipment.

1. Lawn/Landscaped Areas: 85 percent for cohesive soils, 95 percent for cohesionless soils.
2. Paved Areas, Other than Roadways (90 percent for cohesive soils, 95 percent for cohesionless soils).

E. Subsidence: Where subsidence is measurable or observable at electrical work excavations during general project warranty period, remove surface (pavement, lawn or other finish), add backfill material, compact, and replace surface treatment. Restore appearance, quality and condition of the surface or finish to match adjacent work, and eliminate evidence of restoration to greatest extent possible.

3.7 CONCRETE BASES:

A. All concrete bases are the responsibility of Division 3. Coordinate all concrete requirements for Division 26 as follows:

B. Unless otherwise noted, provide 4" high reinforced concrete bases for all floor mounted or floor standing electrical equipment, including generators, transformers, switchgear, battery racks, motor control centers, etc. Extend bases 6" beyond equipment or mounting rails on all sides or as shown on the drawings. Notwithstanding this requirement, coordinate with equipment manufacturer, shop drawings, and height of base to ensure compliance with NEC 404.8.

C. Concrete bases shall be provided under direction of Divisions 3, with concrete installation and finish under Div. 3. Coordinate size and location of all bases and furnish all required anchor bolts, sleeves, reinforcing and templates as required to obtain a proper installation.

D. Provide and locate properly sized concrete pads for power company furnished pad mounted transformers in accordance with power company clearance requirements. Where the serving utility is Rocky Mountain Power, the electrical contractor shall conform to the requirements of Electrical Service Requirements, Section 6.4.

3.8 ROOF PENETRATIONS:

A. Where raceways penetrate roofing or similar structural area, provide appropriate roof jack coordinate with the roofing contractor and the Architect in order to match the vent with the roof construction. The jack shall be sized to fit tightly to raceway for weather-tight seal, and with flange extending a minimum of 9" under roofing in all sides or as required by the roof type of construction. Completely seal opening between inside diameter of roof flashing and outside diameter of penetrating raceways. Coordinate all work with work required under roofing section of specifications.

3.9 FIRE PENETRATION SEALS:

A. Seal all penetrations for work of this section through fire rated floors, walls and ceilings to prevent the spread of smoke, fire, toxic gas or water through the penetration either before, during or after fire. The fire rating of the penetration seal shall be at least that of the floor, wall or ceiling that it is installed, so that the original fire rating of the floor or wall is maintained as required by Article 300-21 of the National Electrical Code. Where applicable, provide OZ Type CFSF/I and CAFSF/I fire seal fittings for conduit and cable penetrations through concrete and masonry walls, floors, slabs, and similar structures. Where applicable, provide 3M CID cast-in device for floor slabs. Where applicable, provide 3M fire barrier sealing penetration system, and/or IPC Flame Safe Fire Stop System, and/or Chase Foam fire stop system, including wall wrap, partitions, caps, and other accessories as required. All materials to comply with UL 1479 (ASTM E-814). Comply with manufacturer's instructions and recommendations for installation of sealing fittings and barrier sealing systems.

3.10 PROJECT FINALIZATION AND START-UP:

A. Upon completion of equipment and system installation, assemble all equipment Factory Representatives and Subcontractors for system start-up.

B. Each Representative and Subcontractor shall assist in start-up and check out their respective system and remain at the site until the total system operation is accepted by the Owner's representative.

C. The Factory Representative and/or System Subcontractor shall give personal instruction on operating and maintenance of their equipment to the Owner's maintenance and/or operation personnel. To certify acceptance of operation and instruction by the Owner's Representative, the contractor shall prepare a written statement as follows:

1. This is to certify that the Factory Representative and System Subcontractor for each of the systems listed below have performed start-up and final check out of their respective systems.
2. The Owner's Representative has received complete and thorough instruction in the operation and maintenance of each system.

SYSTEM FACTORY REPRESENTATIVE

(List systems included) (List name and address of Factory Representative)

_____ _____

Owner's Representative Contractor

D. Send copy of acceptance to Architect/Engineer.

3.11 FINAL REVIEW:

A. At the time of final review, the project foreman shall accompany the reviewing party, and remove coverplates, panel covers and other access panels as requested, to allow review of the entire electrical system.

END OF SECTION 260500

SECTION 260503 - ELECTRICAL SUBMITTALS AND SPARE PARTS

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to all Division 26, 27 and 28 sections.

B. Architectural, Structural, Mechanical and other applicable documents are considered a part of the electrical documents insofar as they apply as if referred to in full. Contractor must review the entire set of plans and specifications. Reviewing only the electrical set is not acceptable.

C. Consult all other sections, determine the extent and character of related work and properly coordinate work specified herein with that specified elsewhere to produce a complete installation.

1.2 SUBMITTAL REQUIREMENTS:

A. GENERAL:

1. After the Contract is awarded but prior to ordering, manufacture, or installation of any equipment, prepare complete Submittals including shop drawings, product data, brochures, etc. for materials and equipment as required by each section of the specification.
2. Review of Submittals shall not relieve the Contractor of responsibility for dimensions and/or errors that may be contained therein, or deviations from the Contract Document's requirements. It shall be clearly understood that the noting of some errors but overlooking others does not grant the Contractor permission to proceed in error. Regardless of any information contained in the Shop Drawings and Brochures, the requirements of the Contract Document's shall govern and are not waived, or superseded in any way by the review of the Shop Drawings and Brochures.
3. Submittals are reviewed, not approved. Comments made within submittals do not alter the contract documents in any way. The contractor is still responsible, regardless of comments (if any) made within submittals, for complying with drawings and specifications.
4. Notify engineer in writing if any of the comments noted in the submittals alter the contract cost. A comment within the submittal process which increases/decreases cost of product is not an authorization to the contractor under any circumstances to proceed.
5. Notify engineer of any modifications between contract documents and submittals. It is the responsibility of the contractor to ensure compliance.

6. ELECTRONIC SUBMITTAL REQUIREMENTS:

a. Provide submittals in Portable Document Format (PDF).
b. Documents must be electronically bookmarked and keyword searchable using Adobe Acrobat (http://www.adobe.com/acrobat) or Bluebeam Revu (http://www.bluebeam.com) for each relevant section. For example, include electronic bookmarks separating "Light Fixtures" from "Panelboards".
c. Electronically highlight all options for light fixtures, electrical equipment, etc. Manual highlighting and scanning of the documents is NOT acceptable and will NOT be reviewed.
d. Provide only completed cutsheets for all fixture and equipment types. Blank cutsheets submitted with a schedule are NOT acceptable and will NOT be reviewed.
e. At the time of submission, the electrical contractor shall provide a complete and comprehensive submission of all required specification sections/shop drawings at the same time. Exceptions may be given, with prior approval, for time-sensitive equipment.
f. A maximum of one submittal per specification section is allowed. It is NOT acceptable to provide a product by product submittal. Single product by product submittals will NOT be reviewed.

B. SCHEDULING

1. GENERAL

a. A minimum period of two weeks, exclusive of transmittal time, will be required each time Submittals are submitted or resubmitted for review. This time period shall be considered by the Contractor when scheduling submittal data.
b. If the shop drawings are rejected twice, the contractor shall reimburse the engineer the sum of $1,200.00 for the third review and any additional reviews required prior to commencement of the third review.

C. QUALITY ASSURANCE

1. PRE-SUBMITTAL PREPARATION

a. Prior to submission of the Shop Drawings and Project Data, review and certify that they are in compliance with the Contract Documents. Verify all dimensional information to ensure proper clearance for installation of equipment.
b. Shop drawings requiring the use of electronic documents (floor plans, Lighting plans, fire alarm plans, etc.) shall be requested via a request for information (RFI) through the general contractor. Electronic documents will be provided to the Architect for distribution. No direct vendor requests will be accepted.
c. Contractor is completely responsible for the content of the submittal.

2. SUBMITTAL REQUIREMENTS

a. Certifications shall be written or in the form of rubber stamp impressions as follows:

1) I hereby certify that this Shop Drawing and/or Brochure has been checked prior to submittal and that it complies in all respects with the requirements of the Contract Drawings and Specifications for this Project.

(Name of Electrical Subcontractor)
Name_____.
Position_____Date_____.

b. Brochures to be submitted shall be published by the Manufacturers and shall contain complete and detailed engineering and dimensional information. Brochures submitted shall contain only information relevant to the particular equipment or materials to be furnished. The Contractor shall not submit catalogs that describe several different items in addition to those items to be used, unless all irrelevant information is marked out, or unless relevant information is clearly marked. Brochures from each manufacturer shall be identified and submitted separately.

c. Shop Drawings shall be done in an easily legible scale and shall contain sufficient plans, elevations, sections, and isometrics to clearly describe the equipment or apparatus, and its location. Drawings shall be prepared by an Engineer/Draftsmen skilled in this type of work. Shop Drawings shall be drawn to at least 1/4" = 1'0" scale.

d. Observe the following rules when submitting the Shop Drawings and Brochures.

1) Each Shop Drawing shall indicate in the lower right hand corner, and each Brochure shall indicate on the front cover the following: Title of the sheet or brochure, name and location of the building; names of the Architect and Electrical Engineer, Contractor, Subcontractors, Manufacturer, Supplier/Vendor, etc., date of submittal, and the date of correction and revision. Unless the above information is included the submittal will be returned for resubmittal.

a) Submittal Identification shall include the following:

i. A unique number, sequentially assigned, shall be noted on the transmittal form accompanying each item submitted.

ii. Original submittal numbers shall have the following format: “XXX-Y;” where “XXX” is the originally assigned

submittal number and "Y" is a sequential letter assigned for resubmittals (for example, A, B, or C being the first, second, and third resubmittals, respectively). Submittal 25B, for example, is the second resubmittal of Submittal 25.

e. SPECIFICATION section and paragraph to which submittal applies.

D. POST-SUBMITTAL

1. Check all materials and equipment after arrival on the job site and verify compliance with the Contract Documents.

1.3 Provide submittals as requested for each of the sections listed below:

A. 26 0510Elevator Electrical Requirements

1. Submit manufacturer's data for all power module switches and other disconnects specified in this section.

B. 260519 Conductors and Cables

1. (600V and Below)

a. Submit megohmmeter test data for circuits under 600 volts.

2. Conductors and Cables (Medium and Low Voltage)

a. Submit manufacturer's data on electrical cable and connectors for use above 600 volts. Upon request of Architect/Engineer, submit certificate of compliance indicating that cable has been tested in accordance with ICEA S-68-516, AE16 #6 and UL Standard 1072, and meets or exceeds minimum requirements.

b. Submit test data in accordance with IEEE Standard 400-2001 showing ambient conditions, voltage levels, level durations, and conduction current for each step. Include effective insulation resistance in submittal.

c. Submit medium voltage cable Splicer/Terminator certification of competency and experience 20 days before splices or terminations are made in medium voltage cables. Splicer/Terminator experience during the immediate past 3 years shall include performance in splicing and terminating cables of the type and classification being provided under this contract.

C. 260526 Grounding

1. Submit the name of test agency to be used for testing specified in this section.

Submit results of tests specified in this section. Also include test results in Operation and Maintenance Manuals as specified.

D. 26 0532 Conduit Raceway

1. Submit manufacturer's data on Power & Control/Signal Cable.

E. 26 0533 Electrical Boxes and Fittings

1. Submit manufacturer's data including specifications, installation instruction and general recommendations for each type of floor box used on project.

F. 26 0536 Raceway Systems

1. Submit manufacturer's data including specifications, installation instructions and general recommendations, for each type of raceway as follows: Surface Metal Raceways, Underfloor metal raceways, Header Ducts for Cellular Metal Floor Deck Units, Cable Tray Systems, Overhead metal raceways, Wire basket cable tray systems
2. Submit dimensioned drawings of raceway systems showing layout of raceways and fittings, spatial relationships to associated equipment, and adjoining raceways, for each type of raceway as follows: Surface metal Raceways, Underfloor Metal Raceways, Header Ducts for Cellular Metal Floor Deck Units, Cable Tray Systems, Overhead metal raceways, Wire basket cable tray systems

G. 26 0548 Electrical Seismic Control

1. A single submittal shall be provided for all seismic anchorage and restraints for all Division 26 equipment and systems provided as part of this project. Individual submittals for specific systems will not be accepted.
2. Submit shop drawings, calculations, and printed data for the following items under provisions of the General Conditions of the Contract:

    a. Complete engineering calculations and shop drawings for all seismic requirements for all equipment to be restrained as outlined in Section 26 0548 Specification, and as detailed on drawings.
    b. The professional seal of the engineer who is responsible for the design of the Seismic Restraint System.
    c. Details for all seismic bracing.
    d. Details for steel frames, concrete inertia bases, and housekeeping pads. Include dimensions, embed depths, dowelling details, and concrete reinforcing requirements.
    e. Clearly outlined procedures for installing and adjusting the isolators, seismic bracing anchors, snubbers, cables, and bolt connections.
    f. Floor plan noting the locations, size, and type of anchorage and restraint to be used.
    g. Include confirmation that all calculations are based on the design criteria listed in appropriate Section.
    h. Certificate of Compliance.

i. Where equipment is exempt per this specification provide a written certificate of compliance for each of the systems noted with the professional seal of engineer who has reviewed the electrical system.

H. 26 0553 Electrical Identification

1. Submit manufacturer's data on each type of electrical identification products

a. Submit one sample of each component of the electrical identification system as follows: Wire/cable tape marker, Tags, Engraved, plastic laminate labels, Arc-flash hazard labels

I. 26 0573 Protective Device Study

1. Submit partial study that includes the calculated values for short circuit current availability and arc flash levels for each switchgear bus, medium voltage controller, switchboard, low voltage motor control center, distribution panelboard, automatic transfer switch, and branch circuit panelboard. This data shall be submitted prior to, or at the same time as, submitting the entire electrical gear package. Contractor shall utilize construction drawings to estimate approximate feeder lengths for this preliminary submittal. Submitted data shall include equipment/panel designations, feeder conductor sizes, feeder lengths, and calculated short circuit values and arc flash levels. Include the utility transformer ratings and transformer impedances used for the preparation of the short circuit calculations.
2. Construction Period Submittal: During the construction period but prior to application of utility power to the electrical distribution system, submit an indexed copy of the complete protective device study based on actual field values. Include the following:

a. Introductory section with basic formulas, pertinent data, and rationale employed in the study.
b. One-line diagram for that portion of the system included in the study.
c. Calculations section showing tabulated calculations.
d. Results, recommendations, settings, etc.

3. Provide one revision to study based on engineering review comments for the completed study to allow for minor modifications to adjustable circuit breakers to minimize arc flash levels.

J. 26 0923Occupancy Sensors

1. Submit manufacturer's data on occupancy sensors, control modules, wiring diagrams, interconnection diagrams and any related accessories.

2. Submit scaled drawings with lighting fixtures shown clearly marked by manufacturer showing proper product, location and orientation of each sensor.

K. 26 0943Lighting Control Equipment

1. Submit manufacturer’s data on lighting control equipment including, but not limited to published catalog data sheets, rough-in diagrams and instructions for installation, operating and maintenance, suitable for inclusion in maintenance manuals.
2. Meet with the electrical engineer at their office prior to preparation of shop drawings to discuss and verify specific programming and zoning requirements of system(s).
3. Meet with the lighting representative/manufacturer of the approved and accepted lighting control equipment to verify and understand specific installation requirements associated with that system.
4. Submit detailed drawings and documentation of lighting control components and interconnection including, but not necessarily limited to:

    a. Electronic controllers
    b. Control stations
    c. Photo sensors
    d. Occupancy sensors
    e. Network wiring details
    f. Input and output wiring details
    g. Lighting control panel load schedules
    h. Provide a complete sequencing and programming schedules for all devices, zones and scenes.
    i. Wallstations layouts
    j. Accurately scaled equipment layouts, wire/cable routing and connections to control wiring and electrical power feeders.

L. 26 2200 Transformers

1. Submit manufacturer's data on transformers, including certification of transformer performance efficiency, percentage regulation at 100 percent and 80 percent power factor, no-load and full load losses in watts, percent impedance at 75 degrees C, hot-spot and average temperature rise above 40 degrees C ambient, sound level in decibels, and standard published data. Before submitting product data, verify that dimensions of units to be supplied allow proper code required clearances adjacent to unit.
2. Submit dimensioned drawings of transformer installations, showing layout, mountings and supports, and spatial relationship to proximate walls and equipment.
3. For types and ratings required, furnish additional fuses, amounting to one unit for every five installed units, but not less than three units of each (including ELSP fuses when specified).

M. 26 2413 Switchgear and Switchboards

1. Submit manufacturer's data on switchgear and switchboards.
2. Submit dimensioned drawings of switchgear and switchboards showing accurately scaled basic sections including, but not necessarily limited to, auxiliary compartments, section components, and combination sections. Show plan view of equipment with dimensioned clearances to proximate equipment. Failure to submit

said plan view shall not relieve contractor of responsibility to verify required clearances before release of equipment for fabrication.

3. Submit manufacturer’s data and shop drawings only after completion of the preliminary protective device study (see Section 26 0573 as applicable). Any Section 26 2413 submittals received prior to submission of the preliminary protective device study will be REJECTED.
4. For types and ratings required, furnish additional fuses, amounting to one unit for every 5 installed units, but not less than 3 units of each.

N. 26 2416Panelboards

1. Submit dimensioned drawings of panelboards and enclosures showing accurately scaled layouts of enclosures and required individual panelboard devices, including but not necessarily limited to, circuit breakers, fusible switches, fuses, ground-fault circuit interrupters, and accessories.
2. Submit manufacturer data including specifications, installation instructions and general recommendations, for each type of panelboard required.
3. Submit manufacturer’s data and shop drawings only after completion of the preliminary protective device study (see Section 26 0573 as applicable). Any Section 26 2416 submittals received prior to submission of the preliminary protective device study will be REJECTED.

O. 26 2713 Service Entrance

1. Submit manufacturer's data on service-entrance equipment and accessories.
2. Submit dimensioned layouts of service-entrance equipment and spatial relationships to proximate equipment. Failure to submit said layouts shall not relieve contractor of responsibility to verify required clearances before release of equipment to fabrication.
3. Submit manufacturer’s data and shop drawings only after completion of the preliminary protective device study (see Section 26 0573 as applicable). Any Section 26 2713 submittals received prior to submission of the preliminary protective device study will be REJECTED.
4. For types and ratings required, furnish additional fuses, amounting to one unit for every 2 installed units, but not less than one unit of each.

P. 26 2726 Wiring Devices

1. Submit manufacturer's data on electrical wiring devices.

Q. 26 2815 Overcurrent Protective Devices

1. Submit manufacturer's data on overcurrent protective devices, including catalog cuts, time-current trip characteristic curves, and mounting requirements.
2. Submit layout drawings of overcurrent protective devices, with layouts of circuit breakers, including spatial relationships to proximate equipment. Failure to submit said spatial layouts does not relieve contractor of responsibility to verify all required clearances before release of equipment for fabrication.
3. Submit manufacturer’s data and shop drawings only after completion of the

preliminary protective device study (see Section 26 0573 as applicable). Any Section 26 2815 submittals received prior to submission of the preliminary protective device study will be REJECTED.

4. For types and ratings required, furnish additional fuses, amounting to one unit for every 5 installed units, but not less than two units of each size and type, unless specified otherwise in another section of these specifications.
5. Submit time-current trip curves (in log-log format) and trip setting parameter/range information (for each trip function) for all solid-state circuit breakers.
6. Manufacturer shall also provide recommended trip settings with the shop drawing submittal (including ground fault settings) for coordination with downstream overcurrent devices. Manufacturer shall base recommendations on the AIC rating of the electrical equipment.
7. Where the Protective Device Study specification section 260573 is included in the project, the time-current curves and recommended trip settings for all solid-state circuit breakers shall be submitted as part of the protective device study.

R. 26 2816 Motor and Circuit Disconnects

1. Submit manufacturer's data including specifications, installation and general recommendations, for each type of motor and circuit disconnect switch required.
2. Submit dimensioned drawings of electrical motor and circuit disconnect switches that have rating of 100 amperes and larger.

S. 26 2913 Motor Starters

1. Submit manufacturer's data on motor starters.
2. Submit dimensioned drawings of motor starters showing accurately scaled equipment layouts.
3. After installation is complete, including water and air balancing, measure voltage (L-L and L-N) and full load current of each phase of each motor. Submit report showing field readings of voltage, amperage, service factor, and thermal heater size installed for each motor.

T. 26 2923 Variable Frequency Drives

1. Submit manufacturer's data on variable frequency drives.
2. Submit dimensioned drawings of variable frequency drive systems including, but not necessarily limited to, the following:

    a. Complete data sheet.
    b. Set of outline drawings giving complete mounting information, conduit entry and exit dimensions, over all unit dimensions, weights, physical characteristics, etc.
    c. Set of complete electrical drawings for power and control wiring.
    d. Manufacture's literature giving detailed information of equipment being supplied including parts numbers, model numbers and ratings.
    e. Harmonic Distortion Limits: The VFD systems shall produce no more than 12% current THD and no more than 3% voltage THD throughout the normal operating range as measured at the input terminals of each VFD

system, on motors 10 HP and larger, provide harmonic filters. For motors less than 10 HP provide AC line reactors with a minimum of 3% impedance. VFD supplier shall submit with the approval shop drawings their harmonic control scheme and actual test results for the proposed scheme on at least three of their existing installations. Data shall clearly identify what equipment is proposed and demonstrate that it routinely meets harmonic limits above for the applications similar to this project. Prior approvals also require this data.

f. Shop drawings shall include interior view of VFD system enclosures with all components identified and located.

3. After installation is complete, submit harmonic voltage and current distortion report as specified herein.

U. 26 3213 Emergency Electrical Systems

1. Dimensioned drawings of emergency electrical system components and accessories including, but not necessarily limited to generator sets, isolation/by-pass switches, day tanks, transfer switches, instruments and accessories, (and) annunciator panels, (and fuel line and exhaust piping). Show accurately scaled layouts of system components; indicate their spatial relationship to associated equipment; show connections to normal and emergency power feeders. Failure to submit said scaled lay-outs does not relieve contractor of responsibility to verify all required clearances before release of equipment for fabrication.
2. Manufacturer's standard catalog data describing and depicting each engine-generator set, batteries, charger, tanks, and all ancillary equipment in sufficient detail to demonstrate complete specification compliance.
3. Drawings depicting each of the following:

   a. Base mounted equipment, with base and all attachments including anchor bolt template and recommended clearances for maintenance and operation.
   b. Complete starting system, fuel system, cooling system, and exhaust system.
   c. Electric wiring of relays, breakers, and switches with applicable single line and wiring diagrams and written description of operation and the instrumentation provided.
   d. Enclosure (if applicable).

4. Manufacturer's standard catalog data describing and depicting each transfer and by-pass isolation switch along with all ancillary equipment in sufficient detail to demonstrate complete specification compliance. In addition provide the following:

   a. One-line diagram of each switch assembly and wiring diagram of each unit.
   b. A complete list of equipment and material to be provided, containing an adequate description of each separate item of equipment.

5. Submit four complete sets of operating manuals for each item of equipment and/or

component outlining the step-by-step procedure required for system start up, operation, and shutdown. Include the manufacturer's name, model number, and a description of all equipment, complete with basic operating features. Describe in detail all maintenance procedures and a troubleshooting guide listing possible breakdowns and repairs for each piece of equipment. Include all factory service manuals, complete parts lists, simplified schematic diagrams of each system as installed, and the original. Include complete rest reports specified in Part 3-Execution herein.

V. 26 3533 Power Factor Correction

1. Submit manufacturer's data on power factor correction capacitors.
2. Provide dimensioned plan views of all equipment locations that require the installation of capacitors. Provide code required clearances and dimensions to all proximate equipment. Provide a dimensioned plan view of main electrical room showing anticipated location of future capacitor bank (where applicable).

W. 26 4313 Surge Protective Devices (SPD)

1. Submit manufacturer's data on SPD's listing all performance ratings specified or required herein.
2. Submit dimensioned drawings of SPD's including, but not necessarily limited to, the following.

    a. Complete data sheet.
    b. Set of outline drawings giving complete mounting information, conduit entry and exit locations and dimensions, overall unit dimensions, weights, physical characteristics, etc.
    c. Set of complete electrical drawings for power and control wiring.
    d. Manufacturer's literature giving detailed information of equipment including parts numbers, model numbers and ratings.
    e. UL 1449 suppressed voltage rating documentation.

X. 26 5100 Interior and Exterior Building Lighting

1. Submit manufacturer's data on interior and exterior building lighting fixtures.
2. Submit dimensioned drawings of lighting fixtures. Submit fixture shop drawings in PDF format with separate sheet for each fixture, assembled in luminaire "type" alphabetical order, with proposed fixture catalog number and accessories clearly indicated on each sheet.
3. When applicable submit standard color samples with the shop drawings. If standard colors are not acceptable, a color sample will be provided to the fixture manufacturer. Return of the shop drawings will be delayed until color samples are provided.
4. Submit ballast and driver manufacturer cut sheets.
5. Submit a list of all lamps used on projects.
6. Provide a complete spare parts list in lighting shop drawing review.

    a. SPARE PARTS:

1) Provide spare diffusers (acrylic and/or glass only) where 20 or more of that fixture types is provided. One set shall be provided per fixture type and one additional per every (10) fixtures of each type; quantity shall not exceed (10) spares for any single fixture type.

b. LED FIXTURES

1) Furnish stock of replacement LED fixtures as follows:
2) One spare fixture for 1 fixture of any fixture type.
3) Two spare fixtures for 2 fixtures of any fixture type.
4) Three spare fixtures for 3 fixtures of any fixture type.
5) Four spare fixtures for 4 or more of any fixture type, with the exception of pole mounted fixtures.

c. Provide (15) extra type X1 and (5) X2 exit signs for discretionary placement by fire marshal or code official. Provide 1000 feet of 3/4" conduit with 3 #12 conductors for exit sign installations. Provide all supports, fittings, boxes, terminations, etc. as required for installation. Install only as directed by engineer. Credit back all unused material and labor to the Owner.

d. Stock of all spare items shall be delivered as directed to Owner's storage space. All components shall be labeled to match construction document nomenclature,

Y. 26 5561 Platform Lighting and Dimming System

1. Submit manufacturer's data on stage lighting and dimming systems, including, but not limited to, dimmer racks, control consoles, lighting instruments, connector strips, receptacles, instructions for installation, operation and maintenance, suitable for inclusion in maintenance manuals.
2. Submit dimensioned drawings of stage lighting and dimming system components and accessories. Show accurately scaled layouts of system components. Provide wiring diagrams for inter connection of system components.

Z. 26 5600 Exterior Area Lighting

1. Submit manufacturer's data on lighting units, including certified dimension drawings of components including, but not necessarily limited to, poles and standards, mast arms, brackets, hardware and fixtures.

AA. 27 1010 Telephone Data Systems

1. See District Specification for more information regarding submittal requirements.
2. Provide electronic submittals in Adobe PDF format within one file. Organize pages within submittal to be in the same order as the specification items (for example, racks prior to cabling). Where multiple submittals are provided due to submittal. If three or more reviews are required of the 27-1500 submittals, Contractor shall reimburse the Engineer for $1,200 before the Engineer will

commence the third review. rejections/corrections, upon completing the submittal process with "No Exceptions Taken", provide a consolidated single PDF submittal showing all products on the project.

3. Provide proof of RCDD certification and connectivity manufacturer certification.
4. Provide submittals for all racks/cabinets; patch panels, devices, cabling, firestopping solutions, tray, non-continuous cable support devices, grounding equipment, and miscellaneous equipment to be used on project. Where multiple part numbers are listed on a datasheet/cutsheet, highlight or circle applicable part.
5. Provide submittals showing complete racking layout in plan and elevation view to scale. Coordinate exact rack layout with Owner Information Technology Representative prior to submittal.
6. Provide color samples of all available standard color faceplates to architect.
7. Provide proposed labeling scheme for approval by owner/engineer.
8. Provide catalog cutsheets of all test equipment that will be used.
9. Provide results of all copper and fiber optic cable tests.

BB. 27 4100 Audiovisual Systems

1. Project manager to provide written proof, signed and dated, that shop drawings and/or brochure has been checked for accuracy prior to submittal. Shop drawings to comply in all respects with the requirements of the contract drawings and specifications for this project.
2. Provide a list of finish options for selection. Do not order any equipment if finishes have not been selected on the shop drawings.
3. Provide shop drawings for 27 4100 at the time of original shop drawing submission. Do not order AV equipment from the first submission. One hundred and twenty (120) days prior to the time of AV equipment installation, provide a second submission of AV equipment only. Provide current equivalent if specified model has been discontinued.

    a. The following items shall be included in the shop drawings submittal:

        1) Project manager's written proof, with signature and date, that shop drawings and/or brochure has been checked for accuracy prior to submittal. Shop drawings to comply in all respects with the requirements of the contract drawings and specifications for this project.
        2) A complete bill of materials, broken out per system type, for all components, accessories and hardware to be provided in order to assemble a complete and working system as described within the contract documents.
            a) The bill of material is intended to be used to verify equipment within each system. Only one cut sheet per unique product type is required.
            b) Example several systems may require the same flat panel display mount, that mount should be listed in each system type with only one (1) cut sheet provided for that product.

    b. Manufacturer's data sheets and installation details for all devices, plates,

cables and similar equipment. Product data showing multiple options, products and/or models shall be clearly marked identifying the specific options, products and/or models being provided.

c. Signal flow drawings showing all audio, video, control, network and power connections required between all pieces of equipment within each system.

1) Unique cable/wire identifier for each connection that correspond to field cabling labelling scheme.
2) All connections require connector type and sex to be identified. Type shall correspond to a connector legend or shall be clearly identified per instance.
3) Wiring pinouts for all multipin connectors used
4) Detailed panel drawings showing wall, floor, rack, etc. input/output panel dimensions, connector types and text labeling for each connection shown
5) Physical location information for each device.
6) Upon request AV Consult's signal flow drawings may be utilized for signal flow documentation within the shop drawings, provided, the items above are included. Contractor shall make request for electronic files as indicated in section 1.2.C.

d. Equipment rack elevations.

e. Matrix routing and preset configuration tables, and digital signal processing configuration details.

f. Wireless microphone transmission frequencies.

g. Submit all manufacturer training, 3rd party and/or organization certificates for each equipment and/or systems required for the implementation of this specification.

h. Provide shop drawings for 27 4100 at the time of original shop drawing submission. Do not order AV equipment from the first submission. One hundred twenty (120) days prior to the time of AV equipment installation, provide a second submission of AV equipment only. Provide current equivalent if specified model has been discontinued.

CC. 27 5123 Intercommunication Systems

1. Provide a complete bill of materials for all components, accessories and hardware to be provided in order to assemble a complete and working system as described within the contract documents.
2. Submit dimensioned drawings and device wiring layouts for Audio, Video, Control, and power.
3. Submit equipment rack elevation diagrams.
4. Submit all manufacturer training, 3rd party and/or organization certificates for each equipment and/or systems required for the implementation of this specification.

DD. 28 1600Intrusion Detection System

1. Submit manufacturer's data sheets including specifications, installation instructions, and general recommendation for each type of equipment specified.
2. Submit dimensioned drawings and wiring layout for any changes in wiring from the layout on the drawings. Submit actual riser diagrams of complete system and elevations of required equipment. Typical risers are not acceptable.
3. Contractor to provide a list of IP addresses of network devises with location and model #s.

EE. 28 2205 Access Control System

1. Submit manufacturer's data sheets including specifications, installation instructions, and general recommendation for each type of equipment specified.
2. Submit dimensioned drawings and wiring layout for any changes in wiring from the layout on the drawings. Submit actual riser diagrams of complete system and elevations of required equipment. Typical risers are not acceptable.
3. Submit network switch port count and power requirements. Port count and POE switch requirements should be broken out per IDF/MDF closet.
4. Submit manufacturer certifications for all systems provided. Certifications must be from local office providing the install.
5. Provide the Owner the following upon project completion:

    a. A complete set of shop drawings indicating: Locations of all panels, power supplies and controllers; point-to-point wiring diagrams for all devices.
    b. A complete equipment list identifying: Type; model; manufacturer; manufacturer’s data sheets.
    c. A list of IP and MAC addresses, username and passwords for network devices coordinated with door name and/or location.
    d. Serial and model numbers for all major components.
    e. Installation manuals and user manuals for all systems listed in these specifications.

FF. 28 2300 IP Video Surveillance System

1. Submit manufacturer's data sheets including specifications, installation instructions, and general recommendation for each type of equipment specified.
2. Submit dimensioned drawings and wiring layout for any changes in wiring from the layout on the drawings. Submit actual riser diagrams of complete system and elevations of required equipment. Typical risers are not acceptable.
3. Submit network switch port count and power requirements. Port count and POE switch requirements should be broken out per IDF/MDF closet.
4. Submit manufacturer certifications for all systems provided. Certifications must be from local office providing the install.
5. Mid-span power budget calculations showing power requirements for all cameras.
6. Provide the Owner the following upon project completion:

    a. A complete set of shop drawings indicating: Locations of all cameras, power supplies and controllers; point-to-point wiring diagrams for all devices.
    b. A complete equipment list identifying: Type; model; manufacturer;

manufacturer’s data sheets.

c. Locations of all cameras with custom painted enclosures due to wood ceilings.
d. Contractor to provide a list of IP address for cameras coordinated with camera name and/or location.
e. Serial and model numbers for all major components.
f. Installation manuals and user manuals for all systems listed in these specifications.

GG. 28 3111 Fire Alarm and Detection System

1. Submit manufacturer's data on fire alarm and detection systems including, but not limited to, roughing-in diagrams and instructions for installation, operating and maintenance, suitable for inclusion in maintenance manuals.
2. Provide shop drawings showing equipment/device locations and connecting wiring of entire fire alarm and detection system. Include wiring diagrams and riser diagrams of panel. Provide dimensioned drawing of Fire Alarm Control Panel and Building Graphic. Shop drawings shall be prepared by an individual with a minimum NICET Level IV (Fire Protection Engineering/Fire Alarm Systems) certification. The individuals name and certification number shall be indicated on submittal design drawings.
3. Submit a written statement to the Architect and the state and local Fire Marshal's Office that each device of the fire alarm system will be installed, inspected and tested in accordance with applicable requirements of NFPA Standard 72.
4. A complete set of shop drawings indicating:

    a. Location of all alarm-initiating and alarm-signaling devices.
    b. Point-to-point wiring diagrams for all alarm-initiating and alarm-signaling devices.

5. Wiring diagrams for:

    a. Alarm control panels.
    b. Auxiliary function relays and solenoids.
    c. Remote signaling equipment.
    d. Standby battery calculations, including voltage drop calculation.

6. A complete equipment list identifying:

    a. Type
    b. Model
    c. Manufacturer
    d. Manufacturer catalog data sheets
    e. UL Listing and/or FM approval showing compatibility of device with Fire Alarm Control Panel (FACP)

7. A complete zone list identifying all:

    a. Alarm-initiating and alarm-signaling devices.
    b. Remote signaling and auxiliary function zones.

c. Specific devices associated with each zone.

8. Submit to State and Local Fire Marshall, a complete Certificate of Compliance

1.4 SPARE PARTS:

A. Provide spare parts (fuses, diffusers, lamps, etc.) as specified. Transmit all spare parts to Owner's Representative prior to substantial completion.

Section	Section Name	Description	Qty. Rqrd.	Qty Rcvd	Fulfilled ?
26 0532	Conduit Raceway	Provide 500 feet of 3/4" EMT conduit with 4 #12 conductors, 500 feet of 3/4" EMT conduit with 4 #10 conductors, mounted above ceiling up to 15 feet. Provide all supports, fittings, boxes, labor, terminations, etc. as required for installation. Install only as directed by engineer. Credit back all unused material and labor to Owner.	Per description		
26 0923	Occupancy Sensors	Spare wall switches and ceiling sensors (including power pack) for each type used on project.	5		
0					
26 2726	Wiring Devices	Provide (5) switches, (20) duplex receptacles (tamper resistant), (10) -110V LED dimmers and (5) GFCI receptacles as directed by the Engineer. Include cover plates and 25' of ¾" EMT conduit with 3 #12 THHN for each device.	Per description		
26 2815	Overcurrent Protective Devices	Maintenance Stock Fuses: for types and ratings required, furnish additional fuses, amounting to one for every 5 installed units, but not less than one unit of each.	Per description		
26 2816	Motor and Circuit Disconnects	Spare fuses amounting to one spare fuse for each 10 installed but not less than three of any one type and size.	Per description		
26 2913	Motor Starters	Maintenance Stock Fuses: For types and ratings required, furnish additional fuses, amounting to one unit for every 10 installed, but not less than 5 units of each, for both power and control circuit fuses.	Per description		
26 5100	Interior and Exterior Building Lighting				
		Provide attic stock of (4) of each of the following fixtures types: A55, A75, B34, B39, D4, D8, H6, SM4M, SM8M			
		Provide (5) extra type XA and (2) XB exit signs for discretionary placement by fire			

		marshal or code official. Provide 1000 feet of 3/4" conduit with 3 #12 conductors for exit sign installations. Provide all supports, fittings, boxes, terminations, etc. as required for installation. Install only as directed by engineer. Credit back all unused material and labor to the Owner.			
		Provide a complete spare parts list in lighting shop drawing review			
		Provide (3) spare fuses for each type and size used.	Per description		
26 0943	Lighting Control Equipment	Provide (3) spare wall stations for each type and size used.	Per description		
27 5123	Intercommunication System	Back boxes	10		
		Call switches	10		
		15 feet of conduit and cable per each spare device	20		
		Popits	20		
		Touchscreen Keypad	Per description		
28 2205	Access Control System	Door Contacts	5		
		Provide 50’ of conduit with 2 pair #18 twisted for each device and connect into loop as directed. Provide 50’ of conduit with Belden #638AFS cable for each reader. Credit back all unused material and labor to the Owner.	5		
		Card Readers (Mullion)	3		
		Card Readers (Standard)	5		
28 3111	Fire Alarm and Detection	Smoke detectors with base	10		
		Thermal detectors with base	10		
		Strobe/horns	10		
		Duct smoke detectors	5		
		Manual pull stations with addressable modules	2		
		Carbon Monoxide Detectors	5		
		100 feet of conduit with wiring (completely installed and wired) for each spare device	Per description		

END OF SECTION 260503

SECTION 260507 - ELECTRICAL CONNECTIONS FOR EQUIPMENT

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is part of each Division-26 section making reference to electrical connections.

1.2 DESCRIPTION OF WORK:

A. Extent of electrical connection for equipment includes final electrical connection of all equipment having electrical requirements. Make final connections for all owner furnished equipment. See other applicable portions of specification for building temperature control wiring requirements.

B. Refer to Division-23 sections for motor starters and controls furnished integrally with equipment; not work of this section.

C. Refer to Division- 23 section for control system wiring; not work of this section.

D. Refer to sections of other Divisions for specific individual equipment power requirements.

1.3 QUALITY ASSURANCE:

A. NEC COMPLIANCE: Comply with applicable portions of NEC as to type products used and installation of electrical power connections.

B. UL LABELS: Provide electrical connection products and materials which have been UL-listed and labeled.

PART 2 – PRODUCTS

2.1 GENERAL:

A. For each electrical connection indicated, provide complete assembly of materials, including but not necessarily limited to, raceways, conductors, cords, cord caps, wiring devices, pressure connectors, terminals (lugs), electrical insulating tape, heat-shrinkable insulating tubing, cable ties, solderless wire nuts, and other items and accessories as needed to complete splices, terminations, and connections as required. Crimp on or slip-on type splicing materials (insulation displacement type) designed to be used without wire stripping are not acceptable. See Section 260532, Conduit Raceway; Section 262726 Wiring Devices: and Section 260519 Conductors and Cables for additional requirements. Provide final connections for equipment consistent with the following:

1. Permanently installed fixed equipment - flexible seal-tite conduit from branch circuit terminal equipment, or raceway; to equipment, control cabinet, terminal junction box or wiring terminals. Totally enclose all wiring in raceway.
2. Movable and/or portable equipment - wiring device, cord cap, and multi-conductor cord suitable for the equipment and in accordance with NEC requirements (Article 400).
3. Other methods as required by the National Electrical Code and/or as required by special equipment or field conditions.

PART 3 – EXECUTION

3.1 INSTALLATION OF ELECTRICAL CONNECTIONS:

A. Make electrical connections in accordance with connector manufacturer's written instructions and with recognized industry practices, and complying with requirements of NEC and NECA's "Standard of Installation" to ensure that products fulfill requirements.

B. Connect electrical power supply conductors to equipment conductors in accordance with equipment manufacturer's written instructions and wiring diagrams.

C. Coordinate installation of electrical connections for equipment with equipment installation work.

D. Verify all electrical loads (voltage, phase, horse power, full load amperes, number and point of connections, minimum circuit ampacity, etc.) for equipment furnished under other Divisions of this specification, by reviewing respective shop drawings furnished under each division. Meet with each subcontractor furnishing equipment requiring electrical service and review equipment electrical characteristics. Report any variances from electrical characteristics noted on the electrical drawings to Architect before proceeding with rough-work. In summary it is not in the Electrical Engineers scope to review the shop drawings from other trades/divisions.

E. Obtain and review the equipment shop drawings to determine particular final connection requirements before rough-in begins for each equipment item.

F. Refer to basic materials and methods Section 26 0553 Electrical Identification, Conductors, for identification of electrical power supply conductor terminations.

END OF SECTION 260507

SECTION 260519 - CONDUCTORS AND CABLES (600V AND BELOW)

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is part of each Division-26 section making reference to conductors and cables specified herein.

1.2 DESCRIPTION OF WORK:

A. Extent of electrical conductor and electrical cable work is indicated by drawings and schedules.

B. Types of conductors and cables in this section include the following:

1. Copper Conductors (600V)
2. Aluminum Conductor (600V)
3. Fire Resistive Cables
4. 0-10V Class 2 Circuits

C. Applications for conductors and cables required for project include:

1. Power Distribution
2. Feeders
3. Branch Circuits
4. 0-10V Class 2 Circuits

1.3 RECORDS SUBMITTAL:

A. Submit record in triplicate of megohmmeter readings to Architect/Engineer. Please see paragraphs 3.2A AFTER INSTALLATION TEST FOR CABLE 600 VOLTS AND BELOW for testing requirements.

1.4 QUALITY ASSURANCE:

A. Comply with NEC as applicable to construction and installation of electrical conductors and cable. Comply with UL standards and provide electrical conductors and cables that have been UL-listed and labeled.

B. Comply with applicable portions of NEMA/Insulated Cable Engineers Association standards pertaining to materials, construction and testing of conductors and cable.

C. Comply with applicable portions of ANSI/ASTM and IEEE standards pertaining to construction of conductors and cable.

1.5 SUBMITTALS:

A. Refer to Section 26 0503 for electrical submittal requirements.

PART 2 - PRODUCTS

2.1 COPPER AND ALUMINUM CONDUCTORS (600V):

A. Provide factory-fabricated conductors of sizes, ratings, materials, and types indicated for each service. Where not indicated provide proper selection to comply with project's installation requirements and NEC standards. Provide conductors in accordance with the following:

1. Service Entrance Conductors – Copper/Aluminum conductor; see drawings for insulation type.
2. Distribution and Panelboard Feeders; and Other Conductors, #2 AWG and Larger – Copper/Aluminum conductor; see drawings for insulation type.
3. Branch Circuit Conductors and All Conductors #3 AWG and Smaller - Copper conductor, with THHN/THWN insulation. Size all conductors in accordance with NEC; minimum size to be #12 AWG.
4. Aluminum Conductors. Where aluminum conductors are specified for use, provide compact stranded Aluminum Association 8000- series alloy conductor material.

a. Stabiloy - Alcan Cable
b. Triple E - Southwire

B. Provide connectors and terminations for aluminum-alloy conductors of hydraulic compression type only, listed under UL 486-B, and marked "AL 7CU" for 75o rated circuits, and "AL9CU" for 90o rated circuits.

C. Provide a maximum of three phase conductors in any one conduit or as approved by electrical engineer. Where phase conductors share a common neutral they must have a means to simultaneously disconnect all ungrounded conductors at the point where the branch circuits originate. The ungrounded and neutral conductors of a multi-wire branch circuit must be grouped together by wire ties at the point of origination.

D. Provide neutral and ground wire as specified elsewhere in documents.

E. Provide separate neutral conductor for all single phase branch circuits installed. No shared neutrals are allowed. Neutral conductor shall be the same size as the phase conductor.

F. MC Cable is not allowed as an acceptable conductor or cable material

2.2 FIRE-RESISTIVE CABLE:

A. Mineral Insulated Copper (MI) Copper Sheathed Cable:

1. General:

a. Provide 1/c type system 1850 sheathed power cable, conforming to current standards of UL system No. 1850.
b. Cable shall be classified as 2-hour fire resisting cable and shall comply with NEC articles 695 and 700 as an "Electrical Circuit Protective System" with a minimum 2-hour fire rating.
c. Construct cable with copper conductor with highly compressed magnesium oxide insulation and seamless soft-drawn copper sheath.
d. Provide termination kits as recommended by cable manufacturer.

2. Manufacturer:

a. Subject to compliance with requirements, provide products of one of the following:

1) Pentair – Pyrotenex System 1850


2.3 COPPER LOW VOLTAGE CONDUCTORS (0-10V CIRCUITS):

A. 0-10V Class 2 Circuits:

1. General:

a. Provide Class 2 circuits for all 0-10V dimming installations. Class 2 circuits shall be permitted to be installed as specified in NEC 725.136(D):

1) Class 2 circuit conductors in compartments, enclosures, device boxes, outlet boxes, or similar fittings shall be permitted to be installed with electric light, power, Class 1 circuits where they are introduced solely to connect the equipment connected to Class 2 circuits:
2) 0-10V ballasts and drivers have a minimum spacing of 0.25 inches between line voltage and the bus terminals (voilet and grey wires) for Class 2 installations.

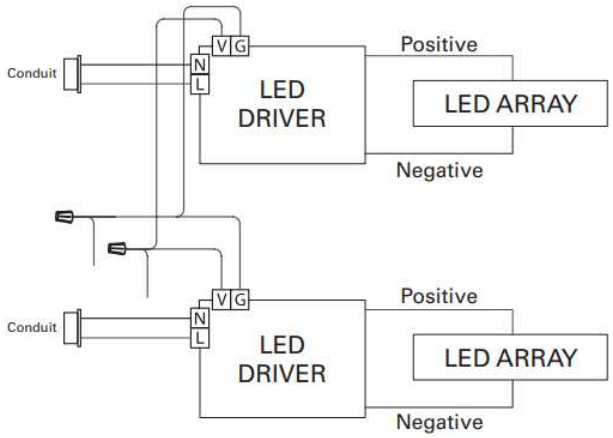

b. Cable shall be classified plenum rated 2 conductor 18 or 16 AWG solid, twisted, and unshielded cable NEC type CMP and CEC type CMP FT6. Special color code specific to low voltage ballast/driver 0-10V wiring protocol. Product shall be manufactured to be in compliant with the requirements of UL444 for installations and applications in accordance with NEC articles 725 and 800

c. Cable shall be installed in a clean and craftmanship-like manner. Support at 5'-0" intervals along the path of the accompanying branch circuit lighting raceway. Pulling wire diagonally across rooms is not allowed. Using ceiling system or light fixture support/seismic wires for support is not allowed.

d. Utilize 18 AWG gauge wire for distances up to 300' and 16 AWG for distances up to 400'.

2. Manufacturer:

a. Subject to compliance with requirements, provide products of one of the following (Plenum Rated):

1) ICE Cable – 18-2LVB Plenum (Gray) or equal
2) Liberty Cable – 18-2C-LVBP(White) or equal

PART 3 - EXECUTION

3.1 INSTALLATION:

A. General: Install electric conductors and cables as indicated, in compliance with manufacturer's written instructions, applicable requirements of NEC and NECA's "Standards of Installation", and in accordance with recognized industry practices.

B. Coordinate installation work with electrical raceway and equipment installation work, as necessary for proper interface.

C. Cables may be pulled by direct attachment to conductors or by use of basket weave pulling grip applied over cables. Attachment to pulling device shall be made through approved swivel connection. Nonmetallic jacketed cables of small size may be pulled directly by conductors by forming them into a loop that pull wires can be attached; remove insulation from conductors before forming the loop. Larger sizes of cable may be pulled by using basket weave pulling grip, provided the pulling force does not exceed limits recommended by manufacturer; if pulling more than one cable, bind them together with friction tape before applying the grip. For long pulls requiring heavy pulling force, use pulling eyes attached to conductors.

D. Do not exceed manufacturer's recommendations for maximum allowable pulling tension, side wall pressure, and minimum allowable bending radius. In all cases, pulling tension applied to the conductors shall be limited to 0.008 lbs. per circular mil of conductor cross-section area.

E. Pull in cable from the end having the sharpest bend; i.e. bend shall be closest to reel. Keep pulling tension to minimum by liberal use of lubricant, and turning of reel, and slack feeding of cable into duct entrance. Employ not less than one man at reel and one in pullhole during this operation.

F. For training of cables, minimum bend radius to inner surface of cable shall be 12 times cable diameter.

G. Where cable is pulled under tension over sheaves, conduit bends, or other curved surfaces, make minimum bend radius 50% greater than specified above for training.

H. Use only wire and cable pulling compound recommended by the specific cable manufacturer, and that is listed by UL.

I. Seal all cable ends unless splicing is to be done immediately. Conduit bodies shall not contain splices.

J. Support all cables in pullholes, concrete trenches, and similar locations by cable racks and secure to rack insulators with nylon cord or self-locking nylon cable ties. Place each cable on separate insulator. In manholes, pullholes, concrete trenches, and similar locations, wrap strips of fire-proofing tape (approx. 1/16 inch thick by 3 inches wide) tightly around each cable spirally in half-lapped wrapping or in two butt-joined wrappings with the second wrapping covering the joints in the first. Apply tape with the coated side toward the cable, and extend tape one inch into the ducts. To prevent unraveling, random wrap the fireproofing tape the entire length of the fireproofing with pressure sensitive glass cloth tape. Provide fireproofing tape of a flexible, conformable fabric having one side coated with flame retardant, flexible, polymeric coating and/or a chlorinated elastomer not less than 0.050 inch thick weighing not less than 2.5 pounds per square yard. Provide tape that is noncorrosive to cable sheath, self-extinguishing, and that will not support combustion. Construct tape of materials that do not deteriorate when subjected to oil, water, gases, salt water, sewage and fungus.

K. Follow manufacturer's instructions for splicing and cable terminations.

L. Fire Protected Circuits:

1. Provide protected circuits for emergency feeders for the following occupancies:

a. Educational occupancies with more than 300 occupants.

2. Feeders shall be protected by one of the following. Electrical contractor shall be responsible for meeting one of the following methods:

a. Feeder is protected by a listed assembly with a minimum 2 hour fire rating.
b. Feeder is listed a fire-resistive cable assembly.
c. Feeder is encased in a minimum of 2" concrete.

3.2 AFTER INSTALLATION TEST FOR CABLE 600 VOLTS AND BELOW:

A. Prior to energization, test cable and wire for continuity of circuitry, and for short circuits, Megger all circuits of 100 amp and greater rating. Correct malfunctions. Record all test data and provide written test report.

B. Subsequent to wire and cable connections, energize circuitry and demonstrate functioning in accordance with requirements.

3.3 IDENTIFICATION OF FEEDERS: Refer to Section 26 0553 for requirements.

END OF SECTION 260519

SECTION 260526 - GROUNDING

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26 Basic Materials and Methods sections apply to work specified in this section.

1.2 DESCRIPTION OF WORK:

A. Provide grounding as specified herein, and as indicated on drawings.

B. Provide grounding and bonding of all electrical and communication apparatus, machinery, appliances, building components, and items required by the NEC to provide a permanent, continuous, low impedance, grounding system.

C. Unless otherwise indicated, ground the complete electrical installation including the system neutral, metallic conduits and raceways, boxes, fittings, devices, cabinets, and equipment in accordance with all code requirements.

D. Ground each separately derived system, as described in NEC Section 250-30, unless otherwise indicated.

E. Types of grounding in this section include the following:

1. Underground Metal Water Piping
2. Metal Building Frames
3. Grounding Electrodes
4. Grounding Rods
5. Separately Derived Systems
6. Service Equipment
7. Enclosures
8. Systems
9. Equipment
10. Other items indicated on drawings

F. Requirements of this section apply to electrical grounding work specified elsewhere in these specifications.

1.3 QUALITY ASSURANCE:

A. Comply with NEC as applicable to electrical grounding and ground fault protection systems. Comply with applicable ANSI and IEEE requirements. Provide products which have been UL listed and labeled.

B. Resistance from the service entrance ground bus, through the grounding electrode to earth, shall not exceed 5 ohms.

1.4 SUBMITTALS:

A. Refer to Section 26 0503 for electrical submittal requirements.

PART 2 – PRODUCTS

2.1 MATERIALS AND COMPONENTS:

A. GENERAL: Except as otherwise indicated, provide each electrical grounding system as specified herein, and as shown on drawings, including but not necessarily limited to, cables/wires, connectors, terminals (solderless lugs), grounding rods/electrodes and plate electrodes, bonding jumper braid, and other items and accessories needed for complete installation. Where materials or components are not otherwise indicated, comply with NEC, NEMA and established industry standards for applications indicated.

B. ELECTRICAL GROUNDING CONDUCTORS: Unless otherwise indicated, provide electrical grounding conductors for grounding connections matching power supply wiring materials and sized according to NEC. Provide with green insulation.

C. GROUND RODS: Steel with copper welded exterior, 3/4" dia. x 10' long. Weaver or Cadweld.

D. GROUND WELL BOXES FOR GROUND RODS: Precast concrete box 9-1/2" W. x 16" L. X 18" D. with light duty concrete cover for non-traffic areas or rated steel plate for traffic areas. Provide covers with lifting holes. Engrave cover with "GROUND ROD".

E. CONCRETE ENCASED GROUNDING ELECTRODE (UFER GROUND): #2/0 AWG bare copper conductor.

F. INSULATED GROUNDING BUSHINGS: Plated malleable iron body with 150 degree Centigrade molded plastic insulating throat, lay-in grounding lug with hardened stainless steel fasteners, OZ-Gedney BLG, or Thomas & Betts #TIGB series.

G. CONNECTIONS TO PIPE: For cable to pipe, OZ-Gedney G-100B series or Thomas & Betts #390X series, or Burndy type GAR.

H. CONNECTIONS TO STRUCTURAL STEEL, GROUND RODS, OR SPLICES: For splicing and/or connecting conductors, use exothermic welds or high pressure compression type connectors. Provide exothermic weld kits manufactured by Cadweld or Thermoweld. If high compression type connectors are used for cable-to-cable, or cable-to-steel, or cable-to-ground rod connections, provide Thomas & Betts #53000 series, or Burndy Hyground series.

I. BONDING JUMPERS: OZ-Gedney Type BJ, or Thomas & Betts #3840 series, or Burndy type GG and type B braid.

J. INTERSYSTEM BONDING TERMINAL: Provide one 12" L. x 2" H x ¼" thick copper bus bar. Mount on wall adjacent to Main Electrical Service Equipment on insulating standoffs, 18" A.F.F. Furnish complete with lugs for connecting systems grounding cables. All holes shall be drilled for 2 hole compression lugs. Provide 6 spare lugs. Connect to equipment grounding bus in Main Electrical Service Equipment with No. 4 AWG copper conductor.

PART 3 - EXECUTION

3.1 INSTALLATION OF GROUNDING SYSTEMS:

A. Install electrical grounding systems in accordance with manufacturer's written instructions and with recognized industry practices to ensure grounding devices comply with requirements.

B. Install clamp-on connectors only on thoroughly cleaned and metal contact surfaces, to ensure electrical conductivity and circuit integrity.

C. Provide grounding for the entire raceway, enclosure, equipment and device system in accordance with NEC. All non-metallic raceways shall include copper grounding conductor sized in accordance with NEC. Include copper grounding conductor in all raceway installed in suspended slabs.

D. Provide service entrance grounding by means of ground rods (quantity of two, driven exterior to building), by means of bonding to water main, and by means of bonding to building structural steel. In addition, provide a grounding electrode for not less than 30 lineal feet in concrete footing or foundation which is in direct contract with earth (UFER).

E. Provide grounding conductors for dimming systems in accordance with manufacturer's requirement.

3.2 GROUNDING ELECTRODES:

A. Concrete Encased Grounding Electrode (UFER Ground): Provide a #2/0 AWG

minimum bare copper conductor encased along the bottom of concrete foundation or footings which are in direct contact with the earth and where there is no impervious water-proofing membrane between the footing and the soil. Extend electrode through a horizontal length of 30 feet minimum and encase with not less than 2 nor more than 5 inches of concrete separating it from surrounding soils. At point of emergence from concrete, run electrode through a protective non-metallic sleeve and extend to the main building [reference] ground bus.

B. Supplementary Grounding Electrode (Driven Rods): Provide driven ground rod(s) installed in listed ground well box(s) and filled with gravel after connection is made. Interconnect ground rod(s) with structural steel and adjacent rods with minimum #4 AWG bare copper conductor. Locate ground rod a minimum of 10 feet from any electrode of another electrical system or from adjacent ground rod(s).

C. Separately Derived Electrical System Grounding Electrode: Ground each separately derived system per requirements in NEC Section 250-26 unless indicated otherwise.

D. GROUNDING ELECTRODE CONDUCTOR: Provide grounding electrode conductor sized per NEC table 250-94 or as indicated.

E. POWER SYSTEM GROUNDING: Connect the following items using NEC sized copper grounding conductors to lugs on the Main Building Ground Bus.

1. Grounding electrode conductor from concrete encased electrode, and from ground rods.
2. Conductor from main incoming cold water piping system.
3. Conductor from building structural steel.
4. Ground for separately derived systems.

F. Run main grounding conductors exposed or in metallic conduit if protection or concealment is required.

G. EQUIPMENT BONDING/GROUNDING: Provide a NEC sized conductor, whether indicated or not on the drawings, in raceways as follows:

1. Non-metallic conduits and ducts.
2. Distribution feeders.
3. Motor and equipment branch circuits.
4. Device and lighting branch circuits.
5. Provide grounding bushings and bonding jumpers for all conduit terminating in reducing washers, concentric, eccentric or oversized knockouts at panelboards, cabinets and gutters.

H. Provide bonding jumpers across expansion and deflection couplings in conduit runs, across pipe connections at water meters, and across dielectric couplings in metallic cold water piping system.

I. Provide bonding wire in all flexible conduit.

3.3 TESTING:

A. Obtain and record ground resistance measurements both from service entrance ground bus to the ground electrode and from the ground electrode to earth. Install additional bonding and grounding electrodes as required to comply with resistance limits specified under this Section.

B. Include typewritten records of measured resistance values in the Operation and Maintenance Manual.

C. Use independent testing agency for all testing.

D. Use test equipment expressly designed for the purpose intended. Submit name of testing agency for review and approval, in writing, to the Engineer prior to the performance of any testing.

END OF SECTION 260526

SECTION 260529 - SUPPORTING DEVICES

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification section, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is a part of each Division-26, 27 and 28 section making reference to supports, anchors, sleeves, and seals, specified herein.

1.2 DESCRIPTION OF WORK:

A. Extent of supports, anchors, and sleeves is indicated by drawings and schedules and/or specified in other Division-26 sections. See Section 260532, Raceways, for additional requirements.

B. Work of this section includes supports, anchors, sleeves and seals required for a complete raceway support system, including but not limited to: clevis hangers, riser clamps, C-clamps, beam clamps, one and two hole conduit straps, offset conduit clamps, expansion anchors, toggle bolts, threaded rods, U-channel strut systems, threaded rods and all associated accessories.

1.3 QUALITY ASSURANCE:

A. Comply with NEC as applicable to construction and installation of electrical supporting devices. Comply with applicable requirements of ANSI/NEMA Std. Pub No. FB 1, "Fittings and Supports for Conduit and Cable Assemblies". Provide electrical components which are UL-listed and labeled.

PART 2 - PRODUCTS

2.1 MANUFACTURED SUPPORTING DEVICES:

A. GENERAL:

1. Provide supporting devices; complying with manufacturer's standard materials, design and construction in accordance with published product information, and as required for a complete installation; and as herein specified. See drawings for additional requirements.

PART 3 - EXECUTION

3.1 INSTALLATION OF SUPPORTING DEVICES:

A. Install hangers, anchors, sleeves, and seals as required, in accordance with manufacturer's written instructions and with recognized industry practices to ensure supporting devices comply with requirements. Comply with requirements of NECA, NEC and ANSI/NEMA for installation of supporting devices.

B. Coordinate with other electrical work, including raceway and wiring work, as necessary to interface installation of supporting devices with other work.

C. Install hangers, supports, clamps and attachments to support piping properly from building structures. Arrange for grouping of parallel runs of horizontal conduits to be supported together on trapeze type hangers where possible. For pre-and post tensioned construction, use pre-set inserts for support of all electrical work. Do not use toggle bolts, moly bolts, wood plugs or screws in sheetrock or plaster as support for any equipment or raceway.

D. RACEWAYS:

1. Support raceways which are rigidly attached to structure at intervals not to exceed 8 feet on center, minimum of two straps per 10 foot length of raceway, and within 12" of each junction box, coupling, outlet or fitting. Support raceway at each 90° degree bend. Support raceway (as it is installed) in accordance with the following:

NUMBER OF RUNS	3/4" TO 1-1/4" 0	1-1/2" & LARGER 0
1	Full straps, clamps or hangers.	Hanger
2	Full straps, clamps or hangers.	Mounting Channel
3 or more	Mounting Channel	Mounting Channel

2. Support suspended raceways on trapeze hanger systems; or individually by means of threaded rod and straps, clamps, or hangers suitable for the application. Do not use beam clamps to support to the bottom cord of the joists. Do not use "tie wire" as a portion of any raceway support system; do not support raceway from ceiling support wires.

E. CABLE SUPPORTS:

1. Install hangers, J-hooks, supports, clamps, clips, ties and attachments to support cables properly from building structures (red iron) at 10’ intervals. Arrange for grouping of parallel runs of horizontal cables, in the red iron members to be supported together in bundles where possible. Do not use toggle bolts, moly bolts, wood plugs or screws in sheetrock or plaster as support for any cable run.

F. FLOOR MOUNTED EQUIPMENT:

1. Provide rigid attachment of all floor mounted equipment to the floor slab or structural system. Provide 5/8" bolts or expansion anchors at each 90 degree corner and at intervals not to exceed 48" on center along entire perimeter of the equipment. Provide rigid attachment for all floor mounted switchboards, panelboards, power and control equipment, motor control centers, dimmer cabinets, transformers (provide neoprene vibrations isolators at anchor points), oil switches, battery packs and racks, and similar equipment furnished under Division 26, 27 and 28.

G. WIREWAYS, BUS DUCTS AND CABLE TRAYS:

1. Provide vertical and lateral support systems for all wireways, busway, and cable trays which are supported from overhead structure. See Sections 260536 and 262500 for additional requirements.

END OF SECTION 260529

SECTION 260532 - CONDUIT RACEWAY

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division 1 Specification sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is part of each Division-26 section making reference to electrical raceways and specified herein.

1.2 DESCRIPTION OF WORK:

A. Conduit raceway work is indicated by drawings, schedules and as described herein.

B. Types of raceways in this section include the following:

1. Electrical Metallic Tubing
2. Flexible Metal Conduit
3. Intermediate Metal Conduit
4. Liquid-tight Flexible Metal Conduit
5. Rigid Metal Conduit
6. Rigid Non-metallic Conduit

C. Division-26 is responsible to provide conduit and rough-in for all Temperature Controls Systems. Coordinate with the Controls Contractor and verify exact location of all controls equipment and routing of conduit required. Obtain and review submittals of all Temperature Control Equipment from Controls Contractor and Divisions 21-23.

1.3 QUALITY ASSURANCE:

A. MANUFACTURERS: Firms regularly engaged in manufacture of raceway systems of types and sizes required, whose products have been in satisfactory use in similar service for not less than three (3) years.

B. STANDARDS: Comply with applicable portions of NEMA standards pertaining to raceways. Comply with applicable portions of UL safety standards pertaining to electrical raceway systems; and provide products and components which have been UL-listed and labeled. Comply with NEC requirements as applicable to construction and installation of raceway systems.

1.4 SUBMITTALS:

A. Refer to Section 26 0503 for electrical submittal requirements.

PART 2 – PRODUCTS

2.1 METAL CONDUIT AND TUBING:

A. GENERAL:

1. Provide metal conduit, tubing and fittings of types, grades, sizes and weights (wall thicknesses) as indicated; with minimum trade size of 3/4".

B. RIGID METAL CONDUIT (RMC): FS WW-C-0581 and ANSI C80.1.

C. INTERMEDIATE STEEL CONDUIT (IMC): FS WW-C-581.

D. PVC EXTERNALLY COATED RIGID STEEL CONDUIT: ANSI C80.1 and NEMA Std. Pub. No. RN 1.

E. ALUMINUM CONDUIT: Not acceptable.

F. ELECTRICAL NON-METALLIC TUBING (ENT) SYSTEM: Not acceptable.

G. MC CABLE: Not acceptable.

H. RIGID AND INTERMEDIATE STEEL CONDUIT FITTINGS:

1. Provide fully threaded malleable steel couplings; raintight and concrete tight where required by application. Provide double locknuts and metal bushings at all conduit terminations. Install OZ Type B bushings on conduits 1-1/4" and larger.

I. ELECTRICAL METALLIC TUBING (EMT): FS WW-C-563 and ANSI C80.3.

J. EMT FITTINGS:

1. Provide insulated throat nylon bushings with non-indenter type malleable steel fittings at all conduit terminations. Install OZ Type B bushings on conduits 1" larger. Cast or indenter type fittings are not acceptable.

K. FLEXIBLE METAL CONDUIT: FS WW-C-566, of the following type;

1. Zinc-coated steel.

L. FLEXIBLE METAL CONDUIT FITTINGS: FS W-F-406, Type 1, Class 1, and Style A.

M. LIQUID TIGHT FLEXIBLE METAL CONDUIT:

1. Provide liquid-tight, flexible metal conduit; constructed of single strip, flexible continuous, interlocked, and double-wrapped steel; galvanized inside and outside; coated with liquid-tight jacket of flexible polyvinyl chloride (PVC).

N. LIQUID-TIGHT FLEXIBLE METAL CONDUIT FITTINGS: FS W-F-406, Type 1, Class 3, Style G.

O. EXPANSION FITTINGS: OZ Type AX, or equivalent to suit application.

2.2 NON-METALLIC CONDUIT AND DUCTS:

A. GENERAL:

1. Provide non-metallic conduit, ducts and fittings of types, sizes and weights as indicated; with minimum trade size of 3/4".

B. UNDERGROUND PVC PLASTIC UTILITIES DUCT:

1. Minimum requirements shall be schedule 40 for encased burial in concrete and for Type II for direct burial.

C. PVC AND ABS PLASTIC UTILITIES DUCT FITTINGS:

D. ANSI/NEMA TC 9, match to duct type and material.

E. HDPE CONDUIT: Not acceptable.

2.3 CONDUIT; TUBING; AND DUCT ACCESSORIES:

A. Provide conduit, tubing and duct accessories of types and sizes, and materials, complying with manufacturer's published product information, which mate and match conduit and tubing. Provide manufactured spacers in all duct bank runs.

2.4 SEALING BUSHINGS:

A. Provide OZ Type FSK, WSK, or CSMI as required by application. Provide OZ type CSB internal sealing bushings.

2.5 CABLE SUPPORTS:

A. Provide OZ cable supports for vertical risers, type as required by application.

PART 3 - EXECUTION

3.1 INSTALLATION OF ELECTRICAL RACEWAYS:

A. Install electrical raceways where indicated; in accordance with manufacturer's written instructions, applicable requirements of NEC and NECA "Standard of Installation", and in accordance with the following:

1. FEEDERS UNDER 600 VOLTS:

a. Install in electric metallic tubing (EMT). Below concrete slab-on-grade or in earth fill, install in non-metallic plastic conduit. In areas exposed to weather, moisture, or physical damage, install in RMC or IMC. In suspended slabs, install in EMT (NOT APPROVED). Encase non-metallic conduit 40-amps or more, 1-1/4" and larger and communication/data conduits 2” and larger in concrete. See duct banks.

2. BRANCH CIRCUITS, SIGNAL AND CONTROL CIRCUITS, AND INDIVIDUAL EQUIPMENT CIRCUITS RATED LESS THAN 100 AMPS:

a. Install in electric metallic tubing (EMT). Below concrete slab-on-grade or in earth fill, install in non-metallic plastic duct. In areas exposed to weather, moisture, or physical damage, install in RMC or IMC. In suspended slabs, install in EMT (NOT APPROVED). Encase non-metallic conduit 40-amps or more, 1-1/4" and larger and communication/data conduits 2” and larger in concrete. See duct banks.

B. Coordinate with other work including metal and concrete deck work, as necessary to interface installation of electrical raceways and components.

C. Install raceway in accordance with the following:

1. Provide a minimum of 12" clearance measured from outside of insulation from flues, steam and hot water piping, etc. Avoid installing raceways in immediate vicinity of boilers and similar heat emitting equipment. Conceal raceways in finished walls, ceilings and floor (other than slab-on-grade), except in mechanical, electrical and/or communication rooms, conceal all conduit and connections to motors, equipment, and surface mounted cabinets unless exposed work is indicated on the drawings. Locate all conduits rising vertically through slab and exposed (ie. into panels) in concrete curbs as directed by the architect. Run concealed conduits in as direct a line as possible with gradual bends. Where conduit is exposed in mechanical spaces, etc., install parallel with or at right angles to building or room structural lines. Do not install lighting raceway until piping and duct work locations have been determined in order to avoid fixtures being obstructed by overhead equipment.
2. Do not install conduit horizontally in walls where it will intersect with water piping in the same vicinity.

3. The required raceway size, for any given installation, shall remain the same throughout the entire length of the run. At no point shall any conduit be reduced in size.
4. Where cutting raceway is necessary, remove all inside and outside burrs; make cuts smooth and square with raceway. Paint all field threads (or portions of raceway where corrosion protection has been damaged) with primer and enamel finish coat to match adjacent raceway surface.
5. Provide a minimum of 1 ½" from nearest surface of the roof decking to raceway.
6. Provide a maximum of three phase conductors in any one conduit or as approved by electrical engineer.
7. Provide neutral and ground wire as specified elsewhere in documents.
8. Provide separate neutral conductor for all single phase branch circuits installed. No shared neutrals are allowed. Neutral conductor shall be the same size as the phase conductor.

D. Comply with NEC for requirements for installation of pull boxes in long runs.

E. Cap open ends of conduits and protect other raceways as required against accumulation of dirt and debris. Pull a mandrel and swab through all conduit before installing conductors. Install a 200 lb. nylon pull cord in each empty conduit run.

F. Replace all crushed, wrinkled or deformed raceway before installing conductors.

G. Do not use flame type devices as a heat application to bend PVC conduit. Use a heating device which supplies uniform heat over the entire area without scorching the conduit.

H. Provide rigid metal conduit (RMC) for all bends greater than 22 degrees in buried conduit. Provide protective coating for RMC bend as specified herein.

I. Provide "Long Sweep" (EAI/TIA elbows for bends greater than 22 degrees in all conduit installed for data/telephone systems.

J. Where raceways penetrate building, area ways, manholes or vault walls and floors below grade, install rigid metal conduit (RMC) for a minimum distance of 10 feet on the exterior side of the floor or wall measured from interior face. Provide OZ, Type FSK, WSK or CSMI sealing bushings (with external membrane clamps as applicable) for all conduit penetrations entering walls or slabs below grade. Provide segmented type CSB internal sealing bushings in all raceways penetrating building walls and slabs below grade, and in all above grade raceway penetrations susceptible to moisture migration into building through raceway.

K. Install liquid-tight flexible conduit for connection of motors, transformers, and other electrical equipment where subject to movement and vibration.

L. Install spare 3/4" conduits (capped) from each branch panelboard into the ceiling and floor space. Run five into the ceiling space and five into the floor space. Where the floor is not accessible run six conduits into the ceiling space. Run conduits the required distance necessary to reach accessible ceiling space.

M. Provide OZ expansion fittings on all conduits crossing building expansion joints, both in slab and suspended.

N. Provide OZ cable supports in all vertical risers in accordance with NEC 300-19; type as required by application.

O. Complete installation of electrical raceways before starting installation of cables/conductors within raceways.

P. Raceway installation below grade:

1. Apply protective coating to metallic raceways in direct contact with earth or fill of any type; consisting of spirally wrapped PVC tape (1/2" minimum overlap of scotch wrap tape or equal); or factory applied vinyl cladding (minimum thickness .020 inches). Completely wrap and tape all field joints.
2. Burial depths must comply with NEC Section 300-5 but in no case be less than 24", unless noted otherwise on drawings.

Q. Raceway installation below slab-on-grade, or below grade:

1. For slab-on-grade construction, install runs of rigid plastic conduit (PVC) below slab. All raceway shall be located a minimum of 8" below bottom of slab. Coordinate strictly with other trades at grade level structural members for correct installation. Install RMC (with protective coating) for raceways passing vertically through slab-on-grade. Slope raceways as required to drain away from electrical enclosures and to avoid collection of moisture in raceway low points.
2. Apply protective coating to metallic raceways in direct contact with earth or fill of any type; consisting of spirally wrapped PVC tape (1/2" minimum overlap of scotch wrap tape or equal); or factory applied vinyl cladding (minimum thickness .020 inches). Completely wrap and tape all field joints.
3. Mark all buried conduits which do not require concrete encasement by placing yellow plastic marker tape (minimum 6" wide) along entire length of run 12" below final grade. Where multiple small lines are buried in a common trench and do not exceed an overall width of 16", install a single line marker.
4. Burial depths must comply with NEC Section 300-5 but in no case be less than 24", unless noted otherwise on drawings.

R. Electrical Identification: Refer to Section 260553 for requirements.

END OF SECTION 260532

SECTION 260533 - ELECTRICAL BOXES AND FITTINGS

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specifications sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is a part of each Division-26, 27 and 28 section making reference to electrical wiring boxes and fittings specified herein. See Section 260532, Raceways, for additional requirements.

1.2 DESCRIPTION OF WORK:

A. The extent of electrical box and electrical fitting work is indicated by drawings and schedules.

B. Types of electrical boxes and fittings in this section include the following:

1. Outlet Boxes
2. Junction Boxes
3. Pull Boxes
4. Floor Boxes
5. Conduit Bodies
6. Bushings
7. Locknuts
8. Knockout Closures
9. Miscellaneous Boxes and Fittings

1.3 QUALITY ASSURANCE:

A. Comply with NEC as applicable to construction and installation of electrical boxes and fittings. Comply with ANSI C 134,1 (NEMA Standards Pub No. OS 1) as applicable to sheet-steel outlet boxes, device boxes, covers and box supports. Provide electrical boxes and fittings which have been UL-listed and labeled.

1.4 SUBMITTALS:

A. Submit manufacturer's data including specifications, installation instruction and general recommendations for each type of floor box used on project.

PART 2 - PRODUCTS

2.1 FABRICATED MATERIALS:

A. INTERIOR OUTLET BOXES:

1. Provide one piece, galvanized flat rolled sheet steel interior outlet wiring boxes with accessory rings, of types, shapes and sizes, including box depths, to suit each respective location and installation, construct with stamped knockouts in back and sides, and with threaded screw holes with corrosion-resistant screws for securing box and covers and wiring devices; minimum size 4"x4"x2-1/8".
2. Provide an 'FS' box, with no knockouts when surface mounted in a finished, non-utility space. Surface mounting is only acceptable when approved by the Architect.

B. INTERIOR OUTLET BOX ACCESSORIES:

1. Provide outlet box accessories as required for each installation, including mounting brackets, hangers, extension rings, fixture studs, cable clamps and metal straps for supporting outlet boxes, which are compatible with outlet boxes being used and fulfilling requirements of individual wiring applications.

C. WEATHERPROOF OUTLET BOXES:

1. Provide corrosion-resistant cast-metal weatherproof outlet wiring boxes, of types, shapes and sizes (including depth) required, with threaded conduit ends, cast-metal face plates with spring-hinged waterproof caps suitably configured for each application, with face plate gaskets and corrosion-resistant fasteners.

D. JUNCTION AND PULL BOXES:

1. Provide code-gage sheet steel junction and pull boxes, with screw-on covers; of types, shapes and sizes to suit each respective location and installation; with welded seams and equipped with stainless steel nuts, bolts, screws and washers.

E. FLOOR BOXES:

1. Single Service Floor Box: Provide leveling and fully adjustable floor service receptacle outlets and fittings of types and ratings indicated; and with finish as selected by Architect. Equip with wiring devices as specified in Section 262726. Provide boxes compatible with floor system; provide epoxy-coated stamped steel boxes or cast iron boxes for slab-on-grade construction; provide stamped steel boxes for suspended slabs. Equip with tile and/or carpet flanges to accommodate floor finish material. Boxes shall be available in one, two or three gang configurations. Boxes shall comply with UL Standard UL514A.
2. Multi-Service Floor Box: Provide leveling and fully adjustable multi compartment floor box; there shall be multiple independent wiring compartments; the floor box shall permit tunneling from end power compartment

to end power compartment. Floor box shall accommodate a minimum of two duplex receptacles and two mounting plates for telecommunication devices. Equip with wiring devices as specified in Section 262726. Provide boxes compatible with floor system; with finish as selected by Architect. Provide epoxy-coated stamped steel boxes or cast-iron boxes for slab-on-grade construction; provide stamped steel boxes for suspended slabs. Equip with tile and/or carpet flanges to accommodate floor finish material. Boxes shall comply with UL Standards UL514A and/or UL514C.

3. Manufacturer: Subject to compliance with requirements, provide floor boxes of one of the following:

    a. Wiremold Co.
    b. Harvey Hubbell, Inc.

F. CONDUIT BODIES:

1. Provide galvanized cast-metal conduit bodies, of types, shapes and sizes to suit respective locations and installation, construct with threaded-conduit-entrance ends, removable covers, and corrosion-resistant screws.

G. BUSHINGS, KNOCKOUT CLOSURES AND LOCKNUTS:

1. Provide corrosion-resistant punched-steel box knockout closures, conduit locknuts and malleable steel conduit bushings and offset connectors, of types and sizes to suit respective uses and installation.

PART 3 - EXECUTION

3.1 INSTALLATION OF ELECTRICAL BOXES AND FITTINGS:

A. GENERAL:

1. Install electrical boxes and fittings where indicated, complying with manufacturer's written instructions, applicable requirements of NEC and NECA's "Standard of Installation", and in compliance with recognized industry practices to ensure that products fulfill requirements.
2. Coordinate installation of electrical boxes and fittings with wire/cable and raceway installation work.
3. Provide coverplates for all boxes. See Section 262726, Wiring Devices.
4. Provide weatherproof outlets for interior and exterior locations exposed to weather or moisture.
5. Provide knockout closures to cap unused knockout holes where blanks have been removed.
6. Install boxes and conduit bodies to ensure ready accessibility of electrical wiring. Do not install boxes above ducts or behind equipment. Install recessed boxes with face of box or ring flush with adjacent surface. Seal between switch, receptacle and other outlet box openings and adjacent surfaces with plaster, grout, or similar suitable material.

7. Fasten boxes rigidly to substrates or structural surfaces to which attached, or solidly embed electrical boxes in concrete or masonry. Use bar hangers for stud construction. Use of nails for securing boxes is prohibited. Set boxes on opposite sides of common wall with minimum 10" of conduit between them. Set boxes on opposite sides of fire resistant walls with minimum of 24" separation.
8. Provide a minimum of 1 ½" from the nearest surface of the roof decking to the installed boxes.
9. Provide electrical connections for installed boxes.
10. Provide an approved fitting on each end of each conduit (regardless of voltage) whether in panel, box, etc. or in free air.
11. Install floor boxes as required for each specific installation per manufacturer installation instructions. Level box prior to concrete pour, to ensure flush mounting with floor (Including finish materials). Coordinate strictly with other trades and verify that the top of the cover assembly is absolutely flush with the floor finish material

END OF SECTION 260533

SECTION 260553 - ELECTRICAL IDENTIFICATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Requirements of the following Division 26 Sections apply to this section:

1. "Basic Electrical Requirements".
2. "Basic Electrical Materials and Methods".

1.2 SUMMARY

A. This section includes identification of electrical materials, equipment and installations. It includes requirements for electrical identification components including but not limited to the following:

1. Buried electrical line warnings.
2. Identification labels for raceways, cables and conductors.
3. Operational instruction signs.
4. Warning and caution signs.
5. Equipment labels and signs.
6. Arc-flash hazard labels

B. Related Sections: The following sections contain requirements that relate to this section:

C. Division 9 Section "Painting" for related identification requirements.

D. Refer to other Division 26 sections for additional specific electrical identification associated with specific items.

1.3 QUALITY ASSURANCE

A. Electrical Component Standard: Components and installation shall comply with NFPA 70 "National Electrical Code"

1.4 SUBMITTALS:

A. PRODUCT DATA: Submit manufacturer's data on each type of electrical identification products.

B. SAMPLES: Submit one sample of each component of the electrical identification system as follows:

1. Wire/cable tape marker.
2. Tags
3. Engraved, plastic laminate labels.
4. Arc-flash hazard labels.

PART 2 – PRODUCTS

2.1 MANUFACTURERS

A. Manufacturers: Subject to compliance with requirements, provide products by the following:

1. American Labelmark Co.
2. Calpico, Inc.
3. Cole-Flex Corp.
4. Emed Co., Inc.
5. George-Ingraham Corp.
6. Ideal Industries, Inc.
7. Kraftbilt
8. LEM Products, Inc.
9. Markal Corp.
10. National Band and Tag Co.
11. Panduit Corp.
12. Radar Engineers Div., EPIC Corp.
13. Seton Name Plate Co.
14. Standard Signs, Inc.
15. W.H Brady, Co.

2.2 ELECTRICAL IDENTIFICATION PRODUCTS

A. Colored paint for raceway identification:

1. Use Kwal Paint colors as specified in Part 3 – Execution.

B. Color Adhesive Marking Tape for Raceways, Wires and Cables:

1. Self-adhesive vinyl tape not less than 3 mills thick by 1” to 2” in width.

C. Underground Line Detectable Marking Tape:

1. Permanent, bright colored, continuous-printed, acid- and alkali-resistant plastic tape specifically compounded for direct-burial service. Not less than 6” wide by 4 mills thick.

2. With metallic core encased in a protective jacket for corrosion protection, detectable by metal detector when tape is buried up to 30 inches deep.
3. Printed legend indicative of general type of underground line below.

D. Wire/Cable Designation Tape Markers:

1. Vinyl or vinyl-cloth, self-adhesive, wraparound, cable/conductor markers with pre-printed numbers and letters.

E. Brass or Aluminum Tags:

1. Metal tags with stamped legend, punched for fastener.
2. Dimensions: 2" X 2" 19 gage.

F. Engraved, Plastic Laminated Labels, Signs and Instruction Plates:

1. Engraving stock melamine plastic laminate, 1/16" minimum thickness for signs up to 20 sq. in. or 8" in length; 1/8 "thick for larger sizes. Engraved legend in ¼" high white letters on black face and punched for mechanical fasteners.

G. Arc-flash Hazard Labels:

1. ANSI Z535.4 Safety Label.
2. Adhesive backed polyester with self-laminating flap. Chemical, abrasion and heat resistant.
3. Dimensions: 5" x 3.5"
4. Information contained: Arc-flash boundary; Voltage; Flash Hazard Category; Incident Energy (arc rating); checkboxes for the required Personal Protective Equipment (PPE) and the date that the calculations were performed.

H. Equipment Labels:

1. Adhesive backed polyester with self-laminating flap. Chemical, abrasion and heat resistant.
2. Dimensions: minimum 5" x 2"
3. Conductor-Identification-Means Labels:

    a. Information contained: the method utilized for identifying ungrounded conductors within switchboards, distribution panels and branch circuit panels.

4. Available-Fault-Current Labels:

    a. Information contained: maximum available fault current at the respective piece of equipment, and date of calculation of fault current.

5. Source-of-Supply Labels:

    a. Information contained: indicate the device or equipment where the power supply originates.

I. Baked Enamel Warning and Caution Signs for Interior Use:

1. Preprinted aluminum signs, punched for fasteners, with colors legend and size appropriate to location.

J. Fasteners for Plastic-Laminated and Metal Signs:

1. Self-tapping stainless steel screws or # 10/32 stainless steel machine screws with nuts, flat and lock washers.

K. Cable Ties:

1. Fungus-inert, self-extinguishing, one-piece, self-locking nylon cable ties, 0.18" minimum width, 50-lb. Minimum tensile strength, and suitable for a temperature range from minus 40° F. to 185° F. Provide ties for specified colors when used for color coding.

L. Colored Support Wires:

1. When electrical equipment/wiring is supported by wires within the ceiling cavity, these wires shall be independent of the ceiling support assembly and shall be distinguishable by painting entire length in bright yellow.

PART 3 – EXECUTION

3.1 INSTALLATION

A. Lettering and Graphics:

1. Coordinate names, abbreviations, colors and other designations used in electrical identification work with corresponding designations specified or indicated. Install numbers, lettering and colors as approved in submittals and as required by code.

B. Install identification devices in accordance with manufacturer's written instructions and requirements of NEC.

C. Sequence of Work:

1. Where identification is to be applied to surfaces that require a finish, install identification after completion of finish work.

D. Conduit Identification:

1. Identify Raceways of Certain Systems with Color Coding. Acceptable means of color identification are as follows:

a. Colored adhesive marking tape.

b. Field-painted colored bands.

c. Color exposed or accessible raceways of the following systems for identification. Make each color band 2 inches wide, completely encircling conduit. Apply bands at changes in direction, at penetrations of walls and floors, and at 20-foot maximum intervals in straight runs. Apply the following colors:

1) Fire Alarm System: Red
2) Intercom: Blue
3) AV & AV Network: Yellow
4) Data: Green
5) MATV: Black
6) Security: Orange
7) Legally Required Emergency Systems: Red with Black Stripe (Per NEC 700.10(A))

2. Identify Junction, Pull and Connection Boxes.

a. Code-required caution sign for boxes shall be pressured-sensitive, self-adhesive label indication system voltage in black, preprinted on orange background. Install on outside of box cover. Also label box covers on outside of cover with identity of contained circuits. Use pressure-sensitive plastic labels at exposed locations and similar labels or plasticized card stock tags at concealed boxes.

3. Label and paint the covers of the systems junction boxes as follows:

SYSTEM	COLOR (ALL COLORS ARE KWAL PAINT)	
Fire Alarm	Red Alert	AC118R
Sound/IC	Neon Blue	7076A
Telephone	Competition Yellow	7225A
Data	Java Green	AC098N
MATV	Flat Black	
Security	Fiesta Orange	AC107Y
Legally Required EM System	Red/Black Stripe	

E. Underground Electrical Line Identification.

1. During trench backfilling, for exterior underground power, signal, and communications lines, install continuous underground line detectable marking tape, located directly above line at 6 to 8 inches below finished grade. Where multiple lines are installed in a common trench or concrete envelope, do not exceed an overall width of 16 inches; install a single line marker.

2. Install detectable marking tape for underground wiring, both direct-buried and in raceway.
3. Provide red marker dye applied to concrete encased ductbank.

F. Conductor Color Coding.

1. Provide color coding for secondary service, feeder and branch circuit conductors throughout the project secondary electrical system as follows:

208/120 Volts	Phase	480/277 Volts
Black	A	Brown
Red	B	Purple
Blue	C	Yellow
White	Neutral	Gray
Green	Ground	Green

2. Switch legs, travelers and other wiring for branch circuits shall be of colors other than those listed above.
3. Use conductors with color factory applied the entire length of the conductors except as follows:

   a. The following field-applied color-coding methods may be used in lieu of factory-coded wire for sizes larger than No. 10 AWG.
   b. Apply colored, pressure-sensitive plastic tape in half-lapped turns for a distance of 6 inches from terminal points and in boxes where splices or taps are made. Apply the last two laps of tape with no tension to prevent possible unwinding. Use 1-inch-wide tape in colors as specified. Do not obliterate cable identification markings by taping. Tape locations may be adjusted slightly to prevent such obliteration.
   c. In lieu of pressure-sensitive tape, colored cable ties may be used for color identification. Apply three ties of specified color to each wire at each terminal or splice point starting 3 inches from the terminal and spaced 3 inches apart. Apply with a special tool or pliers, tighten for snug fit, and cut off excess length.

G. Power Circuit Identification.

1. Securely fasten identifying metal tags or aluminum wraparound marker bands to cables, feeders, and power circuits in vaults, pull boxes, junction boxes, manholes, and switchboard rooms with ¼-inch steel letter and number stamps with legend to correspond with designations on Drawings. If metal tags are provided, attach them with approximately 55-lb monofilament line or one-piece self-locking nylon cable ties.

2. Tag or label conductors as follows:

a. Future Connections: Conductors indicated to be for future connection or connection under another contract with identification indicting source and circuit numbers.

b. Multiple Circuits: Where multiple branch circuits or control wiring or communications/ signal conductors are present in the same box or enclosure (except for three-circuit, four-wire home runs), label each conductor or cable. Provide legend indicating source, voltage, circuit number, and phase for branch circuit wiring. Phase and voltage of branch circuit wiring may be indicated by mean of coded color of conductor insulation. For control and communications/signal wiring, use color coding or wire/cable marking tape at terminations and at intermediate locations where conductors appear in wiring boxes, troughs, and control cabinets. Use consistent letter/number conductor designations throughout on wire/cable marking tapes.

3. Match identification markings with designations used in panelboards shop drawings, Contract Documents, and similar previously established identification schemes for the facility's electrical installations.

H. Apply warning, caution and instruction signs and stencils as follows:

1. Install warning, caution, or instruction signs where required by NEC, where indicated, or where reasonably required to assure safe operation and maintenance of electrical systems and of the items to which they connect. Install engraved plastic-laminated instruction signs with approved legend where instructions or explanations are needed for system or equipment operation. Install butyrate signs with metal backing for outdoor items. Warning and caution signs shall be furnished and installed on, but not be limited to the following equipment and locations:

a. Entrances to rooms and other guarded locations that contain exposed live parts 600 volts or less; signs shall forbid unqualified personnel to enter.

b. Switch and Overcurrent device enclosures with splices, taps and feed-through conductors. Provide warning label on the enclosures that identifies the nearest disconnecting means for any feed-through conductors.

c. Entrances to buildings, vaults, rooms or enclosures containing exposed live parts or exposed conductors operating at over 600 volts: DANGER-HIGH VOLTAGE-KEEP OUT.

d. Metal-enclosed switchgear, unit substations, transformers, enclosures, pull boxes, connection boxes and similar equipment operating at over 600 volts shall have appropriate caution signs and warning labels.

e. Indoor and Outdoor substations operating over 600 volts. Provide warning signs, instructional signs and single-line diagrams in accordance with NEC 225.70.

I. Emergency Operating Signs: Install engraved laminated signs with white legend on red background with minimum 3/8-inch high lettering for emergency instructions on power transfer, load shedding, or other emergency operations.

J. Install equipment/system circuit/device identification as follows:

1. Apply equipment identification labels of engraved plastic-laminate on each major unit of electrical equipment in building, including central or master unit of each electrical system. This includes communication/signal/alarm systems, unless unit is specified with its own self-explanatory identification. Except as otherwise indicated, provide single line of text, with ¼-inch-high lettering on 1-inch-high label (1 ½-inch-high where two lines are required) white lettering in black field. White lettering in red field for Emergency Power Systems. Text shall match terminology and numbering of the Contract Documents and shop drawings. Apply labels for each unit of the following categories of electrical equipment.

    a. Each service disconnect, to identify it as a service disconnect.
    b. Panelboards (exterior and interior), electrical cabinets, and enclosures. For subpanels, identify feeder circuit from which served.
    c. Switches in fusible panelboards shall be labeled. Main switches shall be identified.
    d. Access doors and panels for concealed electrical items.
    e. Electrical switchgear and switchboards.
    f. Motor starters, including circuit origination, HP, heater size, FLA, and mechanical equipment designation.
    g. Disconnect switches.
    h. Pushbutton stations.
    i. Power transfer equipment.
    j. Contactors.
    k. Dimmers.
    l. Control devices.
    m. Transformers.
    n. Power generating units, to include transformer switches.
    o. Telephone switching equipment.
    p. Clock/program master equipment.
    q. Call system master station.
    r. TV/audio monitoring master station.
    s. Fire alarm master station or control panel.
    t. Busduct – Label all cable tap boxes, bus plug-in units, etc. with plastic laminate labels designating load served.
    u. Variable frequency drives.
    v. Lighting Control Equipment.

K. Post Conductor-Identification-Means labels at locations of switchboards, distribution panels and branch circuit panels. The labels shall identify the color-coding used on ungrounded conductors for each voltage system used on the premises.

L. Apply Available-Fault-Current labels at the service entrance equipment.

M. Apply Source-of-Supply labels on the exterior covers of equipment (except in single- or two-family dwellings) as follows:

1. Each switchboard supplied by a feeder.

2. Each branch circuit panelboard supplied by a feeder.
3. Each disconnect switch serving elevators, escalators, moving walks, chairlifts, platform lifts and dumbwaiters.
4. Each dry type transformer (or primary-side disconnect switch at transformer). If the primary-side disconnect is remote from the transformer, both the remote disconnect and the transformer shall be labeled, and the transformer label shall also indicate the location of the disconnect.
5. Each feeder disconnect, branch circuit disconnect, panelboard or switchboard in a remote building or structure

N. The label shall identify the device or equipment where the power supply originates, and the system voltage, phase or line and system at all termination, connection and splice points. For example: Feeder Power Supply for Panel "XX" Originates at Panel "XX" (or Switchboard "XX", Transformer "XX", Switch "XX", etc.); 120/208 volts, 3-phase, Phase Color Identification (or 120/240, 277/480, etc.).

O. Install Arc-flash hazard labels on the following equipment:

1. Each piece of service entrance equipment.
2. Each power distribution switchboard or panel.
3. Each individually mounted circuit breaker.
4. Each branch circuit panelboard.
5. Each motor control center.
6. Each individually mounted motor starter.
7. Each meter socket enclosure.

P. Apply circuit/control/item designation labels of engraved plastic laminate for disconnect switches, breakers, pushbuttons, pilot lights, motor control centers, and similar items for power distribution and control components above, except panelboards and alarm/signal components, where labeling is specified elsewhere.

Q. Install labels at locations indicated and at locations for best convenience of viewing without interference with operation and maintenance of equipment.

R. Engrave all receptacle plates other than those serving 120 volt, single phase devices. State voltage and amperage characteristics: Example; "208V 30A".

S. Mark each device box (for each type of wiring device) with a permanent ink felt tip marker, indicating the circuit to which the device is connected: Example; "CKT A-1"

T. Label circuit breaker feeding fire alarm panel "Fire Alarm Circuit". Using plastic laminate label, white lettering on a red background.

U. Label each pull box feeding light fixtures with the circuit number. Use permanent ink felt tip marker.

END OF SECTION 260553

SECTION 260923 - OCCUPANCY SENSORS

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is part of each Division-26 section making reference to wiring devices specified herein.

1.2 DESCRIPTION OF WORK:

A. The extent of occupancy sensor work is indicated by drawings and schedules.

B. Types of occupancy sensors in this section include the following:

1. Dual Technology Wall Switch
2. Dual Technology Wall Switch with Dimming and Daylight Control.
3. Dual Technology Ceiling Sensor w/ Control Pack

1.3 QUALITY ASSURANCE:

A. Comply with NEC and NEMA standards as applicable to construction and installation of occupancy sensors. Provide occupancy sensors that have been UL listed and labeled.

B. All sensors shall be capable of operating normally with electronic ballasts, PL lamp systems, motor loads and any other passive infrared or microwave systems.

1.4 SUBMITTALS:

A. Refer to Section 26 0503 for electrical submittal requirements.

PART 2 - PRODUCTS

2.1 MANUFACTURER: The manufacturer shall have a minimum of five years of experience in the sensor and lighting control industry. Sensors and related relays shall be compatible with the specific lighting types controlled. All sensors shall be of the same manufacturer, mixing brands of sensors is not acceptable.

A. DUAL TECHNOLOGY WALL SWITCH: Where units are indicated provide a sensor that meets the following minimum requirements:

1. Sensor shall utilize PIR (Passive Infrared) to turn on the lights and then PIR or US (Ultrasonic) technologies to keep lights on.
2. Sensor shall incorporate an inrush current limiter circuit to protect the relay contacts.
3. Sensor shall utilize single or dual dry relay contacts for control of the lighting loads. Contractor shall verify requirements in coordination with the drawings.
4. Sensor shall have a self-adjusting time delay, selectable 5, 15 and 30 minutes.
5. Sensor shall have automatic sensitivity adjustment and be microprocessor controlled.
6. Sensor shall have light level sensing 0 to 200 footcandles.
7. Sensor shall have a 180 degree field of view, coverage up to 800 square feet and shall detect 6 inches of hand movement towards the sensor up to 300 square feet; and body motion towards the sensor up to 1000 square feet.
8. Sensor shall be rated for 0 to 800 watts at 120VAC and 0 to 1200 watts at 277VAC.
9. Sensor shall be automatic on and shall have an automatic to off override switch on the unit. Switch shall be equipped with an air gap switch to disconnect power to the lighting load.
10. Sensor shall have real time motion indicator on the front of the unit.
11. Sensor shall mount to a single gang switch box.
12. Subject to compliance with the above requirements. Provide models of one of the following:

    a. Greengate ONW-D
    b. Wattstopper

B. DUAL TECHNOLOGY WALL SWITCH WITH DIMMING AND DAY-LIGHT CONTROL: Where units are indicated, provide a sensor that meets the following minimum requirements:

1. Dual technology sensors shall have one of its two technologies, not require motion to detect occupancy.
2. Sensors shall offer a minimum on timer of at least 15 minutes, in order to prevent all cycling of lamps before they have burned for the lamp manufacturers minimum recommended time period.
3. Sensors shall utilize an occupancy time delay that keeps lights on after last detected occupancy. Factory default setting of the occupancy time delay shall be 15 minutes.
4. Manual adjustment to the occupancy time delay so as to increase it shall be accommodated.
5. Sensor shall be capable of switching both 120 VAC and 277 VAC.
6. Sensor shall recess into single gang switch box and fit standard GFI opening.
7. Sensor shall meet NEC grounding requirements by providing a dedicated ground connection and intrinsically grounding through its mounting strap.
8. Line and load wire connections shall be interchangeable.
9. Wall switch sensor shall have field programmable adjustments for selecting operational modes, occupancy time delays, minimum on time, and photocell set-point.
10. Sensor shall be capable of both auto-on and manual operation.

11. Combination photocell/dimming sensors set point and deadband shall be automatically calibrated through the sensors microprocessor by initiating the automatic set point programming procedure. Min and max dim settings as well as set point may be manually entered.
12. Subject to compliance with the above requirements, provide models of one of the following:

    a. Sensor-switch – N5X-PDT-D Series
    b. Wattstopper – DW-311 (No Daylight Dimming, use when daylighting is not required)

C. DUAL TECHNOLOGY CEILING SENSOR: Where units are indicated, provide a sensor that meets the following minimum requirements:

1. Sensor shall incorporate ultrasonic (microphonics) and infrared technologies in a single unit.
2. Sensor shall be Class 2, low voltage; capable of mounting in the ceiling for maximum coverage.
3. Sensor shall use internal microprocessor for motion signal analysis and automatic self-adjustment.
4. Sensor shall have automatic self-adjustment algorithm that adjusts timer and sensitivity settings to maximize performance and minimize energy usage.
5. Sensor shall have manual time-out adjustment from 8 minutes to 32 minutes and automatic time out from 8 minutes to 100 minutes.
6. Sensor shall have test time-out setting of 8 seconds, with automatic return to 8 minutes after one hour if sensor is left in test mode.
7. Sensor's microprocessor shall automatically extend timer by 1 hour in response to recognition to false off condition. After 5 hours, sensor reduces extended time by 30 minutes and continues to reduce by 30 minute increments over the next few days.
8. Sensor's microprocessor shall automatically reduce either PIR or ultrasonic sensitivity in response to false on condition.
9. Sensor microprocessor will automatically monitor PIR background threshold signal level and makes corresponding sensitivity adjustments automatically.
10. Sensor microprocessor algorithm shall incorporate automatic adaptation to continuous airflow.
11. For airflow that is so intense as to mask motion, sensor shall flash indicator LED code to indicate excessive airflow.
12. Sensor's microprocessor shall use a four week learning period and develop a circadian calendar.
13. An internal 24 hour 7 day clock establishes what periods the room is typically occupied, biasing sensor to keep lights on while normally occupied and off when normally unoccupied.
14. Sensor shall have selection settings for the following dual technology schemes:

    a. High Sensitivity and High Confidence (miser mode)

15. Sensor shall be available with either 180 degrees or 360 degrees coverage pattern.

16. Infrared lens shall have 360 degree field of view. Two types of lens shall be available, standard and extra dense.
17. Sensor shall have a variety of mask inserts for PIR coverage rejection to prevent false tripping.
18. Transducers shall be protected from tampering.
19. Sensor shall have manual adjustments for timer and sensitivities and override switches to force manual adjustment mode.
20. Sensor shall have adjustable sensitivity from 0% to 100% for both ultrasonic and infrared.
21. Controls shall be behind cover to resist tampering. All adjustments shall be accessible from the front of the sensor.
22. Sensor shall be available with a photocell adjustment from 20 to 3,000 Lux.
23. Sensor shall provide internal operating status and settings confirmation via LED motion lamp indicator.
24. Sensor shall have two (if 180 degree) or three (if 360 degree) real time LED motion indicators visible from the front of the unit: Red = infrared; green = ultrasonic.
25. Subject to compliance with the above requirements, provide models of one of the following:

    a. Hubbell-ATD Series
    b. Sensor Switch-CM-PDT Series
    c. Wattstopper-DT Series
    d. Mytech-Omni-DT Series
    e. Lithonia - LMTO Series
    f. Leviton – OSC UOW Series
    g. Greengate OMC – DT Series

D. 24 VDC POWER/CONTROL PACK: Where units are indicated, provide a power/control pack that meets the following minimum requirements:

1. Control module shall consist of a DC power supply and a dry contact relay for switching a lighting load.
2. Control module shall be available in versions to accept 120, and 277 VAC line voltages.
3. Output shall be 24VDC nominal, and shall be inherently safe, low voltage, limited power output (Class 2).
4. Output shall supply 100mA current, in addition to current consumed internally to operate internal relay.
5. Relay shall utilize normally open, silver alloy dry contacts, and shall be rated for a 20A ballast load at 120V and 277V.
6. Relay function shall not require more than 5 mA control current to operate.
7. Control module shall have line voltage wiring, consisting of input voltage and relay contact connections, exiting from one end, and low voltage DC connections, consisting of ground, power, and control wires, exiting from the other end.
8. Control module shall be sized to fit inside a standard 4” x 4” junction box.

9. Control module shall be equipped with a 1/2” EMT threaded male fitting on the line voltage end, such that it may be mounted to the outside of a junction box with the line voltage wiring internal to the box and the low voltage wiring external.
10. Control module shall be equipable with accessory 1/2” EMT threaded male fitting on the low voltage end, such that it may be mounted to the inside of a ballast cavity with the box and line voltage wiring internal to the cavity and the low voltage wiring external.
11. Slave module shall be available for switching additional circuits. Slave module has same construction and specifications as control module except without power supply function.
12. Subject to compliance with the above requirements, provide models of one of the following:

    a. Hubbell-CU Series
    b. Sensor Switch-PP-20 Series
    c. Wattstopper-BEP Series
    d. Mytech-MP Series
    e. Lithonia - LPCS Series
    f. Greengate SP20-MV Series
    g. Leviton – OSC/OSA Series

PART 3 – EXECUTION

3.1 INSTALLATION OF LIGHTING CONTROL EQUIPMENT:

A. Install occupancy lighting control system components and ancillary equipment as indicated, in accordance with equipment manufacturer's written instructions, and with recognized industry practices, to ensure that lighting control equipment complies with requirements.

B. Comply with requirements of NEC, and applicable portions of NECA's "Standard of Installation" pertaining to general electrical installation practices.

C. Coordinate with other electrical work, including raceways, and electrical boxes and fittings, as necessary to interface installation of lighting control equipment work with other work.

D. Contractor shall be on site as required, to adjust lighting control units for proper operation.

E. Mount the switchpack in a standard 4" junction box. Mount sensor to a standard 4” junction boxes. Refer to manufacturer supplied mounting instructions.

3.2 FIELD QUALITY CONTROL:

A. Upon completion of installation and after circuitry has been energized, demonstrate capability and compliance of system with requirements.

B. System start-up: Provide a factory authorized technician to verify the installation and test the system.

C. Where possible, correct malfunctioning units at site, then retest to demonstrate compliance; otherwise, remove and replace with new units, and proceed with retesting.

D. Contractor shall visit the job site 3 months after the owner has taken occupancy and adjust any units not operating properly, otherwise remove and replace with new units.

3.3 PRODUCT SUPPORT AND SERVICES:

A. System Start-Up: Provide a factory authorized technician to verify the installation, test the system, and train the owner on proper operation and maintenance of the system. Before requesting start-up services, the installing contractor shall verify that:

1. The sensors have been fully installed in accordance with manufacturer's installation instructions.
2. Low voltage wiring for overrides and sensors is completed.
3. Accurate 'as-built' load schedules have been prepared.
4. Proper notification of the impending start-up has been provided to the owner's representative.
5. Programming of all switches, sensors, power packs, relays, etc. shall be completed by factory authorized technician, prior to final and training.

B. Factory support: Factory telephone support shall be available at no cost to the owner during the warranty period. Factory assistance shall consist of assistance in solving programming or other application issues pertaining to the control equipment. The factory shall provide a toll free number for technical support.

C. Functional Testing:

1. The owner shall hire a third party that will conduct and certify the functional testing.
2. Lighting controls devices shall be tested to ensure that control hardware and software are calibrated, adjusted, programmed, and in proper working conditions in accordance with the construction documents, manufacturer's instructions and code requirements. The following shall be performed:

a. Certify that sensors have been located, aimed and calibrated per manufacturer recommendations.
b. Status indicator operates properly.
c. Fixtures that are controlled by auto-on controls turn on to permitted level.
d. Fixtures that are controlled by manual on controls operate when manually activated.
e. Fixtures do not turn on incorrectly due to HVAC or movement outside the controlled area.
f. Confirm that occupancy sensors turn off after space is vacated and do not turn on unless space is occupied.

g. Simulate unoccupied conditions and confirm that vacancy sensors only turn on manually and turn off after space is vacated.

3. The party responsible for the functional testing shall provide documentation that the installed lighting controls meet or exceed all performance criteria and shall not be directly involved in the design or construction of the project.

3.4 WARRANTY:

A. Manufacturer shall provide a one (1) year limited warranty on lighting control system. A ten (10) year limited warranty shall be provided on the lighting control relays.

3.5 AS-BUILT DRAWINGS:

A. A complete set of 'as-builts' drawings showing installed wiring, specific interconnections between all equipment, and internal wiring of this equipment shall be included in the operating and maintenance manuals upon complete of the system.

B. Provide a CD to the owner containing the information specified below. The CD shall include all information required to allow the Owner to change the schedules themselves. The CD shall contain a minimum of following:

1. CAD drawing files of 'as-built' lighting control components and point to point connections.
2. General configuration programming.
3. Job specific configuration programming to include schedule.
4. Tutorial file on complete programming of lighting control system.

3.6 TRAINING

A. Provide four (4) hours of video taped training in two 2 hour sessions on the operation and use of the lighting control equipment, at job site, at no cost to the Owner.

3.7 MANUFACTURER AUTHORIZED PERSONNEL TRAINING:

A. Building Operating Personnel Training: Train Owner's building personnel in procedures for starting-up, testing and operating lighting control system equipment.

END OF SECTION 260923

SECTION 260943 - LIGHTING CONTROL EQUIPMENT

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26 Basic Materials and Methods sections apply to work specified in this section.

1.2 DESCRIPTION OF WORK:

A. Extent of lighting control equipment work is indicated by drawings and schedules, and is hereby defined to include, but not by way of limitation, lighting control panels, control stations and other user interface devices, wiring and ancillary equipment.

B. Types of lighting control equipment specified in this section, includes the following:

1. Low voltage relay control panels
2. Occupancy sensors
3. Daylight sensors
4. Wallstations/Switches
5. Lighting Load Controllers (Room Controllers)
6. Emergency Lighting Control Units/Generator Transfer Devices

C. Requirements are indicated elsewhere in these specifications for work including but not limited to raceways, electrical boxes and fittings required for installation of lighting control equipment, not work of this section.

1.3 QUALITY ASSURANCE:

A. Manufacturers: Firms regularly engaged in manufacture of lighting control equipment and ancillary equipment, of types and capacities required, whose products have been in satisfactory use in similar service for not less than 5 years. To ensure a uniform installation and single responsibility, all switching and dimming equipment described herein shall be supplied by a single manufacturer.

B. Installer: Qualified with at least 3 years of successful installation experience on projects with lighting control equipment installation work similar to that required for project.

C. NEC Compliance: The control system shall comply with all applicable National Electrical Codes regarding electrical wiring standards.

D. NEMA Compliance: The control system shall comply with all applicable portions of the NEMA Standard regarding the types of electrical equipment enclosure.

E. Codes and Standards: Provide units that meet the requirements of IEEE Std. 2000.1.1999.

F. Independent Testing Laboratory: Provide units that have been tested and listed under UL 916 energy management equipment.

G. Component Pre-testing: All control equipment shall undergo strict inspection standards. The equipment shall be previously tested and burned-in at the factory prior to installation.

1.4 SUBMITTALS:

A. Refer to Section 26 0503 for electrical submittal requirements.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS:

A. Manufacturer: Subject to compliance with requirements, provide lighting control equipment of one of the following;

1. Leviton
2. Hubbell Building Automation

B. The lighting controls as shown are based upon Leviton lighting controls. Prior approval and commitment to being able to provide similar and equal system is required before bidding this project. Any system different from Eaton Controls that requires additional relays, etc. not shown on plans due to lack of separation of relays and dimming zones must be accounted for and provided in the bid and must function as similar to that which is required in final installation.

2.2 SYSTEM DESCRIPTION:

A. The lighting control system shall provide seamless control and monitoring of all lighting included in the scope of work regardless of whether it is relay switched or dimmed.

B. The lighting control system shall consist of low voltage relay control panels with programmable switch inputs, the panel shall be microprocessor controlled with a touchscreen interface display. The touchscreen shall provide relay status information viewable through a protected windowed enclosure. All local programming shall be permissible through the self-prompting touchscreen.

C. Programmable intelligence shall include:

1. Time of day control (64 time-of-day/holiday schedules)
2. 32 holiday dates
3. Timed inputs (adjustable from 1 to 99 minutes)
4. Timed override (from touchscreen, adjustable from 1 to 999 minutes, then resumes normal schedule)
5. Pre-set controls
6. Auto daylight savings adjust

7. Low voltage Dimming/Central Dimming Controls:
    a. 0-10V dimming capability
    b. Daylighting control via 0-10V dimming relays and programming
    c. DMX or other dimming protocols as indicated on plans
8. Astronomical clock with offsets
9. Local control (from touchscreen and local switch)
10. Digital wallstations/switches
11. Flash warning of impending off for occupants
12. Network override

D. The controller shall permit lighting to be overridden on for after-hours use or cleaning. The controller shall provide priority and masking choices to allow for customizing the functions of switch inputs, thereby enabling wallstations/switches to function differently at different times of day. These overrides shall be digital, network or hard-wired inputs.

E. The lighting control system shall be fully programmable through PC programming software. Programming shall be permitted through a direct RS-232 connection, modem or TCP/IP.

1. Shall include with user-friendly software suitable for operation on computer workstations which serve as central control stations for the selection and operation of lighting scenes.

2. All software shall be programed by the vendor and delivered ready to use. This program shall include preparation of all graphics, and displays required as a part of this project.

F. The control system shall provide networking between lighting control panels. The network shall support up to a maximum of 254 control panels. Panels shall permit data sharing for global controls. All inputs shall be transferable over the network to create any switching pattern.

G. The lighting control system shall log all control events. Log reports shall be available through the integral touchscreen or enterprise software.

H. All lighting programing shall meet the requirements of the IECC 2015 or current energy code applied to the project.

2.3 EQUIPMENT:

A. Relay Panel

1. Enclosure: Shall be NEMA 1 rated, code gauge steel cabinet. Enclosure and contents shall be designed to operate in interior spaces with temperatures of 32°f - 104°f (0°-40°c) and 0-90% non-condensing humidity. Enclosure shall be available with optional recessed mounting hardware. See drawings for mounting requirements and refer to schedules on drawings for sizes.

2. Interior: Interiors shall be sized to accept relays and will provide true on/off indication of relay status through LED's. The system shall employ all modular connectors to avoid repeat wiring in case of component failure. The system CPU board shall be mounted on quick release hinge pins. All connections for the dry contact inputs shall incorporate modular connectors.

3. Power Supply: The control panel shall incorporate the use of a multi-tapped transformer. The panel shall not require specification of voltage for each control location. The voltage of 120 and 277 VAC shall be available with each control panel.

4. Cover: Provide surface cover with captive screws in hinged, lockable configuration. A wiring schedule directory card shall be affixed to the covers back to allow identification of circuits/relays/load controlled. Schedules must be typed and related to final room names and numbers (not bid document room names and numbers).

5. High Voltage Barrier: The controller shall provide the ability to provide for either voltage separation or emergency circuit separation.

6. Relays: The system shall utilize normally open control relays, that are rated to 20A at 120/277 VAC. The relays shall be mechanically latching, and shall permit individual override and LED configuration of relay status. The relays shall be rated for 10 million operations.

7. System Controller: The system controller shall consist of an integral touchscreen that provides access to the main programming features. The touchscreen shall permit the user to manually command any or all relays individually.

    a. Provide master on/off control of a relay group while still allowing individual relays to be overridden by their local switch.

    b. The control system shall permit up to 32 dry contact inputs for override purposes. Momentary 3 wire or 2 wire (toggle) inputs shall be supported. Any input shall be software linked to any number or relays.

    c. The controller shall provide timers for each override. Each override timer shall be capable of 0-999 minutes. Software shall enable or disable overrides based on priorities, masks or time of day scheduling.

    d. The controller shall accept either dry contact or analog ambient light sensors. The controller shall provide power for the sensor. Sensors shall provide for outdoor, indoor or skylight applications and issue a command to the controller once the threshold is reached.

    e. Each control panel shall incorporate diagnostic aids for confirmation of proper operation. The control panel shall employ both a backlit touchscreen and LED's to indicate:

        i. Power

        ii. System OK

        iii. Network communications

        iv. System clock and date

        v. Programming confirmation

        vi. Control panel subnet network communications

8. Emergency Relay Panels: Shall work in accordance with all governing codes and compliances and all local codes having jurisdiction. Emergency Relay panels shall operate as normal powered relay panels during normal non-emergency power conditions. In case of emergency or power outage emergency designated panels shall work independently and provide automatic and maintained full on power, illumination and control functioning to all designated egress luminaries throughout the building and project site.

9. Wallstations/Switches/Plates: The lighting controller shall support digitally addressable LED annunciated switches. Provide low voltage push-button switches in up to 6 button configurations. Provide factory engraved labeling for individual push-buttons. Provide in color to match wiring devices and coverplate to match devices and plates in Wiring Devices (Section 26 2726).

10. Photocells:

    a. Provide a photocontrol point that consists of an architecturally compatible sensor mounted in the appropriate location for measuring the available daylighting. Each sensor will have a separate calibration module mounted in an enclosure in the electrical closet.

        i. Exterior Lighting: Provide a hooded sensor that can be horizontally mounted on a ½" KO or threaded conduit. The unit shall employ a flat lens and work with a foot-candle range between 1-10 or 10-100 in 10% increments.

    b. Control Unit shall allow for either direct control of up to three devices. These devices can be a relay, or any other device which allows control by a three wire momentary contact.

    c. Control unit shall be switchable between four foot-candle measurement ranges (1- 10 FC, 10- 100 FC, 100- 1000 FC and 1000- 10,000 FC). Depending upon the sensor head and application.

    d. Control unit shall have separate trip points for the high and low response settings. These settings shall be entered via dial switches. LED's shall be provided to illustrate whether the sensor is below the 'low' setting, above the 'high' setting, or in the deadband range.

    e. Control unit shall allow for a momentary contact device to override the photocell relays to either an on or off state.

    f. Control unit shall employ a 3-minute time delay between switching outputs to avoid nuisance tripping. It shall be possible to disable the time delay to aid in initial setup and trouble shooting.

    g. Sensor devices shall be available to match application. Each sensor shall employ photodiode technology to allow a linear response to daylight in its given foot-candle range.

11. Low Voltage Dimming (0-10V):

a. Capable of controlling any 0-10V source with the required dimming channels.

b. 0-10V analog voltage signal.

c. Provide isolated 0-10V output signal conforming to IEC 60929.

d. Sink current via IEC 60929.

e. Source current.

12. Indoor Lighting: Provide a sensor with a Fresnel lens providing for a 60° cone shape response area. The unit shall work with a range between 10-100 foot-candles.

13. Skylights: Provide a daylight sensor with a translucent dome with a 180° field of view and respond in the range of 1,000

14. Wallstations: Provide low voltage push-button type switches up to 8 button configurations to match requirements of lighting control within the room. Provide factory engraved labeling for individual push buttons. Provide in a color to match wiring devices and coverplates to match devices and plates in Wiring Devices (Section 26 2726). Wallstation shall connect to the room controller via the room controller local network. Wallstations that require user interface to allow for raise/lower control of dimming, loads shall include a slider function or similar. All wallstations shall have the ability to be independently program or be re-programmed on site and without the need to replace or send the device to the manufacturer for re-programming.

15. Wiring:

    a. Provide CAT6 cable between switches and controller to create a digital switch network.

    b. Provide CAT6 cable between controller and other controllers via a RS-485 network. The RS-485 network shall support up to 250 controllers with a maximum distance of 4000 feet.

    c. Programming: Provide a RS-232 (RJ-R Connection) to allow programming through either a local connection or remotely through a modem.

    d. Provide wiring in conduit located within the walls and non-accessible ceilings. Provide wiring above accessible ceilings in conduit to system enclosure to system enclosure.

16. Optional Accessories: Provide the following accessories;

    a. Enterprise Software: Provide a PC based interface software that provide access to the lighting control system files within a Windows® environment. The software shall allow individual or network panel programming to be executed locally, via direct connection or remotely through a TCP/IP connection or modem.

    b. Ethernet Interface Module: Provide access to the control panels over a TCP/IP connection by converting sent information into RS-232 communication capable information.

c. Modem: The control panel shall provide a serial communications port for external telecommunications. The modem shall utilize the Hayes compatibility standard and enable modem access as defined by Bell 212A and CCITT V-22 Protocol Standards.

d. Automation Interface Module to district wide BMS: The control panel shall provide for data protocol translation and permit systems that utilize the Modbus® N2, BACnet or LonWorks communication protocols to operate individual relays or relay groups.

e. Provide programming and training time to properly integrate into the Owner's BMS system. Program system per the owner's requirement. Train owner so as to allow them to have the ability to make changes to the system in the future.

B. Room Controllers:

1. The room controller shall provide the following functionality;

   a. Provide interface with room occupancy sensor to provide lighting and receptacle control and be programmable as either manual on/automatic off. Provide interface with room wallstations to provide multi-level switching and/or variable dimming. Provide interface with daylight sensors to provide daylighting controls of lighting fixture via multi-level (step dimming) and/or variable dimming.

2. The room controller shall be a fully functional lighting control system to match the room lighting and control requirements. The controller shall provide the following features:

   a. Separate compartments for line voltage, emergency voltage and low voltage connections.

   b. Breakouts for direct conduit connections.

   c. Dual voltage (120/277 VAC)

   d. Low voltage connections using standard RJ-45 connectors.

   e. Zero cross circuitry for each load.

   f. Relay and 0-10V dimming zone configuration to match room requirements.

   g. The ability to be independently program or be re-programmed on site and without the need to replace or send the device to the manufacturer for re-programming.

3. Emergency Lighting: When the room controller is provided with emergency relay, the controller shall be UL 924 Listed and monitor the normal power circuit. The UL 924 relay will track the normal power operation. Upon loss of normal power the emergency lighting will be forced on to full bright (if dimming) until normal power is restored. The following features shall be included:

   a. 120/277 VAC

   b. Push-to-test

4. Daylight sensors shall work with the room controller to provide automatic

daylight dimming capabilities for loads connected to the room controller. The daylight sensor shall include the following features:

a. An additional photodiode that measures only the visible spectrum.

b. The sensor shall have three light level ranges;

i. Low (3-300 LUX), high (30-3000 LUX) and direct sun (300-30,000 LUX).

c. The sensor shall provide the capability of controlling multiple (up to three) daylight zones for dimming daylight harvesting.

d. The sensor shall include an internal photodiode that measures light in a 60 degree angle cutting off the unwanted light from the interior of the room.

5. Ceiling Mounted Occupancy Sensors: Sensors shall utilize dual-technology (ultrasonic and infrared technologies) and have the following additional features:

a. Sensor shall be class 2, low voltage; capable of mounting in the ceiling for maximum coverage.

b. Sensor shall have automatic self-adjustment algorithm that adjusts timer and sensitivity settings to maximize performance and minimize energy usage.

c. Sensor shall have 360 degree field of view.

d. Sensor shall incorporate non-volatile memory such that all settings and parameters are saved in protected memory.

e. Sensor shall have time delays from 10 to 30 minutes.

f. Sensor shall provide a visual means of indication that motion is being detected via an LED.

g. Sensors shall have readily accessible, user adjustable settings for time delay and sensitivity.

h. Where specified, the sensor shall have an internal additional isolated relay with NO, NC and common outputs for use with HVAC control, data logging and other control options.

6. Wallstations: Provide low voltage push-button type switches up to 8 button configurations to match requirements of lighting control within the room. Provide factory engraved labeling for individual push buttons. Provide in a color to match wiring devices and coverplates to match devices and plates in Wiring Devices (Section 26 2726). Wallstation shall connect to the room controller via the room controller local network. Wallstations that require user interface to allow for raise/lower control of dimming, loads shall include a slider function or similar. All wallstations shall have the ability to be independently program or be re-programmed on site and without the need to replace or send the device to the manufacturer for re-programming.

C. Emergency Power Control (CEPC)/ Emergency Lighting Control Units (ELCU)/Generator Transfer Devices (Required when not built into Room Controller, Relay Panel, etc):

1. The Emergency Power Control (CEPC)/Lighting Control Unit (ELCU) shall provide all required functionality to allow any standard lighting control device to control emergency lighting in conjunction with normal lighting in any area within a building. The unit shall be installed flush to the ceiling so that test switch & LED's are in plain view of room occupants as required by some local electrical codes.

2. The device shall automatically illuminate connected emergency loads upon utility power interruption, regardless of room switch position. (NEC 700.24)

3. Local room switch or lighting control shall turn both regular & emergency luminaires on at the same time (no dedicated emergency room switch required).

4. The emergency lighting control unit shall allow control of emergency lighting fixtures in tandem with normal lighting in an area while ensuring that emergency lighting will turn on immediately to full brightness upon loss of normal power supplying the control device. Emergency lighting operation shall be independent for each controlled area and shall not require a generalized power failure for proper operation.

5. The unit shall be compatible with 2-wire, 3-wire, 0-10V, & DALI dimming systems & ballasts.

6. The device shall be self-contained, measure 1.70" x 2.97" x 1.64," and provide integral one half inch pip nipple mount with snap in locking feature for mounting into a standard junction box KO.

7. The device shall have normally closed dry contacts capable of switching 20 amp emergency ballast loads @ 120-277 VAC, 60 Hz, or 10 amp tungsten loads @ 120 VAC, 60 Hz.

8. The device shall have universal rated voltage inputs provided for normal power sense and normal switched power at 120-277 VAC, 60 Hz.

9. The device shall have an integral momentary test switch. Pressing and holding this switch shall instantly force the unit into emergency mode and turn on emergency lighting. Releasing the test switch shall immediately return the unit to normal operation.

10. The unit shall provide dedicated leads and 24 VDC source for connection to remote test switch, fire alarm system, or other external system capable of providing a normally closed dry contact closure. Breaking contact between the terminals shall force and hold the emergency lighting on until the terminals are again closed. An integral LED indicator shall indicate the unit's current remote activation status.

11. The device shall provide separate LEDs to indicate the presence of normal and emergency power sources. The LEDs shall indicate the unit's current operational mode (normal or emergency).

12. The device's normal power input lead shall be connected to the line side of the control device such that any upstream fault causing a loss of power, including the tripping of the branch circuit breaker, will force the unit into the emergency mode and turn on the emergency lighting.

13. The unit shall automatically switch emergency lighting on and off as normal lighting is switched. When normal power is not available, the unit shall force and hold emergency lighting on regardless of the state of any external control device until normal power is restored.

14. The unit shall utilize zero crossing circuitry to protect relay contacts from the damaging effects of inrush current generated by switching electronic ballast loads.

15. The unit shall have UL 94-V0 or UL 94-5VA flame rating & be approved for installation above the suspended ceiling.

16. To ensure quality and reliability, the unit shall be manufactured by an ISO 9002 certified manufacturing facility and shall have a defect rate of less than 1/3 of 1%.

17. The device shall not generate any objectionable electrical or mechanical noise.

18. The unit shall be UL and cUL listed and labeled for connection to both normal and emergency lighting power sources.

PART 3 - EXECUTION:

3.1 INSTALLATION OF LIGHTING CONTROL EQUIPMENT:

A. Install lighting control system components and ancillary equipment as indicated, in accordance with equipment manufacturers written instructions, and with recognized industry practices, to ensure that lighting control equipment complies with requirements.

B. Comply with Requirements of NEC, and applicable portions of NECA's 'Standard of Installation' pertaining to general electrical installation practices.

C. Coordinate with other electrical work, including raceways, electrical boxes and fittings, as necessary to interface installation of lighting control equipment work with other work.

D. Electrical Identification: Refer to Section 26 0553 for requirements.

3.2 FIELD QUALITY CONTROL:

A. Upon completion of installation and after circuitry has been energized, demonstrate capability and compliance of system with requirements.

B. Where possible, correct malfunctioning units at site, then retest to demonstrate compliance; otherwise, remove and replace with new units, and proceed with retesting.

3.3 PRODUCT SUPPORT AND SERVICES:

A. System Start-Up: Provide a factory authorized technician to verify the installation, test the system, and train the owner on proper operation and maintenance of the system. Before requesting start-up services, the installing contractor shall verify that:

1. The control system has been fully installed in accordance with manufacturer's installation instructions.
2. Low voltage wiring for overrides and sensors is completed.
3. Accurate 'as-built' load schedules have been prepared for each lighting control panel.
4. Proper notification of the impending start-up has been provided to the owner's representative.
5. Programming of all wallstations/switches, relays, groups of relays and interfaces with building automation shall be completed by factory authorized technician, prior to final and training.

B. Factory support: Factory telephone support shall be available at no cost to the owner during the warranty period. Factory assistance shall consist of assistance in solving programming or other application issues pertaining to the control equipment. The factory shall provide a toll free number for technical support.

3.4 PROGRAMMING:

A. Program of all lighting control systems as directed by the electrical engineer and/or owner. Meet with the electrical engineer at their office prior to preparation of shop drawings to discuss specific programming and zoning requirements of system(s). Each networked or standalone system shall be programmed to revert back to its normal "ON" position one hour after selecting a scene or raising or lowering a lighting zone.

B. All lighting programing shall meet the requirements of the IECC 2015 or current energy code applied to the project.

3.5 COMMISSIONING:

A. A lighting control system requires at least one site visit for proper commissioning. If multiple site visits are required, the first ensures that the contractor is trained to install the system correctly. On the second, the factory trained engineer will start up the system, ensure that it is operating according to specification, and perform initial programming. The third visit is for the purposes of refining the programming, and training the owner/end user on the system.

B. Provide factory-certified field service engineer to ensure proper system installation and operation under following parameters:

1. Certified by the equipment manufacturer on the system installed.

2. Site visit activities:

   a. Verify connection of power feeds and load circuits.

   b. Verify connection of controls.

   c. Verify system operation control by control, circuit by circuit.

   d. Obtain sign-off on system functions.

   e. Demonstrate system capabilities, operation and maintenance and educate Owner's representative on the foregoing.

3. At least three site visits to accomplish the following tasks:

   a. Prior to wiring:

      i. Review and provide installer with instructions to correct any errors in the following areas:

         1. Low voltage wiring requirements
         2. Separation of high and low voltage wiring runs
         3. Wire labeling
         4. Load schedule information
         5. Switching cabinet locations and installation
         6. Physical locations and network addresses of controls
         7. Ethernet connectivity
         8. Computer-to-network connections
         9. Load circuit wiring
         10. Connections to other systems and equipment
         11. Placement and adjustment of Occupancy Sensors
         12. Placement and adjustment of Photocells

b. After system installation:

i. Check and approve or provide correction instructions on the following:

1. Connections of power feeds and load circuits

2. Connections and locations of controls

3. Connections of low voltage inputs

4. Connections of the data network

ii. Turn on system control processor and upload any pre-programmed system configuration

iii. Verify cabinet address(es)

iv. Upload pre-programmed system configuration and information to switching and/or dimming cabinets

v. Check load currents and remove bypass jumpers

vi. Verify that each system control is operating to specification

vii. Verify that each system circuit is operational according to specification

viii. Verify that manufacturers' interfacing equipment is operating to specification

ix. Verify that any computers and software supplied by the manufacturer are performing to specifications

x. Verify that any remote WAN (Wide Area Network) connections are operating properly

xi. Have an owner's representative sign off on the above-listed system functions

c. Before project completion and hand-off:

i. Demonstrate system capabilities and functions to owner's representative

ii. Train owner's representative on the proper operation, adjustment, and maintenance of the system.

C. Notification: Upon completion of the installation, the contractor shall notify the

manufacturer that the system is ready for formal checkout. Notification shall be given in writing a minimum of 21 days prior to the time factory-trained personnel are required on site. Each field installed RJ45 connection must be tested prior to system interconnection. A test report must be furnished to manufacturer prior to scheduling commissioning activity. Manufacturer shall have the option to waive formal turn-on.

D. Turn-On: Upon completion of all line, load and interconnection wiring, and after all fixtures are installed and lamped, Manufacturer's Certified Technician shall completely check the installation prior to energizing the system. Each installed relay system shall be tested for proper ON/OFF operations, and proper LED illumination. Each installed control cabinet shall be tested verifying that each controlled load adjusts to the selected setting and that all switch LED's illuminate properly.

E. At the time of checkout and testing, the owner's representative shall be thoroughly instructed in the proper operation of the system.

3.6 RETRO-COMMISSIONING:

A. During the one year warranty period, provide retro-commissioning services at three month, six month, nine month, and one year marks. Provide at least 4 hours of commissioning service for each of the four retro-commissioning periods. This will include meeting with the Owner to receive feedback on the system and making changes to the system including programming, task tuning.

3.7 MAINTENANCE:

A. Enable the end user to order new equipment for system expansion, replacements, and spare parts.

B. Make new replacement parts available for a minimum of ten years from the date of manufacture.

C. Manufacturing shall provide telephone technical support by factory personnel 24 hours a day, 7 days a week. Project cost overruns and delays can occur without this service. Answering services can add to frustration and delay the resolution of any problems or issues. Manufacturers who do not offer factory-direct technical support on a 24/7 basis should not be acceptable on this project.

D. Provide factory-direct technical support hotline 24 hours per day, 7 days per week.

E. Offer renewable annual service contracts, to include parts, factory labor, and annual training visits. Make service contracts available up to ten years after date of system commissioning.

3.8 WARRANTY:

A. Manufacturer shall provide a one (1) year limited warranty on lighting control system. A ten (10) year limited warranty shall be provided on the lighting control relays.

3.9 AS-BUILT DRAWINGS:

A. A complete set of ‘as-builts’ drawings showing installed wiring, specific interconnections between all equipment, and internal wiring of this equipment shall be included in the operating and maintenance manuals upon complete of the system.

B. Provide a CD or USB storage (media) device to the owner containing the information specified below. The media shall include all information required to allow the Owner to change the schedules themselves. The media shall contain a minimum of following:

1. CAD drawing files of ‘as-built’ lighting control components and point to point connections.
2. General configuration programming.
3. Job specific configuration programming to include schedule.
4. Tutorial file on complete programming of lighting control system.

3.10 TRAINING:

A. Provide four (4) hours of video taped training in two 2 hour sessions on the operation and use of the lighting control equipment, at job site, at no cost to the Owner.

B. Provide a CD or USB device to the owner containing the information specified below. The media shall include all information required to allow the Owner to change the schedules themselves. The media shall contain a minimum of following:

1. CAD drawing files of ‘as-built’ lighting control components and point to point connections.
2. General configuration programming.
3. Job specific configuration programming to include schedule.

C. Tutorial file on complete programming of lighting control system

END OF SECTION 260943

SECTION 262416 - PANELBOARDS

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is part of each Division-26 section making reference to panelboards specified herein.

1.2 DESCRIPTION OF WORK:

A. The extent of panelboard and enclosure work, is indicated by drawings and schedules.

B. Types of panelboards and enclosures in this section include lighting and appliance panelboards, and power distribution panelboards.

1.3 QUALITY ASSURANCE:

A. Provide units that have been UL listed and labeled. Comply with NEC as applicable to installation of panelboards, cabinets, and cutout boxes. Comply with NEC pertaining to installation of wiring and equipment in hazardous locations. Comply with NEMA Stds. Pub No. 250, "Enclosures for Electrical Equipment (1000 volt maximum). Pub No. 1, "Instructions for Safe Installation, Operation and Maintenance of Panelboards Rated 600 Volts or Less".

1.4 SUBMITTALS: Refer to Section 26 0503 for requirements.

PART 2 – PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS:

A. Subject to compliance with requirements, provide of one of the following:

1. Cutler Hammer Products, Eaton Corp.
2. General Electric Company
3. Siemens Energy & Automation, Inc.
4. Square D Company (Basis of Design)

2.2 PANELBOARDS:

A. GENERAL:

1. Except as otherwise indicated, provide panelboards, enclosures and ancillary components, of types, sizes, and ratings indicated. Equip with number of unit panelboard devices as required for complete installation. Fully equip "spaces" with hardware to receive breaker or switch of size indicated. Provide CU/AL rated lugs of proper size to accommodate conductors specified.

B. POWER DISTRIBUTION PANELBOARDS:

1. Provide dead-front safety type power distribution panelboards as indicated, with switching and protective devices in quantities, ratings, types and with arrangement shown. Equip with aluminum bus bars, full-sized neutral bus and ground bus. Provide fusible or circuit breaker branch and main devices as indicated. Series rated systems are not acceptable. See Section 262815, Overcurrent Protection Devices.

C. LIGHTING AND APPLIANCE PANELBOARDS:

1. Provide dead-front safety type lighting and appliance panelboards as indicated, with switching and protective devices in quantities, ratings, types, and arrangement shown. Provide bolt-on thermal magnetic type branch breakers. Where multiple breakers are indicated, provide with common trip handle. Series rated systems are not acceptable. Equip with aluminum bus bars, full-sized neutral bus, and ground bus.

D. PANELBOARD ENCLOSURES:

1. Provide galvanized sheet steel cabinet type enclosures, in sizes and NEMA types as indicated, code-gage minimum 16-gage thickness. Provide door-in-door hinged fronts. Provide fronts with adjustable indicating trim clamps, and doors with flush locks and keys, all panelboard enclosures keyed alike, with concealed door hinges and door swings as indicated. Equip with interior circuit-directory frame, and card with clear plastic covering. Provide baked gray enamel finish over a rust inhibitor. Provide enclosures fabricated by same manufacturer as overcurrent devices contained therein Bolt engraved plastic laminate labels indicating panel name and voltage on the interior and exterior of panelboards.
2. Verify that the physical size of the Power Distribution Panelboards and Panelboards match the space provided in the locations shown. Coordinate with the manufacturer to ensure that the Power Distribution Panelboard and Panelboards are manufactured in relation to the space allocated.
3. Provide floor to ceiling panel extensions for all surface mounted panels located outside of mechanical and electrical rooms.

E. POWER ZONE:

1. Provide a combination transformer panelboard (equal to a Square D Mini Power-Zone). Provide with factory-installed primary main breaker and secondary main breaker. Provide circuit breaker with ratings selected to meet National Electric Code requirements and coordinate with transformer magnetizing inrush current. Provide with transformer magnetizing inrush current. Provide with circuit breakers per the panelboard schedule. Provide with copper wound, 115°C rise transformer and copper bus in the panel section.

F. FINISH:

1. Coat interior and exterior of surface with manufacturer's standard color; baked on enamel finish.

G. ELECTRICAL IDENTIFICATION:

1. Refer to Section 260553 for requirements.

PART 3 – EXECUTION

3.1 INSTALLATION OF PANELBOARDS:

A. GENERAL:

1. Install panelboards and enclosures where indicated, in accordance with manufacturer's written instructions, applicable requirements of NEC and NECA's "Standard of Installation", in compliance with recognized industry practices to ensure products fulfill requirements.
2. Provide a surge protective device on each panelboard located on the emergency distribution system. Refer to section 26 4313 for requirements.

B. MOUNTING:

1. Provide 4" high concrete curb under floor standing distribution panelboards.
2. Coordinate installation of panelboards and enclosures with cable and raceway installation work. Anchor enclosures firmly to walls and structural surfaces, ensuring they are permanently and mechanically secure. Arrange conductors neatly within enclosure, and secure with suitable nylon ties. Fill out panelboard's circuit directory card upon completion of installation work. Utilize actual final building room numbers, not architectural numbers used on drawings. Identify individual lighting circuits and individual receptacle circuits by room served. Label circuit breakers to identify location of subpanel or equipment supplied using room numbers and equipment names. Include room number with equipment circuit designations. All directories to be typewritten.

END OF SECTION 262416

SECTION 262726 - WIRING DEVICES

PART 1 – GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is part of each Division-26 section making reference to wiring devices specified herein.

1.2 DESCRIPTION OF WORK:

A. The extent of wiring device work is indicated by drawings and schedules. Wiring devices are defined as single discrete units of electrical distribution systems that are intended to carry but not utilize electric energy.

B. Types of electrical wiring devices in this section include the following:

1. Receptacles
2. Switches
3. Timer Switches
4. 0-10V & ELV LED LAMP DIMMERS
5. Cord caps
6. Cord connectors
7. Flat Panel Display Wall Box
8. Poke-through assemblies
9. Dryer Interlock Control Box

1.3 QUALITY ASSURANCE:

A. Comply with NEC and NEMA standards as applicable to construction and installation of electrical wiring devices. Provide electrical wiring devices that have been UL listed and labeled.

1.4 SUBMITTALS:

A. Refer to Section 26 0503 for electrical submittal requirements.

PART 2 - PRODUCTS

2.1 FABRICATED WIRING DEVICES:

A. GENERAL:

1. Provide factory-fabricated wiring devices, in types, and electrical ratings for applications indicated and complying with NEMA Stds. Pub No. WD 1.
2. Provide wiring devices (of proper voltage rating) as follows:

	RECEPTACLE	SWITCHES			
MFGR		1-POLE	3-WAY	4-WAY	W-PILOT
Hubbell	BR20XTR	HBL 1221	HBL 1223	HBL 1224	HBL 1221-PL
Bryant		1221	1223	1224	1221-PL
Pass Seymour	TR63X	20AC1	20AC3	20AC4	20AC1-RPL
Leviton	TWR20-X	1221	1223	1224	
Cooper	TR5362	1221	1273	1224	1221-PL

3. Provide devices in colors selected by Architect. Provide red devices on all emergency circuits.

B. GROUND-FAULT INTERRUPTER:

1. Provide general-duty, duplex receptacle, ground-fault circuit interrupters; feed-thru types, capable of protecting connected downstream receptacles on single circuit; grounding type UL-rated Class A, Group A, 20-amperes rating; 120-volts, 60 Hz; with solid-state ground-fault sensing and signaling; with 5 milliamperes ground-fault trip level; color as selected by Architect. Provide Hospital grade where required elsewhere by specification or drawings. Provide units of one of the following:

a. P&S/Sierra
b. Hubbell
c. Leviton
d. Square D

C. USB RECEPTACLE

1. Provide duplex receptacle with two (2) USB 3.0 amps or greater, 5VDC, 2.0 Type A charging ports.
2. Provide products of one of the following:

a. Bryant – USB20-X
b. Cooper – TR7736-X
c. Hubbell – USB20X2-X

d. Legrand – TR5362USB-X
e. Leviton – T5832-X

D. TAMPER RESISTANT RECEPTACLES: Provide tamper resistant receptacles in the areas as shown.

1. Provide tamper resistant receptacles in the areas as shown with a subscript 'T'.
2. Provide products of one of the following:

a. Leviton-TWR20-X
b. Hubbell – BR20XTR
c. Pass Seymour – TR63X
d. Cooper – TR5362

E. WEATHER-RESISTANT RECEPTACLES

1. Provide weather-resistant receptacles in outdoor locations such as under roofed open porches, canopies, marquees, etc.
2. Provide products of one of the following:

a. Pass & Seymour 2095TRWRXXX.
b. Hubbell GFTR20XX

F. CORD CAPS AND CONNECTORS:

1. Provide 3, 4 and 5-wire grounding, cap plugs, and connectors of ampere and voltage rating required, for final equipment, and as indicated otherwise on drawings.
2. Provide products of one of the following:

a. Cooper
b. General Electric
c. Hubbell
d. Leviton
e. P&S

G. TIMER SWITCH:

1. Provide a timer switch with the following features and functionalities. Provide switch that mounts in a standard wall box. Provide a Decora style cover plate that matches the other switches on the project. Provide color of switch chosen by Architect.

a. Provide Digital time switches that automatically turn lights off after a preset time. User programmable wall switch for astronomical and scheduled control. Electroluminescent back-lit LCD shows timer countdown. Compatible with all electronic ballasts, ELV, MLV, LED, and motor loads.

1) Wattstopper TS-400: 120/277VAC; 50/60 Hz
2) Greengate

b. Provide Astronomical time switches that automatically turns lighting or other loads on and off according to user programming. Time-out settings range shall range from 5 minutes to 12 hours for flexibility. Electroluminescent back-lit LCD shows timer countdown. Compatible with all electronic ballasts, ELV, MLV, LED, and motor loads. Program schedule per the owner's requirements.

1) Wattstopper RT-200: 120/277VAC; 50/60 Hz

H. 0-10V & ELV LED LAMP DIMMERS:

1. Provide single-pole, semi-conductor modular type 0-10V control for 0-10V LED drivers & 3-wire LED driver dimmers for fixtures; 60 hertz, with wattage and voltage as indicated, continuously adjustable slider control, and with electromagnetic filters to reduce noise and interference to minimum. Construct with continuously adjustable trim potentiometer for adjustment of low end dimming. Color as selected by Architect. Provide devices manufactured by one of the following:

a. Pass & Seymour (Titan Series)
b. Lutron (Nova Series)
c. Lutron (Diva Series)

2.2 WIRING DEVICE ACCESSORIES:

A. WALL PLATES:

1. Provide stainless steel coverplates in all finished areas. Provide galvanized steel plates in unfinished areas. Provide blank coverplates for all empty outlet boxes.

B. WEATHER-PROTECTING DEVICE ENCLOSURES:

1. Where required for compliance with NEC 406-8 (receptacles installed outdoors for use other than with portable tools or equipment), provide weather-tight device covers that provide complete protection with the cord and cap inserted into the wiring device. Provide units that mount on either single or double gang devices.
2. Provide products of one of the following for In Box Horizontal for brick and cast stone:

a. Arlington Industries

1) DSHB1C Clear Cover
2) DSHB1W White Cover
3) DSHB1BR Brown Cover
4) DSHB1BRC Brown Clear Cover

3. Provide products of one of the following for In Box Vertical or Horizontal for Stucco and Metal Sidings:

   a. Arlington Industries
      1) DSBVM1C Clear Cover
      2) DSBVM1W White Cover
      3) DSBHM1C Clear Cover
      4) DSBHM1W White Cover

4. Provide products of one of the following for roof mounted installations:

   a. Intermatic WP1020 or WP1030
   b. P&S WIUC10C or WIUC20c

2.3 FLAT PANEL DISPLAY WALL BOX:

A. Provide a factory assembled display wall box made of 14 gauge steel. Wall box shall have provisions for a UL Listed single gang box for mounting of duplex receptacle and additional back box with a minimum of (1) 1 ¼" conduit opening to allow for low voltage terminations. Coordinate low voltage plate configuration with drawings. Provide device manufactured by one of the following:

1. FSR Metal Products – PWB-100
2. Chief Manufacturing – PAC 525FCW
3. Wiremold – EFSB4

PART 3 – EXECUTION

3.1 GENERAL

A. Install wiring devices as indicated, in compliance with manufacturer's written instructions, applicable requirements of NEC and NECA's "Standard of Installation" and in accordance with recognized industry practices to fulfill project requirements.

B. Coordinate with other work, including painting, electrical box and wiring work, as necessary to interface installation of wiring devices with other work. Install devices in boxes such that front of device is flush and square with coverplate. Drawings are small scale and, unless dimensioned, indicate approximate locations only of outlets, devices, equipment, etc. Locate outlets and apparatus symmetrically on floors, walls and ceilings where not dimensioned and coordinate with other work. Verify all dimensioned items on job site. Consult architectural cabinet, millwork, and equipment shop drawings before beginning rough-in of electrical work. Adjust locations of all electrical outlets as required to accommodate work in area, and to avoid conflicts with wainscoat, back splash, tackboards, and other items.

C. Provide receptacles in surface raceway at 12” on center unless indicated otherwise.

D. Install wiring devices only in electrical boxes that are clean; free from excess building materials, dirt, and debris.

E. Install blank plates on all boxes without devices.

F. Delay installation of wiring devices until wiring work and painting is completed. Provide separate neutral conductor from panel to each GFI receptacle.

G. Install GFI receptacles for all receptacles installed in the following locations:

1. Restrooms, locker rooms, kitchens, within 6 feet of any sink, or when serving vending machines and electric drinking fountains.
2. Outdoors, and on rooftops.
3. Label all receptacles (non-GFI), protected downstream of a GFI receptacle or protected by GFI circuit breaker, with an indication that it is protected.

H. Where light switches or wall box dimmers are specified, provide a separate neutral for each phase of the branch circuits that switches or dimmers are connected.

I. Electrical Identification: Refer to Section 260553 for requirements.

3.2 PROTECTION OF WALL PLATES AND RECEPTACLES:

A. At time of substantial completion, replace those items, that have been damaged, including those stained, burned and scored.

3.3 GROUNDING:

A. Provide electrically continuous, tight grounding connections for wiring devices, unless otherwise indicated.

3.4 TESTING:

A. Prior to energizing circuitry, test wiring devices for electrical continuity and proper polarity connections. After energizing circuitry, test wiring devices to demonstrate compliance with requirements.

END OF SECTION 262726

SECTION 264119 – DEMOLITION

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Special Provisions, Division 1 and Division-2A Specification sections, apply to work of this section.

B. This section is a Division-26 Basic Materials and Methods section, and is part of each Division-26 section making reference to demolition.

1.2 DESCRIPTION OF WORK:

A. The intent of the drawings is to indicate major items affected and not to show every device, outlet, fixture, etc. affected by demolition work.

B. The drawings do not necessarily reflect as-built conditions. The contractor shall visit the jobsite prior to bidding to determine the overall scope of demolition work.

C. Refer to sections of other Divisions for applicable requirements affecting demolition work.

D. Refer to Section 260500 for requirements with regard to power outages affecting the operation of existing electrical systems.

1.3 QUALITY ASSURANCE:

A. NEC COMPLIANCE:

1. Comply with applicable portions of NEC as to methods used for demolition work.

PART 2 - PRODUCTS

2.1 GENERAL:

A. Demolition work shall be laid out in advance to eliminate unnecessary cutting, drilling, channeling, etc. Where such cutting, drilling, or channeling becomes necessary, perform with care, use skilled mechanics of the trades involved. Repair damage to building and equipment. Cutting work of other Contractors shall be done only with the consent of that Contractor. Cutting of structural members shall not be permitted.

2.2 PATCHING AND REPAIR

A. The Contractor is responsible for all demolition, patching and repair of all finished interior surfaces pertaining to the installation of this particular phase of work. All

surfaces shall be finished (painted, etc.) to match the adjacent materials, finishes and colors.

B. Hard surfaces: Whenever demolition or excavation is required for the installation of the electrical system, it shall be the responsibility of this contractor to make repairs and/or replacements of hard finish surfaces such as concrete, asphalt, roofing, etc.

C. The method of patching and repair shall follow good construction practices and all finished surfaces shall match materials and finish wherein the demolition occurred.

2.3 EXISTING EQUIPMENT

A. The following is a part of this project and all costs pertaining thereto shall be included in the base bid.

B. The new electrical equipment and apparatus shall be coordinated and connected into the existing system as required. Auxiliary systems shall comply, unless otherwise specified.

C. The existing electrical devices, conduit and/or equipment that for any reason obstructs construction shall be relocated. Provide conduit, wiring, junction boxes, etc. as required to extend existing circuits and systems to relocated devices or equipment.

D. When installing equipment, conduit, cable, devices, etc., in, or into the existing building, it shall be concealed.

E. All existing electrical equipment and systems in portions of the building not being remodeled shall be kept operational, in service and in working condition throughout the entire construction period. Restore any circuits and systems interrupted. Provide temporary panels, temporary wiring and conduit, etc. as required.

F. Maintain circuit integrity and continuity of all existing circuits and systems that interfere with or are interrupted by remodel work unless those circuits are to be abandoned completely. Maintain all circuits and systems in operation during construction. Provide temporary panels, temporary wiring and conduit, etc. as required.

G. Existing raceways may be used where possible in place, except as noted. All circuits, conduit and wire that are not used in the remodeled area shall be removed back to the panelboard, where it shall be labeled as spare with circuit number indicated. Re-used raceway shall meet all requirements for new installations.

H. Obtain permission from the Prime Engineer and Owner's representative before penetrating any ceiling, floor, and wall surfaces.

I. Any and all equipment having electrical connections that require disconnecting and reconnection at the same or another location throughout the course of construction shall be included as part of this contract.

END OF SECTION 264119

SECTION 265100 - INTERIOR AND EXTERIOR BUILDING LIGHTING

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26 Basic Materials and Methods sections apply to work specified in this section.

1.2 DESCRIPTION OF WORK:

A. Types of lighting fixtures in this section are indicated by schedule and include the following:

1. LED (Light Emitting Diode)

1.3 QUALITY ASSURANCE:

A. Comply with NEC, NEMA and ANSI 132,1 as applicable to installation and construction of lighting fixtures. Provide lighting fixtures that have been UL-listed and labeled.

B. Components and fixtures shall be listed and approved for the intended use by a National Recognized Testing Laboratory (NRTL) including: UL, ETL, and CSA or equivalent

C. All led products shall comply with the latest version of Illuminating Engineer Society (IES) publications LM-79 and LM-80.

1.4 SUBMITTALS:

A. Refer to Section 26 0503 for electrical submittal requirements.

PART 2 – PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS:

A. Subject to compliance with requirements, provide products of one of the following (for each type of fixture):

1. LED:

a. Cree
b. Nichia
c. Samsung
d. Philips Lumiled

e. Osram
f. Xicato

2.2 INTERIOR AND EXTERIOR LIGHTING FIXTURES:

A. GENERAL:

1. Provide lighting fixtures, of sizes, types and ratings indicated complete with, but not necessarily limited to, housings, lamps, lamp holders, reflectors, ballasts, LED drivers, starters, and wiring. Label each fixture with manufacturer's name and catalog number. Provide all enclosed fixtures with positive latch mechanisms; spring tension clips not acceptable. Provide all exterior fixtures with damp or wet location label as required by application.

B. SUPPORT REQUIREMENTS:

1. Provide all pendant and stem hung fixtures with flexible ball joint hangers at all points of support. Equip hooks used to hang fixtures with safety latches. Provide all detachable fixture parts, luminous ceiling accessories, louvers, diffusers, lenses, and reflectors with locking catches, screws, safety chain, or safety cable.

C. LIGHT EMITTING DIODE (LED) LUMINAIRES:

1. LED luminaires that can be serviced in place shall have a disconnecting means internal to the luminaries to disconnect simultaneously from the source of supply all conductors of the driver, including the grounded conductor. Disconnects shall not be required under the following exceptions:

a. Luminaries located in hazardous locations.
b. Luminaries used for egress lighting.
c. Cord-and-plug luminaries.
d. In industrial establishments with restricted public access where conditions of maintenance and supervision ensure that only qualified persons service the installation.
e. Where more than one luminaire is installed in a space and where disconnecting the supply conductors to the luminaire will not leave the space in total darkness.
f. Provide LED luminaires which are tested in accordance with IES LM-79, diodes tested in accordance with IES LM-80, and provide a minimum R9 rating of ≥ 50 (unless specified differently), a CRI rating of ≥ than 80 and L70 (6K) = 50,000 hours (IES TM-21). Provide with 0-10V dimming drivers as standard.
g. The fixture manufacturer(s) shall warrant the luminaires, in their entirety, to be free from defects in material or workmanship for at least 5 years from date of manufacture. Provide warranty in accordance with other sections of this specification and include a certificate of warranty from the fixture manufacturer with extended warranty information and proper forms and procedure description.

D. DIFFUSERS:

1. Where plastic diffusers are specified, provide 100 percent virgin acrylic compound; minimum thickness, .125 inches.

PART 3 - EXECUTION

3.1 INSTALLATION OF LIGHTING FIXTURES

A. Install lighting fixtures at locations and heights as indicated, in accordance with fixture manufacturer's written instructions, applicable requirements of NEC, NECA's "Standards of Installation", NEMA standards, and with recognized industry practices to ensure that lighting fixtures fulfill requirements.

B. Coordinate with other work as appropriate to properly interface installation of lighting fixtures with other work. Consult architectural reflected ceiling plan for exact location of all lighting fixtures.

C. Provide all necessary supports, brackets, and miscellaneous equipment for mounting of fixtures. Support all ceiling mounted fixtures from the building structure; independent of the ceiling system, unless noted. Support each recessed fixture (fluorescent incandescent, and/or HID) from the building structure with #12 ga. steel wire attached to each corner (in addition to supports normally provided for attachment to the ceiling system). Provide backing supports above (or behind) sheetrock, plaster and similar ceiling and wall materials. Support surface mounted ceiling fixtures from channel. Support ceiling mounted outlet boxes independent of the raceway system, and capable of supporting 200 pounds. Feed each recessed fixture directly from an outlet box with flex conduit as required; do not loop from fixture to fixture. See plans for additional details.

D. Provide each lay-in light fixture with at least 36" (Not to exceed 72") of 3/8" steel flexible conduit.

E. Coordinate lighting in mechanical room with duct and equipment locations to avoid obstruction of illumination.

F. Provide gypsum board protection as required, (acceptable to fire official having jurisdiction) to ensure fire rating of each ceiling that the fixtures are installed in.

G. COORDINATION MEETINGS:

1. Meet at least twice with the ceiling installer. Hold first meeting before submittal of shop drawings to coordinate each light fixture mounting condition with ceiling type. During second meeting, coordinate fixture layout in each area.
2. Meet at least twice with the AV/Intercom systems Installer. Hold first meeting before submittal of shop drawings to coordinate each AV equipment, speaker mounting condition with ceiling type. During second meeting, coordinate AV equipment, speaker layout in each area.
3. Meet at least once with the mechanical installer prior to fabrication and

installation of duct work. Coordinate depth and location of all fixtures and duct work in all areas.

H. ADJUST AND CLEAN:

1. Clean lighting fixtures of dirt and debris upon completion of installation.
2. Protect installed fixtures from damage during remainder of construction period. Repair all nicks and scratches to appearance of original finish.

3.2 FIELD QUALITY CONTROL:

A. Upon completion of installation of lighting fixtures, and after building circuitry has been energized, apply electrical energy to demonstrate capability and compliance with requirements.

B. Where possible, correct malfunctioning units at site, then retest to demonstrate compliance; otherwise remove and replace with new units, and proceed with retesting.

C. At the time of Substantial Completion, replace lamps in interior lighting fixtures that are observed to be noticeably dimmed after the Contractor's use and testing, as judged by Architect/Engineer.

3.3 GROUNDING:

1. Provide equipment grounding connections for each lighting fixture.

END OF SECTION 265100

SECTION 271500 - TELEPHONE/DATA SYSTEMS

PART 1 – GENERAL

1.1 SCOPE OF DOCUMENT:

A. The following are project specifications to which all cabling systems must adhere. These specifications apply to all installers (hereinafter referred to as "the Contractor") for all sites, which require, standards-compliant structured cabling systems and shall be used for all the installation, testing, and acceptance of the information transport systems as described in the attached specifications. Prices quoted of the installation facilities shall be all-inclusive and represent a complete installation at such sites as prescribed in this specification and contract documents. The Contractor shall be solely responsible for all parts, labor, testing, acceptance and all other associated processes and physical apparatus necessary to turn-over a completed system fully warranted and operational for acceptance by the Customer. Final acceptance of the installation shall be in writing by the Architect and Engineer.

B. In all instances where Standards are cited, it is assumed Installer will have familiarity with and implicitly follow the recommendations of the most current version of the Standard referenced at the time of installation. Compliance with most current Standards is the sole responsibility of the Contractor.

1.2 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26 Basic Materials and Methods sections apply to work specified in this section.

C. Refer to and coordinate with specification 274100 for any audiovisual equipment requiring UTP based category and/or optical fiber cabling and connectivity. Division 27 1500 shall provide installation and execution requirements for all category and/or optical fiber cabling and connectivity required within the audiovisual system.

1.3 SCOPE OF WORK:

A. The telephone/data system work is indicated by drawings and is hereby defined to include, but not be limited to racks, cabinets, patch panels, cables, raceway, outlet boxes, device plates, backboard, and grounding. Contractor is responsible for installation of all specified and unspecified necessary and miscellaneous items required for delivery of a complete and functional data cabling and device system.

B. Contractor shall provide complete cable and outlet system as indicated on the drawings and described herein. Work shall include all associated infrastructure transmission components and support appliances including, but not be limited to cable, jacks, terminal blocks, racks, cabinets, wire management, labeling, transient voltage surge suppression, patch cords, telecommunications grounding system and all terminations as specified herein.

C. Contractor shall provide system testing as described herein using up-to-date and industry accepted Level IIIe test equipment appropriate to the types of links being tested and in accordance with the latest edition of IEC 61935-1. All testers used shall be factory calibrated within one year of use with references set daily prior to testing.

D. All active equipment (electronics in telecommunications equipment rooms) will be owner furnished and owner installed.

E. Contractor shall be solely responsible for all parts, labor, testing, documentation and all other associated processes and physical apparatus necessary to turn-over the completed system fully warranted and operational for acceptance by Owner and Engineer.

F. Contractor shall provide all labor, materials, tools and equipment required for the complete installation of work called for in the Construction Documents.

G. Copper solution must match optical fiber solution and be provided by the same manufacturer. No two separate warranties are acceptable for the copper connectivity and optical fiber connectivity.

H. Contractor shall provide conduit from telecommunications outlet/connector to accessible ceiling space, then utilize non-continuous cable support devices to EF/ER/TR/TE.

I. Contractor to provide cabling for the Audio Video (AV), the Intercom System, Video Surveillance System and the Telecommunications System separately to patch panels. Each group shall be punched down to its own patch panel to ensure future system work can be completed without disrupting all systems.

1.4 CONTRACTOR QUALIFICATIONS:

A. The contractor shall be fully conversant and capable in the cabling of low voltage applications such as, but not limited to voice and data network systems. The Contractor shall at a minimum possess the following qualifications:

1. Must have at a minimum (1) RCDD certified individual employed full time at the time of bidding. PROVIDE PROOF OF RCDD CERTIFICATION IMMEDIATELY UPON JOB AWARD.
2. BICSI Certified Installers or equivalent.
3. Possess those licenses/permits required to perform telecommunications installations in the specified jurisdiction.

4. Have a minimum of 5 years in the communications structured cabling business and be able to provide three owner references for the type of installation described in this specification for projects within the last 18 months.
5. Personnel trained in the installation of pathways and support for housing horizontal and backbone cabling.
6. Personnel knowledgeable in local, state, province and national codes, and regulations. All work shall comply with the latest revision of the codes or regulations. When conflict exists between local or national codes or regulations, the most stringent codes or regulations shall be followed.
7. Be factory certified by the manufacturer used in installation of all transmission components of all copper and fiber links and able to provide the manufacturer warranty.

1.5 QUALITY ASSURANCE:

A. Required Pre-Telecommunications Construction Meeting with Communications Engineer: Electrical contractor/representative AND Communications Contractor will be required to attend a pre-communications construction meeting (approximately 30-60 minutes) with Communications representative in the electrical engineers office prior to communications construction commencement. This meeting will address any questions on the part of the contractor and the expectations of the Engineer with regard to specifications, plans and site visits for both rough and finish electrical work.

1.6 APPLICABLE CODES AND STANDARDS:

A. Contractor is responsible for compliance with all applicable portions of the NEC code as to type of products used and installation of components. All materials used shall be products and materials which have been UL-listed and labeled. All installed products shall comply with applicable NEMA standards for low loss extended frequency cable.

B. In addition installation shall adhere to the following Standards:

1. ANSI/TIA-568-C.0 - Generic Telecommunications Cabling for Customer Premises, or most recent edition at the time of installation.
2. ANSI/TIA-568-C.1 – Commercial Building Telecommunications Cabling Standards, or most recent edition at the time of installation.
3. ANSI/TIA-568-C.2 - Balance Twisted Pair Communications and Components Standards, or most recent edition at the time of installation.
4. ANSI/TIA –942 -Telecommunications Infrastructure for Data Centers, or most recent edition at the time of installation.
5. TIA-569-B - Commercial Building Standard for Telecom Pathways and Spaces, or most recent edition at the time of installation.
6. ANSI/TIA-606-A – Administration Standard for the Telecommunications Infrastructure of Commercial Buildings, or most recent edition at the time of installation.
7. ANSI-J-STD-607-A - Commercial Building Grounding/Bonding Requirements, or most recent edition at the time of installation.

8. ANSI/TIA 1152 – Testing of Copper Links.
9. BICSI Telecommunications Distribution Methods Manual, 12th edition or most recent edition at the time of installation.
10. TIA 758-A - Customer owned Outside Plant Telecommunications Infrastructure Standard (2004), including all applicable addenda and the most recent revision at the time of installation.
11. BICSI Information Transport Systems Installation Manual - 5th edition or most recent edition at the time of installation.
12. ANSI/NFPA-70- 2008 National Electrical Code, revision, or most recent revision at the time of installation.
13. ANSI/IEEE C-2 - 2007 National Electrical Safety Code or most recent revision at the time of installation.
14. OSHA Standards and Regulations All applicable.
15. Local Codes and Standards All applicable.

C. Note: Anywhere cabling standards conflict with electrical or safety codes, Contractor shall defer to NEC and any applicable local codes or ordinances, or default to the most stringent requirements listed by either. Knowledge and execution of applicable codes is the sole responsibility of the Installer. Any code violations shall be remedied at the Contractor's expense.

1.7 ACCEPTABLE MANUFACTURERS:

A. General:

1. Unapproved product substitutions are not allowed. Contractor wishing to substitute any products for those expressly specified shall submit three samples of the alternate product to Engineer no less than two weeks prior to the last addendum accompanied by all engineering documents, drawings and third party test data proving mechanical and transmission equivalency. Acceptance of substitutions shall be received from Engineer in writing. All unapproved substitutions installed shall be removed by Contractor who shall assume all costs for removal and replacement with approved products. Such costs shall include, but not be limited to labor, materials, as well as any penalties or fees for late completion.

B. APPROVED MANUFACTURERS:

1. The manufacturers listed in the section of Parts 2, 3, and 4 below are to establish a minimum standard. All cabling, copper and fiber, will match the solution existing in the building. No other manufacturer or combination of manufacturers may be used for the copper cabling or connectivity equipment.
2. Copper Cabling / Connectivity Approved Manufacturers:

a. Siemon.
b. Siemon / Mohawk.
c. CommScope.
d. Belden.

e. Panduit.
f. Panduit/General Cable.
g. Leviton / Berk-tek.
h. Hubbell / Hitachi.

3. Fiber Cabling Approved Manufacturers:

a. Same manufacturer from Part 2.

4. Non-Cabling / Connectivity Approved Manufacturers:

a. Same manufacturer from Part 2.
b. APC.
c. Great Lakes Cabinets.
d. Chatsworth.
e. Belden.

1.8 SUBMITTALS:

A. Provide electronic submittals in Adobe PDF format within one file.

B. Provide submittals for all racks/cabinets; patch panels, devices, cabling, firestopping solutions, tray, non-continuous cable support devices, grounding equipment, and miscellaneous equipment to be used on project. Where multiple part numbers are listed on a datasheet/cutsheet, highlight or circle applicable part.

C. Provide submittals showing complete racking layout in plan and elevation view to scale. Coordinate exact rack layout with Owner Information Technology Representative prior to submittal.

D. For any unspecified components, Contractor shall submit manufacturer's data and installation details for all devices, plates, cables, termination blocks, patch cords, line suppression blocks, wire management, labels, and similar equipment.

E. Provide color samples of all available standard color faceplates to architect.

F. Provide proposed labeling scheme for approval by owner/engineer.

G. Provide results of all copper and fiber optic cable tests.

PART 2 - PRODUCTS

2.1 GENERAL:

A. All products shall be in new condition and UL listed.

B. Provide complete raceway, outlet boxes and miscellaneous items. All conduit utilized shall be EMT grade.

C. Provide 4-11/16” x 2-1/8" deep square outlet box at each outlet location with single gang plaster or tile ring. Provide wall board adapters as necessary.

D. Communication grounding and bonding shall be constructed and installed to meet or exceed the requirements of the National Electrical Code (NEC), IEC 1000-5-2 and ANSI/J-STD--607-A throughout the entire grounding system.

E. All termination hardware shall be rated to meet Category 6 specifications.

2.2 ENTRANCE FACILITY (EF) / EQUIPMENT ROOM (ER) / TELECOMMUNICATIONS ROOM (TR):

A. General:

1. Contractor shall be responsible for the adequate and appropriate design of all racking systems, paying particular attention to sizing of all cable management troughs and supports both horizontal and vertical installation of patch panels and wire management into rack.
2. Provide line surge suppressors at main telephone board in ER for all incoming phone lines if not provided by service provider. Provide ground connection to TMGB.

B. Provide the following, see specifications for each item in this document:

1. Wall Linings in each EF, ER, and TR:

a. In addition to the architectural walls, provide plywood wall lining that mounts at 8” A.F.F which shall:

1) Be fire-rated or treated on all sides with at least two coats of fire-resistant light-colored paint. Fire-retardant plywood is also acceptable. Leave fire rated stamp on plywood unpainted.
2) Have walls lined with A/C grade or better, void-free plywood, 8 feet high with a minimum thickness of ¾”. See plans for additional wall locations.
3) Install the plywood with grade A surface exposed. Plywood shall be securely fastened to wall-framing members to ensure that it can support attached equipment.
4) Use flush hardware and supports to mount plywood.
5) Plywood shall be void free and kiln-dried to a maximum moisture content of 15 percent to avoid warping.

2. Main Cross Connect (MC) / Horizontal Cross Connects (HC):

a. Floor Mounted Racks (See Plans For Locations): Use existing.
b. Copper Patch Panels:

1) Provide modular flush mount angled patch panels of required number and size to accommodate shown telecommunications outlets on plans. (No horizontal cable managers are required)
2) Size panels to provide minimum 25% spare capacity. Fill all available space in remaining patch panels so that panels are fully populated.
3) Support Category 6 or higher applications.
4) Shall accommodate 8-Pin 8-Contact (8P8C) ports.
5) Mount to standard EIA 19" rack.
6) Each patch panel shall include mounted behind it one "towel rack" style cable support bar for each 24 connections to which the Contractor shall dress cables using hook and loop type cable ties.
7) Approved Equipment

a) Siemon Z-Max Angled Patch Panels.
b) CommScope 360 GigaSPEED XL Angled Patch Panels
c) Belden AngleFlex Patch Panel
d) Hubbell NextSpeed Angled Patch Panels
e) Panduit Modular Patch Panels (Model CPPA)
f) Leviton patch panel 6W587-U48 (angled) or 6W587-U48 (angled recessed for wall cabinets).
g) TE 1499623-1 Angled Modular SL Panel

c. Cable Tray (only within the EF/ER/TR): Use Existing.

2.3 CABLING DISTRIBUTION SYSTEMS AND MISCELLANEOUS EQUIPMENT:

A. General:

1. Provide plenum rated cable if required, cabling must be appropriate for the environment in which it is installed. Provide wet rated cable for all wet locations, including any conduit in or below slab on grade.
2. Contractor shall be responsible for sizing all pathways such that newly installed cable represents not more than a 35% fill as per manufacturer's directions. Overfilled pathways are the sole responsibility of the Contractor who shall remove and reinstall at Contractors expense.
3. Provide cabling rated for the environment in which it is installed (i.e. riser, plenum, outdoor). All cabling installed in wet locations (i.e. underground conduit, conduit in slab on grade) shall be listed for use in wet locations.

B. Horizontal Cabling Distribution System – Balanced Twisted Pair:

1. General:

    a. Provide appropriate number of Category 6 horizontal cables, patch cables, work area cables, for all terminated data drops, between switches, etc. so that building-wide networking will be operational once all installation is complete.

2. Horizontal Cabling:

    a. Provide Cat 6 UTP, minimum compliant, 4-Pair 100Ω Balanced Twisted Pair Cable to all locations shown on plans.
    b. Provide cabling rated for the environment in which it is installed (i.e underground conduit, conduit in slab on grade). All cabling installed in wet locations shall be listed for use in wet locations.
    c. Provide a minimum of (2) cables, unless otherwise noted, to each location shown on plans.

        1) Provide (2) Category 6 cables to each wireless access point (WAP).

    d. Horizontal cable shall be Data – Blue, Sound/Intercom – Yellow and Security – Orange.
    e. Approved Equipment: See approved manufacturers list.

3. Patch and Work Area Cables:

    a. Provide (1) 7 foot long Cat 6 patch cable for each workstation and (1) 5 foot or 7 foot Cat 6 patch cable for each patch panel port in the TR/TC. Provide half of the TR/TC patch cables in 5 foot lengths and the remaining half in 7 foot lengths.
    b. No patch or work area cords shall in any case exceed in total 10 meters as per TIA Standard unless design includes Standards compliant MUTOA (multi-user termination outlet) and work area cord adjustments are made according to recommendations for zone cabling contained within TIA 568-C or most recent revision at the time of installation. Coordinate with owner for preferred patch cord lengths at patch panel and work area.
    c. Copper patch cord and work area outlet cabling must be provided by the same manufacturer and meet the same performance standards as the horizontal cabling.
    d. Patch cord and work area cables shall be blue.
    e. Provide (1) 5 foot, 2-strand optical fiber patch cable for each patch panel. The cable shall be provided by the same manufacturer and meets the same performance standards as the backbone optical fiber.

4. Telecommunications Outlets/Connectors (See Plans for Locations):

    a. Flat Faceplates:

1) Provide modular type information outlets with flat telephone jack or data outlet. Provide single gang faceplate kits to allow up to six data or voice jacks as shown on plans. Provide faceplate kits for wall outlets in colors and materials that match power wiring device plates. Provide faceplate kits that allow labeling schemes described herein. Faceplates shall accept STP, UTP, fiber optic or audio/video modules as an option.
2) Blank off all unused ports.
3) Color: Standard color as selected by owner/architect.

b. 8P8C Flat Connector:

1) Provide Category 6/Class E eight-position eight-contact (8P8C) jack, The termination cap shall be color coded for T568A and T568B wiring schemes.
2) Be a Category 6/Class E eight-position jack module that terminates on unshielded twisted 4 pair, 22 – 26 AWG, 100 ohm cable utilizing a 110 punch down solution. Maintain cable pair geometry and minimize untwist while minimizing stress on critical circuit-board components.
3) Color: Standard color as selected by owner/architect.

c. Weather resistant outlets/connectors:

1) Provide outlet and face plate with characteristics stated above with protection against moisture. In areas where water is present (i.e. serving line in cafeteria).

PART 3 – EXECUTION

3.1 GENERAL:

A. Prior to pathway rough-in, low voltage contractor shall meet with electrical contractor to review pathway installation requirements.

B. Pathway Requirements:

1. General:

a. All pathways shall be designed, constructed, grounded and installed in accordance with all recommendations delineated within TIA 569-B and Standard TIA 942.
b. Prior to placing any cable pathways or cable, the contractor shall survey the site to determine job conditions will not impose any obstructions that would interfere with the safe and satisfactory placement of the cables. Arrangements to remove any major obstructions not identified on plans need to be determined at that time with the Engineer.

2. Cable Tray Within EF/ER/TR:

   a. Wrapped around room (wall support is acceptable).
   b. Along equipment rows leading to cross-connects.
   c. Ground tray to TGB or TMGB (whichever is closer) utilizing #6CU bare wire.
   d. Coordinate tray locations with lighting, air-handling systems, and fire extinguishing systems so that fully loaded trays will not obstruct or impede their operation.

3. Racks / Cabinets:

   a. Racks shall be securely attached to the concrete floor using minimum 3/8" hardware or as required by local codes.
   b. Racks shall be placed with a 36-inch (minimum) clearance from the walls on all sides of the rack. When mounted in a row, maintain a minimum of 36 inches from the wall behind and in front of the row of racks and from the wall at each end of the row.

4. Conduits:

   a. Achieve the best direct route parallel with building lines with no single bend greater than 90 degrees or an aggregate of bends in excess of 180 degrees between pull points or pull boxes.
   b. Conduit runs shall not have continuous sections longer than 100 feet without a pull box and may only be filled to 35% capacity.
   c. Ream all conduit ends and fit with an insulated throat nylon bushing with non-indenter type malleable steel fittings to eliminate sharp edges.
   d. Telecommunications conduits should not be routed over or adjacent to heat sources such as boilers, hot water lines, or steam lines. Neither should they be routed near large motors, generators, photocopy equipment, or electrical power cabling and transformers.
   e. Conduits that enter an EF/ER/TR must terminate near the corners to allow for proper cable racking. Terminate these conduits as close as possible to the wall where the backboard is mounted to minimize the cable route.
   f. Terminate conduits that protrude through the structural floor 1" to 3" above the surface within an EF/ER/TR.
   g. After installation, conduits shall be clean, dry, unobstructed, capped for protection, labeled for identification, reamed and fitted with bushings.
   h. A 200lb pull cord (nylon, 1/8" minimum) shall be installed in any empty conduit.
   i. When the number of conduits requires more than one row, restrict the number of rows to two wherever practicable.

5. Open Top Cable Support Requirements:

a. Provide wide surface area open-top cable supports spaced 5 feet apart at the maximum to adequately support and distribute cable's weight. Follow manufacturer specifications for cable loading. Provide supports which have a galvanized finish with wide base specifically for telecommunications cabling.
b. Non-continuous cable supports shall provide a bearing surface of sufficient width to comply with required bend radii of high-performance cables.
c. Non-continuous cable supports shall have flared edges to prevent damage while installing cables.
d. Multi-tiered non-continuous cable support assemblies shall be used where separate cabling compartments are required. Assemblies shall consist of a steel angled hanger bracket holding up to six non-continuous cable supports.
e. Approved Equipment:

1) Panduit J-Pro
2) Cooper

6. Pull Box Requirements:

a. NEC sized pull boxes are not acceptable. Follow BICSI and EIA/TIA 569-B guidelines for pull box sizing.
b. Provide pull boxes in sections of conduit that are 100 feet or longer, contain more than two 90 degree bends, or contain a reverse bend.
c. Conduits that enter the pull box from opposite ends should be aligned.
d. Pull boxes shall have a length 12 times the diameter of the largest conduit.
e. All pull boxes must be accessible.

C. Cabling System:

1. Follow T568B scheme for copper cabling terminations.
2. Backbone cables shall be installed separately from horizontal distribution cables. All backbone cables will be run in orange innerduct. Provide plenum rated innerduct if required, innerduct must be appropriate for the environment in which it is installed.
3. Provide a minimum of one balanced twisted pair cable to each voice outlet and one balanced twisted pair cable to each data outlet shown on the drawings unless noted otherwise on the drawings.
4. Provide a minimum 6" service loop in each communications system junction box for balanced twisted pair. Cables shall be coiled in the in-wall boxes if adequate space is present to house the cable coil without exceeding manufacturers bend radius.
5. Provide a minimum 10' service loop in each EF/ER/TR/TE.
6. Provide a minimum 2' service loop at each stub-up or at each transition from conduit to cable tray.
7. Provide a minimum 10' service loop in the ceiling before the conduit travels down the wall and terminates into the communications junction box.

8. Provide modular jacks for each installed cable at outlets shown on drawings. Blank off all unused ports on faceplate.
9. Provide Velcro type ties for all cables and install in a neat and workmanlike manner. Where applicable, use plenum rated Velcro. Where cable is installed in cable tray, bundle a maximum of 25 cables in each Velcro tie.
10. The bending radius and pulling strength requirements of all backbone and horizontal cables shall be observed during handling and after installation. Use pulling compound as recommended by manufacturer.
11. All horizontal cables, regardless of media type, shall not exceed 90 m (295 ft) from the telecommunications outlets in the work area to the horizontal cross connect.
12. The combined length of all patch cords in the EF/ER/TR and the work area shall not exceed 10m (33 ft).
13. No splices are allowed.
14. In a false ceiling environment, a minimum of 3 inches shall be observed between cable supports and false ceiling. At no point shall cable(s) rest on acoustic ceiling grids or panels.
15. Cable shall be installed above fire-sprinkler systems and shall not be attached to the system or any ancillary equipment or hardware. The cable system and support hardware shall be installed so that it does not obscure any valves, fire alarm conduit, boxes, or other control devices.
16. Cables shall not be attached to ceiling grid seismic support wires or lighting fixture seismic support wires. Where support for horizontal cable is required, the contractor shall install appropriate carriers to support the cabling.
17. Any cable damaged or exceeding recommended installation parameters during installation shall be replaced by the contractor prior to final acceptance at no cost to the Owner.
18. Pulling tension for balanced twisted pair shall not exceed 25lbf and for optical fiber shall not exceed 50lbf.
19. Pair untwist at the termination shall not exceed 0.125”. The cable jacket shall be maintained as close as possible to the termination point.
20. Cables shall be neatly bundled and dressed to their respective panels or blocks. Each panel or block shall be fed by an individual bundle separated and dressed back to the point of cable entrance into the rack or frame.
21. Cable shall not be draped on, tied or otherwise secured to electrical conduit, plumbing, ventilation ductwork or any other equipment. Cable shall be secured to building supports or hangers or to additional blocks or anchors specifically installed for this purpose.

D. Grounding System:

1. All grounding and bonding shall be done according to ANSI J-STD-607-A, TIA 942, and NEC.
2. All cabinets/racks shall utilize paint piercing grounding washers, to be used where rack sections bolt together, on both sides, under the head of the bolt and between the nut and rack.
3. All racks shall further utilize a full-length rack ground strip attached to the rear of the side rail with the thread-forming screws provided to ensure metal-to-metal contact. Similar to Panduit RGS.

4. All active equipment from owner shall be bonded to ground. If the equipment manufacturer provides a location for mounting a grounding connection, that connection shall be utilized. All active equipment shall be bonded using the appropriate jumper for the equipment being installed using the thread-forming screws. Similar to Panduit RG.
5. Racks shall have individual, appropriately sized conductors bonded to the grounding backbone. Do not bond racks or cabinets serially – daisy-chained rack grounds will not be accepted.
6. Patch panels shall be bonded to racks using the appropriate bonding screws. Mounting rails may utilize cage nuts, threaded holes or thru hole mounting fasteners to secure patch panels to the rails.
7. Bond cable tray, raceway system, structural steel and all other metal equipment located within EF/ER/TR to the grounding bus bar utilizing copper conductors per the following schedule:

    a. ≤25' - #4
    b. ≤50' - #1
    c. ≤75' - #2/0
    d. ≥75' - #3/0

8. Provide 4" X 12" X ¼" CU Telecommunication Main Grounding Bus Bar (TMGB) with bonding conductor per schedule above to Intersystem Bonding Terminal (IBT) in each telecommunication room (EF/ER/TR) with a main cross-connect (MC).
9. Provide 2" X 12" X ¼" CU Telecommunication Grounding Bus Bar (TGB) with bonding conductor per schedule above to TMGB in each room with a horizontal cross-connect (HC).
10. Refer to electrical diagrams for additional ground connection requirements.

E. Electromagnetic Compatibility:

1. General:

    a. Do not install power feeders above or within the telecommunications room. Do not install telecommunications conduits above electrical panelboards, switchboards, transformers, motor control centers, etc.
    b. Where telecommunication cable is installed in grounded, metallic conduit near power cables, the power cables shall be kept physically separated from telecommunications cables:

        1) Circuits Under 5kVA: 2" minimum separation.
        2) Circuits Over 5kVA: 6" minimum separation.
        3) Electrical motors/transformers: 48" minimum separation.
        4) Lighting ballasts: 6" minimum separation.

    c. Where telecommunication cable is installed in cable tray or underground in non-metallic conduit near power cables, the power cables shall be kept physically separated from telecommunications cables by a minimum of 12".

F. Firestopping:

1. Provide firestop solution equivalent to the wall/ceiling/floor rating.
2. Provide firestop labels next to each penetration with written date. Label both sides of the penetration.
3. Take picture of both sides of the firestopping seal and include in O&M documentation of all firestopped locations. Provide drawing correlating photographs to actual locations in building.
4. All penetrations through fire rated building structures (walls and floors) shall be sealed with an appropriate Firestop system. This requirement applies to through penetrations (complete penetration) and membrane penetrations (through one side of a hollow fire rated structure). Any penetrating item i.e., riser slots and sleeves, cables, conduit, cable tray, and raceways, etc. shall be properly firestopped.
5. Firestop systems shall be UL Classified to ASTM E814 (UL 1479). A drawing showing the proposed firestop system shall be provided to the Engineer prior to installing the Firestop system(s).
6. Firestopping within conduits and sleeves shall be re-enterable. Firestopping outside and around annular space of sleeves and conduits at wall penetrations shall dry to a hard consistency. Mineral wool or other cavity stuffing shall be utilized as noted in the firestop system approved for this project.
7. Utilize firestop pass-through type devices for medium to large penetrations into fire walls/floors. Similar to STI Series SSB.

G. Miscellaneous Equipment:

1. Arrange all terminal blocks in a manner that allows natural wiring progression and minimizes crossing of wires.
2. Provide patch cords and cross connect cables as necessary for a complete operational telephone and data network system. Consult with owner to determine any special needs such as dedicated phone lines.

PART 4 – LABELING

4.1 GENERAL:

A. The contractor shall develop and submit for approval a labeling system for the cable installation. The Owner will negotiate an appropriate labeling scheme with the successful contractor. At a minimum, the labeling system shall clearly identify all components of the system: racks, cables, panels and outlets. The labeling system shall designate the cables origin and destination and a unique identifier for the cable within the system. Racks and patch panels shall be labeled to identify the location within the cable system infrastructure. All labeling information shall be recorded on the as-built drawings and all test documents shall reflect the appropriate labeling scheme.

B. All telecommunications spaces, pathways, cables, connecting hardware, equipment, racks, patch panels, outlet/connectors, and grounding system shall be labeled in accordance with TIA/EIA 606-A.

C. All labels shall meet UL 969 requirements for legibility, defacement and adhesion requirements. Handwritten labels are not allowed.

D. Provide laminated plans (minimum size 11x17) of all telecommunications as-built plans (including riser diagrams) in each and every EF, ER, and TR.

4.2 TELECOMMUNICATION PATHWAYS:

A. Identify each dedicated pathway (including inner ducts) for the voice and data system.

B. Label pathways at regular intervals and wherever they are accessible.

4.3 TELECOMMUNICATION CABLES:

A. Identify cables at each end with a permanent label or physical/electronic tag:

1. The same alphanumeric identifiers should be used at both ends of the cable.
2. Identify cables at regular intervals throughout and wherever they are accessible.
3. Cables shall be identified by a self-adhesive label in accordance with the System Documentation Section of this specification and ANSI/TIA/EIA-606-A. The cable label shall be applied to the cable behind the faceplate that can be accessed by removing the cover plate and to the cable behind the patch panel on a section of cable that can be viewed without removing the bundle support ties. Cables labeled within the bundle where the label is obscured from view shall not be acceptable.

4.4 CONNECTING HARDWARE:

A. Identify connecting hardware items (termination blocks, cross-connects, racks, cabinets, patch panels, telecommunications outlet/connectors, ports) using alphanumeric identification such as the following three-level scheme:

1. First level—Termination field or patch panel. Color-coding or other labeling should be used to uniquely identify each termination field (e.g., voice and data) on a common mechanical assembly.
2. Second level—Terminal block within a given field or patch panel, which could be a row of insulation displacement connectors (IDCs), optical fiber connectors, or modular jacks.
3. Third level—Defines the individual position within a given terminal block or patch panel.

4.5 TELECOMMUNICATIONS GROUNDING SYSTEM:

A. Identify each telecommunications grounding bus bar (TGB) and telecommunications main grounding bus bar (TMGB).

B. Identify each grounding conductor relating to the telecommunications system, including those connecting building steel, grounding electrodes, water pipes, and telecommunications structural components.

PART 5 - MISCELLANEOUS

5.1 TESTING:

A. General:

1. Provide testing for all copper and fiber optic cable according to TIA/EIA standards and any other requirements of the manufacturer who will provide warranty.
2. Submit copy of current calibration of all testing equipment. Submit all test reports electronically to architect/engineer and include in O&M manuals to include test reports.
3. Correct any malfunctions. Contractor shall re-terminate/replace any cable, connection, or equipment found to be defective or non-compliant with these specifications and referenced standards.

B. Copper Cable:

1. Utilize Level IIIe Tester to test all equipment and each outlet, horizontal cable, termination block, patch cords, etc. to verify compliance with requirements. Testing shall consist of industry accepted verification tests for the Category of cable installed and shall meet latest requirements of EIA/TIA cabling Standards.
2. UTP Cable and Links: All UTP cabling channel must be tested at swept frequencies up to 250MHz for internal channel performance parameters as defined in IEEE 802.3an and ANSI/TIA/EIA-568C. Certifications shall include the following parameters for each pair of each cable installed:

    a. Wire map (pin to pin connectivity).
    b. Length.
    c. Insertion Loss .
    d. Near End Crosstalk (NEXT).
    e. Far End Crosstalk (FEXT).
    f. Attenuation to Crosstalk Ratio Far End (ACRF) .
    g. Attenuation/Crosstalk Ration (ACR).
    h. Return Loss.
    i. Propagation Delay.
    j. Delay Skew.

3. All channels that fail testing parameters will be replaced at the Contractor’s expense until all channels pass the performance parameters.

5.2 WARRANTY:

A. Register installation with cable/connectivity manufacturer.

B. Provide and submit all test results to owner, engineer, and manufacturer and meet all other manufacturer requirements in order to provide minimum 20 year extended product link warranty for complete cabling/connectivity installation, including all copper and optical fiber utilized on the entire channel. The channel warranty shall be provided by the connectivity manufacturer. Include replacement material and installation for any defective product.

5.3 OPERATING AND MAINTENANCE MANUALS:

A. Operating and maintenance manuals shall be submitted prior to testing of the system. A total of (4) hard copy O&M manuals and an Adobe PDF of the entire O&M manual shall be delivered to the Owner. Manuals shall include all service, installation, programming, and warranty, including test results for each cable.

5.4 TRAINING:

A. Provide four hours training on the operation and installation of the structured cabling system at job site, at no cost to owner.

5.5 RECORD DRAWINGS:

A. The Owner shall provide electronic (DWG) format of telephone/data system drawings on which as-built construction information can be added. These documents will be modified accordingly by the telecommunications contractor to denote as-built information as defined above and returned to the Owner.

B. Provide a complete set of "as built" drawings in paper and electronic (DWG and PDF) formats showing cabinets, racks, patch panels, wiring, specific interconnections between all equipment and internal wiring of equipment. Drawings are to include all labeling information used in denoting equipment used in the installation. Labeling, icons, and drawing conventions used shall be consistent throughout all documentation provided.

END OF SECTION 271500

SECTION 274100 - AUDIOVISUAL SYSTEM

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26, 27 & 28 basic materials and methods sections apply to work specified in this section.

C. Refer to specification 26 0553 for cabling, conduit and junction box color requirements.

D. Refer to specification 27 1500 for category and/or optical fiber cable and connectivity specifications.

E. All unshielded category 'UTP' and/or optical fiber cable, for AV equipment, used on this projector shall match the horizontal cabling within the building.

1. Category cables used for transporting video, audio and controls simultaneously from transmitters to receivers and/or switchers shall follow the Manufacturer's recommended cabling specifications.

1.2 ADMINISTRATIVE REQUIREMENTS:

A. BNA Project Contact:

1. Eric Mangum, CTS-D

a. Phone: 801-532-2196
b. Email: emangum@bnaconsulting.com

B. Bid Submittal:

1. Equipment Costs: Breakout cost of material and labor as different line items.

C. Coordination:

1. Coordinate final inspection of the systems installed, with Audiovisual (AV) Consultant, three (3) weeks in advance.
2. Obtain GANTT chart for construction time frame from the General Contractor.
3. Coordinate with Electrical contractor to meet at least twice with the ceiling installer. Hold first meeting before submittal of shop drawings to coordinate the mounting condition of all ceiling-mounted AV equipment with ceiling type.

During the second meeting, coordinate the location of all ceiling-mounted AV equipment in each area.

4. Meet at least once with the mechanical installer prior to fabrication and installation of duct work. Coordinate depth and location of all loudspeaker and duct work in all areas.
5. Meet with Electrical contractor prior to pathway rough-in to coordinate AV system requirements in each area.
6. Meet at least once, prior to rough-in, with horizontal cabling installer to verify all AV network requirements. Coordinate cable color according to specification 26 0553.
7. Meet at least twice with owner to coordinate AV network requirements. Hold the first meeting before submittal of shop drawings to coordinate network protocols, including but not limited to: IP address schedules, MAC address schedules, patchbay schedules, security requirements, and VLANs. Hold the second meeting prior to AV system deployment.
8. Coordinate color and finish of all AV system components with Architect or Electrical contractor as appropriate.
9. Coordinate all AV system components within millwork/furniture with millwork shop drawings prior to rough-in.
10. Coordinate color (including custom color) and finish of all AV system components with Architect prior to ordering. Architect may require custom color of grills, face plates, etc.. AV contractor shall paint or have devices painted by others. The cost for custom colors shall be within the AV Contractors Bid.
11. Notify AV Consultant when rough-in is complete and ready to inspect. AV Consultant and Electrical Engineer to sign off on rough-in prior to rough-in resuming rough-in for typical rooms.

1.3 DESCRIPTION OF WORK:

A. Provide the specified systems in a complete and operating condition with all necessary materials and labor to fulfill the requirements and the intent of the drawings and specifications. Except as otherwise indicated, provide manufacturer's standard system components. Contractor shall furnish all cables, materials and equipment, whether specifically mentioned herein or not, to ensure a complete and functional system.

B. Master quotes do not relieve contractor from preforming due diligence for equipment type, equipment quantity, and quantity of room types. Any errors, conflicts, or omissions between the drawings and/or specifications and master quotes shall be the responsibility of the contractor to resolve.

C. Bidders wishing to provide equipment other than the equipment specified shall submit proposed substitute equipment to AV Consultant (8) working days prior to bidding. Submittals for prior approval shall include description of equipment, design intent, complete riser diagrams for proposed equipment, equipment specifications, cut sheets of proposed equipment, reason for alternate equipment. AV Consultant may request physical equipment to test and demo. Acceptance of proposed equipment by AV Consultant shall not relieve AV contractor from responsibility to provide audio-visual systems equal to those specified in this Section. Contractor shall be ultimately responsible for providing

complete and working audio-visual systems that function, control and operate in the same manner as the specified equipment. AV Consultant has final say if proposed equipment is equal to the specified equipment. Equipment that AV Consultant is not familiar with will require the contractor to provide manufacturer training at manufacturer's facility and have a manufacturer representative present at time of commissioning.

D. Equipment submitted in bid proposal that has not been approved by AV Consultant in writing will not be accepted and shall be replaced by approved equipment at contractor's expense. Equipment not listed within this specification, or contract documents, that are required for a complete and working system, shall be of professional grade and used in the same manner as needed for a complete and working system.

E. Input plates shall match the color and style being used throughout the project.

F. Contractor is responsible for coordinating with all other trades for equipment locations, mounting requirements, supports and plenum space requirements.

G. All control processors and controllers are to be on an unswitched power connection.

H. AV contractor shall attend the electrical pre-construction meeting per specification 26 0500.

1.4 QUALITY ASSURANCE:

A. Installer:

1. Integrating firm shall have worked satisfactorily for a minimum of (5) years of completing systems equal to this scope, quality, type and complexity.
2. Key personnel assigned to the project shall each have minimum of (10) years of experience in completing systems equal to this scope, quality, type and complexity.
3. Contractor shall be a factory authorized distributor of all equipment specified for the geographical area of the project.
4. Contractor shall maintain complete installation and service facilities for the duration of the project contract.
5. Contractor shall have current manufacturer certificates for all AV systems and equipment listed within this specification.
6. Contractor shall be in good standing with owner based on previous projects.
7. Contractors that do not meet the above requirements cannot bid on this project.

B. Contractor must follow the standards described within:

1. BICSI/AVIXA AV Design Reference manual.
2. ANSI/AVIXA 2M-2010 Standard guide for Audiovisual Systems Design and Coordination Processes.
3. ANSI/AVIXA 10:2013 Audiovisual Systems Performance Verification Guide.

C. All work shall be done by expert technicians qualified in the field with knowledge of specified systems. Workmanship shall comply with industry best practices concerning grounding, shielding, cable dressing, cable termination and equipment mounting.

D. PRE-APPROVED INSTALLERS:

1. Cache Valley Elec.
2. GenComm
3. Marshall Industries.
4. Performance Audio
5. Poll Sound
6. AVI-SPL
7. TPI
8. Bids submitted by non-approved installers will not be accepted.
9. Bidders not pre-approved shall submit in writing the following for review at least (8) working days prior to bid:

    a. List of qualifications including:

        1) Industries certifications including manufacturers.
        2) Approved resale manufacturers.

    b. Past and current projects within the last 5 years similar in scope and size.
    c. (3) Different referrals from the owners of (3) different projects within the last 5 years.

1.5 **SUBMITTALS:** Refer to Section 26 0502 for requirements.

1.6 **WARRANTY:**

A. Systems shall be guaranteed for a period of one (1) year from the date of substantial completion against defective materials, inferior workmanship or improper installation adjustment. Guarantee shall cover all parts and labor.

B. If system failure causes audiovisual system to be inoperative or unusable for its intended purpose, contractor, when notified of the problem, shall repair system so it will be operational and usable within three (3) business days. If defective components cannot be repaired in time, provide temporary equipment as required.

C. Systems designed for 24/7 operation shall be repaired and/or replaced within 24 hours of time of notification. If defective components cannot be repaired in time, provide temporary equipment as required.

D. Contractor shall supply (1) year warranty on all system programming from the date of substantial completion. During this time period, upon owner request, the contractor shall provide programming changes up to (4) four times free of charge. During this time the programs shall be password protected. At any time during the (1) year, the owner can terminate the warranty and request the programming of each system. At this time the programs are to be turned over to the owner and all passwords are to be removed. The owner shall own all rights to the programming after this time, to be used in this facility. Provide the Owner written proof that all ownership has been relinquished.

E. Contractor shall honor equipment warranties for term established by manufacturer if

greater than warranty time frame mentioned above.

PART 2 – PRODUCTS

2.1 GENERAL**:**

A. All equipment shall be installed as shown on the drawings and in strict accordance with the specifications. Any errors, conflicts, or omissions discovered in the specifications or the drawings shall be submitted in writing to the AV Consultant for clarification.

B. Equipment lists are provided to set equipment expectations and may not be complete. Coordinate with devices shown on drawings, system risers and equipment lists for system intent. Provide a complete and functional system as described within the construction documents.

2.2 MANUFACTURER APPROVED EQUALS:

A. The Manufacturers listed below have the potential to be considered equals, as it relates to the system design intent and the equipment specified herein. Any equipment chosen as equal to what has been specified in section 2.4 will be the responsibilities of the AV Integrator to coordinate all resulting changes and guarantee a complete and functional system e.g. rough-in requirements, programming, etc. Please note that some components have been chosen over others for features and/or size limitations. Equipment listed in section 2.4 with an asterisk have feature and/or size limitations and may not be substituted.

1. Amplifiers – Crown, QSC, LEA
2. Cables – Belden, Gepco/General, Ice, Liberty and Westpenn cables
3. Displays – LG, NEC, Planar, Samsung and Sharp
4. Equipment racks – Atlas Sound, Chief and Middle Atlantic
5. Loudspeakers – Atlas Sound, Community, JBL and SoundTube
6. Microphones – AKG, Audio Technica, Sennheiser and Shure
7. Mounts – Chief and Premier mounts
8. Projection Screens – Da-Lite, Draper and Stewart Films
9. Video Equipment – AMX, Crestron, Extron
10. Wall plates – Attero tech, Crestron, Extron, RCI Custom and RDL

2.3 GENERAL EQUIPMENT REQUIREMENTS**:**

A. Loudspeakers:

1. Provide applicable mounting equipment as needed, including but not limited to; back boxes, mounting hardware, safety equipment, and seismic restraints.

B. Equipment Racks:

1. All AV equipment racks within this specification shall have the following accessories and/or features, either rack mountable or built into the rack, depending on the model of the rack.

    a. Surge protection for all devices located within the rack. Surge protector shall be: 20 AMPs, rack mountable or mount to a side rail and at least 1,000 joules of protection.

        1) Acceptable manufacturers: Furman, Juice Goose, Middle Atlantic and SurgeX.

    b. Horizontal, vertical, and entry cable management.

        1) All cabling shall be straight off of the back of equipment to horizontal supports connected to equipment rack. Cabling shall follow support to vertical supports when going into other components and/or out of the equipment rack.
        2) Cabling secured to other cabling and supported from the connector is not acceptable.
        3) Separate AC power and other signal types from each other.

    c. Power strips as necessary.
    d. Sequencers

        1) All equipment racks with the following equipment shall have a sequencer within the equipment rack. AV integrator to follow industry standards when using sequencers.

            a) Amplifiers
            b) Video processors without control processors

    e. Active Thermal Management

        1) Solid rear door.
        2) Fan kit totaling 190 CFM mounted on the top face of the equipment rack.

            a) Thermostatic fan controller (set temperature range between 80 degrees and 90 degrees Fahrenheit.
            b) Fan guards

        3) Blank panels on the front of the equipment rack in all unused rack spaces.
        4) Solid blank panels in unused rack spaces in top (6) six racks spaces.
        5) Stack power amplifiers with 1 open rack space between.
        6) Provide active thermal management in the following equipment racks in the following systems.

2.4 **EQUIPMENT REQUIRED PER ROOM TYPE**

TYPICAL CLASSROOM EQUIPMENT SCHEDULE			
TYPE	**DESCRIPTION**	**MANFR.**	**MODEL NO.**
R1	2X2 EQUIPMENT RACK, ABOVE CEILING 2 RU, RECESSED	CHIEF	CMS492
HDU KP3	DIGITALINX 'ARK' SERIES AV ROOM KIT WITH 4 HDMI INPUTS, USB 2.0 TRANSFER, CONTROLLER (KP3)	LIBERTY/DIGITALINX	DL-ARK-4HC
CHD	4K 10.2G 70M HDMI WALL PLATE EXTENDER SET WITH AUDIO PASS-THROUGH AND RS232 (SECONDARY TEACHER LOCATION)	LIBERTY/DIGITALINX	DL-1H-1A-WPKT-W
	4X1 HDMI 2.0 SUPER SLIM AUTO-SWITCHER	LIBERTY/DIGITALINX	DL-S41-H2
CSA	CLASSROOM RF MICROPHONE SYSTEM, RF RECEIVER, TEACHER & HANDHELD MICROPHONE, LOUDSPEAKERS (C4)	AUDIO ENHANCEMENT	OPTIMUM SYSTEM WITH XD RECEIVER (EXISTING)
C4	LOUDSPEAKER, 4", CEILING 120 DEGREE COVERAGE	AUDIO ENHANCEMENT	CS-12 (EXISTING)
CS	WIRELESS COLLABORATION DEVICE	VIVI	VIVI PRO
	PROJECTOR CEILING MOUNT, LAY-IN ADJUSTABLE 9"-12" EXTENSION POLE COLOR BY ARCHITECT	CHIEF	CMA440 RPA CMS009012 CMA115
P1	POWERLITE 1080P 3LCD LASER 4600 LM COLOR BY ARCHITECT	EPSON	EB L260F
SC1	WALL MOUNTED, MANUAL, 16X9, 110" SCREEN W/MATTE WHITE MATERIAL	DA-LITE	MODEL C WITH CSR (EXISTING)
END OF SCHEDULE			

PART 3 – EXECUTION

3.1 INSTALLATION OF AV SYSTEMS:

A. Provide AV systems and ancillary equipment as indicated on drawings and in accordance

with equipment manufacturer's written instructions, the NEC, and with industry best practices.

B. Coordinate all work performed by other contractors pertaining to the AV system, including raceways, electrical boxes and fittings.

C. Video systems.

1. HDCP:

a. All equipment within the signal path must be capable of processing HDCP-compliant material.
b. All switcher, scalers, transmitters, and receivers shall reflect the HDCP compliance of the endpoint/display(s).
c. HDCP shall be disabled in the switcher/scaler when a non-HDCP-compliant endpoint/display is used.

2. EDID Strategy:

a. Permanent video sources shall be set manually within the equipment to output their native resolution. Video properties shall not rely on EDID.
b. Portable video sources and wall plates shall use EDID tables within the switcher/scaler for preferred video properties. The EDID table shall be set with the following settings:

1) Most common resolutions within the display's aspect ratio.

a) 3840 x 2160 recommended resolution.

2) 60 and/or 30 frames per second
3) RGB color space
4) Stereo audio, 44,100 Hz, 16 bit

D. Pathway Requirements:

1. General:

a. All pathways shall be designed, constructed, grounded and installed in accordance with all recommendations delineated within TIA 569-B and Standard TIA 942.
b. Prior to placing any cable pathways or cable, the contractor shall survey the site to determine job conditions will not impose any obstructions that would interfere with the safe and satisfactory placement of the cables. Arrangements to remove any major obstructions not identified on plans need to be determined at that time with the Engineer.

2. Conduits:

a. All cabling shall be installed in a minimum of 1" conduit to accessible ceiling space unless otherwise noted. Refer to AV symbol schedule for specific conduit requirements.
b. Provide conduit to accessible ceiling space and then utilize non-continuous open top cable supports every 5' above accessible ceiling.
c. Provide conduit from device to device in open and/or exposed ceilings. Ceilings with clouds are considered open/exposed ceiling.
d. Achieve the best direct route parallel with building lines with no single bend greater than 90 degrees or an aggregate of bends in excess of 180 degrees between pull points or pull boxes.
e. Provide large radius elbows on all bends.
f. Conduit runs shall not have continuous sections longer than 100 feet without a pull box. Refer to rough-in schedule for conduit fill capacity.
g. AV conduits should not be routed over or adjacent to heat sources such as boilers, hot water lines, or steam lines. Neither should they be routed near large motors, generators, photocopy equipment, or electrical power cabling and transformers.
h. After installation, conduits shall be clean, dry, unobstructed, capped for protection, labeled for identification, reamed and fitted with bushings.
i. A 200lb pull cord (nylon, 1/8" minimum) shall be installed in any empty conduit.

3. Open Top Cable Support Requirements:

a. Non-continuous cable supports shall provide a bearing surface of sufficient width to comply with required bend radii of high-performance cables
b. Non-continuous cable supports shall have flared edges to prevent damage while installing cables.

4. Pull Box Requirements:

j. NEC sized pull boxes are not acceptable. Follow BICSI and EIA/TIA 569-B guidelines for pull box sizing.
k. Provide pull boxes in sections of conduit that are 100 feet or longer, contain more than two 90 degree bends, or contain a reverse bend.
l. Conduits that enter a pull box from opposite ends should be aligned.
m. Pull boxes shall have a length 12 times the diameter of the largest conduit.
n. All pull boxes must be accessible.

E. Cabling System:

1. Follow T568B scheme for copper category cabling terminations.
2. Follow TIA/EIA-568A for commercial buildings cabling.
3. Provide a minimum 6" service loop in each AV system junction box. Cables shall be coiled in the in-wall boxes if adequate space is present to house the cable coil without exceeding manufacturers bend radius.

4. In a false ceiling environment, a minimum of 3 inches shall be maintained between cable supports and false ceiling. At no point shall cable(s) rest on lay-in ceiling grids or panels.
5. Cable shall be installed above fire-sprinkler systems and shall not be attached to the system or any ancillary equipment or hardware. The cable system and support hardware shall be installed so that it does not obscure any valves, fire alarm conduit, boxes, or other control devices.
6. Cables shall not be attached to ceiling grid seismic support wires or lighting fixture seismic support wires. Where support for AV cable is required, the contractor shall install appropriate carriers to support the cabling.
7. Any cable damaged or exceeding recommended installation parameters during installation shall be replaced by the contractor prior to final acceptance at no cost to the Owner.
8. Pulling tension for balanced twisted pair shall not exceed 25lbf and for optical fiber shall not exceed 50lbf.
9. Pair untwist at the termination shall not exceed 0.125". The cable jacket shall be maintained as close as possible to the termination point.
10. Cable shall not be draped on, tied or otherwise secured to electrical conduit, plumbing, ventilation ductwork or any other equipment. Cable shall be secured to building supports or hangers or to additional blocks or anchors specifically installed for this purpose.
11. Group multiple cabling together with expandable nylon loom, similar to Techflex - Flexo, when cabling exists a cavity and connects to a device. Cabling within a lectern, podium or millwork shall have expandable nylon loom sleeve as well.

F. Grounding System:

1. All grounding and bonding shall be done according to ANSI J-STD-607-A, TIA 942, and NEC.
2. All cabinets/racks shall utilize paint piercing grounding washers, to be used where rack sections bolt together, on both sides, under the head of the bolt and between the nut and rack.
3. All racks shall further utilize a full-length rack ground strip attached to the rear of the side rail with the thread-forming screws provided to ensure metal-to-metal contact. Similar to Panduit RGS.
4. All active equipment shall be bonded to ground. If the equipment manufacturer provides a location for mounting a grounding connection, that connection shall be utilized. All active equipment shall be bonded using the appropriate jumper for the equipment being installed using the thread-forming screws. Similar to Panduit RG.
5. Racks shall have individual, appropriately sized conductors bonded to the grounding backbone. Do not bond racks or cabinets serially – daisy-chained rack grounds will not be accepted.
6. Refer to electrical diagrams for additional ground connection requirements.

G. Cabling groups and conduit separation:

1. Refer to "CABLING GROUPS AND CONDUIT SEPARATION SCHEDULE".

H. Firmly secure all equipment in place that is not intended for portability.

I. Mount projectors permanently and provide mechanical index ensuring precise alignment of the projected image.

J. Provide adequate structural support for AV system components. Provide fastenings and supports with a safety load factor of at least five.

3.2 LABELING

A. The contractor shall develop and submit for approval a labeling system for the cable installation. The Owner will negotiate an appropriate labeling scheme with the contractor. At a minimum, the labeling system shall clearly identify all components of the system: racks, cables, panels and wall plates. The labeling system shall designate the cables origin and destination and a unique identifier for the cable within the system. All labeling information shall be recorded on the as-built drawings and all test documents shall reflect the appropriate labeling scheme.

B. All labels shall meet UL 969 requirements for legibility, defacement and adhesion requirements. Handwritten labels are not allowed. All labels shall maintain consistent typeface, size and color.

C. Provide laminated plans (minimum size 11x17) of all AV as-built plans (including riser diagrams) in each and every AV Rack.

3.3 CONTROL SYSTEM FUNCTIONALITY:

A. GENERAL:

1. Touch panels shall have a “Tech” button that is hidden from general users, and password protected. “Tech” pages/windows will allow Full control over the devices that the touch panel usually controls.
2. Touch panels shall have a help button visible at all times that will display a menu of the most common problems, and quick fixes or items to check. The help menu shall allow the owner to send a message to the help desk for assistance with their specific problem.
3. Touch panel shall have a back button to get to the previous page/window
4. All programming shall be turned over to owner after 1 year and all final changes have been made to the system. Passwords shall be removed from the program at this time.
5. All common and most used functions shall be accessible with no more than 3 button presses. All GUIs for each type of space shall have a consistent look, feel and ease of use.

B. ROOM FUNCTIONS:

1. Refer to drawings for keypad layouts, button callouts and description of system intent.
2. All room controls are required to have the similar looks and functionality.
3. Multipurpose room controls/functionality

    a. All inputs and outputs shall be coordinated with AV riser diagram.
    b. Inputs assigned for the north east area shall be mixed in that area unless the rooms are combined.
    c. Inputs assigned to the north west area shall be mixed in that area unless the rooms are combined.
    d. Basic touch panel controls:

        1) On:

            a) Un-mutes the system inputs for that area when rooms are uncombined.
            b) When rooms are combined it shall un-mute all inputs.

        2) Combined:

            a) Combines and uncombines the rooms. The state of the rooms shall reflect on the button.

        3) Mute:

            a) Mutes all audio channels for the area.

        4) Off:

            a) Mutes all system inputs for that area when rooms are uncombined.
            b) When rooms are combined it shall mute all inputs.

C. Amplifiers shall be set to go to stand by after 30 minutes of no audio detection.

3.4 FIELD QUALITY CONTROL:

A. TESTING:

1. Upon completion of installation of each system and after electrical circuitry has been energized, demonstrate capability and compliance with requirements. Where possible, correct malfunctioning units on site, then retest to demonstrate compliance; otherwise, remove and replace with new units, and proceed with testing.

2. Before inspection by owner and AV Consultant, and after completion of the installation, conduct system tests and make necessary corrections for proper system operation.
3. Adjust, balance and align equipment for optimum quality and to meet the manufacturer's published specifications.
4. All limiters and/or compressors shall be set to prevent operators from over-adjusting sound levels and damaging system components, while maintaining the highest amount of gain possible.
5. System shall have no audible hum, noise, RFI, or distortion when operating under normal conditions. System shall reproduce material at the loudspeakers rated output level without audible distortion. All input levels shall be pre-set so system may be operated without causing unstable feedback under normal use.
6. System shall have no image distortion, hum bars, color shift, or any other picture distortion while operating under normal conditions. Provide cable equalizers, located near displays, on all cables that are more than 30 feet in length and/or have more than 4 connection points.
7. Adjust gain controls for optimum signal-to-noise with 0 dBu at a line-level input.
8. Perform polarity checks of loudspeaker lines by means of a polarity tester or use DC source at one end of each line and a voltmeter at the other end. Loudspeaker lines shall be identically polarized with respect to color coding.
9. Loose parts and poor workmanship or soldering shall be replaced.
10. Sweep Loudspeaker systems with high-level sine wave or 1/3 octave pink noise source. Correct causes of buzzes or rattles related to Loudspeakers or enclosures. Notify owner of external causes of buzzes or rattles.
11. Equalize the loudspeakers to produce less than 6 dB total variation between 500 Hz and 8000 Hz (+/- 3 dB).
12. Contractor shall provide system testing as described herein using up-to-date and industry accepted test equipment appropriate to the types of links being tested and in accordance with the latest edition of IEC 61935-1. AV Contractor shall own and have access to a handheld Quantum Data 780C tester to allow for on-site verification testing and troubleshooting of HDMI and digital video networks and analog video displays. All test equipment used shall be factory calibrated within one year of use with references set daily prior to testing.
13. Contractor shall provide HDCP compliant device with digital cables, and digital HDCP content for testing of routing and HDCP compliant distribution and switching. Also provide analog VGA output equipment for testing of video switching, scaling, and distribution if analog is included with this project.
14. Horizontal cabling contractor shall test all twisted pair cabling used within the AV system following the standards in specification 27 1500 under the testing section. Provide documentation of testing to AV Consultant prior to final walk through.

B. At the time of final commissioning, if the AV consultant determines that the systems are not sufficiently complete to do a final punch list, and was not notified at least 3 days prior to the visit, then a return visit will be required. The AV Consultant's return visit will be paid for in advance by the AV integrator at a flat rate of $1,200 per person, at no cost to the owner.

3.5 OPERATING AND MAINTENANCE MANUALS: Refer to Section 26 0502 for requirements.

3.6 TRAINING:

A. Provide four (4) sessions of two (2) hours each of training on the operation of each system, at job site, at no cost to owner.

B. Training shall be video recorded. Two (2) DVD copies shall be given to the owner.

C. The second training shall take place within a month of the first training and all questions shall be answered.

D. Contractor shall be present at the first performance using the system within rooms listed below. Owner will coordinate with contractor 3 weeks in advance for personal trained on the system to help with the show and be onsite in-case there are any problems. AV Contractor to provide this within their bid.

1. Multipurpose room

3.7 RECORD DRAWINGS: Refer to Section 260502 for requirements.

END OF SECTION 274100

SECTION 275123 - INTERCOMMUNICATION SYSTEMS

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26, 27 & 28 basic materials and methods sections apply to work specified in this section.

C. Refer to specification 260553 conduit and junction box color requirements.

D. Refer to specification 271500 for category and/or optical fiber cable and connectivity specifications.

E. All unshielded category 'UTP' and/or optical fiber cable, for AV equipment, used on this projector shall match the horizontal cabling within the building.

1. Category cables used for transporting video, audio and controls simultaneously from transmitters to receivers and/or switchers shall follow the Manufacturer's recommend cabling specifications.
2. Division 271500 shall provide installation and execution requirements for all category and/or optical fiber cabling and connectivity required within the audiovisual system

1.2 ADMINISTRATIVE REQUIREMENTS:

A. Bid Submittal:

1. Equipment Costs: Breakout cost of material and labor as different line items.
2. Provide separate line items for each section that you are being bid on.
    a. Contractor shall not provide a single number with all of the sections/scopes combined.

B. All bids shall be based on the expansion of the school district's existing Intercommunication and Bell Schedule Server Systems and must be compatible with Audio Enhancements - Epic System - No Exceptions. Equipment as specified herein is part of the Epic System.

1. Contractor wanting to bid on IP intercom alternate shall submit eight (8) working days prior to bid the system they intend to provide. System shall meet all requirements listed below with no exceptions.

C. Coordination:

1. Coordinate final inspection of the systems installed, with Audiovisual (AV) Consultant, three (3) weeks in advance.
2. Obtain GANTT chart for construction time frame from the General Contractor.
3. Coordinate with Electrical contractor to meet at least twice with the ceiling installer. Hold first meeting before submittal of shop drawings to coordinate the mounting condition of all ceiling-mounted AV equipment with ceiling type. During second meeting, coordinate the location of all ceiling-mounted AV equipment in each area.
4. Meet at least once with the mechanical installer prior to fabrication and installation of duct work. Coordinate depth and location of all loudspeaker and duct work in all areas.
5. Meet with Electrical contractor prior to pathway rough-in to coordinate Intercom system requirements in each area.
6. Meet at least once, prior to rough-in, with horizontal cabling installer to verify all required drop points are accounted for. Coordinate cable color according to specification 26 0553 and 27 1500.
7. Coordinate all AV system components within millwork/furniture with millwork shop drawings prior to rough-in.
8. Meet at least twice with owner to coordinate network requirements. Hold the first meeting before submittal of shop drawings to coordinate network protocols, including but not limited to: IP address schedules, MAC address schedules, patchbay schedules, security requirements, and VLANs. Hold the second meeting prior to system deployment.
9. Meet at least twice with owner to coordinate security system integration. Hold the first meeting before submittal of shop drawings to coordinate microphone placement and security tie in requirements. Hold the second meeting prior to system deployment.
10. Coordinate color (including custom color) and finish of all AV system components with Architect prior to ordering. Architect may require custom color of grills, face plates, etc.. Intercom contractor shall paint or have devices painted by others. The cost for custom colors shall be within the Intercom Contractors Bid.
11. Coordinate all system components within millwork/furniture with millwork shop drawings prior to rough-in.

1.3 DESCRIPTION OF WORK:

A. The work covered by this section of the specifications shall include all material, labor, hardware, software, firmware and programming to install a completed and operating system as described herein and shown in the drawings. The system shall utilize the schools shared data network, and not require the use of any proprietary switches, routers, or other network components. Beyond the shared data network hardware, the rest of the system shall be complete with all necessary materials, labor, hardware, software, firmware and programming specifically tailored for the installation. It shall be possible to permanently modify the software on site by using a system administrator software network interface.

B. This section includes a fully operational IP platform for school internal communications system incorporating school safety notifications and general communications including but not limited to the following:

1. Classroom systems and common zone network interfaces shall be capable of utilizing standard Category based infrastructure, Category 6 or better, for installation from the intermediate distribution frames only to the classroom and/or zone, allowing for only one type of wiring infrastructure within the school. Distribution of all voice signaling shall utilize a shared or dedicated IP network.
2. The platform shall provide complete internal communications employing SIP (Session Initiation Protocol) including the minimum functions listed.

    a. Integration with any VoIP telephone system using SIP type integration. It shall allow the school(s) to upgrade or replace their telephone system without requiring the owner to replace, or lose any feature of, their internal communications (intercom) system.

    b. Support a SIP trunk from the building's VOIP phone system to provide hands free two-way communication from all administrative telephones to any location equipped with a talkback speaker or audio system with room microphone

    c. Provide its own SIP environment, and in the case of a failure of the schools VoIP telephone system, be capable of operating completely independently for all functions, except access from the handsets connected to the schools VoIP system.

    d. Access remote classrooms (trailers, temporary classrooms etc.) via IP interface or room audio system with room microphone. It shall provide intercom, class change tones, emergency tones, and normal / emergency paging via a wired network to these remote locations.

    e. Integrate with the classroom sound amplification system (CSAS) and utilize the same loudspeakers as the CSAS.

3. Emergency announcement that will override any pre-programmed zones assuring that all Emergency/Lockdown etc., are heard at each and every loudspeaker location.
4. The system shall be a software-controlled system, whose primary interface is a web-based portal, accessible from any authorized computer.
5. Provide a map-based user interface. All major functions, including intercom, paging, notifications and alerts shall be done using the map as the foundation for those actions.
6. Bell Event announcement

    a. Bell Schedules shall be easily assigned to days and changed simply with authenticated access to the system through any browser-based device.

    b. Provide a simple calendar-based scheduling system for bells. It shall provide the ability to have an unlimited number of bell schedules.

c. Provide a calendar-based scheduling up to four years in advance. The system shall be capable of displaying a fully year calendar and differentiating which bell program is scheduled to run on each day in an easy-to-read format. The calendar shall be based on a standard school year and provide a selectable start month.

d. Provide the ability to initiate school safety paging announcements, evacuation tones and take cover tones from any telephone within the facility or outside the facility to any other location within the facility or district.

7. Capability of prerecording normal/emergency announcements that can be activated by a Soft Key or via a dedicated call-switch.
8. The system shall utilize a shared data network (VLAN enabled) or dedicated network as means of distribution for all voice overhead paging, emergency paging, emergency tones, intercom, and class change tones.
9. The system shall provide two I/O Ports on each classroom network interface, and common zone network interface which can be used as programmable inputs or outputs to control contact closures. Contact closures can be activated manually to turn on cameras, unlock doors, emergency lockdown, etc.
10. The system shall provide a flexible and robust event engine, and in addition to pre-programmed events and actions, the event engine shall be capable of accepting Java based programming to accomplish advanced integrations and functions.
11. The system shall automatically broadcast emergency instructions throughout the entire school when an alarm (e.g. lockdown, lockout, security, fire) is tripped or manually activated. The emergency instructions shall be preprogrammed and require no user intervention. The system shall provide a redundant alarm annunciation over intercom/paging speakers and is not meant to replace primary fire alarm or security systems.
12. The system shall have the capability of maintaining a record of all alerts that are received and provide appropriate school personnel the capability to enter information about the alert, which shall be maintained in the systems database. That information shall also be made available to appropriate school personnel in the form of a report that shows all alerts that have occurred, their date, time, and the end alert information.

C. Equipment submitted in bid proposal that has not been approved by AV Consultant in writing will not be accepted and shall be replaced by approved equipment at contractor's expense. Equipment not listed within this specification, or contract documents, that are required for a complete and working system, shall be of professional grade and used in the same manner as needed for a complete and working system.

D. Input plates shall match the color and style being used throughout the project.

E. Contractor is responsible for coordinating with all other trades for equipment locations, mounting requirements, supports and plenum space requirements.

F. All cabling shall be installed in a minimum of 1" conduit to accessible ceiling space unless otherwise noted. Provide conduit to accessible ceiling space and then utilize non-

continuous open top cable supports every 5'.

G. Intercom contractor shall participate in a mandatory pre-construction meeting no more than sixty (60) days prior to ordering equipment, and before work can begin. Contractor is responsible for coordinating meeting. The meeting will be held at AV Consultant's office. All submittals, shop drawings, and bill of materials shall be completed and submitted to AV Consultant for review eight (8) working days prior to this meeting.

1. Intercom contractor shall attend the electrical pre-construction meeting per specification 260500.

1.4 QUALITY ASSURANCE:

A. Manufacturers:

1. Firms regularly engaged in manufacture of sound equipment, components and accessories, of types, capacities and characteristics required, whose products have been in satisfactory use in similar service for not less than 5 years. Equipment supplier shall be authorized representative of the manufacturer of each major piece of equipment and be currently authorized by the manufacturer to furnish, install and service that particular equipment.
2. System shall be compatible with the districts security system.

B. Installer:

1. Qualified with at least 5 years of successful installation experience with similar systems.
2. Integrating firm shall have worked satisfactorily for a minimum of (5) years of completing systems equal to this scope, quality, type and complexity.
3. Key personnel assigned to the project shall each have minimum of (10) years of experience in completing systems equal to this scope, quality, type and complexity.
4. Contractor shall be a factory authorized distributor of all equipment specified for the geographical area of the project.
5. Contractor shall maintain complete installation and service facilities for the duration of the project contract.
6. Contractor shall have current manufacturer certificates for system and equipment listed within this specification.
7. All contractors biding on this project must have local representation that is within 4 hours of the job site.

C. Contractor must follow the standards described within:

1. BICSI/AVIXA AV Design Reference manual.
2. ANSI/AVIXA 2M-2010 Standard guide for Audiovisual Systems Design and Coordination Processes.
3. ANSI/AVIXA 10:2013 Audiovisual Systems Performance Verification Guide.

D. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction.

E. Comply with NFPA 70 and with NEMA Standard SB-40 for Emergency Communications in K-12 schools.

F. Comply with UL 60950.

1.5 SUBMITTALS: Refer to Section 260502 for requirements.

1.6 WARRANTY:

A. Systems shall be guaranteed for a period of one (1) year from the date of substantial completion against defective materials, inferior workmanship or improper installation adjustment. Guarantee shall cover all parts and labor.

B. If system failure causes audiovisual system to be inoperative or unusable for its intended purpose, contractor, when notified of the problem, shall repair system so it will be operational and usable within three (3) business days. If defective components cannot be repaired in time, provide temporary equipment as required.

C. Contractor shall supply one (1) year warranty on all system programming from the date of substantial completion. During this time period, upon owner request, the contractor shall provide programming changes up to four (4) sessions free of charge. During this time the programs shall be password protected. At any time during the one (1) year, the owner can terminate the warranty and request the programming of each system. At this time the programs are to be turned over to the owner and all passwords are to be removed. The owner shall own all rights to the programming after this time, to be used in this facility.

D. Contractor shall honor equipment warranties for term established by manufacturer if greater than warranty time frame mentioned above. Equipment for the project shall not be purchased until ready to be installed/programmed. Manufacturer warranties for this project shall extend more than 2/3rd of their term past substantial completion. Example, a three (3) year manufacturer warranty shall have more than two (2) years left once substantial completion has occurred.

E. Prior to the end of the one (1) year warranty. The Intercom Integrator shall preform the following:

1. Three (3) months prior to end of warranty remind the owner and AV Consultant that the end of the warranty is approaching. At this time coordinate the events below with the owner and notify the AV Consultant of the time of the walk through(s).
2. One (1) month prior to end of warranty, walk through campus and verify all components are working. Supply list of components with location, type equipment and status to the AV Consultant and Owner. Correct any and all

malfunctions as necessary.

PART 2 - PRODUCTS

2.1 GENERAL:

A. The platform shall utilize IP network Technology, Call-in Notification, School Paging and Evacuation tones, IP infrastructure, Atomic Time Synchronization with Class Change Tones utilizing multiple, programmable schedules for each zone, Two-way hands-free Internal Intercommunications and Paging, and Program Distribution. The system shall be easy to learn and operate. All standard programming shall be web based and user friendly to allow the system administrator the ability to easily program system features.

B. Provide complete and satisfactorily operating school communications and school safety as described herein, using materials and equipment of types, sizes, ratings, and performances as indicated. Use materials and equipment that comply with referenced standards and manufacturers' standard design and construction, in accordance with published product information. Coordinate the features of all materials and equipment so they form an integrated system, with components and interconnections matched for optimum performance of specified functions.

C. Each Classroom shall be provided with a call-in momentary contact button, microphone, and integration with classroom sound amplification system.

D. All main components and software shall be distributed from (1) manufacturer and be a complete system. This includes; Software and IP Endpoints, excluding the VoIP telephone system.

E. Intercom paging system power and network intercom interface:

1. Shall allow users to install intercom paging systems spanning multiple building or facilities connected through a VLAN. Provide a 100/1000 Ethernet switch port configured on a dedicated VLAN.
2. All Network interfaces used in the classroom and for the common zones shall be powered via PoE from the district provided network switches.

    a. PoE switches and network cabling from MDF (Main Distribution Frame) and IDF (Intermediate Distribution Frame) to devices provided by others.

F. All network switches shall include an uninterruptable power source to provide adequate runtime. In the event the school has a generator the UPS systems shall hold the switches long enough until generator power can be provided. Customer to provide all necessary UPS for network switches.

2.2 SYSTEM FUNCTIONS/SOFTWARE

A. Server and Server software:

1. Software-controlled system, whose primary interface is a web-based portal, accessible from any authorized computer. The system shall support being deployed on physical server hardware.

    a. The system shall utilize a 1U rack server, operating as an appliance, and dedicated to the operation of this system only.
    b. The entire system shall be Linux based.
    c. (4) HDD Bays with (2) 240 GB SSD drives in a RAID 1 configuration
    d. Dual 1 Gbps Ethernet ports, 1 dedicated server on board management NIC/ethernet port.
    e. Intel Xeon Processor 3.5 GHz with 16 GB DDR4 2400 MHz RAM
    f. Redundancy:

        1) RAID1
        2) Dual power supplies
        3) Hot swappable hard drives.

2. The system shall be based on standards compliant SIP and RTP communications across the network and shall allow direct Trunk Integration to the VoIP telephone system.
3. The system shall provide a simple calendar-based scheduling system for bells. It shall provide the ability to have an unlimited number of bell schedules.
4. Provide a map-based user interface. All major functions, including intercom, paging, notifications and alerts shall be done using the map as the foundation for those actions. Paging shall clearly show on the map where the page audio will be transmitted to.
5. The system shall support utilizing a shared data network and support (VLAN [Virtual Local Area Network] enabled) or dedicated network as means of distribution for all voice overhead paging, emergency paging, emergency tones, intercom, and class change tones. System shall support routing of traffic across multiple subnets and network segments.
6. Bell Event announcement.

    a. Bell Schedules shall be easily assigned to days and changed simply with authenticated access to the system through any browser-based device.
    b. Provide a simple calendar-based scheduling system for bells. It shall provide the ability to have an unlimited number of bell schedules.
    c. Provide a calendar-based scheduling up to four years in advance. The system shall be capable of displaying a fully year calendar and differentiating which bell program is scheduled to run on each day in an easy-to-read format. The calendar shall be based on a standard school year and provide a selectable start month.

d. Provide the ability to initiate school safety paging announcements, evacuation tones and take cover tones from any telephone within the facility or outside the facility to any other location within the facility or district.

7. The system shall automatically broadcast page emergency instructions throughout an entire school when an alarm (e.g. lockdown, lockout, security, fire) is tripped or manually activated. The emergency instructions shall be preprogrammed and require no user intervention. The system shall provide redundant alarm annunciation over intercom/paging speakers and is not meant to replace primary fire alarm or security systems
8. User access:

    a. Provide discreet control over roles for the system. Roles shall be definable down to the individual feature level and provide the district with the ability to restrict or grant access to any roll individual features or groups of features.
    b. Web based administration programming tool which allows the administrative personnel to easily manage audio sources, class change schedules, paging groups, time updates, holiday schedules and day/night mode operation from a web browser.
    c. Fully integrated with the school's existing LDAP or active directory system.
    d. Be based on a database structure, utilizing a robust commercially available database such as SQL.
    e. Provide web browser access to the system specifically for a teacher. Teacher access shall be assigned through LDAP or active directory. The teacher screen shall provide information specific to the room that the teacher is assigned to. That information shall consist of, but not limited to, the next scheduled event for the room (Bell, Announcement, etc.), teacher name, room number, an intercom call button, and an emergency call button.
    f. Provide for a complete personal alert function for each teacher. The alert functionality shall be an integrated part of the administrative head end software and shall not require any separate application or hardware to support this functionality.

        1) The teacher personal alert functionality shall be integrated into the classroom microphones and the teacher web screen.

9. Have the ability to synchronize to the same NTP server utilized for the Master Clock system.
10. Ability to monitor operations and functions of the system.
11. Provide web-based off-site programming and diagnostics of the system. It shall also be capable of determining basic circuit faults.
12. Provide the ability for the school to upload their own recorded files for both Bell Tones, and Notifications.

13. The system shall provide the ability to initiate school safety paging announcements, evacuation tones and take cover tones from any telephone within the facility or outside the facility to any other location within the facility or district.
14. IP-enabled two-way voice communication shall be available from any provided telephone or administrative console through any speaker in the system. This shall allow hands-free communication to any classroom or any individual loudspeaker unit. A pre-announce tone shall sound immediately before the intercom path is opened.
15. Display the location of the alert on the map in the case of a wireless microphone being within range of its paired receiver, or from the teacher's web access screen. The system shall also be capable of approximately locating the location of the alert in the case of a wireless microphone that is not in range of its paired receiver.
16. Upon alert, the system shall:

    a. Have the ability to provide notification on the dedicated console at the front office, or on any other computer which is currently logged into the administrative interface and has the appropriate credentials.
    b. Provide both an audible tone, and a change on the screen that clearly indicates that an emergency alert has been received.
    c. Capable of sending e-mail and SMS text messages to designated school personnel. These alerts shall include a web link to the administrative console.
    d. Acknowledge the receipt of the alert by changing the indicators on the classroom microphone receiver in the room where the alert was received from. In the case of an alert received from a microphone not in range of its paired receiver, no acknowledge shall be sent.
    e. If cameras are installed in the classrooms, the system shall be capable of showing a live video from the classroom that received an alert. This shall only be shown in the case of an alert where the microphone is within range of its paired receiver.

17. The system shall contain a rules-based integration engine that allows for input of TCP, HTTP, or Serial Data and allows for the parsing of data for actions or triggering other systems via TCP, HTTP or Serial.
18. The system shall support digital message displays that provide visual feedback in the form of scrolling messages via an LCD or LED display all controlled from the network.
19. The system shall have the ability to carry IP Communications to the edge of the classroom Audio/visual Systems. It shall be able to control connected A/V Devices, provided that those devices are controllable by RS-232.

B. Intercom Paging System Administrative Console:

1. The administrative console shall be customizable, flexible and provide full access to the intercom paging system.
2. Console shall be micro-computer based running a Linux OS and run in a Kiosk mode locking the user into the intercom screen.

3. The supplier is required to provide a dedicated touch screen console as noted within the drawings, with a minimum size of 22" Diagonally. The Console shall not require the district to provide any additional hardware, software or licensing. The Console shall also provide a boom microphone attached via USB to the console for paging/intercom use.
4. Administrative access to the system shall be browser based and shall also be capable of being any administrative computer.
5. Functionality to provide full access to all features such as all call, paging groups, emergency tones, control music, WAV file distribution, test rooms, crisis mode, schedules, etc.

C. IP addressable Module for non-classroom zones (Audio Enhancement – MS-300):

1. Full Duplex, hands-free communications on intercom call
2. Amplifier powered only by the PoE power source for emergency paging applications
3. Mounting bracket as required, refer to drawings for location and mounting requirements identified on plans as follows:

    a. Individual zones "Z-ID"
    b. Common zones with "Z-#X#"

4. Connections – The following connections must be available:

    a. Line-level Output
    b. Two (2) External I/O Connections – Terminal Block
    c. RJ45 for PoE Network Connection
    d. Serial interface for connecting to other equipment or SAFE compatible equipment.

5. Speaker Connection that is powered exclusively by the PoE power from the network that can drive up to two (2) loudspeakers.
6. Integrated Network-Based Communications shall support the following protocols:

    a. Directed UDP
    b. Unicast Audio
    c. Multi-Cast Audio
    d. SIP

7. The system must have integrated SIP communications and be able to communication bi-directionally with any VoIP communications system that follows the standard SIP protocols.

D. IP-addressable Module for classrooms:

1. Classroom IP addressable modules will be provided as part of specification 27 4100 and included in 27 4100 Contractors scope of work. Intercom contractor shall provide all programming for device. 27 5123 Contractor to coordinate with

0 24/70V transformer. 92dB SPL 1W/1M with 99dB max SPL at maximum tap. 65Hz – 17kHz frequency response ±3dB and 100-degree dispersion angle.

a. Quam – System 12 or equal
b. 2'x2' ceiling tile replacement loudspeaker with 5 oz. magnet and 5 watt 24/70V transformer. 92dB SPL 1W/1M with 99dB max SPL at maximum tap. 65Hz – 17kHz frequency response ±3dB and 100-degree dispersion angle.

2. Type 'IC2' - loudspeaker assembly (hard lid ceiling):

a. Atlas – SD72W w/ 76-8 mounting ring and BMTT95-8 enclosure
b. Quam – C10X/BU/WS w/ SSB-7 mounting ring and ERD-8U enclosure
c. Gyp loudspeaker with 10 oz. magnet and 5 watt 24/70V transformer. 95dB SPL 1W/1M with 102dB max SPL at maximum tap. 60Hz – 8kHz frequency response ±3dB and 90-degree dispersion angle.

3. Type 'IC3' - loudspeaker assembly (structurally mounted):

a. Atlas – SD72W w/ BMTT95-8 enclosure
b. Quam – C10X/BU/WS w/ ERD-8U enclosure
c. Open ceiling direct mount to structure loudspeaker with 10 oz. magnet and 5 watt 24/70V transformer. 95dB SPL 1W/1M with 102dB max SPL at maximum tap. 60Hz – 8kHz frequency response ±3dB and 90-degree dispersion angle.

4. Type 'IC4' - loudspeaker assembly (lay-in tile IP);

a. Intercom Manufacturer specific assembly with an IP Addressable module and loudspeaker.

5. Type 'IW1' - loudspeaker assembly (recessed wall mount interior):

a. Quam – 8C5PAX/TBLU w/ ES-8 enclosure and BS8W grill
b. Indoor recessed wall 8" loudspeaker with 5 oz. magnet and 5 watt 24/70V transformer. 92dB SPL 1W/1M with 99dB max SPL at maximum tap. 65Hz – 17kHz frequency response ±3dB and 100-degree dispersion angle.

6. Type 'IW2' - loudspeaker assembly (recessed wall mount exterior):

a. Atlas – VTF-152UCN or VTF-157UCN w/ AR Adapter Ring
b. Exterior recessed wall 4" loudspeaker with 5 watt 24/70V transformer. 96dB SPL 1W/1M with 107dB max SPL at maximum tap. 600Hz – 5.5kHz frequency response ±5dB and 170-degree dispersion angle.

7. Type 'IW3' loudspeaker assembly (exterior hour):

a. Atlas – AP-15T

b. Exterior Horn with compression driver and 15 watt 24/70/100V transformer. 106dB SPL 1W/1M with 120dB max SPL at maximum tap. 400Hz – 14kHz frequency response ±5dB and 70-degree dispersion angle.

E. UPS – Juice Goose – SCV-20001 or equal

1. Contractor to verify UPS load requirements prior to purchase of UPS. Intercom system shall maintain power for 30 minutes after building loses power.

F. Clocks:

1. Clocks shall be battery powered. The contractor shall provide a fresh battery and install each clock set to the correct local time. Room types will have different size requirements.
2. 12" clock – American Time and signal – E56BAQD304BF

a. Provide 1 clock per the following room types:

1) Learning Studio/Classrooms
2) Collaboration Area
3) Offices
4) Work rooms
5) Conference rooms

3. 15" clock – American Time and signal – E66BAQD304BF (Recreational Space Clock)

a. Provide 1 clock per the following room types:

1) Gymnasiums (provide 1 on each side of the dividing curtain)
2) Music rooms
3) Shops
4) Kitchen
5) Commons/learning stairs
6) Media center

4. Provide wire guard on all clocks in locations where other devices are protected. Coordinate with fire alarm plans for locations requiring wire guards.

2.3 INTERCOMMUNICATION, PROGRAM DISTRIBUTION, CLOCK/TIME SIGNALING SYSTEM

1. Separately addressable paging zones shall be provided as indicated on the drawings. Zones shall be capable of being grouped for various call scenarios as defined or requested by the owner.
2. Refer to the intercom drawings for identification of zones, zone types, and ceiling construction type.

a. Individual zones are designated with “Z-ID”
b. Common distributed zones are identified with a unique zone number “Z-#X#”.

3. Space requirements:

a. Classrooms/Teaching spaces.

1) The IP module/loudspeakers for each space shall be utilized for the intercommunication system.
2) One (1) Call switch shall be provided in each room near the CSA antenna location. Refer to drawings for location of devices.
3) One (1) Clock located above the entrance door.

b. Shared spaces between Classrooms/Teaching spaces.

1) The IP module/loudspeakers for each space shall be utilized for the intercommunication system.
2) One (1) Call switch shall be provided on the wall adjacent to the main hallway.
3) One (1) Clock located above the entrance door.
4) These rooms will be used as shelter in place rooms for adjoining classrooms.

c. Specialty Teaching spaces with high ambient noise floor (Wood/Metal/AG shops).

1) Distributed ceiling recessed loudspeakers (Qty. as required) at 14’ by 14’ minimum spacing, type as required for ceiling construction.
2) Visual strobe
3) One (1) Call switch shall be provided at the primary teaching station. Coordinate location of primary teaching location with drawings.
4) One (1) Clock located above the entrance door

d. Private Offices, Conference rooms, Faculty Lounges & Work Rooms (outside of the main office/administration suite)

1) One (1) ceiling mounted loudspeaker, type as required for ceiling construction.
2) Connect to adjacent corridor zone you enter the office from
3) Offices off of a classroom shall be on the same zone as the classroom
4) Gymnasium

e. Gymnasium

1) Ceiling mounted loudspeakers, Qty. and type as required for ceiling construction and adequate coverage (< 6dB level variation).
2) One (1) Call switch shall be provided co-located with any light switches adjacent to each entrance.

f. Cafeteria/Commons/Dining

1) Ceiling mounted loudspeakers, Qty. and type as required for ceiling construction and adequate coverage (< 6dB level variation).

g. Kitchen

1) Ceiling mounted loudspeakers, Qty. and type as required for ceiling construction and adequate coverage (< 6dB level variation).
2) One (1) Call switch shall be provided co-located with any light switches adjacent to main entrance.
3) Within the Kitchen office provide a two-way system with call button and loudspeaker.

h. Corridors, Vestibules & Open Collaboration/Circulation areas

1) Distributed ceiling recessed loudspeakers (Qty. as required) at 20’ minimum spacing, type as required for ceiling construction.
2) Rooms that are wider than 25’ shall require an additional row of loudspeakers and located on a maximum of a 20’ x 20’ spacing centered in the room.
3) Coordinate with ceiling devices and locate adjacent to smoke detectors when within few feet of one. Loudspeakers shall be in line with any lighting within the space
4) Provide a minimum of one (1) loudspeaker for each space type

i. Stairwells

1) One (1) ceiling mounted loudspeaker, type as required for ceiling construction.
2) Connect to the adjacent corridor zone.

j. Restrooms

1) One (1) ceiling mounted loudspeaker, type as required for ceiling construction.
2) Connect to the adjacent corridor zone
3) Do not provide loudspeakers in single use restrooms adjacent to a corridor zone.

k. Administration Suite (Private offices, Conference rooms, Nurse areas, work rooms, reception, etc. within the main administration suite)

1) Distributed ceiling recessed loudspeakers (Qty. as required) at 20’ minimum spacing down corridors and 14’ x 14’ in open areas, type as required for ceiling construction.
2) Provide a minimum of one (1) loudspeaker for each space type.
3) Provide a minimum of one (1) loudspeaker on an individual zone in the reception area. General pages from the reception area shall not play over this zone, it shall only be used for prerecorded messages.

l. Building Exterior

1) Distributed recessed loudspeakers (Qty. as required) to cover all sides of the building and all entrances.
2) Coordinate and co-locate loudspeaker rough-in with exterior fire alarm horn strobe locations.
3) Provide unique zone for each side of the building (North/South/East/West)
4) Provide ‘IW3’ type loudspeakers on areas with:
    1. Playground equipment
    2. Fields
    3. Other play surfaces
5) Provide ‘IW2’ type loudspeakers on the front of the building and in locations where the property line is less than 30’ from the building.

m. Rooms smaller than 100 sqft and that are adjacent to a corridor/hallway will not require a loudspeaker when an announcement is audible within the room. Audible within the room shall be defined as 15 dB above the ambient noise within the room.

1) Vestibules are excluded from small rooms and will require a loudspeaker tied to the adjacent corridor zone.

B. All class-change bell signaling shall be sounded over the intercommunication system.

1. Each dialing administrative console in the system shall be programmable for the following options:

a. Allow zone paging.
b. Allow All-Page announcements.
c. Allow Executive Override.
d. Allow Emergency paging.
e. Allow activation of Time Zone tones.
f. Set the priority level and target display of "normal" calls.
g. Set the priority level and target display of "emergency" calls.

h. Assignment of architectural number.
i. Class of Service.
j. Assignment of associated speaker to paging zone.
k. Automatic Call-Back-Busy.
l. Call Forward-No Answer.
m. Call Forward-Busy.
n. Allow activation of security monitoring functions on a per room and per zone basis.

C. All class-change signaling shall be sounded over system loudspeakers as programmed.

PART 3 - EXECUTION

3.1 GENERAL

A. Wiring shall be installed in metallic conduit and provided with necessary junction and pull boxes. All wiring shall be color coded and in accordance with the manufacturer's instructions, local and national codes. Care shall be exercised in wiring to avoid damage to the cables. All boxes shall be plumb and square. Cables shall be pulled continuous without splicing, leaving ends in lengths as directed by the manufacturer's representative.

B. After all circuits and cables have been pulled and completed from one extremity to the other, the electrical contractor shall check all circuits free of opens, shorts and grounds. The electrical contractor shall identify and tag all cables at the head end.

C. The manufacturer's representative shall make all final connections to the equipment, shall test and adjust the systems, and shall instruct the proper parties as to care and operation.

D. Any additional equipment required for a fully functional system to meet the intent of the specifications shall be provided whether or not specifically listed herein.

3.2 INSTALLATION OF SOUND SYSTEMS:

A. Install sound systems as indicated, in accordance with equipment manufacturer's instructions, and with recognized industry practices, to ensure that system equipment complies with requirements. Comply with requirements of NEC and applicable portions of NECA's "Standard of Installation" practices.

B. Equalize systems using industry recognized practices and equipment.

C. Pathway Requirements:

1. General:

a. All pathways shall be designed, constructed, grounded and installed in accordance with all recommendations delineated within TIA 569-B and Standard TIA 942.
b. Prior to placing any cable pathways or cable, the contractor shall survey

the site to determine job conditions will not impose any obstructions that would interfere with the safe and satisfactory placement of the cables. Arrangements to remove any major obstructions not identified on plans need to be determined at that time with the Engineer.

2. Conduits:

   a. Contractor shall provide a minimum of 1-1" EMT conduit from device to cable tray, unless otherwise noted, for device connections exiting the room. Refer to symbol schedule for specific conduit requirements.
   b. Achieve the best direct route parallel with building lines with no single bend greater than 90 degrees or an aggregate of bends in excess of 180 degrees between pull points or pull boxes.
   c. Provide large radius elbows on all bends.
   d. Conduit runs shall not have continuous sections longer than 100 feet without a pull box. Refer to rough-in schedule for conduit fill capacity.
   e. AV conduits should not be routed over or adjacent to heat sources such as boilers, hot water lines, or steam lines. Neither should they be routed near large motors, generators, photocopy equipment, or electrical power cabling and transformers.
   f. After installation, conduits shall be clean, dry, unobstructed, capped for protection, labeled for identification, reamed and fitted with bushings.
   g. A 200lb pull cord (nylon, 1/8" minimum) shall be installed in any empty conduit.

3. Open Top Cable Support Requirements:

   a. Non-continuous cable supports shall provide a bearing surface of sufficient width to comply with required bend radii of high-performance cables
   b. Non-continuous cable supports shall have flared edges to prevent damage while installing cables.

4. Pull Box Requirements:
   a. NEC sized pull boxes are not acceptable. Follow BICSI and EIA/TIA 569-B guidelines for pull box sizing.
   b. Provide pull boxes in sections of conduit that are 100 feet or longer, contain more than two 90 degree bends, or contain a reverse bend.
   c. Conduits that enter a pull box from opposite ends should be aligned.
   d. Pull boxes shall have a length 12 times the diameter of the largest conduit.
   e. All pull boxes must be accessible.

D. Cabling System:

1. Follow T568B scheme for copper category cabling terminations.
2. Provide a minimum 6" service loop in each AV system junction box. Cables shall be coiled in the in-wall boxes if adequate space is present to house the cable coil

without exceeding manufacturers bend radius.

3. In a false ceiling environment, a minimum of 3 inches shall be maintained between cable supports and false ceiling. At no point shall cable(s) rest on lay-in ceiling grids or panels.
4. Cable shall be installed above fire-sprinkler systems and shall not be attached to the system or any ancillary equipment or hardware. The cable system and support hardware shall be installed so that it does not obscure any valves, fire alarm conduit, boxes, or other control devices.
5. Cables shall not be attached to ceiling grid seismic support wires or lighting fixture seismic support wires. Where support for AV cable is required, the contractor shall install appropriate carriers to support the cabling.
6. Any cable damaged or exceeding recommended installation parameters during installation shall be replaced by the contractor prior to final acceptance at no cost to the Owner.
7. Pulling tension for balanced twisted pair shall not exceed 25lbf and for optical fiber shall not exceed 50lbf.
8. Pair untwist at the termination shall not exceed 0.125". The cable jacket shall be maintained as close as possible to the termination point.
9. Cable shall not be draped on, tied or otherwise secured to electrical conduit, plumbing, ventilation ductwork or any other equipment. Cable shall be secured to building supports or hangers or to additional blocks or anchors specifically installed for this purpose.

E. Cabling groups and conduit separation:

1. Refer to "CABLING GROUPS AND CONDUIT SEPARATION SCHEDULE".

F. Firmly secure all equipment in place that is not intended for portability.

G. Mount projectors permanently and provide mechanical index ensuring precise alignment of the projected image.

H. Provide adequate structural support for AV system components. Provide fastenings and supports with a safety load factor of at least five.

3.3 GROUNDING:

A. All grounding and bonding shall be done according to ANSI J-STD-607-A, TIA 942, and NEC.

B. All cabinets/racks shall utilize paint piercing grounding washers, to be used where rack sections bolt together, on both sides, under the head of the bolt and between the nut and rack.

C. All racks shall further utilize a full-length rack ground strip attached to the rear of the side rail with the thread-forming screws provided to ensure metal-to-metal contact. Similar to Panduit RGS.

D. All active equipment shall be bonded to ground. If the equipment manufacturer provides a location for mounting a grounding connection, that connection shall be utilized. All active equipment shall be bonded using the appropriate jumper for the equipment being installed using the thread-forming screws. Similar to Panduit RG.

E. Racks shall have individual, appropriately sized conductors bonded to the grounding backbone. Do not bond racks or cabinets serially – daisy-chained rack grounds will not be accepted.

F. Refer to electrical diagrams for additional ground connection requirements.

3.4 LABELING

A. The contractor shall develop and submit for approval a labeling system for the cable installation. The Owner will negotiate an appropriate labeling scheme with the contractor. At a minimum, the labeling system shall clearly identify all components of the system: racks, cables, panels and wall plates. The labeling system shall designate the cables origin and destination and a unique identifier for the cable within the system. All labeling information shall be recorded on the as-built drawings and all test documents shall reflect the appropriate labeling scheme.

B. All labels shall meet UL 969 requirements for legibility, defacement and adhesion requirements. Handwritten, Ink, or Laser Printing labels are not allowed. Labels shall be uniform in physical size and text height with minimal blank space. Provide labels using thermal transfer print. Heat shrinking or wraparound labels are required, flag style labels are not allowed.

C. Provide laminated plans (minimum size 11x17) of all Intercom as-built plans (including riser diagrams) intercom rack. Contractor shall be responsible for providing a 1RU drawer.

D. Label each equipment with the date (month/year) that it was installed along with the IP address, if applicable, and equipment type.

3.5 CYBER SECURITY

A. Contractor shall change all default username and passwords for all network devices provided. A Strong Password should include at a minimum the following:

1. Be at least 12 characters in length
2. Contain both upper and lowercase alphabetic characters (e.g. A-Z, a-z)
3. Have at least one numerical character (e.g. 0-9)
4. Have at least one special character (e.g. ~!@#$%^&*()_-+=)
5. Cannot contain full words

B. No written username or passwords shall be located in any areas of installation.

C. Network devices to be set up on a separate network other than owner's LAN ensuring no internal or external users can access system without authorization.

D. Follow manufacturers hardening guide and use best industry practices to secure network and devices provided by contractor and associated with system.

3.6 FIELD QUALITY CONTROL

A. Manufacturer's Field Services:

1. Provide services of a duly factory authorized service representative for this project location to supervise the field assembly and connection of components and the pre-testing, testing, and adjustment of the system.

B. Inspection:

1. Make observations to verify that units and controls are properly labeled, and interconnecting wires and terminals are identified. Provide a list of final tap settings of paging speaker line matching transformers.
2. The installation technician from the installer / manufacturer shall perform all system tests as specified. Perform all tests in the presence of the Owner, Architect / Engineer and any designated personnel as deemed necessary by the Owner or Architect / Engineer. This test shall be performed with the devices at their operational location and under normal operational conditions. Bench or default settings for devices are not acceptable. All test and test report costs shall be included in the contractors bid. A checkout report shall be generated by the installation technician and submitted to the Owner and Architect. The report shall include but not be limited to the following:
    a. A complete list of all equipment installed with corresponding serial numbers.
    b. Indication that all equipment is properly installed, functions and conforms to the specifications.
    c. Serial numbers, locations by device and model number for each installed device.
    d. Technician's name, specified certification credentials and date of system test.
    e. Any additional information as deemed necessary by the Owner and or Architect / Engineer.

C. TESTING:

1. Upon completion of installation of each system and after electrical circuitry has been energized, demonstrate capability and compliance with requirements. Where possible, correct malfunctioning units on site, then retest to demonstrate compliance; otherwise, remove and replace with new units, and proceed with testing.
2. Before inspection by owner and AV Consultant, and after completion of the installation, conduct system tests and make necessary corrections for proper

system operation.

3. Adjust, balance and align equipment for optimum quality and to meet the manufacturer's published specifications.
4. All limiters and/or compressors shall be set to prevent operators from over-adjusting sound levels and damaging system components.
5. System shall have no audible hum, noise, RFI, or distortion when operating under normal conditions. System shall reproduce material at the loudspeakers rated output level without audible distortion. All input levels shall be pre-set so system may be operated without causing unstable feedback under normal use.
6. System shall have no image distortion, hum bars, color shift, or any other picture distortion while operating under normal conditions. Provide cable equalizers, located near displays, on all cables that are more than 30 feet in length and/or have more than 4 connection points.
7. Adjust gain controls for optimum signal-to-noise with 0 dBu at a line-level input.
8. Perform polarity checks of loudspeaker lines by means of a polarity tester or use DC source at one end of each line and a voltmeter at the other end. Loudspeaker lines shall be identically polarized with respect to color coding.
9. Loose parts and poor workmanship or soldering shall be replaced.
10. Sweep Loudspeaker systems with high-level sine wave or 1/3 octave pink noise source. Correct causes of buzzes or rattles related to Loudspeakers or enclosures. Notify owner of external causes of buzzes or rattles.
11. Contractor shall provide system testing as described herein using up-to-date and industry accepted test equipment appropriate to the types of links being tested and in accordance with the latest edition of IEC 61935-1.
12. Horizontal cabling contractor shall test all twisted pair cabling used within the system following the standards in specification 27 1500 under the testing section. Provide documentation of testing to Intercom Consultant prior to final walk through.

D. At the time of final commissioning, if the Intercom consultant determines that the systems are not sufficiently complete to do a final punch list, and was not notified at least three (3) days prior to the visit, then a return visit will be required. The Intercom Consultant's return visit will be paid for in advance by the Intercom integrator at a flat rate of $500 per person, at no cost to the owner.

3.7 OCCUPANCY ADJUSTMENTS:

A. When requested by the Architect within one year of date of Substantial Completion, provide on-site assistance in adjusting sound levels, resetting matching transformer taps, and adjusting controls to suit actual occupied conditions.

3.8 TRAINING

A. The contractor shall provide and implement a complete and comprehensive staff training program for all administrators, facility staff members and teachers. This mandatory training program will provide school staff a complete understanding of how to utilize and

properly operate all functions.

B. The training program shall be implemented by a staff member/trainer employed by the contractor. The trainer must be factory certified to provide training on their product.

C. All staff development training is to be coordinated through the owner's designated representative. As training sessions are completed, the trainer will provide the school's administrative staff and school district's staff a document listing all of the staff and faculty members who attended, received and completed the training program.

D. Provide a minimum of four (4) six (6) hour sessions of in-service training with this system. These sessions shall be broken into segments that will facilitate the training of individuals in the operation of this system. Operators Manuals and Users Guides shall be provided at the time of this training.

E. Schedule training with Owner through the Architect, with at least fourteen (14) days advance notice.

F. Training shall be recorded using a video recording device that support a minimum resolution of 1080P/60 with an integrated microphone connection for an external microphone and a camera tri-pod mount. Presenter shall be wearing a lapel microphone that connects to the recording device and a Tri-pod shall be used for stabilizing the recording device. Recordings that are shaky, poor audio and/or video quality, incomplete, or other issues will not be accepted and the contractor will be responsible for providing a new recording and training within five (5) business days of notification. Provide a digital copy to the Owner and Intercom Consultant. If Digital copy is sent in a link, verification of end user download shall be provided to the owner and Intercom Consultant showing IP address or user that download and what date. The link cannot have an expiration date and will be the responsibility of the contractor to maintain. Links shall be included in the Operating and Maintenance manuals in the first section. Video files shall also be provided on a flash drive within the intercom equipment rack adjacent to the server location. Flash drive shall be clearly labeled.

3.9 CLEANING AND PROTECTION

A. Prior to final acceptance, the contractor shall vacuum and clean all system components and protect them from damage and deterioration. All general areas within and around all equipment rack/cabinets in the facility will be swept, vacuumed, and cleaned up.

3.10 OPERATING AND MAINTENANCE MANUALS: Refer to Section 26 0502 for requirements.

END OF SECTION 275123

SECTION 282200 - ACCESS CONTROL SYSTEM

PART 1 – GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26 Basic Materials and Methods sections apply to work specified in this section.

1.2 DESCRIPTION OF WORK

A. The security intrusion detection and access control systems is hereby defined to include, but not be limited to equipment, raceway, outlets, coverplates, cabinets, grounding and miscellaneous items required for complete system.

B. Refer to other Division-26 sections for requirements for raceways, trays, boxes and fittings, and supporting devices, and other sections, as applicable.

1.3 QUALITY ASSURANCE:

A. Manufacturers: Firms regularly engaged in manufacture of security system equipment and components of the types described here-in and whose products have been in satisfactory use in similar applications for not less than 5 years.

B. Installer: Qualified technicians: With at least 3 years of successful installation experience with security systems, and shall be a Bosch Certified Security Dealer.

1.4 SUBMITTALS:

A. Product Data: Submit manufacturer's data sheets including specifications, installation instructions, and general recommendation for each type of equipment specified.

B. Shop Drawings: Submit dimensioned drawings and wiring layout for any changes in wiring from the layout on the drawings.

PART 2 – PRODUCTS

2.1 General: Provide a complete and operable access control system, which utilizes door control and card readers to maintain building security.

2.2 ACCESS CONTROL SYSTEM COMPONENTS

A. Provide access control panel complete with the following items:

1. Intelligent System Controller No. LNL-2220.
2. Dual-Reader Interface Module No. LNL-1320, Series 2.

a. Provide one module for every two doors.

3. Onboard Cobox Micro. Serial Server No. LNL-2220.
4. Surface Mount Can 24" H x 18" W x 4.5" D.

B. Power Supply Panel: LNL No. RK-AL400 ULX. Provide power supply panel complete with the following item:

1. Battery 18AH 12VFC.

C. Provide the following field installed devices:

1. Office Panic Switch.
2. Proximity Card Reader; Hid Corp ARD-R40.

2.3 WIRING:

A. Provide the following wiring for the access control system components.

1. Office Panic Switch: 2 pair #18 twisted.
2. Door Hardware Power Supply- Belden #638AFS Access Control Banana Peel Cable.
3. Door Hardware Power Supply to the following:

a. Card Reader; Belden #638AFS. Access Control Banana Peel Cable.
b. Door Hardware; 1 pair #18 twisted.

PART 3 – EXECUTION

3.1 INSTALLATION OF SECURITY SYSTEM

A. General: Install security system as indicated, in accordance with equipment manufacturers written instructions, and with recognized industry practices, to ensure that system equipment complies with requirements. Comply with requirements of NEC, and applicable portions of NECA's "Standards of Installation" practices.

B. Review and coordinate security system layout and wiring with Jordan School District Maintenance Department and get approval prior to rough-in.

C. Coordinate all equipment locations and mounting details with other trades and suppliers.

D. Mount security devices a minimum of 3 feet from heat or air movement sources.

E. The office panic switch will secure all exterior doors and release all door magnet hold open doors. Coordinate all functions of the access control system with the District Security Department.

F. Grounding: Provide grounding connections sufficiently tight to assure permanent and effective ground.

G. Testing: Upon completion of installation of system and after energized, demonstrate system compliance with intent.

H. Wiring: Install all wiring in conduit raceway. Wire all components of the system in accordance with factory recommendations. All final connections shall be made by a qualified technician familiar with the school district procedures and the manufacturer's equipment. Label each junction box throughout system, 'Security', indicate zone number, and paint cover of junction boxes orange (Kwal Howells Orange Fiesta AC107Y).

I. Zoning: Each location shall be provided with a D8127T POPIT module which has been assigned a discreet address. Each detector, door switch, sensing device shall be considered a location. Multiple doors at a common entry shall be considered one location.

J. Labeling: Label all devices with their appropriate address with 30 point KROY labels.

K. Warranty: Provide warranty complying with Division 265000.

3.2 AS BUILT DRAWINGS:

A. A complete set of CAD "AS-BUILT" Drawings showing installed wiring, color coding, specific interconnections between all equipment, and internal wiring of the equipment shall be delivered to the owner upon completion of the system.

B. A building map (2 copies) shall be supplied to the owner indicating the exact location of all devices along with the addresses of the individual devices. Install building security map adjacent to the security control panel. Provide high quality plastic sign (map holder) with two layers. The back layer shall be painted black. The front layer shall be a clear center for viewing the CAD security drawing. Edges of the sign shall be colored to match the building interior. The building map shall indicate the various by the use of different colors (minimum of five colors).

C. The disk containing the files shall be supplied to the owner. These disks shall include all information required to allow the district to change the security program themselves. These computer disks shall contain a minimum of the following:

1. CAD drawing files of building security map.

2. CAD drawing files of AS BUILT security components and point to point connections.
3. General configuration programming.
4. Job specific configuration programming.
5. Tutorial file on complete programming of security system.

END OF SECTION 282200

SECTION 283111 - FIRE ALARM AND DETECTION SYSTEM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS:

A. Drawings and general provisions of Contract, including General and Supplementary Conditions and Division-1 Specification sections, apply to work of this section.

B. Division-26 Basic Materials and Methods sections apply to work specified in this section.

1.2 DESCRIPTION OF WORK:

A. Provide a new addressable fire alarm and detection system.

1. Locate FACP Panel within the MDF/Equipment Room.
2. Provide and install NAC/booster panels as needed throughout the project.

B. Provide duct smoke detectors and fan relays at all fan units 2000 CFM and over. Shut down all supply and return fans upon a general alarm signal.

C. Provide CO detectors, Monitor Module and fan relays at all gas fired fan units. Shut down all supply and return fans upon a general alarm signal.

D. Install all wiring in steel conduit (3/4" minimum). All conduit runs shall form a complete loop from the fire alarm control panel.

E. Provide vandal resistant cages to protect horn/strobes, smoke and heat detectors as indicated on drawings and, in gyms whether shown or not. Securely fasten security cages as required. Provide backing and bracing as required to ensure that attachment extends beyond the ceiling materials. Cages shall have two pieces, one backplate and one cover to attach to backplate. Provide cages/guards on horn/strobes that are clear and do not limit their effect on the field performance with the listing requirements.

F. Comply with NEC as applicable to construction and installation of fire alarm and detection system components and accessories. Provide components and systems, which are UL-listed and labeled for fire alarm. Provide fire alarm and detection systems and accessories, which are FM approved. Comply with State and local requirements as applicable.

G. The fire alarm system supplier shall be UL, UUJS Listed as a Local, Auxiliary, Remote Station, and Proprietary Signaling Services company. The UL Certification number shall be submitted with the bid documentation.

H. The project shall be UL Certificated. Upon completion of the project, provide to the owner, a certificate from the UL Listed supplier with the project specific certificate. Certificate and number shall be documented and included as part of the closeout documentation.

I. Ensure that the fire alarm supplier has a minimum of (1) NICET Level IV, and (3) NICET Level III technicians on staff.

J. Comply with applicable provisions of current NFPA Standard 72 National Fire Alarm and Signaling Code (as applicable), local building codes, the most current adopted revision of the International Building Code (IBC), the International Fire Code (IFC), the International Mechanical Code (IMC), and meet requirements of local authorities having jurisdiction.

K. Carefully review all Division 23 drawings for all fire/smoke and smoke dampers. Fire/smoke and smoke dampers are NOT shown on electrical plans. Electrical contractor is responsible for coordinating 120V emergency power to all dampers and providing fire alarm connections to each one. See mechanical drawings for all locations.

L. Provide a fire alarm duct detector within 5-feet of any fire/smoke damper as required to comply with IMC 607.5.4.1. The duct detector shall be listed for the air velocity, temperature and humidity at the point where it is to be installed. A duct detector will not be required at a fire/smoke damper located on a corridor wall where the corridor has smoke detection devices installed. For dampers installed within an un-ducted opening in a wall, a spot-type detector listed for releasing service shall be installed within 5-feet horizontally of the damper. Provide a fire alarm relay at each fire/smoke damper. Provide a test switch at each location where the damper is located above an inaccessible ceiling or is located more than 10 feet above the finished floor. Coordinate the location of test switches with owner/architect.

1.3 QUALITY ASSURANCE:

A. Installer:

1. Fire alarm equipment supplier shall be a Gamewell-FCI Platinum Level Distributor and UL Listed Installer.
2. Integrating firm shall have worked satisfactorily for a minimum of (5) years of completing systems equal to this scope, quality, type and complexity.
3. Key personnel assigned to the project shall each have minimum of (10) years of experience in completing systems equal to this scope, quality, type and complexity.
4. Contractor shall be a factory authorized distributor of all equipment specified for the geographical area of the project.
5. Contractor shall maintain complete installation and service facilities for the duration of the project contract.
6. Contractor shall have current manufacturer certificates for all fire alarms systems and equipment listed within this specification.

7. Contractor shall be in good standing with owner based on previous projects.
8. Contractors that do not meet the above requirements cannot bid on this project.

B. All work shall be done by expert technicians qualified in the field with knowledge of specified systems. Workmanship shall comply with industry best practices concerning grounding, shielding, cable dressing, cable termination and equipment mounting.

C. PRE-APPROVED INSTALLERS:

1. Nelson Fire Systems

a. Ben Nelson, (801) 468-8300, 1481 S. Major St, Salt Lake City, UT 84115

2. Bids submitted by non-approved installers will not be accepted.
3. Bidders not pre-approved shall submit in writing the following for review at least (8) working days prior to bid:

a. List of qualifications including:

1) Industries certifications including manufacturers.
2) Approved resale manufacturers.

b. Past and current projects within the last 5 years similar in scope and size.
c. (3) Different referrals from the owners of (3) different projects within the last 5 years.

1.4 SUBMITTALS: Refer to Section 260502 for requirements.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS:

A. MANUFACTURER: Provide fire alarm and detection system by Gamewell-FCI. Fire alarm equipment supplier shall be a Gamewell-FCI Platinum Level Distributor.

2.2 FIRE ALARM AND DETECTION SYSTEMS:

A. General: Provide an electrically operated, electrically supervised fire alarm system as described herein. Include control units, power supplies, alarm initiating and indicating devices, conduit, wire, fittings and accessories required to provide a complete operating system. Enclose entire system in raceway. Provide basic wiring materials which comply with Division 26, Basic Materials and Methods Sections for raceways, conductors, boxes, fittings, supports, etc. Minimum wire size to be #14 AWG copper.

B. System type: Analog addressable, non-coded. Either manual activation of a fire alarm station or activation of an automatic initiating device energizes all fire alarm signaling devices, sounding a non-coded alarm and providing device identification on an annunciator panel.

C. System operation: Provide system such that any manual station or automatic initiating device annunciates all alarm indicating units (bells, horns, buzzers, chimes, visual alarm lamps, etc.) continuously until the manual station or initiating device is restored to normal and the fire alarm control unit reset. Annunciate alarm signals by device at the control panel and all remote annunciators. Provide all conductors, raceway, equipment and labor to accomplish the following:

D. Deactivate air supply and return fan units simultaneously by means of a supervised master fan shutdown relay with slave relays as required. Restart air units automatically after panel has been reset. Provide a bypass switch for master fan shut down relay for drill purposes, and indicate by a locked-in lamp that the circuit has been bypassed. Coordinate location of bypass switch with owner and architect prior to rough-in.

E. Selectively activate and/or deactivate fan units as required.

F. Release all magnetic door holders upon activation of an alarm from any device by use of a master relay in the control panel.

G. Provide supervised circuits for the following:

1. Close dampers upon activation of an alarm from any device through the HVAC interface relays at the Fire Command Center.
2. Recall elevators, upon activation of an alarm, to the floor of building egress unless the alarm is on the egress floor, in which case recall elevator to the level designated by the Fire Marshall. Cooperate with the elevator supplier to ensure complete operable system. Provide shunt trip breaker(s) as required.

H. Central Station Monitoring. Provide an interface to the building security panel for fire alarm signal transmission to the district central station. Provide dry contacts at the main fire alarm control unit for ‘Alarm’, ‘Supervisory’, and ‘Trouble’. Connections shall be supervised by the security alarm panel.

I. Provide fire alarm control panel with capability of shutting down individual initiating devices for maintenance purposes without affecting the continued operation of other initiating devices.

J. Provide manual fire alarm stations in boiler rooms, kitchen and main administrative office. Coordinate locations with architect.

K. Provide external alarm horns sufficient to be heard in all outdoor areas within the vicinity of the building.

L. Sprinkler Supervision. Provide a signal initiating and supervisory circuit to each PIV (post indicator) valve, and to each sprinkler riser and subdivision. Provide continuous alarm signal upon actuation of any water flow signal initiating device. Sound alarm until the condition has been corrected and the panel manually reset as required by UL864. Provide separate alarm zones for: (1) alarm zones from "waterflow alarms", (2) alarm zones from "supervisory alarm" indicating sprinkler system trouble. Provide 120 VAC power to all alarm bells/lights furnished under Division 23. Review final fire sprinkler drawings and coordinate for panel, flow and tamper switch locations.

M. Provide relays, monitor modules and connections as required at control panel of kitchen hood suppression system for initiation of alarm signal to fire alarm control panel. Connect hood suppression control panel to shunt trip breakers as required.

N. Provide all required wiring from gas shut off valve to the kitchen hood suppression control panel. Make all connections to insure a properly operating system. Verify with Mechanical Contractor.

2.3 FIRE ALARM CONTROL PANEL: Gamewell-FCI E3 Series

A. The fire alarm control panel shall be microprocessor-based. Each loop shall be capable of 159 analog addresses and 159 monitor and/or control addresses.

B. The fire alarm control panel shall contain an 80-digit alphanumeric display and permit the user to perform all necessary functions including but not limited to the following:

1. Alarm/Trouble Acknowledge.
2. Alarm Silence
3. Reset
4. Lamp Test
5. Control of Initiating Devices (on/off)
6. Control of output modules (on/off)
7. Change sensitivity of devices
8. Change time
9. Walk test
10. View 4000 event history log.

C. The fire alarm control panel shall be capable of alarm verification. The control panel shall indicate which smoke detector is in alarm during the pre-alarm window.

D. All alarm signals shall be locked in at the panel until the operated device is returned to its normal condition and the control panel is manually reset.

E. Alarm or trouble activation of initiating points shall be represented in English on the alphanumeric display on both the remote operating panel and the fire alarm control panel indicating the address of the specific device, i.e. Device L4S76, Smoke Detector, 1st floor Rm. 17.

F. System shall be capable of networking with other control panels on multi-mode fiber optic cables.

G. Each initiating and signal circuit shall be electrically supervised for opens, shorts, and ground faults in the wiring.

H. Limit each notification and initiation circuit to 80% of total capacity during initial installation.

I. The occurrence of any fault shall activate the system trouble circuitry but shall not interfere with the proper operation of any circuit that does not have a fault condition.

J. The system communication loops shall be capable of being wired using Class "A" (Style 6) supervised circuits (a ground fault on either conductor or a break shall not prevent a device from operating on either side of the break)

K. The fire alarm control panel shall contain circuitry permitting the transmission of trouble and alarm signals over leased phone lines by the means of reverse polarity. There shall be a supervised disconnect switch to allow testing of the fire alarm control panel without transmitting an alarm to the central station.

L. The fire alarm control panel shall include the following features:

1. Auxiliary SPDT fire alarm actuated contacts.
2. Auxiliary SPDT supervisory alarm actuated contacts.
3. Auxiliary SPDT trouble actuated contacts.
4. A solid-state power transfer circuit that shall switch to standby power automatically and instantaneously if normal power fails or falls below 15% of normal ("brown out" conditions). This electronic circuit shall allow the batteries to be effectively "floated" on the operating system to avoid upsetting the normal microprocessor scan and minimize resultant nuisance troubles and/or alarms.
5. A ground fault detector to detect positive or negative grounds on the initiating circuits, signal circuits, power circuits, and telephone line circuit. A ground fault code on the alphanumeric display shall provide indication of either a positive or negative ground fault and shall operate a general trouble but shall not cause an alarm to be sounded.
6. A short circuit error message shall be a standard feature of the fire alarm control panel. Each communication loop shall be monitored and shall have a distinctive error message.
7. Lightning protection shall be a standard feature of the fire alarm control panel and shall be incorporated in the power supply circuit, common control circuits, signal circuits, and telephone line circuit.
8. Individual PTC overcurrent protection shall be provided for the following: smoke detector power, main power supply, signal circuit #1, signal circuit #2, battery standby power, and auxiliary output.
9. The fire alarm control panel shall be of dead-front construction. One key shall allow access to all operator functions.
10. Opening the main door shall expose all components for inspection or adjustment without further dismantling of the cabinet, control unit, or wiring.

11. It shall be possible to check and adjust the sensitivity of all analog devices from the main fire alarm panel.

M. The fire alarm control panel shall have batteries capable of powering the system for (24) hours in standby condition and (15) minutes in alarm at end of 24-hour period.

N. There shall be no special tools required for the programming of devices. A standard slot head screwdriver only.

1) Provide (16) separate bypass switches for the functions listed below with separate red, green, and yellow LED's per switch:
2) Strobe/Horn bypass
3) Fan/Damper shutdown bypass
4) Door holder bypass
5) Separate switch for each addressable loop bypass
6) Owner shall designate purpose for any unused switches.

O. Provide one (1) Gamewell-FCI ANX-SR and one (1) Gamewell-FCI FP-GATE-3 for interface to existing district Gamewell-FCI FocalPoint system. Provide new graphics and populate all new fire alarm system point information. Test communication signals from building to FocalPoint system. Two (2) network IP addresses at the new fire alarm control unit will be required for connection to the FocalPoint system. Coordinate with the district IT department for network connections.

P. In the event of a power outage, the control panel shall be capable of storing and printing the last 4000 events, including during the power outage.

2.4 REMOTE OPERATING PANEL: Gamewell-FCI Model: LCD-E3

A. Recessed Remote Operating Panel (Provide color as selected by Architect)

B. The Remote Operating Panel shall contain 80-digit alphanumeric display providing status of all devices including the fire alarm control panel.

C. The Remote Operating Panel shall permit the user to perform all necessary functions including but not limited to the following:

1. Alarm/Trouble Acknowledge
2. Alarm Silence
3. Reset
4. Lamp Test
5. Control of Initiating Devices (on/off)
6. Control of Output Modules (on/off)
7. View Event Log
8. Change time
9. Walk test

2.5 MONITOR MODULE: Gamewell-FCI Model: AMM-2F/AMM-4F

A. Remote identification module devices shall be attached to any single normally open initiating device (heat detector, waterflow switch, duct detectors, sprinkler, tamper switches, kitchen hood, pull station, carbon monoxide detector, etc.). The modules shall supply addressing and status information to the Fire Alarm Control Panel through the signaling line circuit.

2.6 CONTROL POINT MODULE: Gamewell-FCI Model: AOM-2RF

A. The control point module shall be connected to the same loop as the initiating devices, and shall provide two relay outputs (Form "C" 2 Amp @ 30 VDC, resistive only).

B. This relay output shall be used to perform auxiliary functions.

C. When the AOM is activated, the red "ACTIVE" LED shall be on solid. Under normal conditions, the green “ON LINE" LED shall flash.

2.7 DOOR HOLDER: ASSA ABLOY Model: 994M

A. The door holder shall be wall mounted, semi-recessed; be powered at 24 VDC; and have 40 lbs. of holding force and be of a brushed aluminum finish. Provide DC power supply as required.

2.8 MANUAL FIRE ALARM STATION: Gamewell-FCI Model: MS-7AF

A. Provide red enclosure, manual fire alarm stations with the following features:

1. suitable for semi-flush mounting.
2. Addressable alarm type electrically compatible with system requirements.
3. Double Action

2.9 PHOTOELECTRIC DETECTORS (GAMEWELL-FCI: ASD-P W/ADB-PL2F W/B210LP BASE):

A. All photoelectric detectors shall be capable of being replaced without disconnecting any wires or wire connectors from the base of the detector. Each detector shall be installed on a separate base. The detector base shall be capable of receiving a photoelectric, ionization, or electronic thermal detector. All photoelectric detectors shall be UL 268 listed. All detectors shall have two viewable LEDs to indicate the status of the device.

2.10 DUCT SMOKE DETECTORS: Gamewell-FCI Model: DNR

A. Provide photoelectric type with UL 268A listings. If duct smoke detector is not readily accessible, provide with a remote indicating light and remote test station.

2.11 THERMAL DETECTORS: Gamewell-FCI Model: ATD-RL2F

A. Thermal detectors shall operate on the Rate-of-Rise principal. The detectors shall have a fixed temperature rating of 135 degrees Fahrenheit. Exception: in Boiler rooms, provide temperature rating of 200 degrees Fahrenheit.

1. The heat detector shall consist of a base and a head.
2. The base shall be capable of accepting either a smoke detector or a 135 (or 200) degree heat detector.
3. The head shall automatically restore to its normal standby condition when the temperature returns to its normal range.

2.12 AUDIOVISUAL ALARM HORNS: Gamewell-FCI Model: P2W/P2RK

A. Provide audio-visual alarm horns with selectable multi-candela strobes (15/30/75/110 cd) and selectable horn (90 or 95 dba). Provide outdoor devices listed for exterior use. Provide white devices inside and red devices outside. Synchronize all strobes.

2.13 VISUAL ALARM STROBES: Gamewell-FCI Model: SW

A. Provide visual alarm strobes with selectable multi-candela strobes (15/30/75/110 cd). Provide white devices. Synchronize all strobes.

2.14 CARBON MONOXIDE (CO):

A. Provide a System Sensor CO1224 carbon monoxide detector with Realtest Technology. Provide detectors with the following features:

1. Compliance with UL2075.
2. Trouble relay.
3. Wiring supervision with SEMS Terminals.
4. A six-year end-of-life timer.
5. Sounder base for sound audible alarm.
6. Provide a monitor module for each detector.

2.15 VISUAL ALARM STROBE (CO detection) (Gamewell-FCI Model SCW-P)

A. Provide a white ceiling mounted visual alarm strobe with a CO label and a blue lens #LENS-BC. Locate in main admin offices. Coordinate location with architect.

2.16 AUXILIARY RELAY: Gamewell-FCI Model: PR-1

A. Remote auxiliary relay boards shall be rated at 10 AMPS @ 120 VAC. A red LED shall light to indicate relay activation. All relays shall transfer on general alarm and latch on until reset. All relays shall be supervised. The control output provided can be used in conjunction with fire alarm applications (i.e. fan controls, dampers, doors, and any other general alarm control).

2.17 INITIATING MODULES: Gamewell-FCI Model: AMM-4F

A. Provide style "6" initiating modules capable of receiving and annunciating an alarm from any detector, even with a single fault condition on any initiating circuit.

B. Power all smoke detectors from the "Style 6" initiating loop wiring. For systems which power smoke detectors separately from the "Style 6" loop, provide monitoring for both the power source and the independent initiating wiring, so that complete trouble and alarm indication is achieved by loop. Provide capability to operate all smoke detectors, even with a single fault condition on the smoke detector power wiring.

2.18 SIGNALING MODULES: Gamewell-FCI Model: AOM-2SF

A. Provide signaling as required. Provide power adequate to sound all signaling devices concurrently. Provide supervised indicating circuits for polarized 24V D.C. alarm signaling devices.

2.19 SUPPLEMENTAL NOTIFICATION CIRCUITS: Gamewell-FCI Model: HPFF8

A. Provide supplementary notification appliance circuit panel(s) as required. The ‘SNAC’ shall be capable of supplying up to four Class A, Style Z notification appliance circuits. The panel shall contain its own battery charger, regulated power supply, and shall be supervised for ground fault, overcurrent, open circuits and low battery conditions. Ground fault, battery and circuit trouble conditions shall transmit a trouble signal to the main fire alarm control panel.
Locate all Supplementary Notification Appliance Circuit power supplies as indicated on drawings.

2.20 NETWORK REPEATER: Gamewell-FCI Model: RPT-E3 (FML-E3)

A. Provide the ARCNET Repeater Module (RPT-E3) with fiber optic modules as required for E3 Series fire alarm control panel. The component shall be Listed under UL® Standard 864, 9th Edition. Shall provide the capability for remotable E3 Series and S3 Series sub-assemblies to connect in Styles 4 or 7 configurations. The RPT-E3 shall have fiber-optic network connection capabilities. Wiring fire panels together in a class A loop utilizing specification grade MM OM3 fiber optic cable. Provide synchronization circuit between all fire alarm panels.

2.21 SYSTEM CONFIGURATION PROGRAMMING:

A. To help the owner in programming, system changes, and servicing, the fire alarm system shall have the following functions:

1. The FACP shall be capable of an auto-configuration, which, via a password, all analog devices and panel modules are automatically programmed into the system. At this point the system will operate as a general alarm system without any other programming.
2. If any two devices are addressed the same, the LED's on both devices will light steady and the panel will read "extra address with the address number".
3. If any device is installed and not programmed into the system, the LED will light steady and the panel will read the same as above.

2.22 BATTERIES/POWER SUPPLIES:

A. Provide standby batteries capable of operating fire alarm system for minimum of 24 hours, then operating all indicating units for at least five minutes. Locate batteries in fire alarm control unit, or in similar type enclosure located as directed. Provide all interconnecting wiring. Place batteries which vent hydrogen gas in separate enclosure. Provide 30 percent spare capacity.

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS:

A. Install fire alarm and detection systems as indicated, in accordance with equipment manufacturer’s written instructions and complying with applicable portions of NEC and NECA’s “standard of installation”.

B. Install wiring, raceways, and electrical boxes and fittings in accordance with Division 26 Basic Materials and Methods section, “Raceways”, “Wires and Cables”, and “Electrical Boxes and Fittings”, and in accordance with other sections, as applicable. Label all junction boxes “F.A.” and paint box and cover red, per Section 26 0553.

C. All wire used on the fire alarm system shall be U.L. Listed as fire alarm protective signaling circuit cable per NEC, Article 760.

D. If twisted or shielded wire is required or recommended by the manufacturer it must be used.

E. Review proper installation procedure for each type of device with equipment supplier before installation.

F. Provide Two (2) network IP addresses at the new fire alarm control unit for connection to the FocalPoint system. Coordinate with the district IT department for network connections.

G. Coordinate the mechanical units that are protected by Carbon Monoxide Detectors and shut down the unit upon detection of CO. Locate the CO detector in the first room the mechanical unit serves. Verify exact requirements with the Fire Marshal.

H. Label the end of wires in all boxes including panel, power supplies, pull boxes, etc.V

I. Label circuit breaker feeding fire alarm panel: “Fire alarm circuit”. Use plastic laminate label, white letters on red background.

J. Where smoke or heat detectors are specified, install device a minimum of three feet from adjacent air supply diffusers to ensure proper operation of device.

K. Refer to NFPA for spacing and exact placement of fire alarm devices.

3.2 GUARANTEE:

A. Furnish a three-year guarantee for all equipment, materials and installation, including all labor, transportation, and equipment.

B. Emergency Response. The fire alarm equipment supplier shall provide an emergency response within four hours of any reported system failure to resolve the problem on a continuous basis.

3.3 PRE-TEST:

A. The contractor shall with a representative of the manufacturer conduct a test 3 days before the final test to verify operation of all devices. Any problems must be corrected before the final test.

3.4 FINAL TEST:

A. Before the installation shall be considered completed and acceptable, a test on the system shall be performed as follows:

1. The contractor's job foreman, a representative of the manufacturer, a representative of the owner, shall operate every building fire alarm device to ensure proper operation and correct annunciation at the control panel. Fan shutdown and door holder circuits shall operate.
2. Conduct a full 24-hour test of battery operation. System shall be put on the batteries for a full 24 hours and all notification appliances shall be operational for a period of 5 minutes.
3. The supervisory circuitry of the initiating and indicating circuits shall also be verified.
4. Provide printout demonstrating successful performance of all devices.

3.5 LABELING:

A. All devices shall be labeled with their appropriate address. The labels shall be 18 point pressure sensitive labels.

B. All initiating devices shall be programmed to include the device address and a complete user text English location description, i.e. Device L4S76, Smoke Detector, 1st floor Rm.17.

C. Label the end of all wires in all boxes including panels, power supplies, pull boxes, etc.

3.6 AS BUILT DRAWINGS:

A. A complete set of CAD "as-built" drawings showing installed wiring, color coding, specific interconnections between all equipment, and internal wiring of the equipment shall be delivered to the owner upon completion of the system. Vendor shall not request drawings from the Engineer. Vendor shall request current architectural drawings from the Architect and include all cost with bid.

B. A building map shall be supplied to the owner indicating the exact location of all devices along with the addresses of the individual devices. Install building fire alarm map adjacent to the fire alarm panel and all remote operating panels. Provide high quality plastic sign (map holder) with two layers. The back layer shall be painted black. The front layer shall be a clear center for viewing the CAD fire alarm drawing. The building map shall indicate the various devices by the use of different colors (minimum of five colors).

C. Provide a CD to the Owner containing the information specified below. The CD shall include all information required to allow the Owner to change the fire alarm program themselves. The CD shall contain a minimum of the following:

1. CAD drawing files of building fire alarm map
2. CAD drawing files of as-built fire alarm components and point to point connections.
3. General configuration programming.
4. Job specific configuration programming.

3.7 OPERATING AND MAINTENANCE MANUALS:

A. Operating and maintenance manuals shall be submitted prior to testing of the system. Manuals shall include all service, installation, and programming information.

3.8 TRAINING:

A. Provide four (4) hours training on the operation and installation of fire alarm system, at job site, at no cost to owner.

END OF SECTION 283111

SECTION 321313 - CONCRETE PAVING

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes concrete paving including the following:

1. Walks.

B. Related Requirements:

1. Section 033000 "Cast-in-Place Concrete" for general building applications of concrete.
2. Section 321373 "Concrete Paving Joint Sealants" for joint sealants in expansion and contraction joints within concrete paving and in joints between concrete paving and asphalt paving or adjacent construction.

1.2 DEFINITIONS

A. Cementitious Materials: Portland cement alone or in combination with one or more of blended hydraulic cement, fly ash, slag cement, and other pozzolans.

B. W/C Ratio: The ratio by weight of water to cementitious materials.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1. Review methods and procedures related to concrete paving, including but not limited to, the following:

a. Concrete mixture design.
b. Quality control of concrete materials and concrete paving construction practices.

2. Require representatives of each entity directly concerned with concrete paving to attend, including the following:

a. Contractor's superintendent.
b. Concrete paving Subcontractor.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples for Initial Selection: For each type of product, ingredient, or admixture requiring color selection.

C. Samples for Verification: For each type of product or exposed finish, prepared as Samples of size indicated below:

D. Design Mixtures: For each concrete paving mixture. Include alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For qualified ready-mix concrete manufacturer and testing agency.

B. Material Certificates: For the following, from manufacturer:

1. Cementitious materials.
2. Fiber reinforcement.
3. Admixtures.
4. Curing compounds.
5. Applied finish materials.
6. Bonding agent or epoxy adhesive.
7. Joint fillers.

C. Material Test Reports: For each of the following:

1. Aggregates: Include service-record data indicating absence of deleterious expansion of concrete due to alkali-aggregate reactivity.

D. Field quality-control reports.

1.6 QUALITY ASSURANCE

A. Ready-Mix-Concrete Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C94/C94M requirements for production facilities and equipment.

1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities" (Quality Control Manual - Section 3, "Plant Certification Checklist").

B. Testing Agency Qualifications: Qualified according to ASTM C1077 and ASTM E329 for testing indicated.

1. Personnel conducting field tests must be qualified as ACI Concrete Field Testing Technician, Grade 1, according to ACI CP-1 or an equivalent certification program.

C. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
   1. Build mockups of concrete paving in the location and of the size indicated or, if not indicated, build mockups where directed by Architect and not less than 96 inches by 96 inches.
   2. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in mockups unless Architect specifically approves such deviations in writing.
   3. Subject to compliance with requirements, approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.

1.7 FIELD CONDITIONS

A. Traffic Control: Maintain access for vehicular and pedestrian traffic as required for other construction activities.

B. Cold-Weather Concrete Placement: Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing, or low temperatures. Comply with ACI 306.1 and the following:

   1. When air temperature has fallen to or is expected to fall below 40 deg F, uniformly heat water and aggregates before mixing to obtain a concrete mixture temperature of not less than 50 deg F and not more than 80 deg F at point of placement.
   2. Do not use frozen materials or materials containing ice or snow.
   3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in design mixtures.

C. Hot-Weather Concrete Placement: Comply with ACI 301 and as follows when hot-weather conditions exist:

   1. Cool ingredients before mixing to maintain concrete temperature below 90 deg F at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated in total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
   2. Cover steel reinforcement with water-soaked burlap, so steel temperature will not exceed ambient air temperature immediately before embedding in concrete.
   3. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade moisture uniform without standing water, soft spots, or dry areas.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

A. ACI Publications: Comply with ACI 301 unless otherwise indicated.

2.2 FORMS

A. Form Materials: Plywood, metal, metal-framed plywood, or other approved panel-type materials to provide full-depth, continuous, straight, and smooth exposed surfaces.

1. Use flexible or uniformly curved forms for curves with a radius of 100 feet or less. Do not use notched and bent forms.

B. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and that will not impair subsequent treatments of concrete surfaces.

2.3 CONCRETE MATERIALS

A. Cementitious Materials: Use the following cementitious materials, of same type, brand, and source throughout Project:

1. Portland Cement: ASTM C150/C150M, gray portland cement Type I.
2. Fly Ash: ASTM C618, Class C or Class F.
3. Slag Cement: ASTM C989/C989M, Grade 100 or 120.

B. Normal-Weight Aggregates: ASTM C33/C33M, Class 4M, uniformly graded. Provide aggregates from a single source with documented service-record data of at least 10 years' satisfactory service in similar paving applications and service conditions using similar aggregates and cementitious materials.

1. Maximum Coarse-Aggregate Size: 1 inch nominal.
2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.

C. Air-Entraining Admixture: ASTM C260/C260M.

D. Water: Potable and complying with ASTM C94/C94M.

2.4 FIBER REINFORCEMENT

A. Synthetic Fiber, Fibrillated Fibers: Fibrillated polypropylene fibers engineered and designed for use in decorative concrete paving, complying with ASTM C1116/C1116M, Type III, 1/2 to 1-1/2 inches long.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Euclid Chemical Company (The); an RPM company.
b. FORTA Corporation.
c. FiberForce; ABC Polymer Industries, LLC.
d. GCP Applied Technologies Inc.

e. Nycon Corporation.
f. Propex Operating Company, LLC.
g. Sika Corporation.

2.5 CURING MATERIALS

A. Moisture-Retaining Cover: ASTM C171, polyethylene film or white burlap-polyethylene sheet.

B. Water: Potable.

C. Evaporation Retarder: Waterborne, monomolecular, film forming, manufactured for application to fresh concrete.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

a. Bon Tool Co.
b. Brickform; a division of Solomon Colors.
c. ChemMasters, Inc.
d. Dayton Superior Corporation.
e. Euclid Chemical Company (The); an RPM company.
f. Kaufman Products, Inc.
g. Lambert Corporation.
h. Laticrete International, Inc.
i. Master Builders Solutions.
j. Metalcrete Industries.
k. Nox-Crete Products Group.
l. Sika Corporation.

2.6 RELATED MATERIALS

A. Joint Fillers: ASTM D1751, asphalt-saturated cellulosic fiber ASTM D1752, cork or self-expanding cork in preformed strips.

B. Bonding Agent: ASTM C1059/C1059M, Type II, non-redispersible, acrylic emulsion or styrene butadiene.

2.7 CONCRETE MIXTURES

A. Prepare design mixtures, proportioned according to ACI 301, for each type and strength of normal-weight concrete, and as determined by either laboratory trial mixtures or field experience.

1. Use a qualified independent testing agency for preparing and reporting proposed concrete design mixtures for the trial batch method.
2. When automatic machine placement is used, determine design mixtures and obtain laboratory test results that comply with or exceed requirements.

B. Add air-entraining admixture at manufacturer's prescribed rate to result in normal-weight concrete at point of placement having an air content as follows:

1. Air Content, 1-1/2-inch Nominal Maximum Aggregate Size: 4-1/2 percent plus or minus 1-1/2 percent.
2. Air Content, 1-inch Nominal Maximum Aggregate Size: 4-1/2 percent plus or minus 1-1/2 percent.
3. Air Content, 3/4-inch Nominal Maximum Aggregate Size: 5 percent plus or minus 1-1/2 percent.

C. Limit water-soluble, chloride-ion content in hardened concrete to 0.30 percent by weight of cement.

D. Synthetic Fiber: Uniformly disperse in concrete mixture at manufacturer's recommended rate, but not less than 1.0 lb/cu. yd..

E. Concrete Mixtures: Normal-weight concrete.

1. Compressive Strength (28 Days): 4000 psi.
2. Maximum W/C Ratio at Point of Placement: 0.45.
3. Slump Limit: 4 inches, plus or minus 1 inch.

2.8 CONCRETE MIXING

A. Ready-Mixed Concrete: Measure, batch, and mix concrete materials and concrete according to ASTM C94/C94M and ASTM C1116/C1116M. Furnish batch certificates for each batch discharged and used in the Work.

1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine exposed subgrades and subbase surfaces for compliance with requirements for dimensional, grading, and elevation tolerances.

B. Proof-roll prepared subbase surface below concrete paving to identify soft pockets and areas of excess yielding.

1. Completely proof-roll subbase in one direction and repeat in perpendicular direction. Limit vehicle speed to 3 mph.
2. Proof-roll with a pneumatic-tired and loaded, 10-wheel, tandem-axle dump truck weighing not less than 15 tons.

3. Correct subbase with soft spots and areas of pumping or rutting exceeding depth of 1/2 inch according to requirements in Section 312000 "Earth Moving."

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Remove loose material from compacted subbase surface immediately before placing concrete.

3.3 EDGE FORMS AND SCREED CONSTRUCTION

A. Set, brace, and secure edge forms, bulkheads, and intermediate screed guides to required lines, grades, and elevations. Install forms to allow continuous progress of work and so forms can remain in place at least 24 hours after concrete placement.

B. Clean forms after each use and coat with form-release agent to ensure separation from concrete without damage.

3.4 JOINTS

A. General: Form construction, isolation, and contraction joints and tool edges true to line, with faces perpendicular to surface plane of concrete. Construct transverse joints at right angles to centerline unless otherwise indicated.

1. When joining existing paving, place transverse joints to align with previously placed joints unless otherwise indicated.

B. Construction Joints: Set construction joints at side and end terminations of paving and at locations where paving operations are stopped for more than one-half hour unless paving terminates at isolation joints.
1. Butt Joints: Use epoxy-bonding adhesive at joint locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
2. Doweled Joints: Install dowel bars and support assemblies at joints where indicated. Lubricate or coat with asphalt one-half of dowel length to prevent concrete bonding to one side of joint.

C. Isolation Joints: Form isolation joints of preformed joint-filler strips abutting concrete curbs, catch basins, manholes, inlets, structures, other fixed objects, and where indicated.

1. Locate expansion joints at intervals of 50 feet unless otherwise indicated.
2. Extend joint fillers full width and depth of joint.
3. Terminate joint filler not less than 1/2 inch or more than 1 inch below finished surface if joint sealant is indicated.
4. Place top of joint filler flush with finished concrete surface if joint sealant is not indicated.

5. Furnish joint fillers in one-piece lengths. Where more than one length is required, lace or clip joint-filler sections together.
6. During concrete placement, protect top edge of joint filler with metal, plastic, or other temporary preformed cap. Remove protective cap after concrete has been placed on both sides of joint.

D. Contraction Joints: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of the concrete thickness, as follows:

1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint with grooving tool to a 1/4-inch radius. Repeat grooving of contraction joints after applying surface finishes. Eliminate grooving-tool marks on concrete surfaces.

    a. Tolerance: Ensure that grooved joints are within 3 inches either way from centers of dowels.

2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch- wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before developing random contraction cracks.

    a. Tolerance: Ensure that sawed joints are within 3 inches either way from centers of dowels.

3. Doweled Contraction Joints: Install dowel bars and support assemblies at joints where indicated. Lubricate or coat with asphalt one-half of dowel length to prevent concrete bonding to one side of joint.

E. Edging: After initial floating, tool edges of paving, gutters, curbs, and joints in concrete with an edging tool to a 1/4-inch radius. Repeat tooling of edges after applying surface finishes. Eliminate edging-tool marks on concrete surfaces.

3.5 CONCRETE PLACEMENT

A. Before placing concrete, inspect and complete formwork installation and items to be embedded or cast-in.

B. Remove snow, ice, or frost from subbase surface before placing concrete. Do not place concrete on frozen surfaces.

C. Moisten subbase to provide a uniform dampened condition at time concrete is placed. Do not place concrete around manholes or other structures until they are at required finish elevation and alignment.

D. Comply with ACI 301 requirements for measuring, mixing, transporting, and placing concrete.

E. Do not add water to concrete during delivery or at Project site. Do not add water to fresh concrete after testing.

F. Deposit and spread concrete in a continuous operation between transverse joints. Do not push or drag concrete into place or use vibrators to move concrete into place.

G. Consolidate concrete according to ACI 301 by mechanical vibrating equipment supplemented by hand spading, rodding, or tamping.

H. Screed paving surface with a straightedge and strike off.

I. Commence initial floating using bull floats or darbies to impart an open-textured and uniform surface plane before excess moisture or bleedwater appears on the surface. Do not further disturb concrete surfaces before beginning finishing operations or spreading surface treatments.

J. Slip-Form Paving: Use design mixture for automatic machine placement. Produce paving to required thickness, lines, grades, finish, and jointing.

1. Compact subbase and prepare subgrade of sufficient width to prevent displacement of slip-form paving machine during operations.

3.6 FLOAT FINISHING

A. General: Do not add water to concrete surfaces during finishing operations.

B. Float Finish: Begin the second floating operation when bleedwater sheen has disappeared and concrete surface has stiffened sufficiently to permit operations. Float surface with power-driven floats or by hand floating if area is small or inaccessible to power units. Finish surfaces to true planes. Cut down high spots and fill low spots. Refloat surface immediately to uniform granular texture.
1. Medium-to-Fine-Textured Broom Finish: Draw a soft-bristle broom across float-finished concrete surface, perpendicular to line of traffic, to provide a uniform, fine-line texture.

3.7 CONCRETE PROTECTION AND CURING

A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures.

B. Comply with ACI 306.1 for cold-weather protection.

C. Evaporation Retarder: Apply evaporation retarder to concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete but before float finishing.

D. Begin curing after finishing concrete but not before free water has disappeared from concrete surface.

E. Curing Methods: Cure concrete by moisture curing or moisture-retaining-cover curing as follows:

1. Moisture Curing: Keep surfaces continuously moist for not less than seven days with the following materials:

   a. Water.
   b. Continuous water-fog spray.
   c. Absorptive cover, water saturated and kept continuously wet. Cover concrete surfaces and edges with 12-inch lap over adjacent absorptive covers.

2. Moisture-Retaining-Cover Curing: Cover concrete surfaces with moisture-retaining cover, placed in widest practicable width, with sides and ends lapped at least 12 inches, and sealed by waterproof tape or adhesive. Immediately repair any holes or tears occurring during installation or curing period, using cover material and waterproof tape.

3.8 PAVING TOLERANCES

A. Comply with tolerances in ACI 117 and as follows:

1. Elevation: 3/4 inch.
2. Thickness: Plus 3/8 inch, minus 1/4 inch.
3. Surface: Gap below 10-feet- long; unleveled straightedge not to exceed 1/2 inch.
4. Alignment of Tie-Bar End Relative to Line Perpendicular to Paving Edge: 1/2 inch per 12 inches of tie bar.
5. Lateral Alignment and Spacing of Dowels: 1 inch.
6. Vertical Alignment of Dowels: 1/4 inch.
7. Alignment of Dowel-Bar End Relative to Line Perpendicular to Paving Edge: 1/4 inch per 12 inches of dowel.
8. Joint Spacing: 3 inches.
9. Contraction Joint Depth: Plus 1/4 inch, no minus.
10. Joint Width: Plus 1/8 inch, no minus.

3.9 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Testing Services: Testing and inspecting of composite samples of fresh concrete obtained according to ASTM C172/C172M will be performed according to the following requirements:

1. Testing Frequency: Obtain at least one composite sample for each 100 cu. yd. or fraction thereof of each concrete mixture placed each day.

   a. When frequency of testing will provide fewer than five compressive-strength tests for each concrete mixture, testing to be conducted from at least five randomly selected batches or from each batch if fewer than five are used.

2. Slump: ASTM C143/C143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
3. Air Content: ASTM C231/C231M, pressure method; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.
4. Concrete Temperature: ASTM C1064/C1064M; one test hourly when air temperature is 40 deg F and below and when it is 80 deg F and above, and one test for each composite sample.
5. Compression Test Specimens: ASTM C31/C31M; cast and laboratory cure one set of three standard cylinder specimens for each composite sample.
6. Compressive-Strength Tests: ASTM C39/C39M; test one specimen at seven days and two specimens at 28 days.

    a. A compressive-strength test to be the average compressive strength from two specimens obtained from same composite sample and tested at 28 days.

C. Strength of each concrete mixture will be satisfactory if average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi.

D. Test results to be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests to contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.

E. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.

F. Additional Tests: Testing and inspecting agency will make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect.

G. Concrete paving will be considered defective if it does not pass tests and inspections.

H. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

I. Prepare test and inspection reports.

3.10 REPAIR AND PROTECTION

A. Remove and replace concrete paving that is broken, damaged, or defective or that does not comply with requirements in this Section. Remove work in complete sections from joint to joint unless otherwise approved by Architect.

B. Drill test cores, where directed by Architect, when necessary to determine magnitude of cracks or defective areas. Fill drilled core holes in satisfactory paving areas with portland cement concrete bonded to paving with epoxy adhesive.

C. Protect concrete paving from damage. Exclude traffic from paving for at least 14 days after placement. When construction traffic is permitted, maintain paving as clean as possible by removing surface stains and spillage of materials as they occur.

D. Maintain concrete paving free of stains, discoloration, dirt, and other foreign material. Sweep paving not more than two days before date scheduled for Substantial Completion inspections.

END OF SECTION 321313

SECTION 321373 - CONCRETE PAVING JOINT SEALANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Cold-applied joint sealants.
2. Joint-sealant backer materials.

B. Related Requirements:

1. Section 079200 "Joint Sealants" for sealing nontraffic and traffic joints in locations not specified in this Section.

1.3 PREINSTALLATION MEETINGS

A. Preinstallation Conference: Conduct conference at Project site.

1.4 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Paving-Joint-Sealant Schedule: Include the following information:

1. Joint-sealant application, joint location, and designation.
2. Joint-sealant manufacturer and product name.
3. Joint-sealant formulation.
4. Joint-sealant color.

1.5 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Installer.

B. Product Certificates: For each type of joint sealant and accessory.

1.6 QUALITY ASSURANCE

A. Installer Qualifications: An entity that employs installers and supervisors who are trained and approved by manufacturer.

B. Product Testing: Test joint sealants using a qualified testing agency.

1.7 FIELD CONDITIONS

A. Do not proceed with installation of joint sealants under the following conditions:

1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer or are below 40 deg F.
2. When joint substrates are wet.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

PART 2 - PRODUCTS

2.1 MATERIALS, GENERAL

A. Compatibility: Provide joint sealants, backing materials, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.

2.2 COLD-APPLIED JOINT SEALANTS

A. Single-Component, Self-Leveling, Silicone Joint Sealant: ASTM D5893/D5893M, Type SL.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to the following:

a. Crafco Inc; RoadSaver Silicone SL.
b. Dow Chemical Company; 890-SL.
c. Pecora Corporation; 300 SL.

2.3 JOINT-SEALANT BACKER MATERIALS

A. Joint-Sealant Backer Materials: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by joint-sealant manufacturer, based on field experience and laboratory testing.

B. Round Backer Rods for Cold-Applied Joint Sealants: ASTM D5249, Type 3, of diameter and density required to control joint-sealant depth and prevent bottom-side adhesion of sealant.

C. Backer Strips for Cold- and Hot-Applied Joint Sealants: ASTM D5249; Type 2; of thickness and width required to control joint-sealant depth, prevent bottom-side adhesion of sealant, and fill remainder of joint opening under sealant.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine joints to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting joint-sealant performance.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Surface Cleaning of Joints: Before installing joint sealants, clean out joints immediately to comply with joint-sealant manufacturer's written instructions.

1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.

3.3 INSTALLATION OF JOINT SEALANTS

A. Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated unless more stringent requirements apply.

B. Joint-Sealant Installation Standard: Comply with recommendations in ASTM C1193 for use of joint sealants as applicable to materials, applications, and conditions.

C. Install joint-sealant backings to support joint sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.

1. Do not leave gaps between ends of joint-sealant backings.
2. Do not stretch, twist, puncture, or tear joint-sealant backings.
3. Remove absorbent joint-sealant backings that have become wet before sealant application and replace them with dry materials.

D. Install joint sealants immediately following backing installation, using proven techniques that comply with the following:

1. Place joint sealants so they fully contact joint substrates.
2. Completely fill recesses in each joint configuration.
3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.

E. Tooling of Nonsag Joint Sealants: Immediately after joint-sealant application and before skinning or curing begins, tool sealants according to the following requirements to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint:

1. Remove excess joint sealant from surfaces adjacent to joints.
2. Use tooling agents that are approved in writing by joint-sealant manufacturer and that do not discolor sealants or adjacent surfaces.

F. Provide joint configuration to comply with joint-sealant manufacturer's written instructions unless otherwise indicated.

3.4 CLEANING AND PROTECTION

A. Clean off excess joint sealant as the Work progresses, by methods and with cleaning materials approved in writing by joint-sealant manufacturers.

B. Protect joint sealants, during and after curing period, from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately and replace with joint sealant so installations in repaired areas are indistinguishable from the original work.

3.5 PAVING-JOINT-SEALANT SCHEDULE

A. Joint-Sealant Application: Joints within concrete paving.

1. Joint Location:

a. Expansion and isolation joints in concrete paving.
b. Contraction joints in concrete paving.
c. Other joints as indicated.

2. Joint Sealant: Single-component, self-leveling, silicone joint sealant.

B. Joint-Sealant Application: Joints within concrete paving and between concrete and asphalt paving.

1. Joint Location:

    a. Joints between concrete and asphalt paving.
    b. Joints between concrete curbs and asphalt paving.
    c. Other joints as indicated.

END OF SECTION 321373

SECTION 323300 - SITE FURNISHINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section Includes:

1. Seating.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of product.

B. Samples: For each exposed product and for each color and texture specified.

C. Samples for Verification: For each type of exposed finish, not less than 6-inch-long linear components and 4-inch-square sheet components.

1. Include full-size Samples of bench. Approved samples may be incorporated into the Work.

1.4 INFORMATIONAL SUBMITTALS

A. Material Certificates: For site furnishings manufactured with preservative-treated wood.

1. Indicate type of preservative used and net amount of preservative retained.

1.5 CLOSEOUT SUBMITTALS

A. Maintenance Data: For site furnishings to include in maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Bench Replacement Planks: No fewer than two full-size units for each size indicated.
2. Anchors: Five.

PART 2 - PRODUCTS

2.1 SEATING

A. Basis-of-Design Product: Subject to compliance with requirements provide Landscape Forms Inc.; Arcata Bench or similar product as approved by Architect during bidding period.

B. Frame: Cast aluminum.

C. Seat and Back:

1. Material:
   a. HDPE Planks derived from recycled packaging: Evenly spaced, parallel.

2. Seat Height: 18-inches.
3. Seat Surface Shape: Flat.
4. Overall Height: 32-inches.
5. Overall Width: 75-inches.
6. Overall Depth: 24-inches.
7. Arms: Two, one at each end.

   a. Arm Material: Match frame.

8. Weight: 220-lbs.
9. Seating Configuration: Multiple units as indicated.

   a. Straight shape.

D. Aluminum Finish: Color coated.

1. Color: As selected by Architect from manufacturer's full range.

E. HDPE Color: As selected by Architect from manufacturer's full range.

2.2 MATERIALS

A. Aluminum: Alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated; free of surface blemishes and complying with the following:

1. Rolled or Cold-Finished Bars, Rods, and Wire: ASTM B211.
2. Extruded Bars, Rods, Wire, Profiles, and Tubes: ASTM B221.
3. Structural Pipe and Tube: ASTM B429/B429M.
4. Sheet and Plate: ASTM B209.
5. Castings: ASTM B26/B26M.

B. Plastic: Color impregnated, color and UV-light stabilized, and mold resistant.

1. Polyethylene: Fabricated from virgin plastic HDPE resin.

C. Anchors, Fasteners, Fittings, and Hardware: Manufacturer's standard, corrosion-resistant-coated or noncorrodible materials; commercial quality, tamperproof, vandal and theft resistant, concealed, recessed, and capped or plugged.

1. Angle Anchors: For inconspicuously bolting legs of site furnishings to on-grade substrate; one per leg.
2. Antitheft Hold-Down Brackets: For securing site furnishings to substrate; two per unit.

D. Nonshrink, Nonmetallic Grout: Premixed, factory-packaged, nonstaining, noncorrosive, nongaseous grout complying with ASTM C1107/C1107M; recommended in writing by manufacturer, for exterior applications.

E. Erosion-Resistant Anchoring Cement: Factory-packaged, nonshrink, nonstaining, hydraulic-controlled expansion cement formulation for mixing with potable water at Project site to create pourable anchoring, patching, and grouting compound; resistant to erosion from water exposure without needing protection by a sealer or waterproof coating; recommended in writing by manufacturer, for exterior applications.

2.3 FABRICATION

A. Metal Components: Form to required shapes and sizes with true, consistent curves, lines, and angles. Separate metals from dissimilar materials to prevent electrolytic action.

B. Welded Connections: Weld connections continuously. Weld solid members with full-length, full-penetration welds and hollow members with full-circumference welds. At exposed connections, finish surfaces smooth and blended, so no roughness or unevenness shows after finishing and welded surface matches contours of adjoining surfaces.

C. Pipes and Tubes: Form simple and compound curves by bending members in jigs to produce uniform curvature for each repetitive configuration required; maintain cylindrical cross section of member throughout entire bend without buckling, twisting, cracking, or otherwise deforming exposed surfaces of handrail and railing components.

D. Exposed Surfaces: Polished, sanded, or otherwise finished; all surfaces smooth, free of burrs, barbs, splinters, and sharpness; all edges and ends rolled, rounded, or capped.

E. Factory Assembly: Factory assemble components to greatest extent possible to minimize field assembly. Clearly mark units for assembly in the field.

2.4 GENERAL FINISH REQUIREMENTS

A. Appearance of Finished Work: Noticeable variations in same piece are unacceptable. Variations in appearance of adjoining components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.

2.5 ALUMINUM FINISHES

A. Powder-Coat Finish: Manufacturer's standard polyester powder-coat finish complying with finish manufacturer's written instructions for surface preparation, including pretreatment, application, baking, and minimum dry film thickness.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas and conditions, with Installer present, for compliance with requirements for correct and level finished grade, mounting surfaces, installation tolerances, and other conditions affecting performance of the Work.

B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. Comply with manufacturer's written installation instructions unless more stringent requirements are indicated. Complete field assembly of site furnishings where required.

B. Unless otherwise indicated, install site furnishings after landscaping and paving have been completed.

C. Install site furnishings level, plumb, true, and securely anchored at locations indicated on Drawings.

END OF SECTION 323300